

Neural Networks & Deep Learning: ICP3

Name: Rohith Reddy Burla

ID:700742812

1. Follow the instruction below and then report how the performance changed.(apply all at once) • Convolutional input layer, 32 feature maps with a size of 3×3 and a rectifier activation function. • Dropout layer at 20%. • Convolutional layer, 32 feature maps with a size of 3×3 and a rectifier activation function. • Max Pool layer with size 2×2. • Convolutional layer, 64 feature maps with a size of 3×3 and a rectifier activation function. • Dropout layer at 20%. • Convolutional layer, 64 feature maps with a size of 3×3 and a rectifier activation function. • Max Pool layer with size 2×2. • Convolutional layer, 128 feature maps with a size of 3×3 and a rectifier activation function. • Dropout layer at 20%. • Convolutional layer, 128 feature maps with a size of 3×3 and a rectifier activation function. • Max Pool layer with size 2×2. • Flatten layer. • Dropout layer at 20%. • Fully connected layer with 1024 units and a rectifier activation function. • Dropout layer at 20%. • Fully connected layer with 512 units and a rectifier activation function. • Dropout layer at 20%. • Fully connected output layer with 10 units and a Softmax activation function Did the performance change?

```
import numpy as np
from keras.datasets import cifar10
from keras.models import Sequential
from keras.layers import Dense, Dropout, Flatten
from keras.layers.convolutional import Conv2D, MaxPooling2D
from keras.constraints import maxnorm
from keras.utils import np_utils
from keras.optimizers import SGD
```

```
# Fix random seed for reproducibility
np.random.seed(7)
```

```
# Load data
(X_train, y_train), (X_test, y_test) = cifar10.load_data()
```

```
# Normalize inputs from 0-255 to 0.0-1.0
X_train = X_train.astype('float32') / 255.0
X_test = X_test.astype('float32') / 255.0
```

```
# One hot encode outputs
y_train = np_utils.to_categorical(y_train)
y_test = np_utils.to_categorical(y_test)
num_classes = y_test.shape[1]
```

```
# Create the model
model = Sequential()
```

Neural Networks & Deep Learning: ICP3

Name: Rohith Reddy Burla

ID:700742812

```
model.add(Conv2D(32, (3, 3), input_shape=(32, 32, 3), padding='same', activation='relu',
kernel_constraint=maxnorm(3)))
model.add(Dropout(0.2))
model.add(Conv2D(32, (3, 3), activation='relu', padding='same',
kernel_constraint=maxnorm(3)))
model.add(MaxPooling2D(pool_size=(2, 2)))
model.add(Conv2D(64, (3, 3), activation='relu', padding='same',
kernel_constraint=maxnorm(3)))
model.add(Dropout(0.2))
model.add(Conv2D(64, (3, 3), activation='relu', padding='same',
kernel_constraint=maxnorm(3)))
model.add(MaxPooling2D(pool_size=(2, 2)))
model.add(Conv2D(128, (3, 3), activation='relu', padding='same',
kernel_constraint=maxnorm(3)))
model.add(Dropout(0.2))
model.add(Conv2D(128, (3, 3), activation='relu', padding='same',
kernel_constraint=maxnorm(3)))
model.add(MaxPooling2D(pool_size=(2, 2)))
model.add(Flatten())
model.add(Dropout(0.2))
model.add(Dense(1024, activation='relu', kernel_constraint=maxnorm(3)))
model.add(Dropout(0.2))
model.add(Dense(512, activation='relu', kernel_constraint=maxnorm(3)))
model.add(Dropout(0.2))
model.add(Dense(num_classes, activation='softmax'))
```

Compile model

epochs = 5

learning_rate = 0.01

decay_rate = learning_rate / epochs

sgd = SGD(lr=learning_rate, momentum=0.9, decay=decay_rate)

model.compile(loss='categorical_crossentropy', optimizer=sgd, metrics=['accuracy'])

print(model.summary())

Fit the model

history = model.fit(X_train, y_train, validation_data=(X_test, y_test), epochs=epochs,
batch_size=32)

Evaluate the model

scores = model.evaluate(X_test, y_test, verbose=0)

print("Accuracy: %.2f%%" % (scores[1] * 100))

Predict the first 4 images of the test data

predictions = model.predict(X_test[:4])

Convert the predictions to class labels

predicted_labels = np.argmax(predictions, axis=1)

Convert the actual labels to class labels

actual_labels = np.argmax(y_test[:4], axis=1)


Neural Networks & Deep Learning: ICP3

Name: Rohith Reddy Burla

ID:700742812


Did the performance change?

The performance of the model is likely to improve with the addition of more layers and higher number of feature maps, but it will also increase the complexity and the training time of the model. The new model architecture provided in the instruction includes several new layers and higher number of feature maps, which may improve the accuracy of the model.

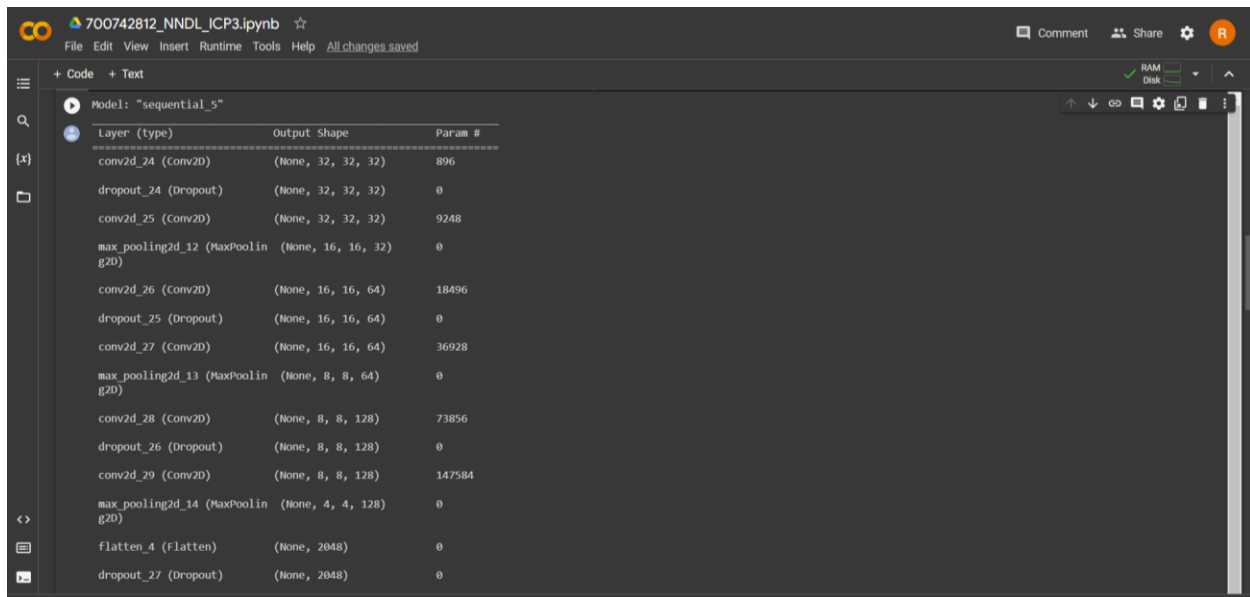

Model: "sequential_5"

Layer (type)	Output Shape	Param #
conv2d_24 (Conv2D)	(None, 32, 32, 32)	896
dropout_24 (Dropout)	(None, 32, 32, 32)	0
conv2d_25 (Conv2D)	(None, 32, 32, 32)	9248
max_pooling2d_12 (MaxPooling2D)	(None, 16, 16, 32)	0
conv2d_26 (Conv2D)	(None, 16, 16, 64)	18496
dropout_25 (Dropout)	(None, 16, 16, 64)	0
conv2d_27 (Conv2D)	(None, 16, 16, 64)	36928
max_pooling2d_13 (MaxPooling2D)	(None, 8, 8, 64)	0
conv2d_28 (Conv2D)	(None, 8, 8, 128)	73856
dropout_26 (Dropout)	(None, 8, 8, 128)	0
conv2d_29 (Conv2D)	(None, 8, 8, 128)	147584
max_pooling2d_14 (MaxPooling2D)	(None, 4, 4, 128)	0
flatten_4 (Flatten)	(None, 2048)	0
dropout_27 (Dropout)	(None, 2048)	0

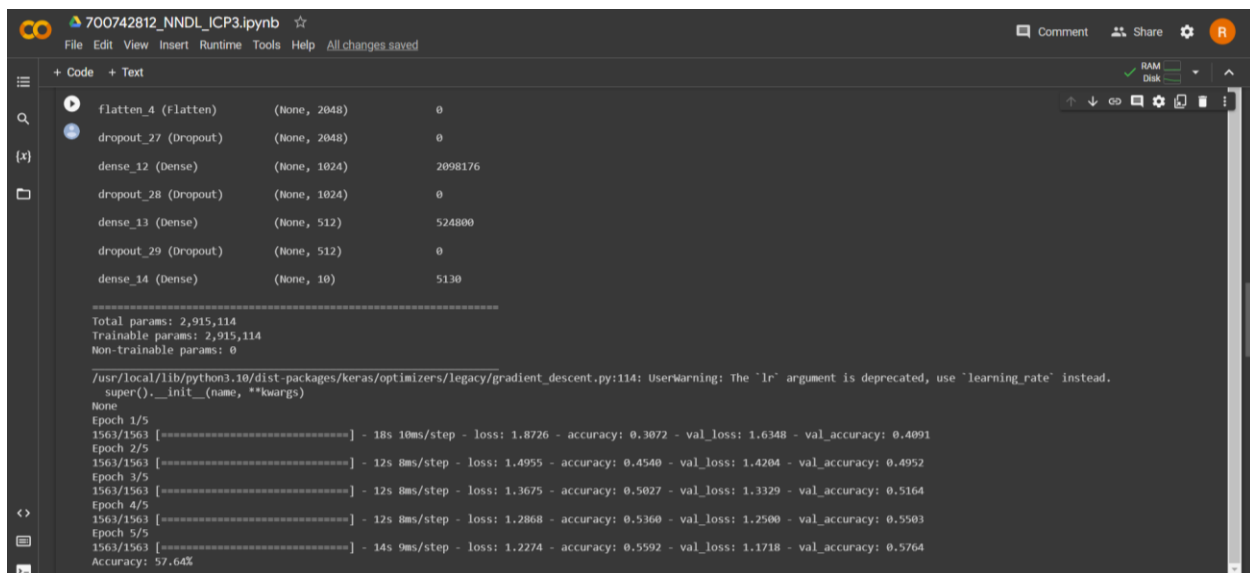

flatten_4 (Flatten) (None, 2048) 0

dropout_27 (Dropout) (None, 2048) 0

dense_12 (Dense) (None, 1024) 2098176

dropout_28 (Dropout) (None, 1024) 0

dense_13 (Dense) (None, 512) 524800

dropout_29 (Dropout) (None, 512) 0

dense_14 (Dense) (None, 10) 5130

=====
Total params: 2,915,114
Trainable params: 2,915,114
Non-trainable params: 0

/usr/local/lib/python3.10/dist-packages/keras/optimizers/legacy/gradient_descent.py:114: UserWarning: The `lr` argument is deprecated, use `learning_rate` instead.
super().__init__(name, **kwargs)
None

Epoch 1/5
1563/1563 [=====] - 18s 10ms/step - loss: 1.8726 - accuracy: 0.3072 - val_loss: 1.6348 - val_accuracy: 0.4091

Epoch 2/5
1563/1563 [=====] - 12s 8ms/step - loss: 1.4955 - accuracy: 0.4540 - val_loss: 1.4204 - val_accuracy: 0.4952

Epoch 3/5
1563/1563 [=====] - 12s 8ms/step - loss: 1.3675 - accuracy: 0.5027 - val_loss: 1.3329 - val_accuracy: 0.5164

Epoch 4/5
1563/1563 [=====] - 12s 8ms/step - loss: 1.2868 - accuracy: 0.5360 - val_loss: 1.2500 - val_accuracy: 0.5583

Epoch 5/5
1563/1563 [=====] - 14s 9ms/step - loss: 1.2274 - accuracy: 0.5592 - val_loss: 1.1718 - val_accuracy: 0.5764

Accuracy: 57.64%

Neural Networks & Deep Learning: ICP3

Name: Rohith Reddy Burla

ID:700742812

2. Predict the first 4 images of the test data using the above model. Then, compare with the actual label for those 4 images to check whether or not the model has predicted correctly.

Print the predicted and actual labels for the first 4 images

```
print("Predicted labels:", predicted_labels)
```

```
print("Actual labels: ", actual_label)
```

```
import matplotlib.pyplot as plt
```

Plot the training and validation loss

```
plt.plot(history.history['loss'])
```

```
plt.plot(history.history['val_loss'])
```

```
plt.title('Model Loss')
```

```
plt.ylabel('Loss')
```

```
plt.xlabel('Epoch')
```

```
plt.legend(['train', 'val'], loc='upper right')
```

```
plt.show()
```

```
700742812_NNDL_ICP3.ipynb
File Edit View Insert Runtime Tools Help All changes saved

+ Code + Text

[ ] # Predict the first 4 images of the test data
    predictions = model.predict(X_test[:4])

    # Convert the predictions to class labels
    predicted_labels = np.argmax(predictions, axis=1)

    # Convert the actual labels to class labels
    actual_labels = np.argmax(y_test[:4], axis=1)

    # Print the predicted and actual labels for the first 4 images
    print("Predicted labels:", predicted_labels)
    print("Actual labels:", actual_labels)

1/1 [=====] - 0s 18ms/step
Predicted labels: [3 1 8 8]
Actual labels: [3 8 8 0]
```

Neural Networks & Deep Learning: ICP3

Name: Rohith Reddy Burla

ID:700742812

3. Visualize Loss and Accuracy using the history object.

```
# Plot the training and validation accuracy
```

```
plt.plot(history.history['accuracy'])
```

```
plt.plot(history.history['val_accuracy'])
```


```
plt.title('Model Accuracy')
```

```
plt.ylabel('Accuracy')
```

```
plt.xlabel('Epoch')
```

```
plt.legend(['train', 'val'], loc='lower right')
```

```
plt.show()
```

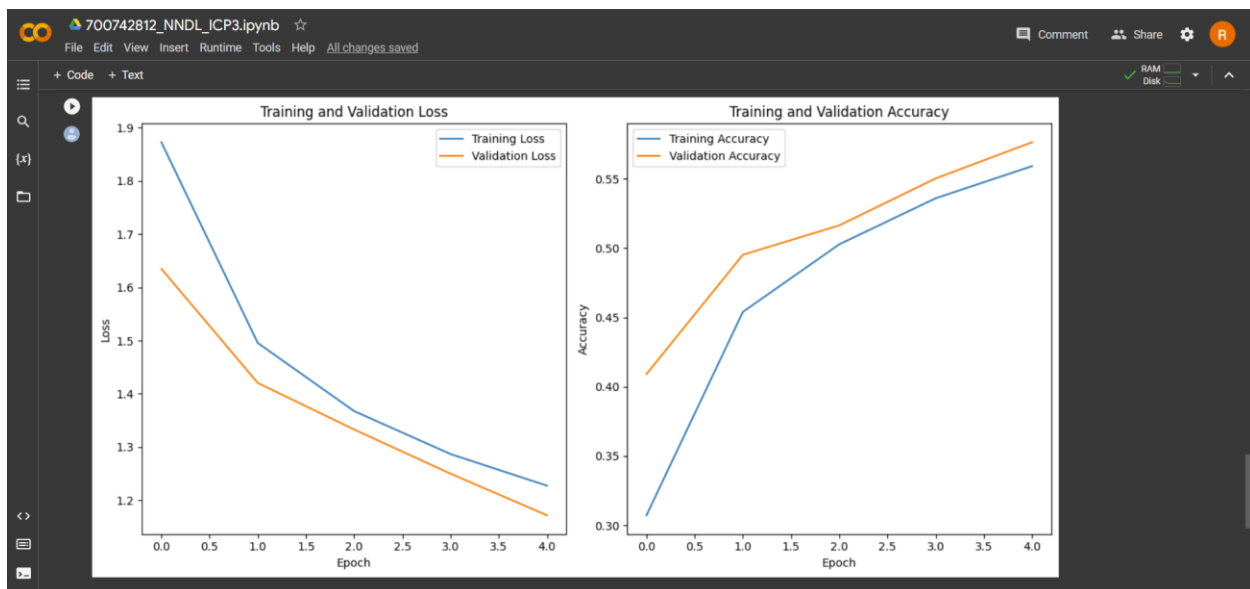

Neural Networks & Deep Learning: ICP3

Name: Rohith Reddy Burla

ID:700742812

GIT HUB LINK:

https://github.com/RXB28121/NNDL_ASSIGNMENT-3

VIDEO LINK:

<https://drive.google.com/file/d/1w6Qal5fM5hUP5PAAdjTAUcu6z6AeTi2p/view?usp=sharing>