

ATIVIDADE 13: SUB-REDES — PARTE 8


Rede Classe C 165.214.32.0/24. VLSM: 3 sub-redes com 50 hosts, 2 sub-redes com 30 hosts.

1. Memória de Cálculo

VLSM: Para 50 hosts, usamos /26 (Bloco 64). Para 30 hosts, usamos /27 (Bloco 32).

Sub-rede	Endereço	Primeiro Válido	Último Válido	Broadcast
Sub-rede 1 (50)	165.214.32.0/26	165.214.32.1	165.214.32.62	165.214.32.63
Sub-rede 2 (50)	165.214.32.64/26	165.214.32.65	165.214.32.126	165.214.32.127
Sub-rede 3 (50)	165.214.32.128/26	165.214.32.129	165.214.32.190	165.214.32.191
Sub-rede 4 (30)	165.214.32.192/27	165.214.32.193	165.214.32.222	165.214.32.223
Sub-rede 5 (30)	165.214.32.224/27	165.214.32.225	165.214.32.254	165.214.32.255

2. Topologia no Packet Tracer

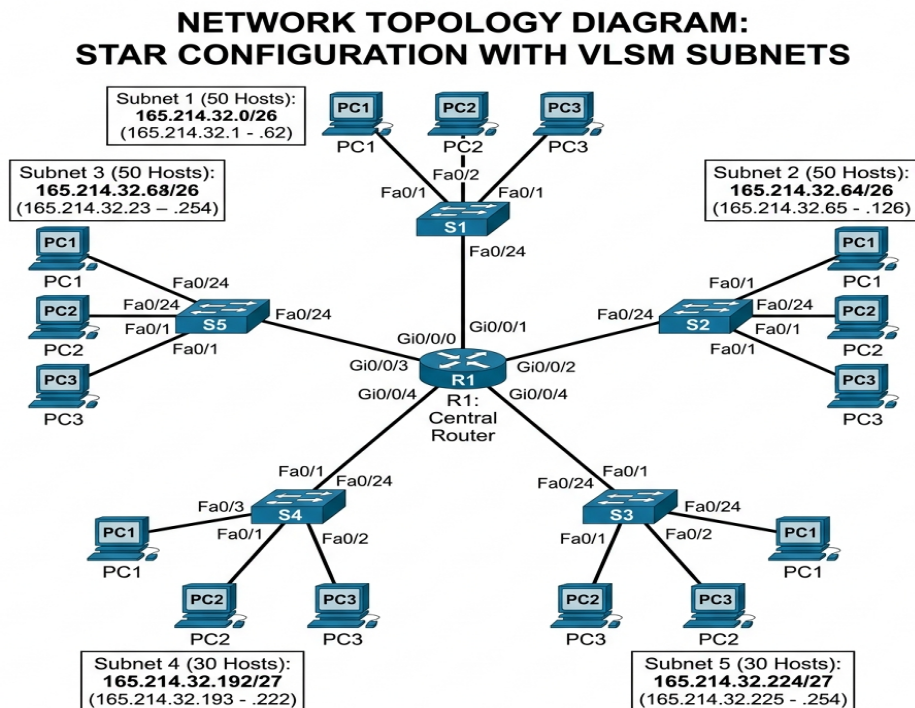

3. Configurações de IP dos Hosts (1 por sub-rede)

Host SR 1

IPv4 Address: 165.214.32.2
Subnet Mask: 255.255.255.192
Default Gateway: 165.214.32.1

Host SR 2

IPv4 Address: 165.214.32.66
Subnet Mask: 255.255.255.192
Default Gateway: 165.214.32.65

Host SR 3

IPv4 Address: 165.214.32.130
Subnet Mask: 255.255.255.192
Default Gateway: 165.214.32.129

Host SR 4

IPv4 Address: 165.214.32.194
Subnet Mask: 255.255.255.224
Default Gateway: 165.214.32.193

Host SR 5

IPv4 Address: 165.214.32.226
Subnet Mask: 255.255.255.224
Default Gateway: 165.214.32.225

4. Testes de Conectividade (Ping L3)

```
C:\>  
C:\> ping 165.214.32.130  
Pinging 165.214.32.130 with 32 bytes of data:  
Reply from 165.214.32.130: bytes=32 time<1ms TTL=128  
Reply from 165.214.32.130: bytes=32 time<1ms TTL=128  
Reply from 165.214.32.130: bytes=32 time<1ms TTL=128  
Reply from 165.214.32.130: bytes=32 time<1ms TTL=128  
  
C:\> ping 165.214.32.226  
Pinging 165.214.32.226 with 32 bytes of data:  
Reply from 165.214.32.226: bytes=32 time<1ms TTL=128  
Reply from 165.214.32.226: bytes=32 time<1ms TTL=128  
Reply from 165.214.32.226: bytes=32 time<1ms TTL=128  
Reply from 165.214.32.226: bytes=32 time<1ms TTL=128
```