


LAB SESSION 3

Exercise 1: Display the name and salary of employees earning more than \$4000.

Exercise 2: Display the employee name and department number for employee number 7839.

Exercise 3: Display the name and salary of employees whose salary is not between \$5,000 and \$12,000.




ENAME	SALARY
KING	5000

ENAME	DEPTNO
KING	10

ENAME	SALARY
JAMES	950
TURNER	1500
FORD	3000
SCOTT	3000
CLARK	2450
BLAKE	2850
JONES	2975

7 rows selected.

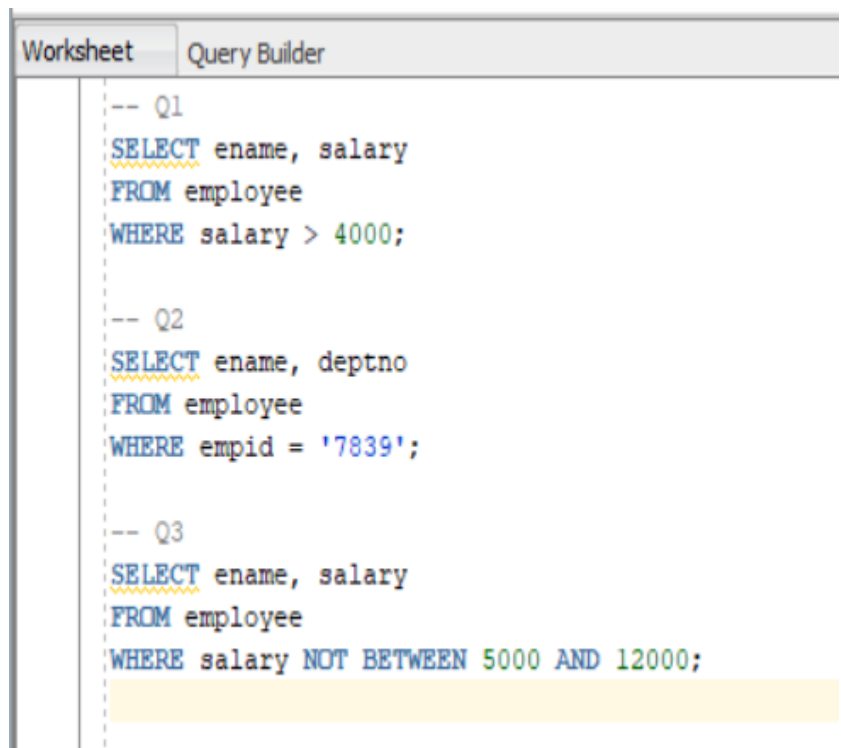

```
-- Q1
SELECT ename, salary
FROM employee
WHERE salary > 4000;
```

```
-- Q2
SELECT ename, deptno
FROM employee
WHERE empid = '7839';
```

```
-- Q3
SELECT ename, salary
FROM employee
WHERE salary NOT BETWEEN 5000 AND 12000;
```

Exercise 4: Display the employee name, job, and hire date of employees hired between February 20, 1998 and May 1, 1998, ordered by hire date in ascending order.

Exercise 5: Display the name and department number of employees in departments 20 and 30, ordered alphabetically by name.

Exercise 6: Display the name and salary of employees earning between \$5,000 and \$12,000 and working in department 20 or 50, with column aliases Employee and Monthly Salary.

The screenshot shows a SQL query editor with three queries (Q4, Q5, Q6) and a results window. The editor has a toolbar with icons for running queries, saving, and other functions. The results window shows the output of the queries.

Query Builder

```
-- Q4
SELECT ename, job, hiredate
FROM employee
WHERE hiredate BETWEEN
TO_DATE('20-FEB-98','DD-MON-RR')
AND TO_DATE('01-MAY-98','DD-MON-RR')
ORDER BY hiredate ASC;

-- Q5
SELECT ename, deptno
FROM employee
WHERE deptno IN ('20','30')
ORDER BY ename;

-- Q6
SELECT ename AS "Employee",
       salary AS "Monthly Salary"
FROM employee
WHERE salary BETWEEN 5000 AND 12000
AND deptno IN ('20','50');
```

Query Result x **Script Output** x

Task completed in 0.07 seconds

no rows selected

ENAME	DEPTNO
BLAKE	30
FORD	20
JAMES	30
JONES	20
SCOTT	20
TURNER	30

6 rows selected.

no rows selected

Exercise 7: Display the name and hire date of employees hired in the year 1994.

Exercise 8: Display the name and job title of employees who do not have a manager.

The screenshot shows a database query tool interface. The top toolbar includes icons for running queries, saving, and other functions, with a timer showing 0.059 seconds. Below the toolbar are two tabs: 'Worksheet' and 'Query Builder'. The 'Worksheet' tab is active, displaying two SQL queries. The first query, labeled '-- Q7', selects the employee name and hire date for those hired in 1994. The second query, labeled '-- Q8', selects the employee name and job title for those without a manager. Below the queries is a 'Query Result' tab, which shows the results of the queries. The first query returned no rows, while the second query returned one row for the employee 'KING' with the job title 'PRESIDENT'.

```
-- Q7
SELECT ename, hiredate
FROM employee
WHERE TO_CHAR(hiredate, 'YYYY') = '1994';

-- Q8
SELECT ename, job
FROM employee
WHERE mgr IS NULL;
```

no rows selected


ENAME	JOB
KING	PRESIDENT

Exercise 9: Display the name, salary, and commission of employees who earn commission, sorted in descending order of salary and commission.

Exercise 10: Display the names of employees whose third letter is 'a'.

Exercise 11: Display the names of employees who have both 'a' and 'e' in their name.

Exercise 12: Display the name, job, and salary of employees whose job is Salesman or Clerk and whose salary is not equal to \$2,500, \$3,500, or \$800.

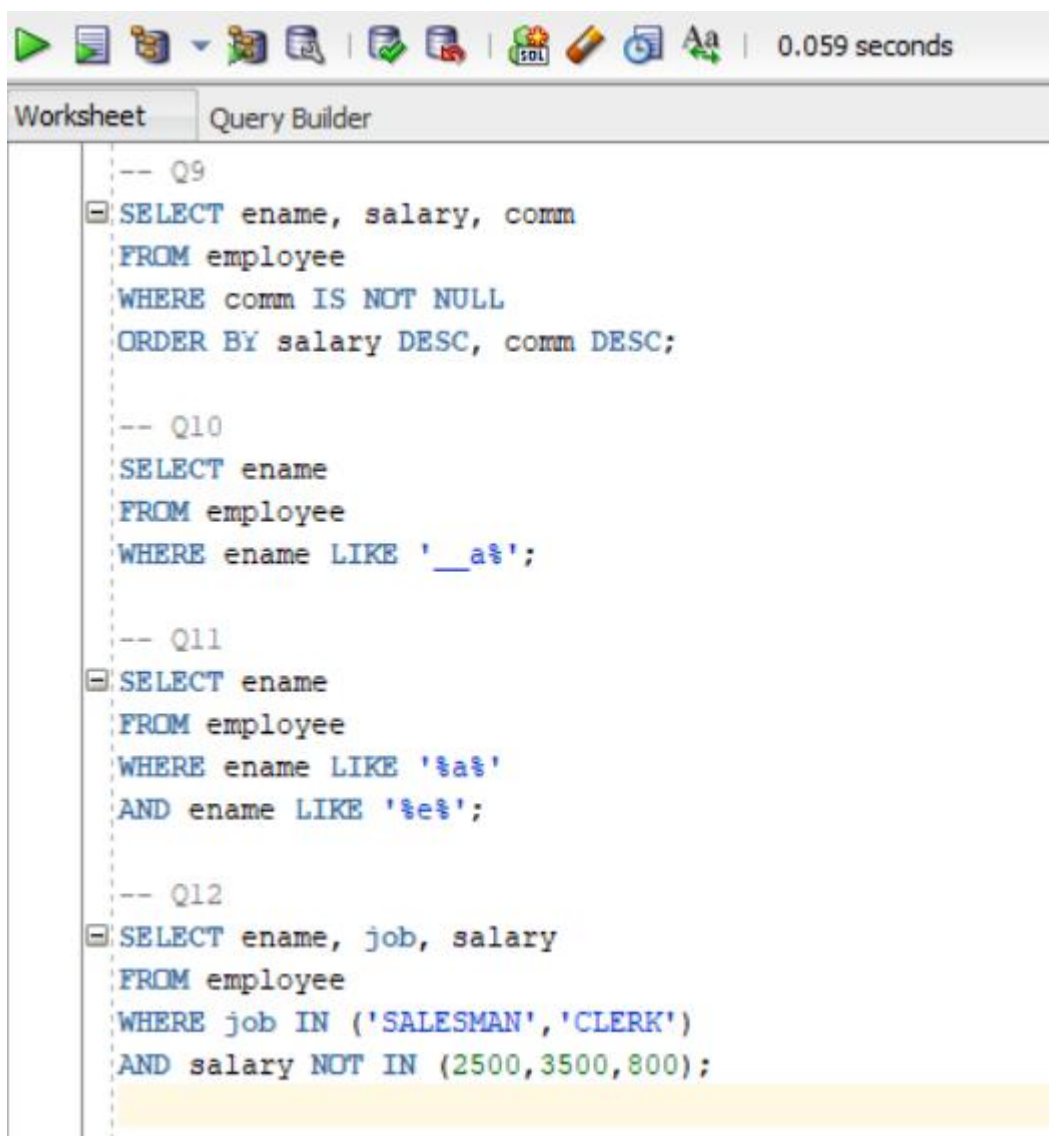

The screenshot shows a SQL Query Builder window with a toolbar at the top containing icons for execution, undo, redo, and other functions. The toolbar also displays a timer of 0.059 seconds. Below the toolbar, there are two tabs: 'Worksheet' and 'Query Builder'. The 'Query Builder' tab is active, showing a list of queries on the left and their corresponding SQL statements on the right. The queries are as follows:

```
-- Q9
SELECT ename, salary, comm
FROM employee
WHERE comm IS NOT NULL
ORDER BY salary DESC, comm DESC;

-- Q10
SELECT ename
FROM employee
WHERE ename LIKE '__a%';

-- Q11
SELECT ename
FROM employee
WHERE ename LIKE '%a%'
AND ename LIKE '%e%';

-- Q12
SELECT ename, job, salary
FROM employee
WHERE job IN ('SALESMAN','CLERK')
AND salary NOT IN (2500,3500,800);
```

