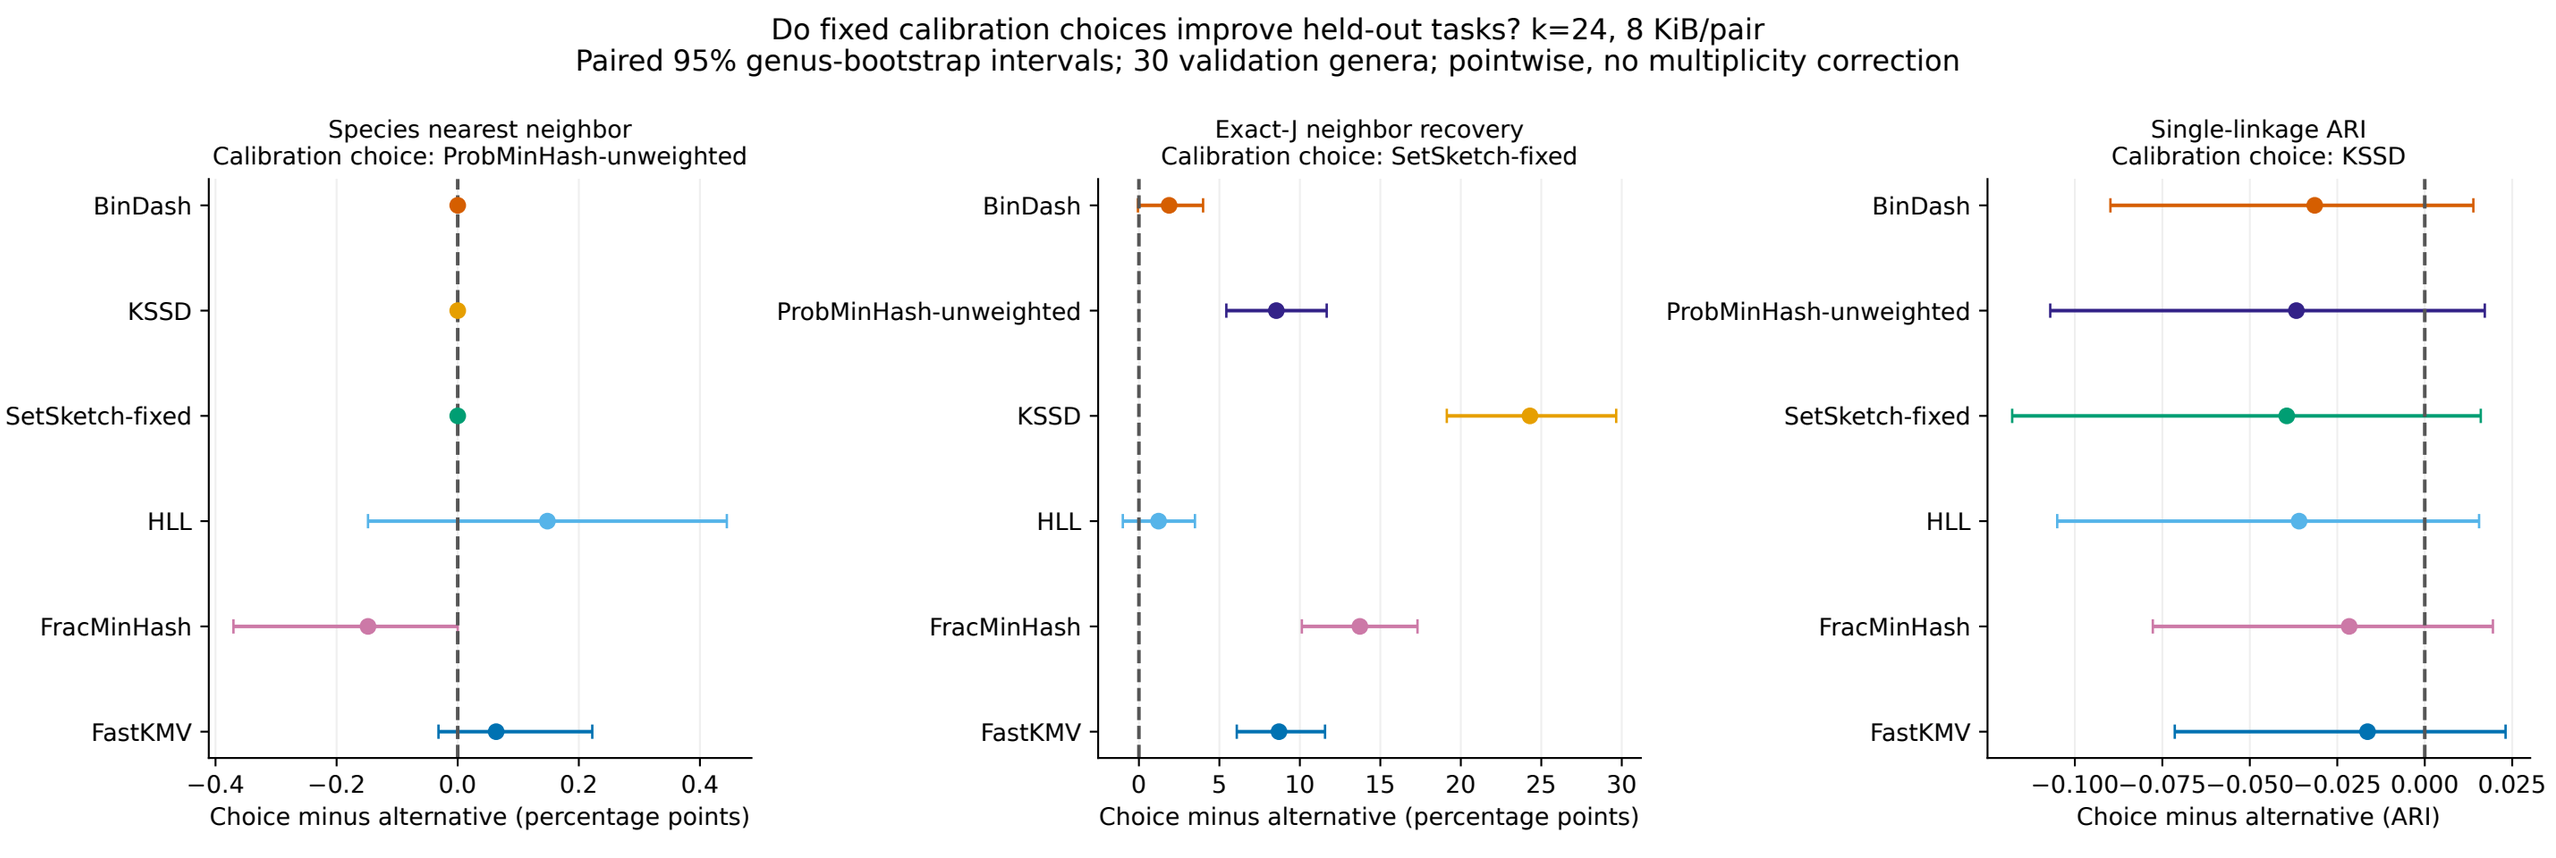
Do fixed calibration choices improve held-out tasks? k=24, 8 KiB/pair
Paired 95% genus-bootstrap intervals; 30 validation genera; pointwise, no multiplicity correction
Species nearest neighbor
Calibration choice: ProbMinHash-unweighted
BinDash
KSSD
SetSketch-fixed
HLL
FracMinHash
FastKMV
−0.4
−0.2
0.0
0.2
0.4
Choice minus alternative (percentage points)
Exact-J neighbor recovery
Calibration choice: SetSketch-fixed
BinDash
ProbMinHash-unweighted
KSSD
HLL
FracMinHash
FastKMV
0
5
10
15
20
25
30
Choice minus alternative (percentage points)
Single-linkage ARI
Calibration choice: KSSD
BinDash
ProbMinHash-unweighted
SetSketch-fixed
HLL
FracMinHash
FastKMV
−0.100
−0.075
−0.050
−0.025
0.000
0.025
Choice minus alternative (ARI)