users	
id 🔑	integer
name	varchar
email	varchar NN
password	varchar NN
phone_number	varchar
is_admin	boolean
created_at	timestamp


restaurants	
id 🔑	integer -
name	varchar NN
address	text
contact_info	varchar

	tables		
)	id 🔑	integer	+
*	restaurant_id	integer NN	
	table_number	varchar	
	capacity	integer	
	location	varchar	
	is_available	boolean	

	bookings	
	id 🔑	integer
~	user_id	integer NN
~	table_id	integer NN
	booking_date	date
	time_slot	varchar
	number_of_guests	integer
	status	varchar
	created_at	timestamp

time_slots	
id Ø	integer
slot_time	varchar NN

users	
id 🔑	integer
name	varchar
email	varchar NN
password	varchar NN
phone_number	varchar
is_admin	boolean
created_at	timestamp

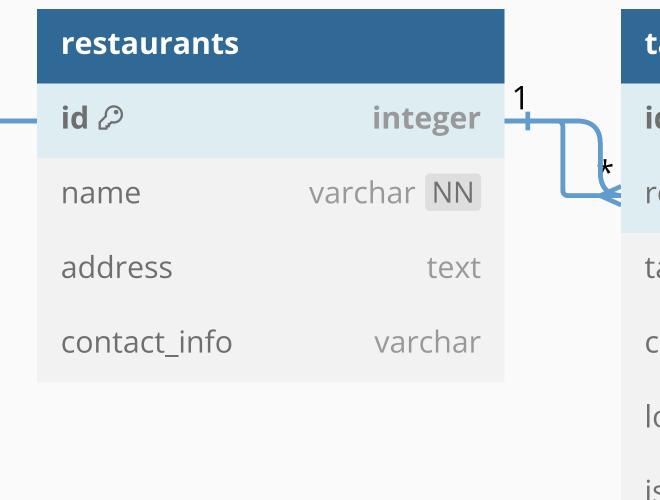

	tables		
)	id 🔑	integer	1
*	restaurant_id	integer NN	
	table_number	varchar	
	capacity	integer	
	location	varchar	
	is_available	boolean	

	bookings	
	id 🔑	integer
*	user_id	integer NN
*	table_id	integer NN
	booking_date	date
	time_slot	varchar
	number_of_guests	integer
	status	varchar
	created_at	timestamp

time_slots	
id 🔑	integer
slot_time	varchar NN