EECS 370 — Lecture 1


Introduction





Who am I?

- Bachelors (CE), Masters (CSE), and PhD (CSE) all from Michigan!
- Research in computer architecture
 - How to make devices like Graphics Processing Units (GPUs) better at nongraphics stuff?
- Currently work on curriculum design for quantum computing

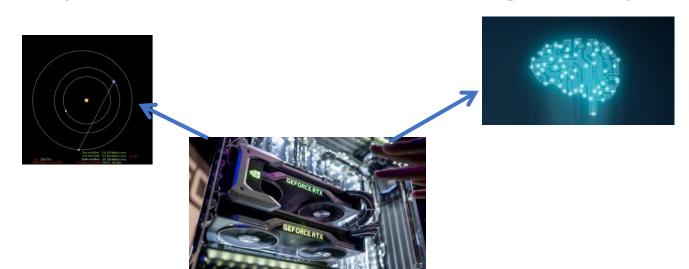





Who am I?

- When not doing school stuff, you can find me:
 - Triathlon training
 - Cooking
 - Designing retro games / emulators
- Call me:
 - Jon
 - Dr / Prof Beaumont
 - "Yo Teach!"









Who are You?

Poll: Who are you!



I'll make use of polls during class – these are optional

I have you log in with your name because it helps me learn names

(you can also ask questions asynchronously on Slido)



Class resources

Course homepage:

eecs370.github.io/

- All assignments will be posted here.
- Also links for administrative requests (SSD, Medical emergencies, etc.)
- Ed: edstem.org
 - Use for general questions on lectures, projects and homework assignments. Can discuss with your classmates.
- Gradescope:

https://www.gradescope.com

- Turn in homework assignments.
- Contact us if you don't have access

For other issues, submit admin form linked on website



Course Logistics

- In line with the general CoE and University policies, default mode of instruction is in-person
- Lectures (Tu/Th)
 - Attendance is not required
 - Feel free to ask questions at anytime!
 - Interaction is highly encouraged (and critical!)
- Office hours may have some remote options, but mostly in-person
 - See website start soon
- Labs...



Async Recordings

- If you're watching lectures asynchronously...
- I have studio recordings
 - Much better quality than lecture recordings
 - I won't walk off screen, etc





Labs!



- Labs (M or Fr)
 - Work on assignments during lab
 - Assignments due on Gradescope by 11:55 pm Wed
 - Assignment graded for correctness
 - 20% of lab grade comes from doing a lecture quiz online (more details later)
 - Due Wed at 11:55 pm **before** the lab
 - Attendance required to get credit starting with lab 3
 - Fill out lab survey to let us know if you can't make your section
 - Lab 1 due Wednesday September 4



Your work in 370

- Programming assignments (40%)
- Homeworks (5% total)
 - Total of 4 homeworks, drop lowest
- Labs (5% total)
 - Total of 12, drop 2 lowest
- One midterm and a final exam (50% total)
 - In-person
 - Midterm Wednesday October 9th, 7-9 pm
 - Final Wed December 11th, 10:30 am 12:30 pm



Programming assignments

- 4 programming assignments simulating the execution of a simple microprocessor
 - Assembler / functional processor simulation
 - Linker
 - Pipeline simulation
 - Cache simulation
- Using C to program, C is a subset of C++ without several features like classes
- The challenge is to understand computer organization enough that you can build a complete computer emulator



Auto-grading assignments

- We use a program to grade your assignments
 - Program submitted using <u>autograder.io</u>
- Assignments due at 11:55 pm on due date.
 You may use late days just for projects over the course of the semester
- Make sure code runs correctly on CAEN machines
- Make sure to have a CAEN account
- Help on C available from staff



Admin Requests

- If anything comes up that may interfere with your work in the class (e.g. illness, family emergency, etc) fill out the admin form on the course website
 - We'll probably instruct you to use late day / drop, but it gets it on the record in-case something comes up later



Academic integrity

- We want you to collaborate as you learn!
 - But DON'T SHARE CODE

Suspected code copying reported to Honor Council

 usual penalty is 0 on assignment and 1/3 letter grade reduction in course

DO NOT

Share high level strategies Share code

Help someone debug Debug for someone

Explain compiler errors to Fix someone's compiler


someone error

Discuss test strategies Share test cases



Al Tools (e.g. ChatGPT)

- ChatGPT is a great tool!
- Think of it as another student:
 - A great resource to ask questions to
 - It might sometimes be wrong
 - Taking work that it wrote and representing it as your own is an honor code violation
- So feel free to use it as a starting point, verify any answers it gives, and submit your own work



Coolguy Whit - drawception.com



How we assign course grades

- Grade on a straight scale
- We may adjust this in your favor if exams are more difficult than expected
- Average is usually ~B-B+

Total Weighted Score	Letter Grade
0 - 56%	Е
57 - 59%	D
60 - 64%	D+
65 - 69%	C-
70 - 74%	С
75 - 78%	C+
79 - 81%	B-
82 - 85%	В
86 - 89%	B+
90 - 92%	Α-
93 - 96%	А
97 - 100%	A+




Course textbooks

Computer Organization and Design ARM Edition

by Patterson and Hennessy

Not required, but it's good

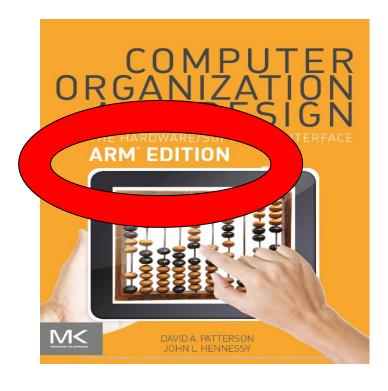



What is 370 about?

You're used to writing programs like this

- But what's actually happening *inside* the computer when we compile / run this?
 - Come to think it... what does "compiling" even mean??
- 370 in a nutshell: How do computer's execute programs?



You will need to know this stuff if...

- You work in designing processors at Intel, ARM, NVIDIA, etc.
- You write optimized library code
- You work on designing operating systems or compilers
- You work in computer security
- You work in designing embedded systems (IOT, etc)



You might need to know this stuff if...

- Even if you just write software for the rest of your life
 - Important to know what your computer is doing when it executes your code!
 - It can make a big difference in your performance
- My favorite example comes from the #1 StackOverflow question of all time...



Example

 Consider 1 version of code that loops through an array of random values and adds all elements larger than 128

```
for (unsigned c = 0; c < arraySize; ++c)</pre>
    data[c] = std::rand() % 256;
// Test
clock_t start = clock();
long long sum = 0;
// Primary loop
for (unsigned c = 0; c < arraySize; ++c)</pre>
    if (data[c] >= 128)
        sum += data[c];
double elapsedTime =
  static_cast<double>(clock() - start);
```

https://stackoverflow.com/questions/11227809/



Example

What will happen to the execution time of the loop if we sort the

array beforehand?

```
for (unsigned c = 0; c < arraySize; ++c)</pre>
    data[c] = std::rand() % 256;
std::sort(data, data + arraySize);
// Test
clock t start = clock();
long long sum = 0;
// Primary loop
for (unsigned c = 0; c < arraySize; ++c)</pre>
    if (data[c] >= 128)
        sum += data[c];
double elapsedTime =
  static cast<double>(clock() - start);
```


Poll: What do you think will happen?

- A. Sorted array sums much faster
- B. Sorted array sums much slower
- C.No significant difference between sorted and unsorted arrays
- D.I have no idea!



Why take 370?

Inherent value in understanding how the tools we use work



"We shape our tools and thereafter our tools shape us"

- Marshal McLuhan



Let's take a break

- In the meantime...
- What processor are you using?
 - Windows: Control Panel > System and Security > System
 - Mac: Click top-left Apple icon > About this Mac
 - Linux: Iscpu
- How many cores does it have?
 - Windows: Ctrl-Shift-Esc > Performance

<u>Poll:</u> What hardware do you have with you today?



Course overview

- Introduction (this lecture)
- ISAs and Assembly (~6 lectures)

- Processor implementation (~9 lectures)
- Memory (~7 lectures)
- Exams/catch-up (3 lectures)



- We're used to seeing programs like this
- But computer hardware is limited and can't understand code this complicated
 - Tons of different keywords and variable names...
 - Matching up different parentheses
 - Do we have to hardwire all this in logical circuits???




- High level languages are intended to be easy for humans to understand / write
 - NOT for hardware to execute
- To be executed, must compile this complicated code into a set of very simple and easy to understand instructions that hardware can execute*



^{*}Another option is interpreting programs, like is done in Python. We won't cover that in this class

THIS is what computers can understand and execute

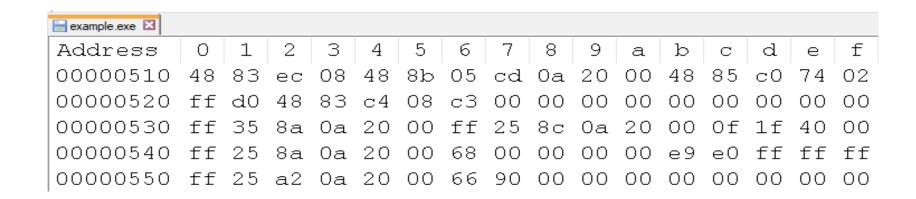

\$xxd -b [file]
will show you the
binary contents... not
very useful



- This is called "machine code": just a bunch of 0s and 1s (easier for us to read if we convert it into hex digits)
- Early programmers literally programmed by flipping switches on and off
- It's what's produced when you type: g++ example.c -o example.exe



- Humans often work at an intermediate level by writing assembly code
- Usually has a 1-1 correspondence with machine code instructions
 - Gives the programmer fine control over the final executable
- But it's (relatively) easy to read
- You can view generated assembly code with -s flag in g++:

```
g++ -s example.c
```

```
5 daxpy:
   .LFB0:
            .cfi startproc
 8
            pushq
                    %rbp
            .cfi def cfa offset 16
10
            .cfi offset 6, -16
                    %rsp, %rbp
            mova
12
            .cfi def cfa register 6
13
                    \%edi, -20(\%rbp)
            movl
14
                    %xmm0, -32(%rbp)
            movsd
15
                    %rsi, -40(%rbp)
            movq
16
                    %rdx, -48(%rbp)
            movq
                    $0, -4(%rbp)
            movl
18
                     .L2
            jmp
```

Source Code to Execution (simplified)

C, C++, etc.


Compiler

Assembly

Assembler

Executable

- There are some things missing here... we'll fill those in later
- First quarter of the course will cover this process
- Remainder of the class will be... how do you build this thing?? (and memory)





Architectures

- Not just one type of machine code produced for all types of computers
- Just like how there are several different programming languages (C/C++, Java, Python, etc)...
 - there are also many different types of **architectures** that code can be compiled to run on
- Popular architectures:
 - x86, ARM, RISC-V
- Code compiled for one architecture will not run on another



x86

- Designed by Intel (AMD designed 64-bit version)
- Beefy, complex, fast, power-hungry
- Used in:
 - Desktops
 - Most laptops
 - Servers
 - PlayStation 4/5, Xbox One







ARM

- Designed by... Arm
- Versatile: can be used for higher performance or low-power usage
- Used in:
 - Most smartphones
 - Recent Macbooks
 - Recent supercomputer clusters
 - Nintendo Switch









RISC-V

- Open source
- Very popular in academia
 - Don't need to pay super-expensive licensing fees
- Starting to make its way into actual products





Architectures Discussed in this Class

- We primarily focus on:
 - A subset of ARM called "LEG" (hardy-har-har)
 - A made-up ISA we call LC2K (Little Computer 2000)
 - Extremely simple, lets us focus on the concepts
 - Not practical for real applications






The Trend of Computing

Moore's Law: The number of transistors on microchips doubles every two years Our World

in Data

Moore's law describes the empirical regularity that the number of transistors on integrated circuits doubles approximately every two years. This advancement is important for other aspects of technological progress in computing – such as processing speed or the price of computers.

Moore's Law

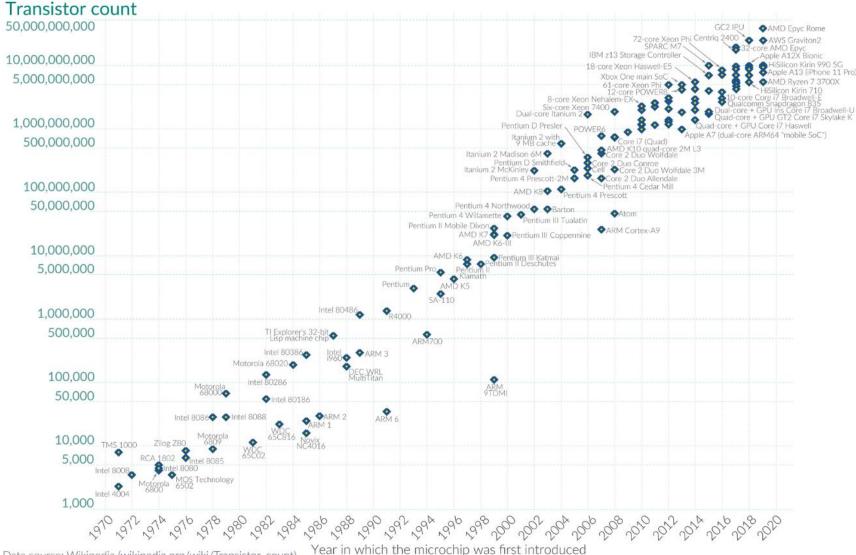



The End of Moore's Law?: Dennard Scaling

- Dennard Scaling: as transistors get smaller their power density stays constant
- Translation: as the number of transistors on a chip grows (Moore's Law), the power stays roughly constant
- Mid-2000's Dennard Scaling broke. Why? Transistors got so small that they began to leak a lot of power. Leaking lots of power caused a chip heat up a lot.
- Conclusion: you can put lots of transistors on a chip, but you can't use them all at full power at the same time.
 - You'll melt the processor!
- This is why newest processors focus on having multiple cores



Reminder

- Make sure you have a CAEN account!
- Lab 1 next week
 - learn about C programming, debugging methods and tools, and more



Next Time

- Introduce Instruction Set Architectures (ISAs)
- Feel free to leave any lingering questions on Slido and I'll try to address at the start of next lecture

