




1 · Simulate the accelerated scan (forward model)



2 · Train the diffusion prior (once, offline — no mask)



3 · Reconstruct = reverse diffusion + data consistency (the key idea)

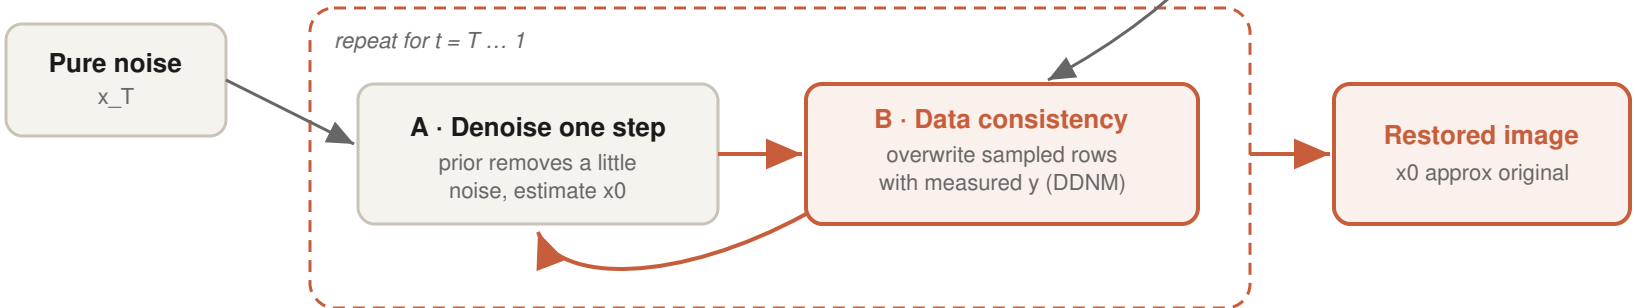

4 · Evaluate

Compare to baseline (zero-fill / CS-MRI) and to the article's GAN

PSNR and SSIM per ratio (20/30/50%, real and imag) · line plots with std · sample-wise scatter + Pearson r · 4 qualitative examples

The prior invents realistic anatomy; data consistency keeps it faithful to what the scanner actually measured.

One trained prior serves all three acceleration ratios — only the mask changes at reconstruction time.