


Visualizing data

Abhijit Dasgupta

Fall, 2019

Why visualize data?


Anscombe's data

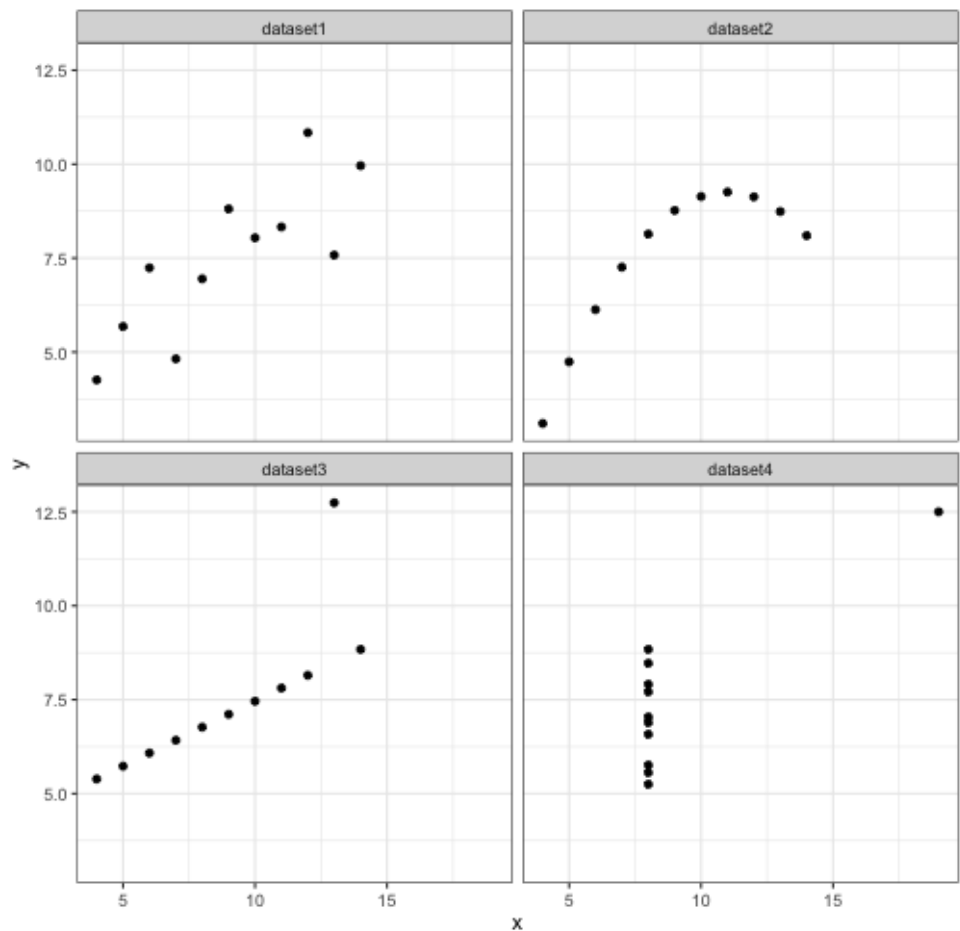

Anscombe, 1973

Statistic	Value
mean(x)	9
mean(y)	7.5
var(x)	11
var(y)	4.13
cor(x,y)	0.82

The DataSaurus dozen

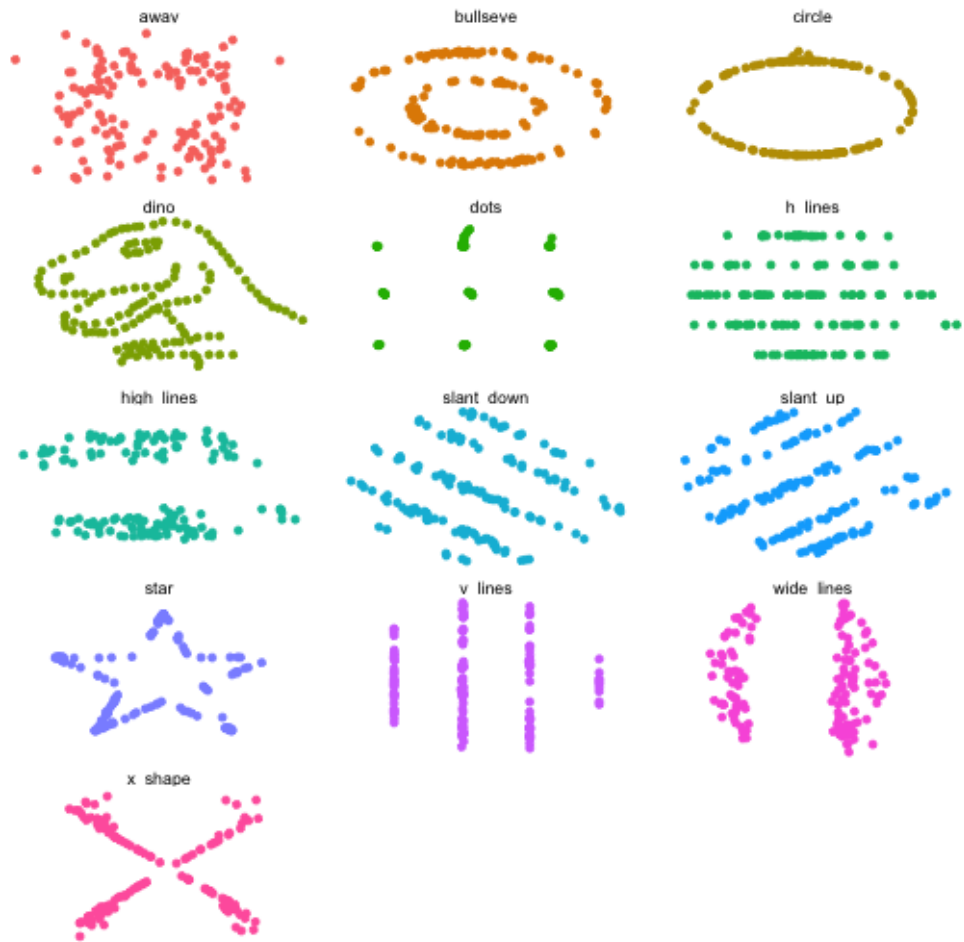


Statistic	Value
mean(x)	54.3
mean(y)	47.8
var(x)	281
var(y)	725
cor(x,y)	-0.07

Bottom line


- Summary statistics cannot always distinguish datasets
- Take advantage of humans' ability to visually recognize and remember patterns
- Find discrepancies in the data more easily

Some examples


Gallery

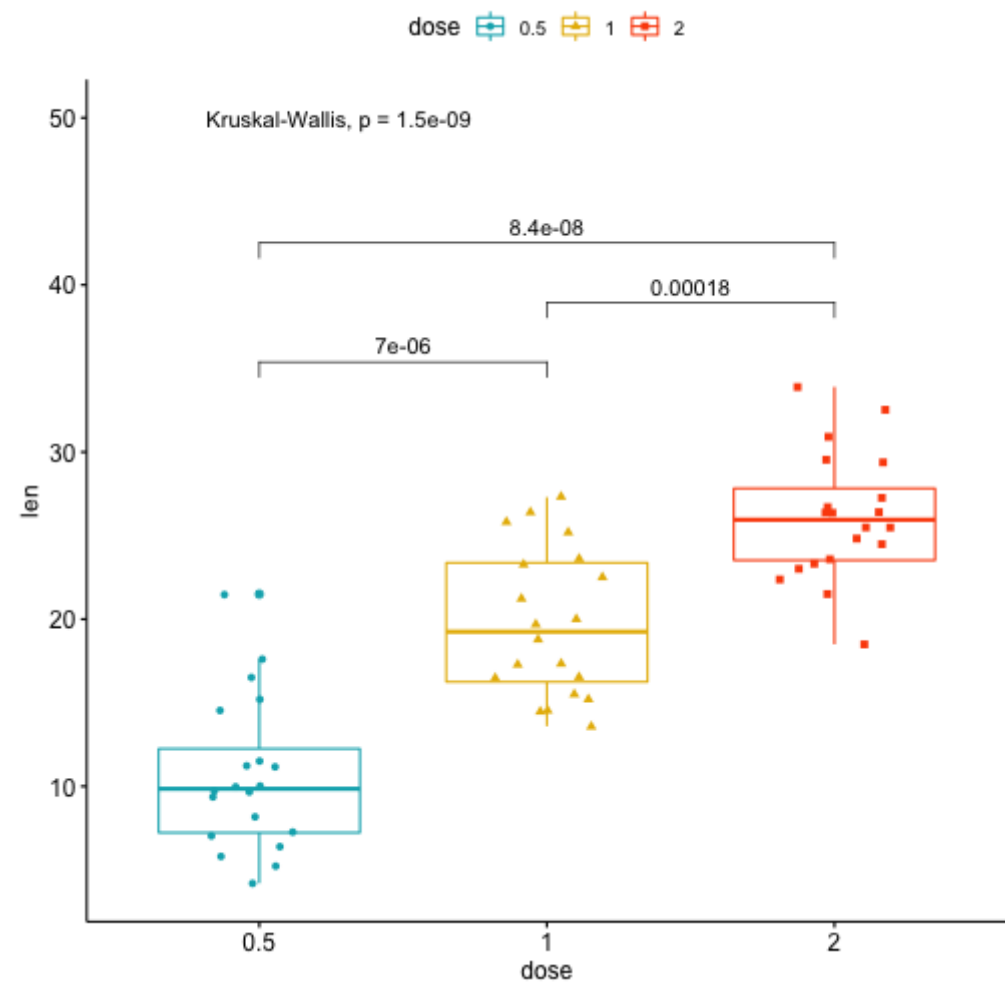

Gallery

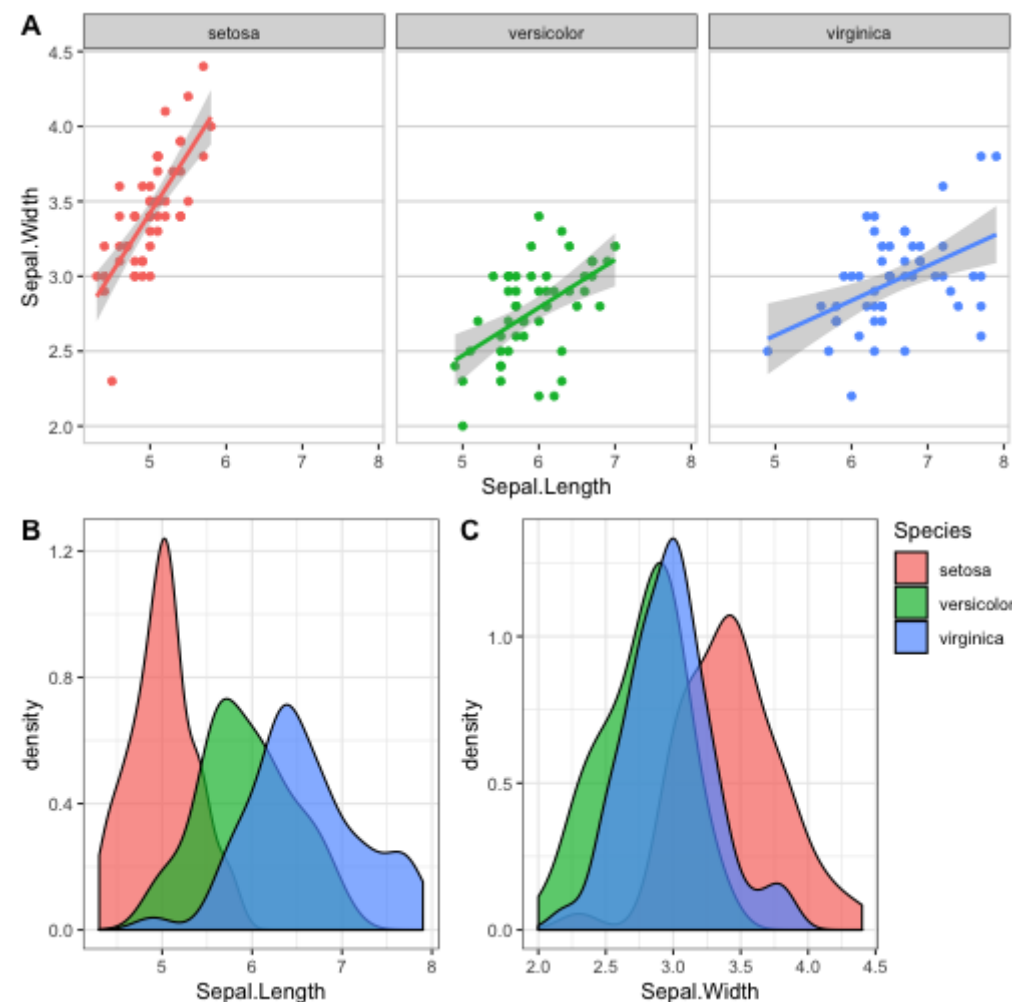

Gallery

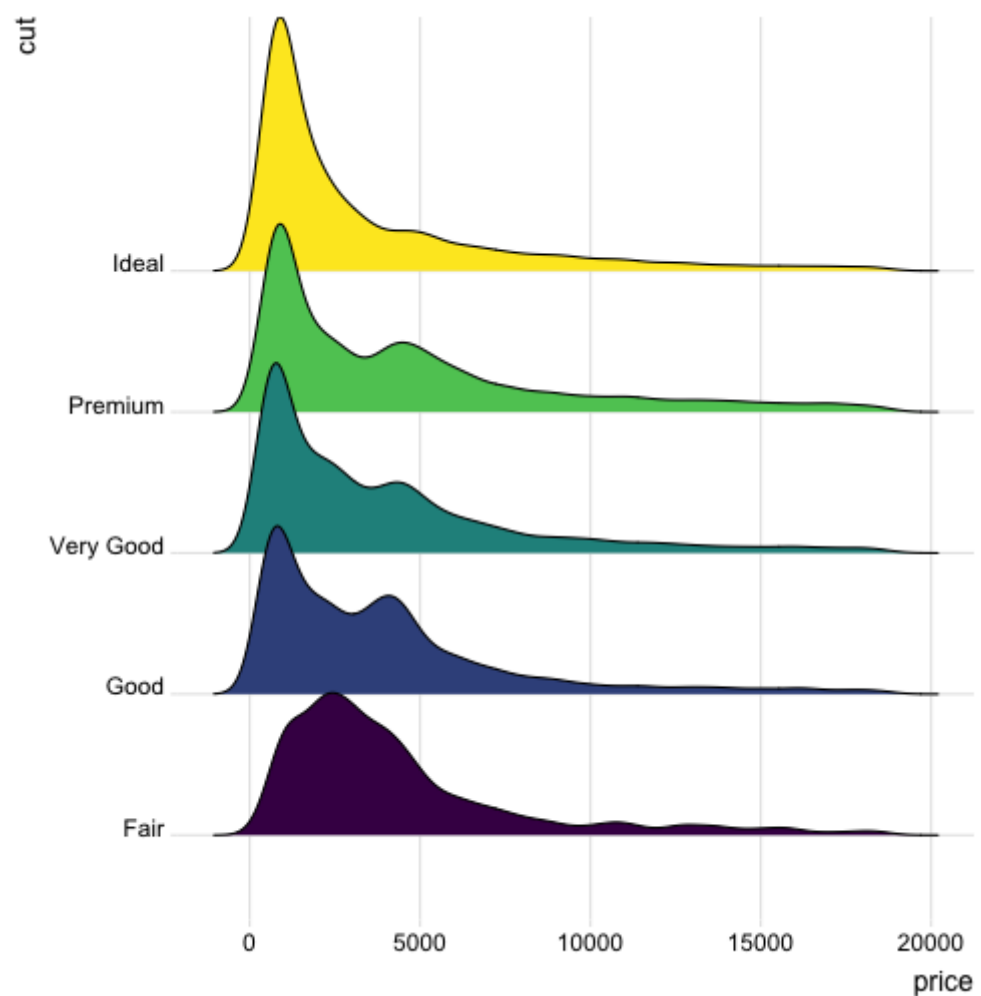

Gallery

Manhattan plot


Gallery

Circular Manhattan plot

Gallery

Maps

Interactive graphs

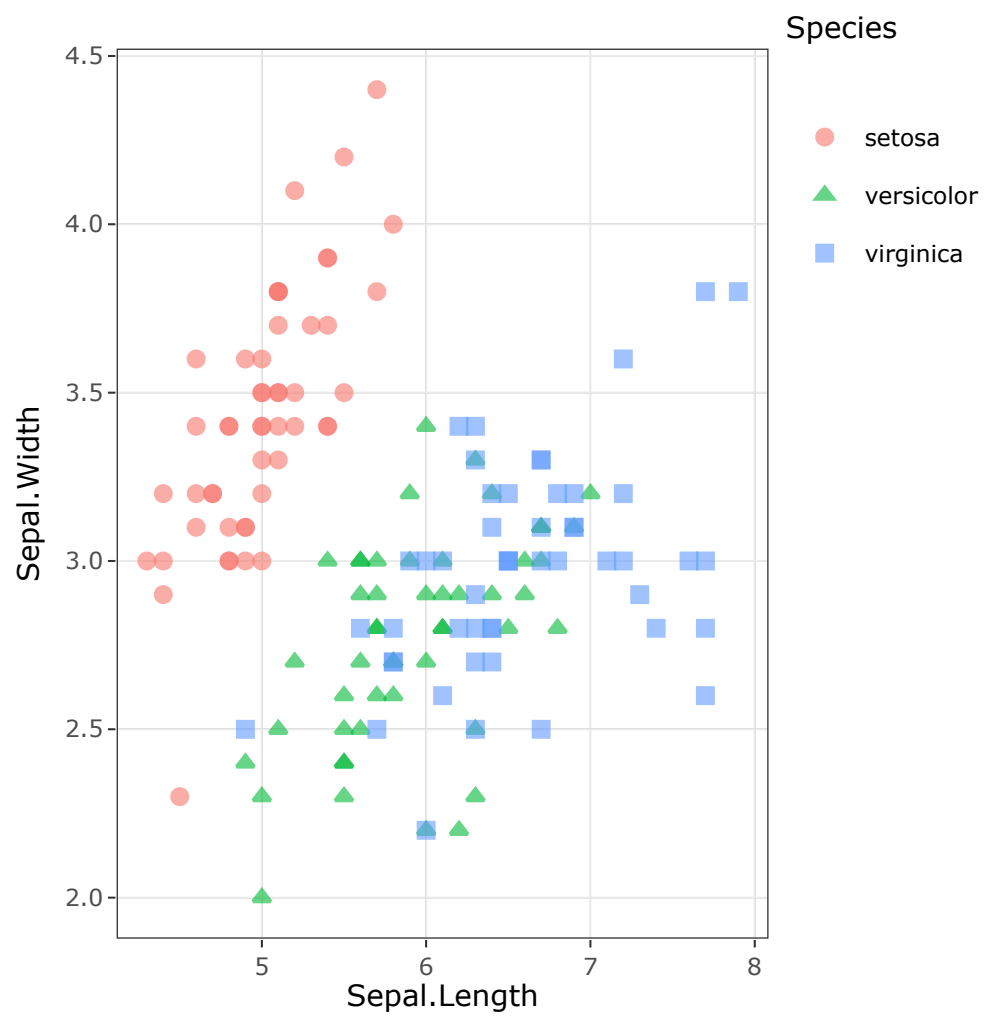

Animated graphs

```
#>
```

```
Frame 1 (1%)
Frame 2 (2%)
Frame 3 (3%)
Frame 4 (4%)
Frame 5 (5%)
Frame 6 (6%)
Frame 7 (7%)
Frame 8 (8%)
Frame 9 (9%)
Frame 10 (10%)
Frame 11 (11%)
Frame 12 (12%)
Frame 13 (13%)
Frame 14 (14%)
Frame 15 (15%)
Frame 16 (16%)
Frame 17 (17%)
Frame 18 (18%)
Frame 19 (19%)
Frame 20 (20%)
Frame 21 (21%)
Frame 22 (22%)
Frame 23 (23%)
Frame 24 (24%)
Frame 25 (25%)
Frame 26 (26%)
Frame 27 (27%)
Frame 28 (28%)
```

Data visualization with ggplot2

What is ggplot2?

- A second (and final) iteration of the ggplot
- Implementation of Wilkerson's Grammar of Graphics in R
- Conceptually, a way to layer different elements onto a canvas to create a data visualization
- Started as Dr. Hadley Wickham's PhD thesis (with Dr. Dianne Cook)
- Won the John M. Chambers Statistical Software Award in 2006
- Mimicked in other software platforms
 - ggplot and seaborn in Python
 - Translated in plotly

ggplot2 uses the grammar of graphics

A grammar ...

- compose and re-use small parts
- build complex structures from simpler units

of graphics ...

- Think of yourself as a painter
- Build a visualization using layers on a canvas
- Draw layers on top of each other

Introduction to ggplot2

The ggplot2 package is a very flexible and (to me) intuitive way of visualizing data. It is based on the concept of layering elements on a canvas.

■ This idea of layering graphics on a canvas is, to me, a nice way of building graphs

You need:

- A `data.frame` object
- *Aesthetic mappings* (`aes`) to say what data is used for what purpose in the viz
 - x- and y-direction
 - shapes, colors, lines
- A *geometry object* (`geom`) to say what to draw
 - You can "layer" geoms on each other to build plots

Introduction to ggplot2

`ggplot` used pipes before pipes were a thing.

However, it uses the `+` symbol for piping rather than the `%>%` operator, since it pre-dates the `tidyverse`

Introduction to ggplot2

```
library(ggplot2)
ggplot(mtcars, aes(x = wt, y = mpg)) + geom_point()
```

- A data.frame object: mtcars
- Aesthetic mapping:
 - x-axis: wt
 - y-axis: mpg
- Geometry:
 - geom_point: draw points

Introduction to ggplot2

```
library(ggplot2)
ggplot(mtcars, aes(x = wt, y = mpg)) + geom_point()+ geom_smooth()
```

- A data.frame object: mtcars
- Aesthetic mapping:
 - x-axis: wt
 - y-axis: mpg
- Geometry:
 - geom_point: draw points
 - geom_smooth: Add a layer which draws a best-fitting line

A dataset

We will use the [beaches](#) dataset

```
library(tidyverse)
library(rio)
beaches <- import('data/sydneybeaches3.csv')
```


```
#>      date year month day season rainfall temperature enterococci
#> 1 2013-01-02 2013     1   2      1      0.0         23.4         6.7
#> 2 2013-01-06 2013     1   6      1      0.0         30.3         2.0
#> 3 2013-01-12 2013     1  12      1      0.0         31.4        69.1
#> 4 2013-01-18 2013     1  18      1      0.0         46.4         9.0
#> 5 2013-01-24 2013     1  24      1      0.0         27.5        33.9
#> 6 2013-01-30 2013     1  30      1      0.6         26.6        26.5
#>   day_num month_num month_name season_name
#> 1      2         1    January      Summer
#> 2      6         1    January      Summer
#> 3     12         1    January      Summer
#> 4     18         1    January      Summer
#> 5     24         1    January      Summer
#> 6     30         1    January      Summer
```

Credit: D. J. Navarro

Building a graph


Start with a blank canvas

```
ggplot()
```



Add a data set

```
ggplot(  
  data = beaches  
)
```




Add a mapping from data to elements

```
ggplot(  
  data = beaches,  
  mapping = aes(  
    x = temperature,  
    y = rainfall  
  )  
)
```

What goes in

- the x and y axes
- the color of markers
- the shape of markers

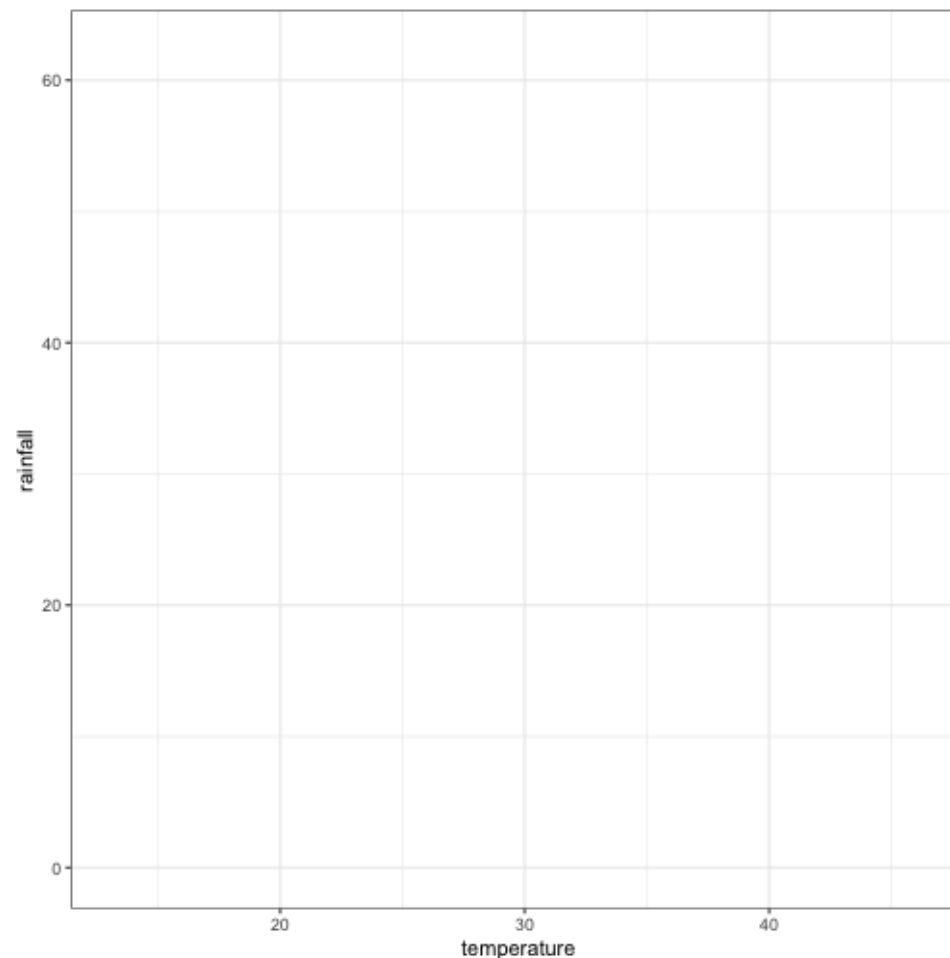


Add a geometry to draw

```
ggplot(  
  data = beaches,  
  mapping = aes(  
    x = temperature,  
    y = rainfall  
  )  
) +  
  geom_point()
```


What to draw:

- Points, lines
- histogram, bars, pies

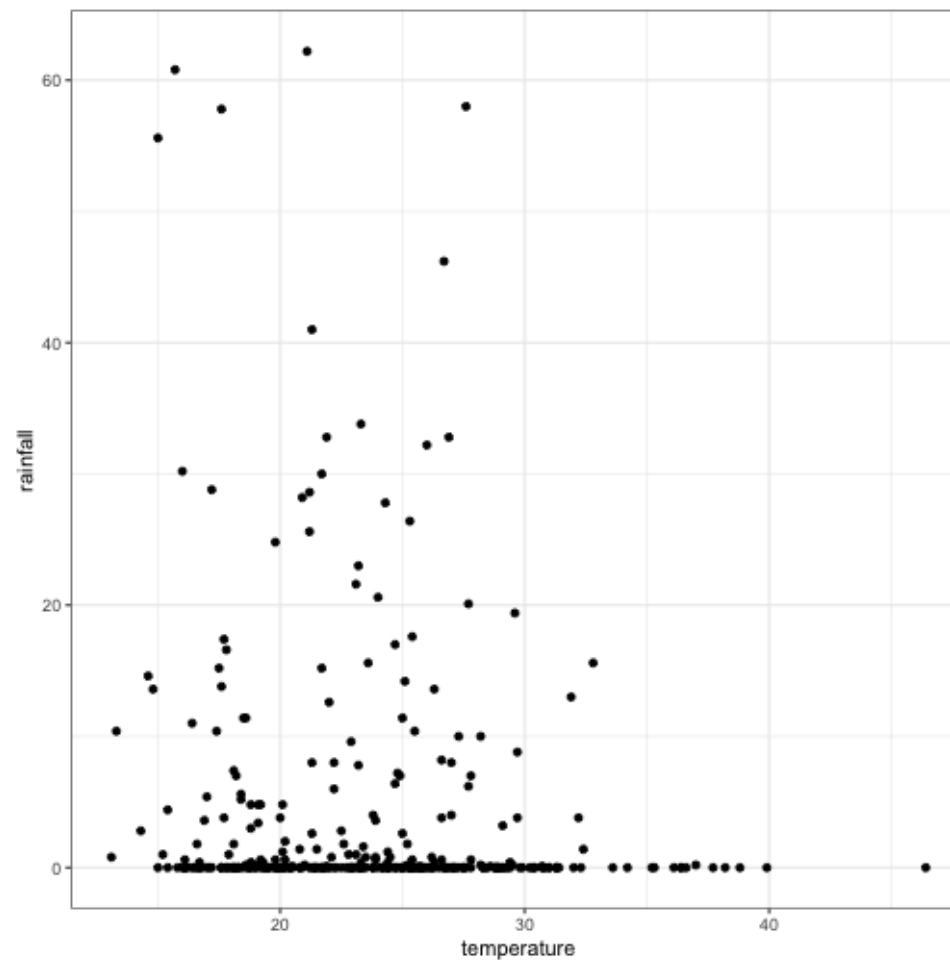

Add options for the geom


```
ggplot(  
  data = beaches,  
  mapping = aes(  
    x = temperature,  
    y = rainfall  
  )  
) +  
  geom_point(size = 4)
```

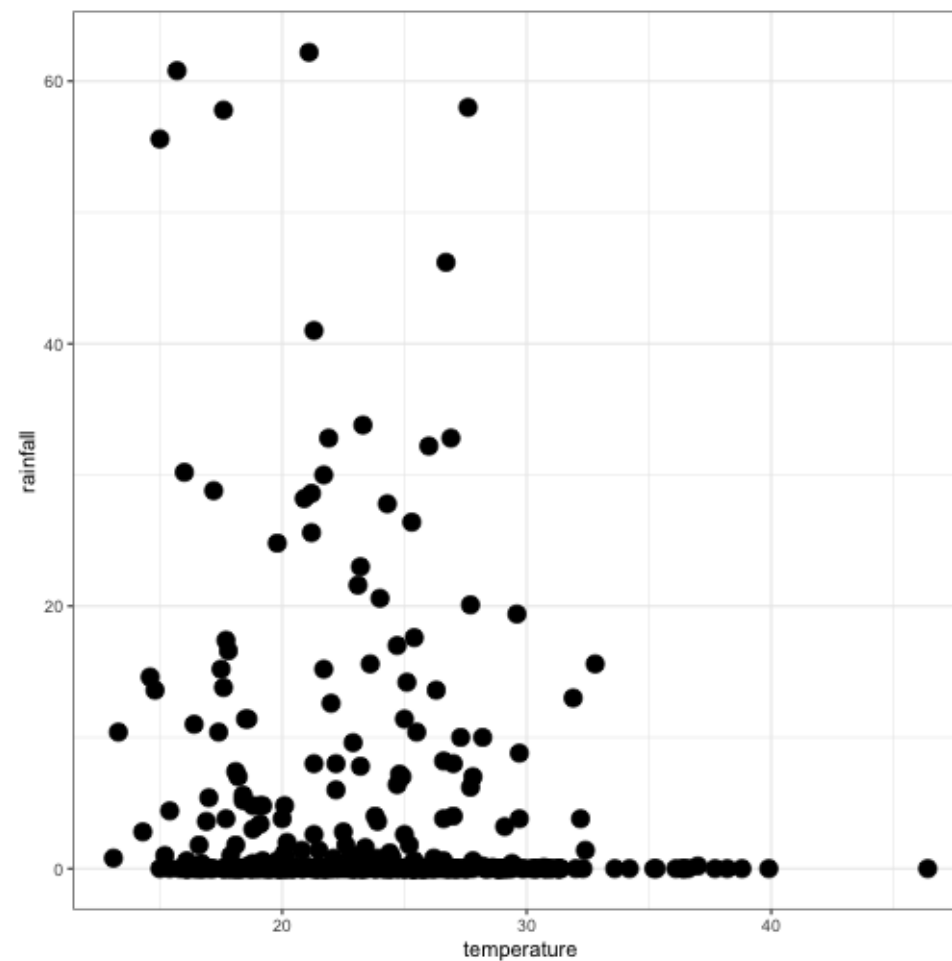

Add a mapping to modify the geom


```
ggplot(  
  data = beaches,  
  mapping = aes(  
    x = temperature,  
    y = rainfall  
  )  
) +  
  geom_point(  
    mapping = aes(color = season_name),  
    size = 4  
  )
```

Anything data-driven has to be a mapping, driven by the aes function

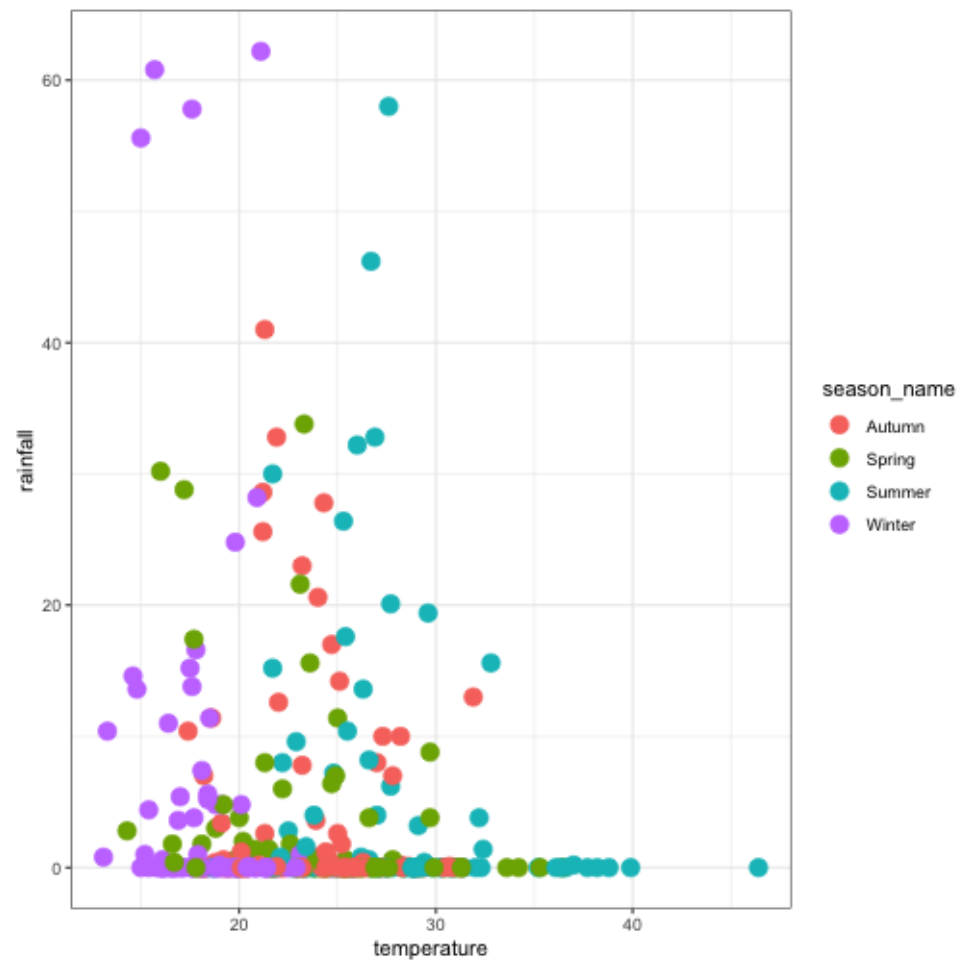


Split into facets

```
ggplot(
  data = beaches,
  mapping = aes(
    x = temperature,
    y = rainfall
  )
) +
  geom_point(
    mapping = aes(color = season_name),
    size = 4
  ) +
  facet_wrap(~ season_name)
```

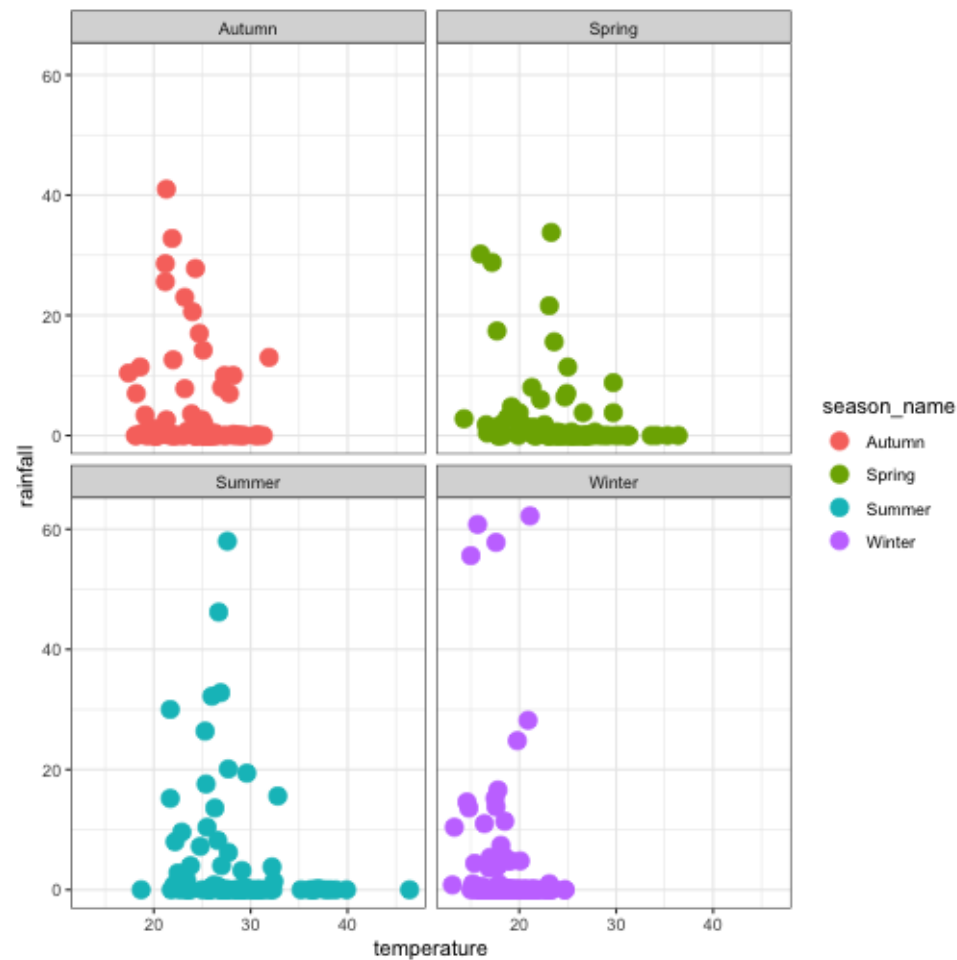


Remove the legend

```
ggplot(  
  data = beaches,  
  mapping = aes(  
    x = temperature,  
    y = rainfall  
  )  
) +  
  geom_point(  
    mapping = aes(color = season_name),  
    size = 4,  
    show.legend = FALSE  
  ) +  
  facet_wrap( ~ season_name)
```

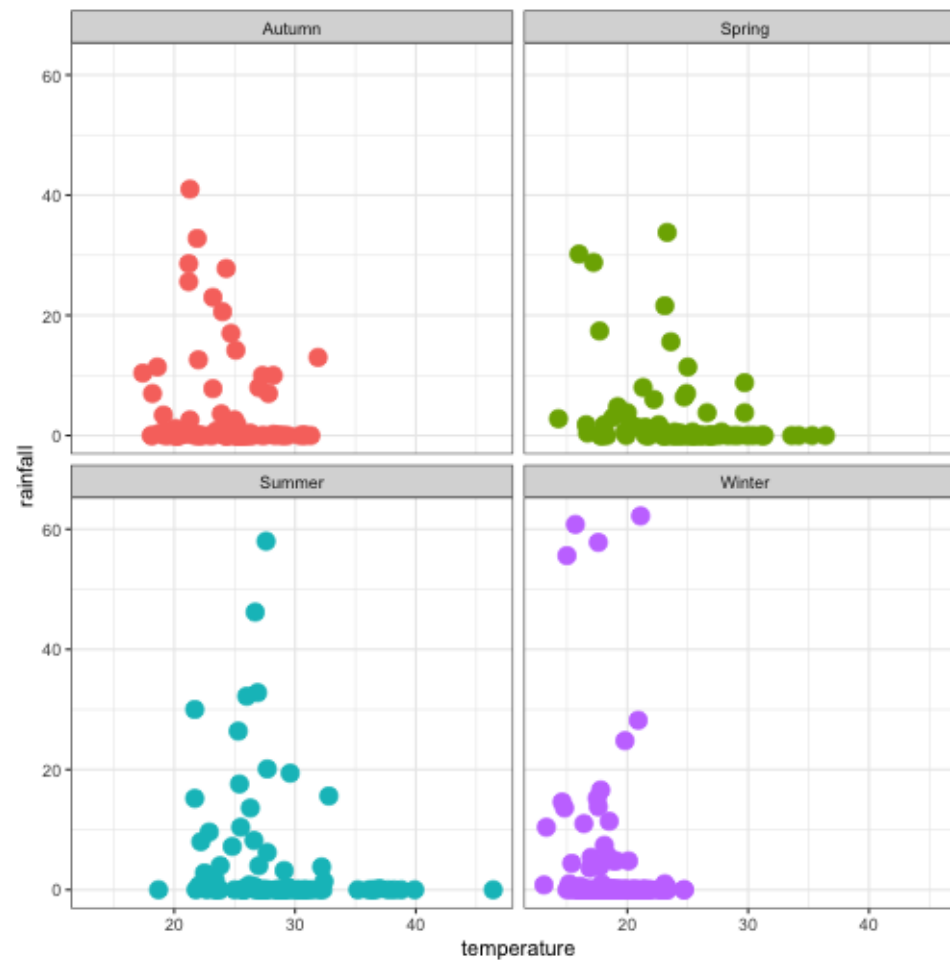


Change the background

```
ggplot(
  data = beaches,
  mapping = aes(
    x = temperature,
    y = rainfall
  )
) +
  geom_point(
    mapping = aes(color = season_name),
    size = 4,
    show.legend = FALSE
  ) +
  facet_wrap( ~ season_name) +
  theme_bw()
```

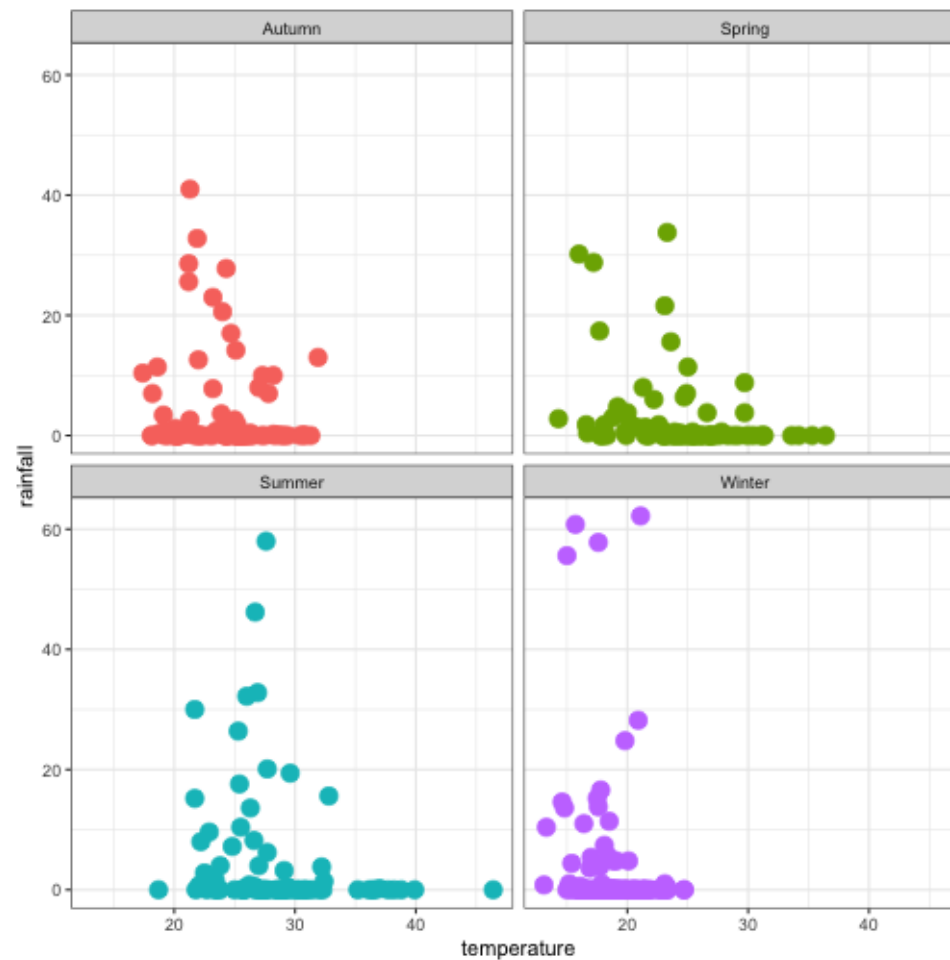


Update the labels

```
ggplot(
  data = beaches,
  mapping = aes(
    x = temperature,
    y = rainfall
  )
) +
  geom_point(
    mapping = aes(color = season_name),
    size = 4,
    show.legend = FALSE
  ) +
  facet_wrap( ~ season_name) +
  theme_bw() +
  labs(x = 'Temperature (C)', y = 'Rainfall (mm)')
```

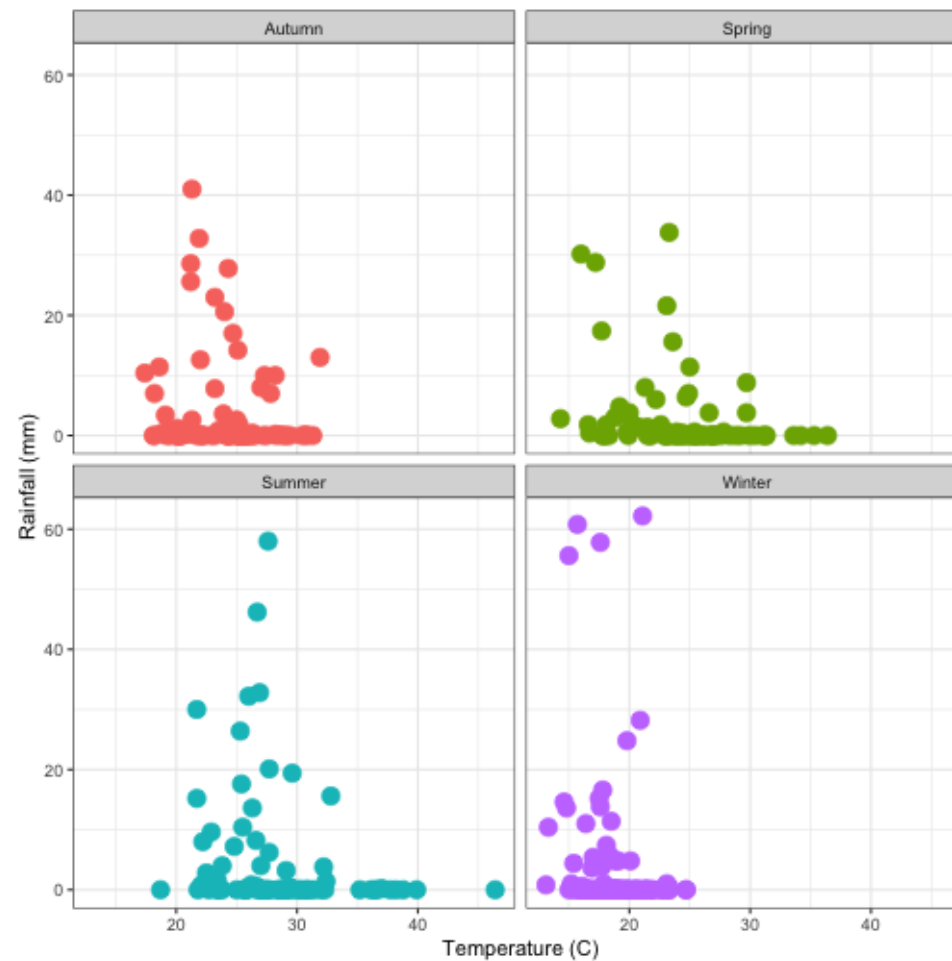

Add titles

```
ggplot(
  data = beaches,
  mapping = aes(
    x = temperature,
    y = rainfall
  )
) +
  geom_point(
    mapping = aes(color = season_name),
    size = 4,
    show.legend = FALSE
  ) +
  facet_wrap( ~ season_name) +
  theme_bw() +
  labs(x = 'Temperature (C)',
       y = 'Rainfall (mm)',
       title = 'Sydney weather by season',
       subtitle = "Data from 2013 to 2018")
```

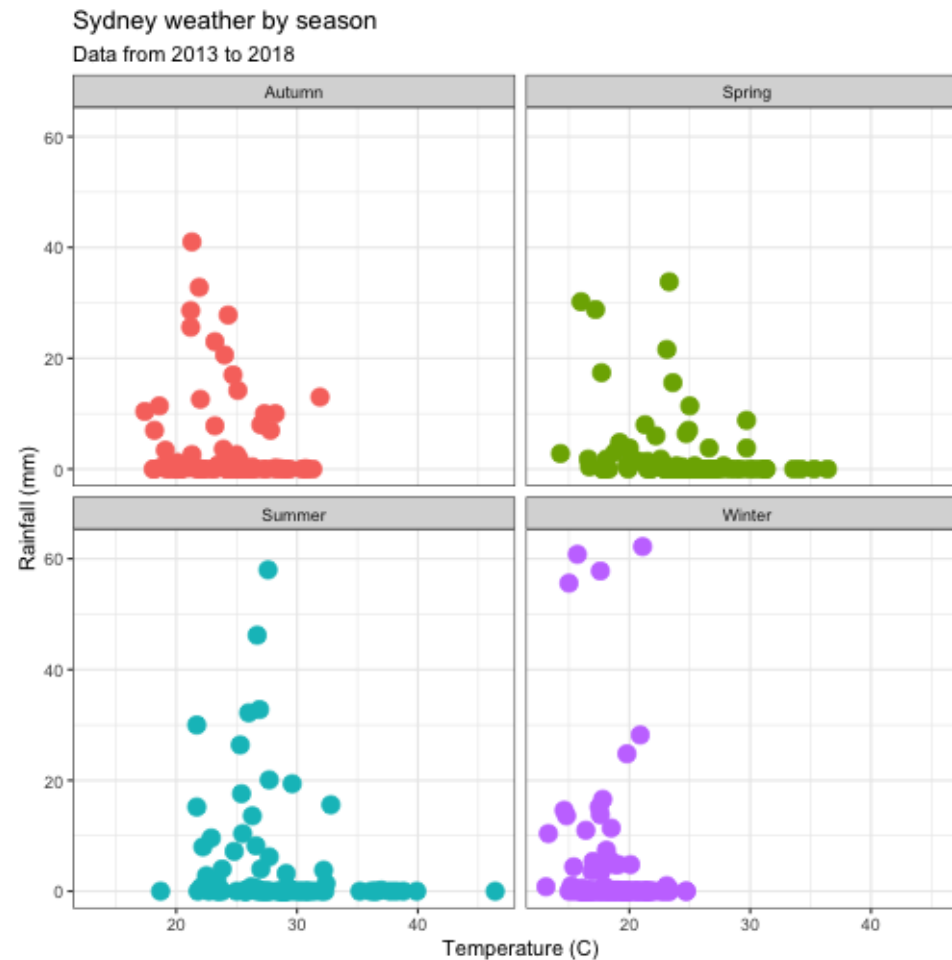

The grammar

- Data
- Aesthetics (or aesthetic mappings)
- Geometries (as layers) or Statistics (as computed layers)
- Facets
- Themes
- (Coordinates)
- (Scales)

Peeking under the hood

If I write...

```
ggplot(  
  data = beaches,  
  aes(x = temperature,  
      y = rainfall)  
) +  
  geom_point()
```


what's really run is ...

```
ggplot(  
  data = beaches,  
  mapping = aes(  
    x = temperature, y = rainfall)) +  
  layer(  
    geom = "point",  
    stat = "identity",  
    position = "identity") +  
  facet_null() +  
  theme_grey() +  
  coord_cartesian() +  
  scale_x_continuous() +  
  scale_y_continuous()
```

Each element can be adapted and tweaked to create graphs

Customize

```
ggplot(
  data = beaches,
  mapping = aes(
    x = temperature,
    y = rainfall
  )
) +
  geom_point(
    mapping = aes(color = season_name),
    size = 4,
    show.legend = FALSE
  ) +
  facet_wrap( ~ season_name) +
  theme_bw() +
  labs(x = 'Temperature (C)',
       y = 'Rainfall (mm)',
       title = 'Sydney weather by season',
       subtitle = "Data from 2013 to 2018") +
  theme(axis.title = element_text(size = 14),
        axis.text = element_text(size = 12),
        strip.text = element_text(size = 12))
```

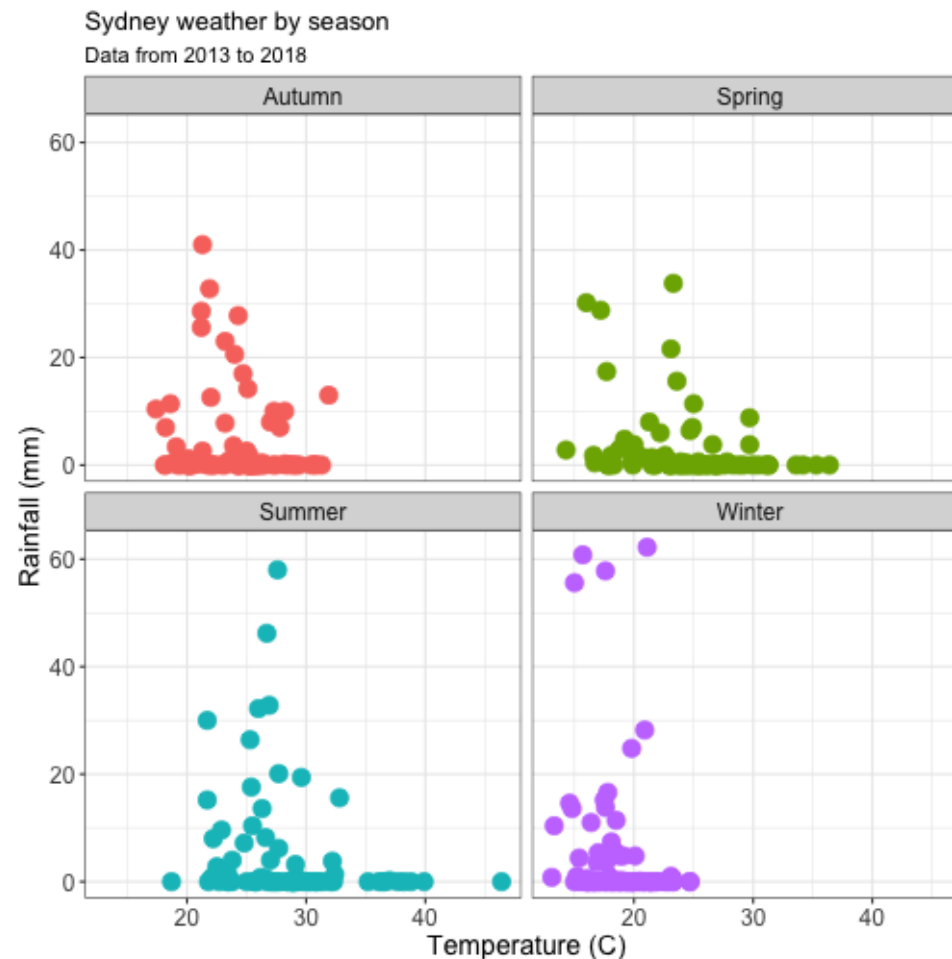


Using the BRCA data

We'll use the brca data developed during the homework. The RDS file is available [here](#).

```
brca_clean <- readRDS('data/brca.rds')
brca_clean <- brca_clean %>%
  rename('Age' = 'Age.at.Initial.Pathologic.Diagnosis')
```


Univariate plots

```
ggplot(data=brca_clean,  
       mapping = aes(x = Age)) +  
  geom_histogram()
```

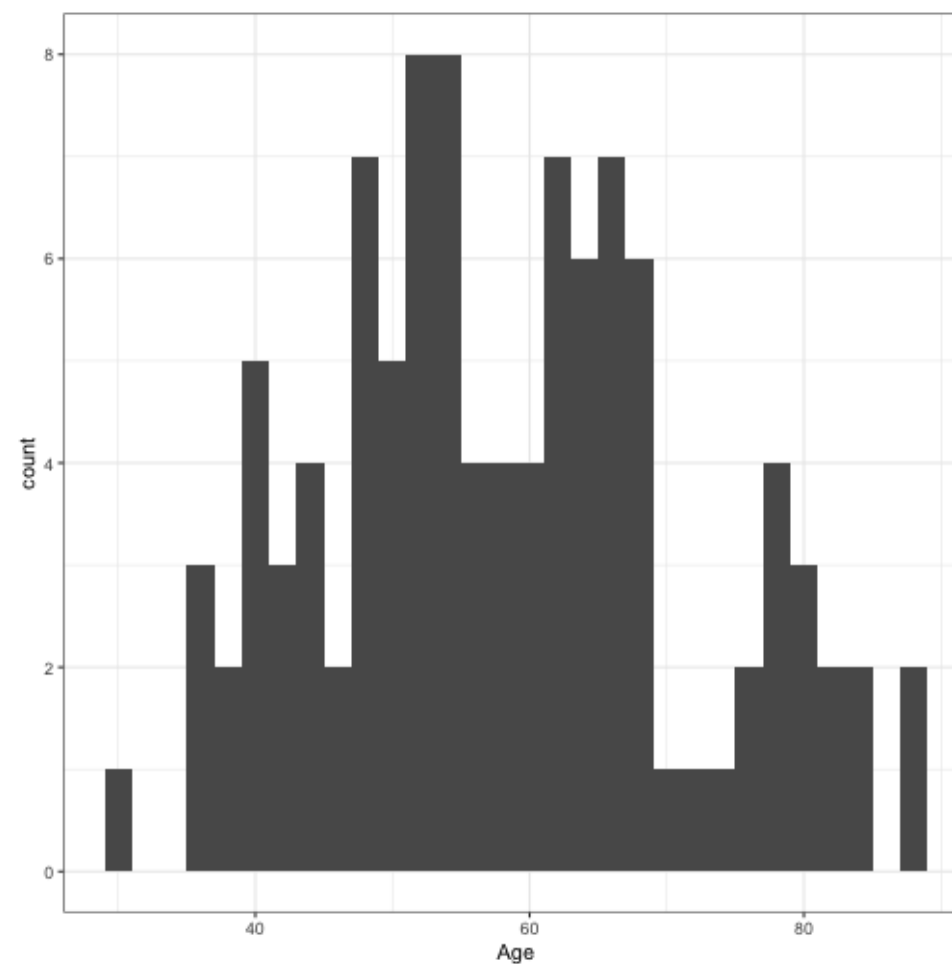


Univariate plots

```
ggplot(data=brca_clean,  
       mapping = aes(x = Age)) +  
  geom_histogram(bins=50)
```

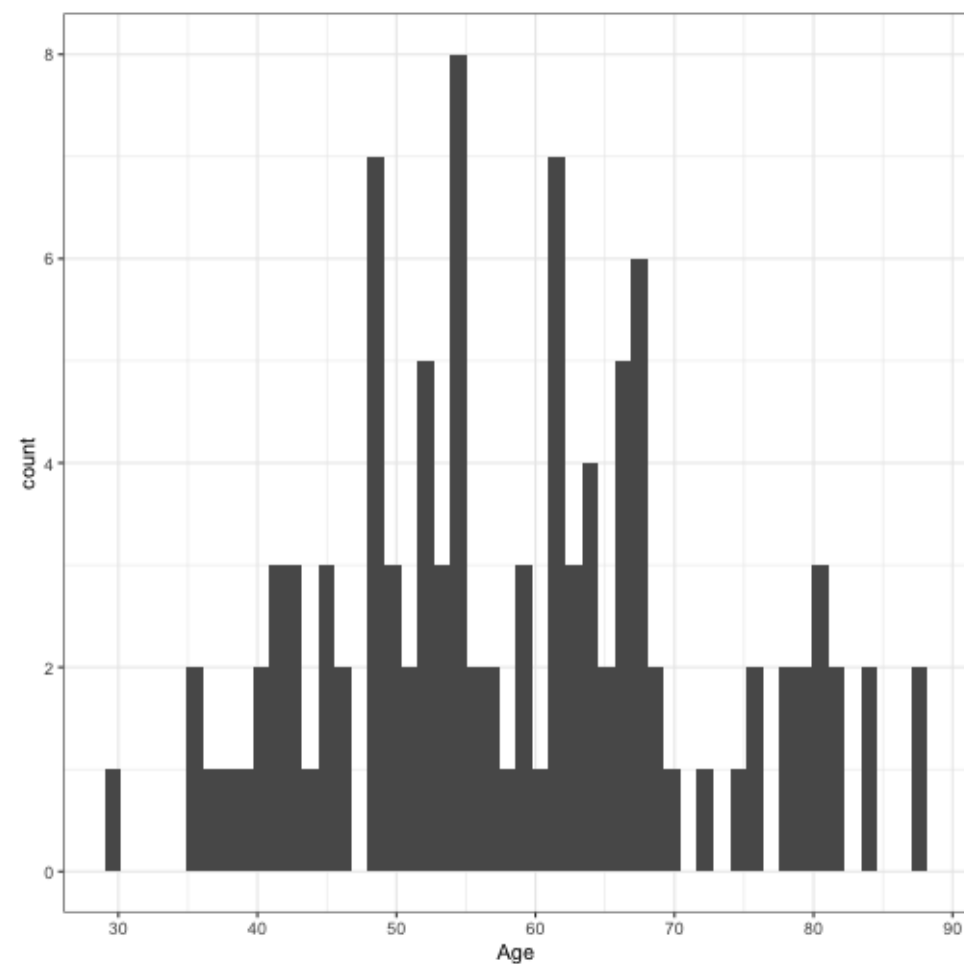


Univariate plots

```
ggplot(data=brca_clean,  
       mapping = aes(x = Age)) +  
  geom_density()
```

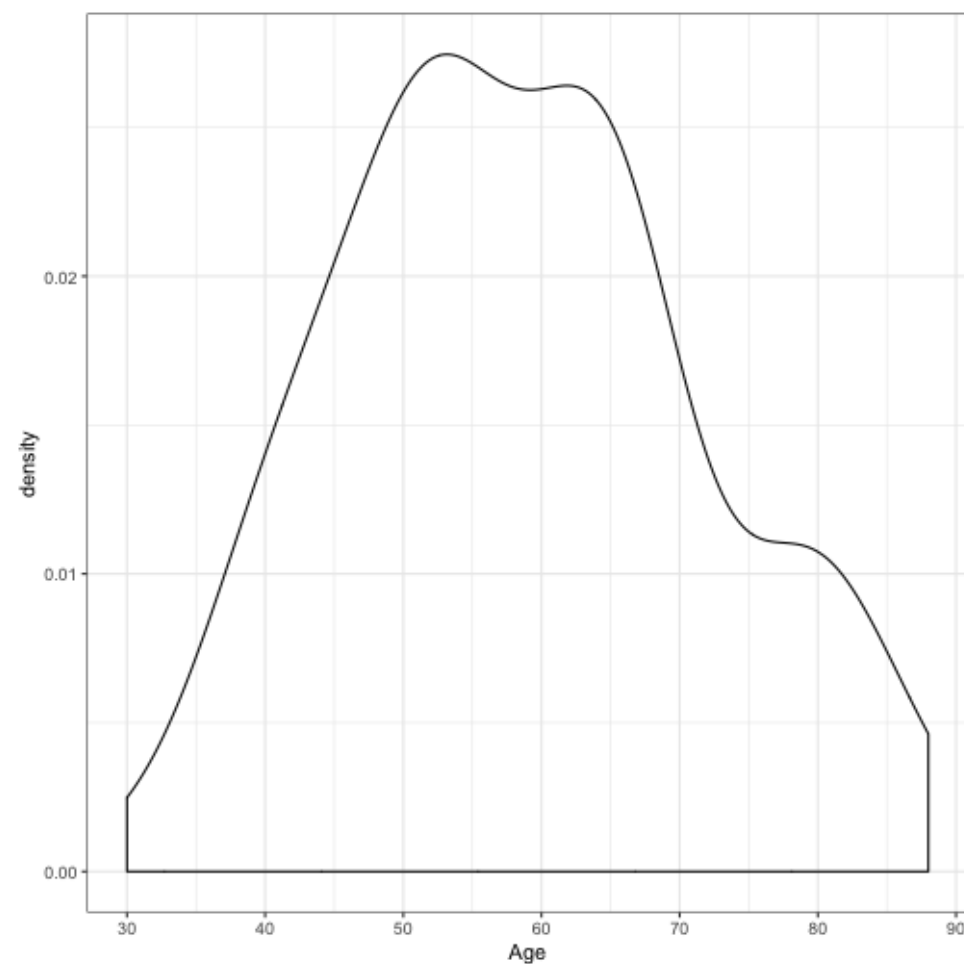

Univariate plots


```
ggplot(data = brca_clean,  
       mapping = aes(x = Tumor)) +  
  geom_bar()
```

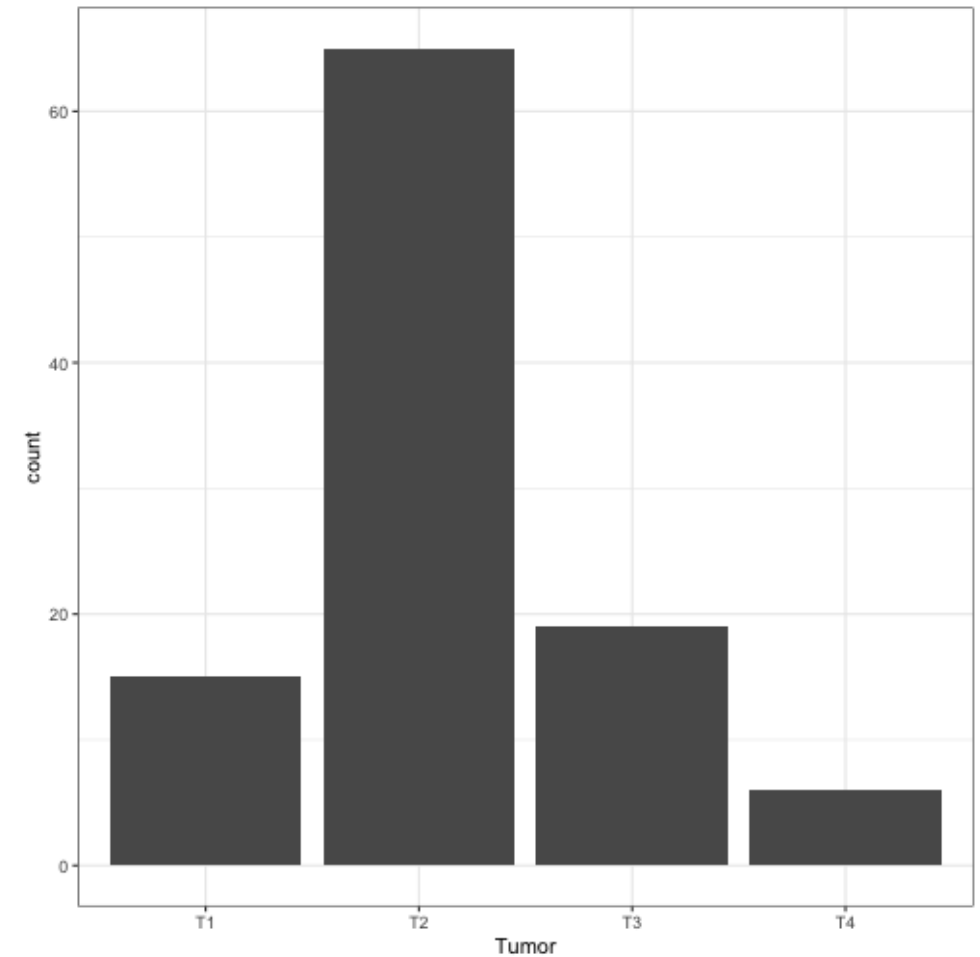

Bivariate plots


Continuous with discrete

```
ggplot(data = brca_clean,  
       mapping = aes(x = brca_cat, # Put discrete on  
                      y = Age)  
       ) +  
  geom_boxplot()
```

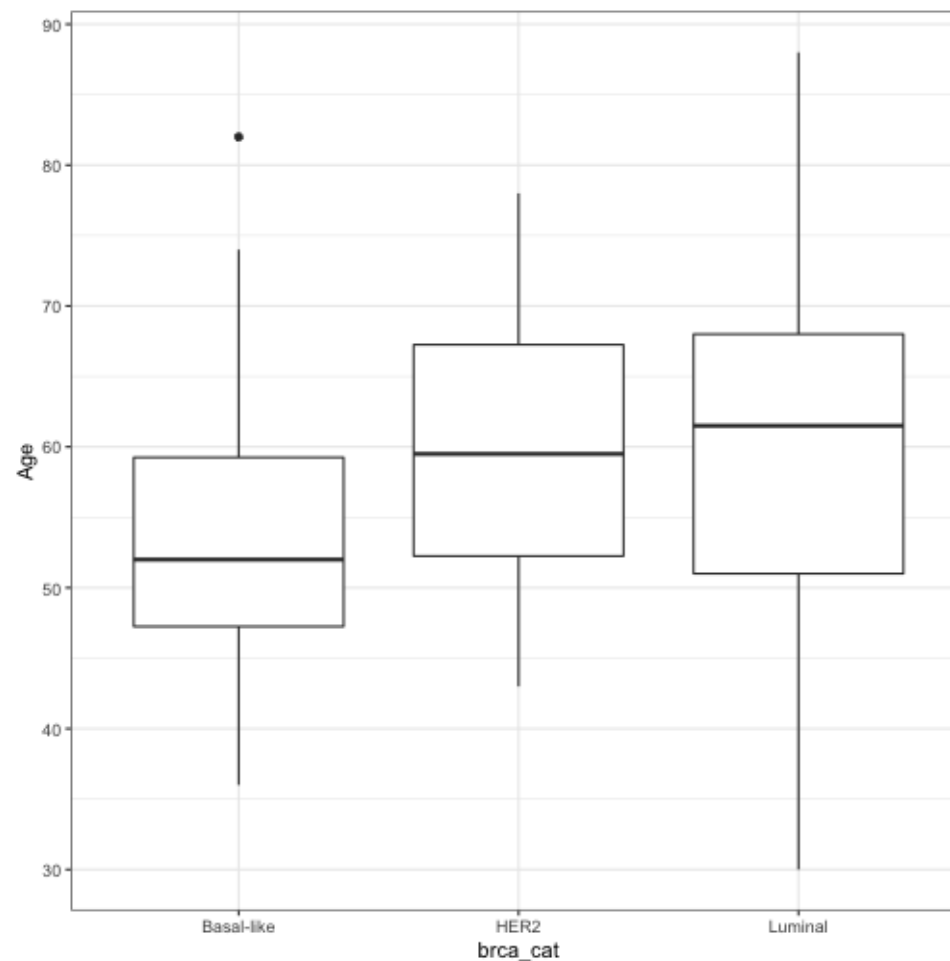


Continuous with discrete

```
ggplot(data = brca_clean,  
       mapping = aes(x = brca_cat, # Put discrete on  
                     y = Age)  
       ) +  
  geom_violin()
```

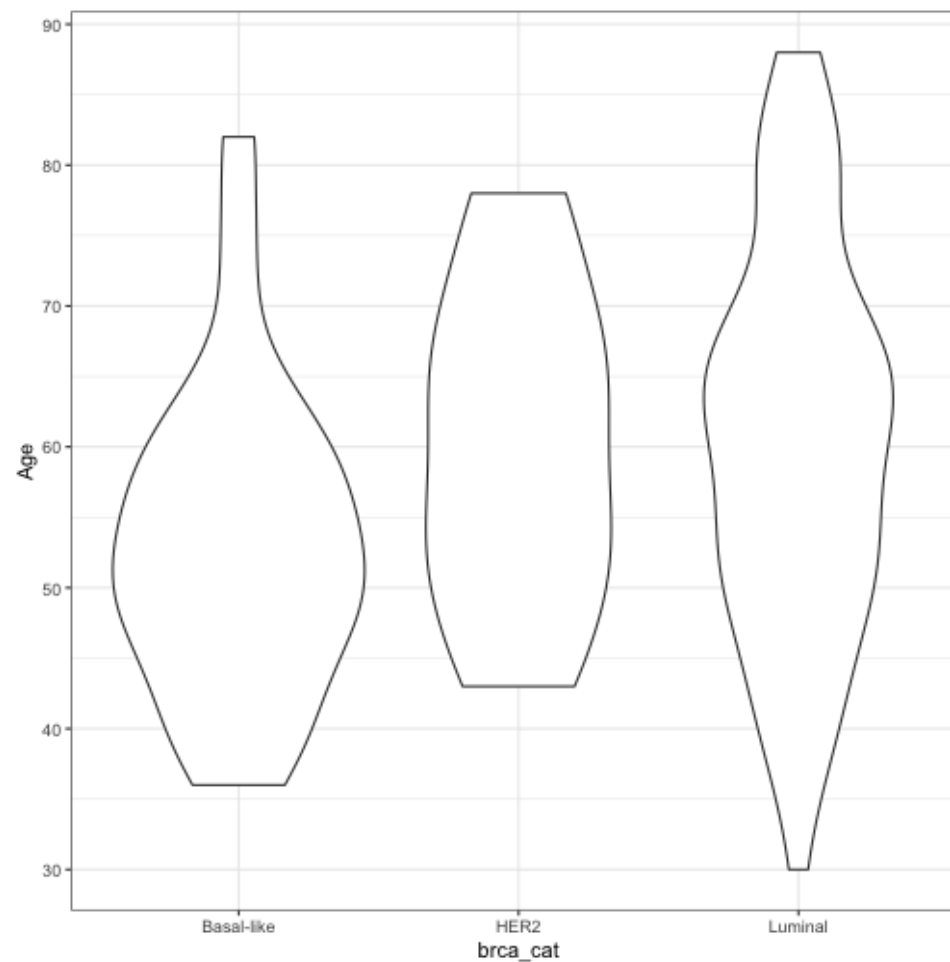


Two continuous variables

```
ggplot(data=mpg,
       mapping = aes(x = displ,
                     y = cty))
  ) +
  geom_point()
```

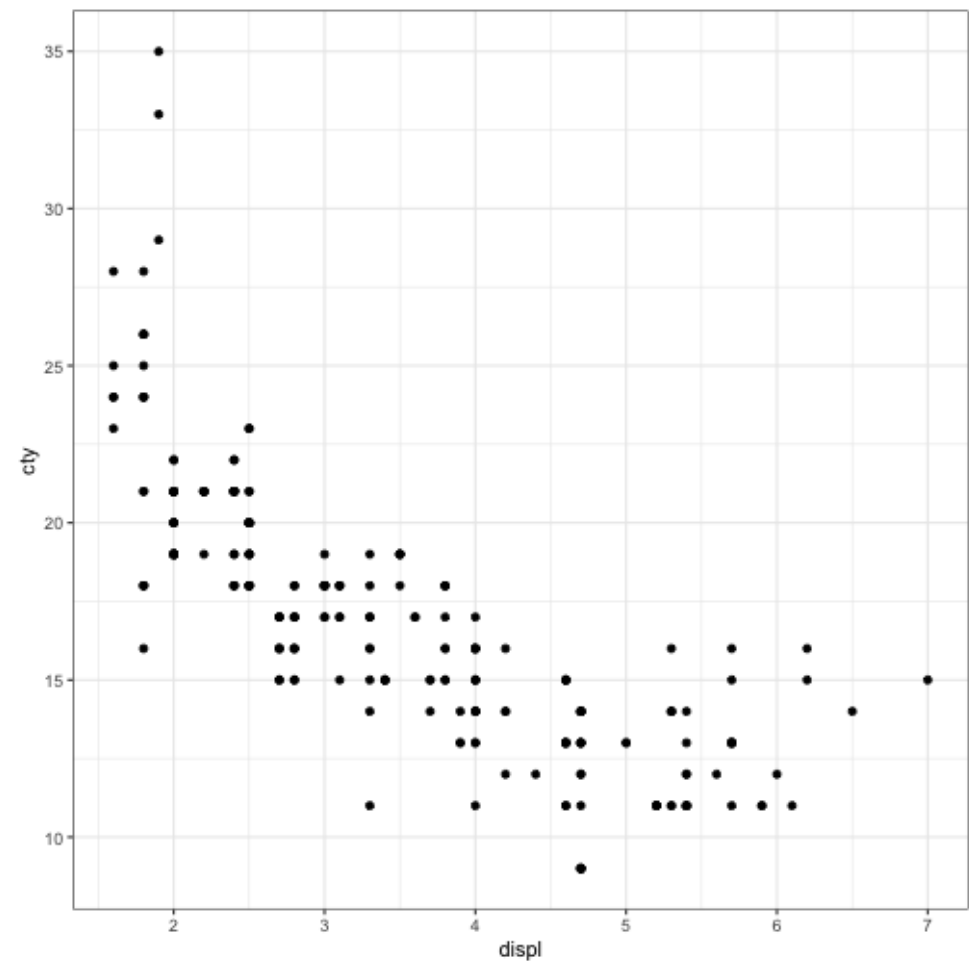

Two continuous variables

```
ggplot(data=mpg,  
       mapping = aes(x = displ,  
                     y = cty)  
       ) +  
  geom_point() + geom_smooth()
```

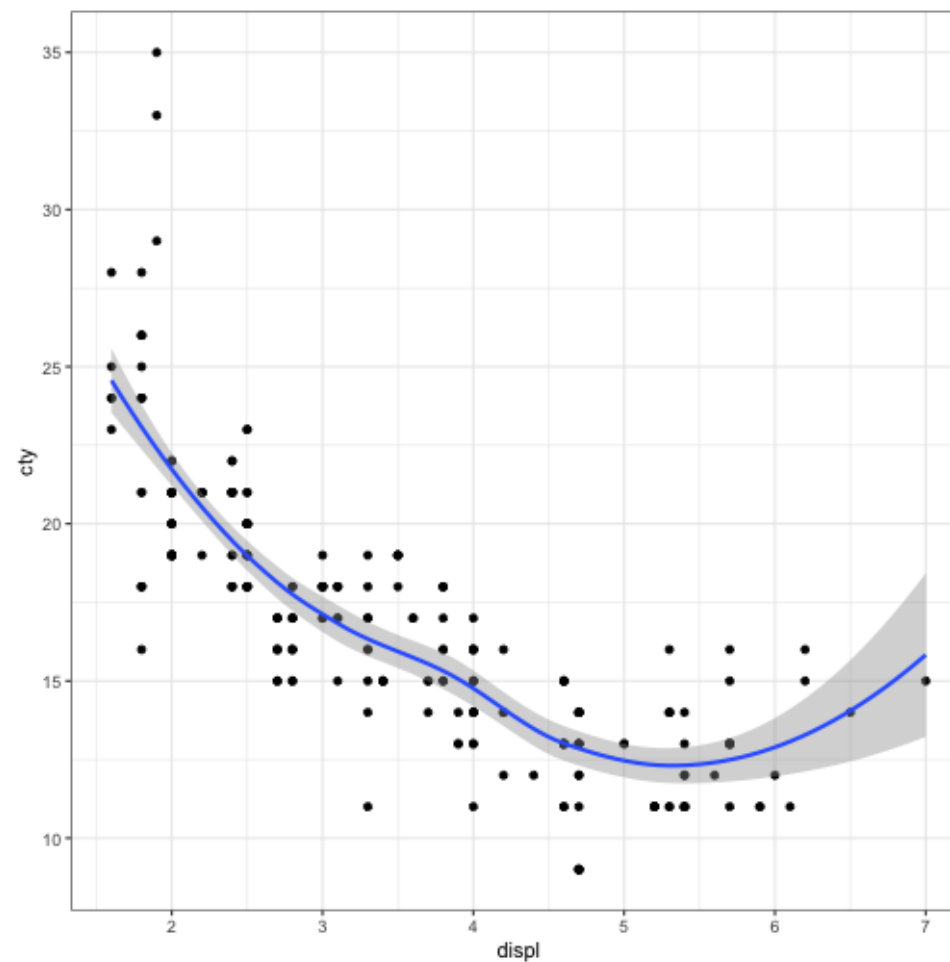


Two continuous variables

```
ggplot(data=mpg,  
       mapping = aes(x = displ,  
                     y = cty))  
  ) +  
  geom_point() + geom_smooth(method='lm')
```


This forces a straight line.

lm stands for **linear model**

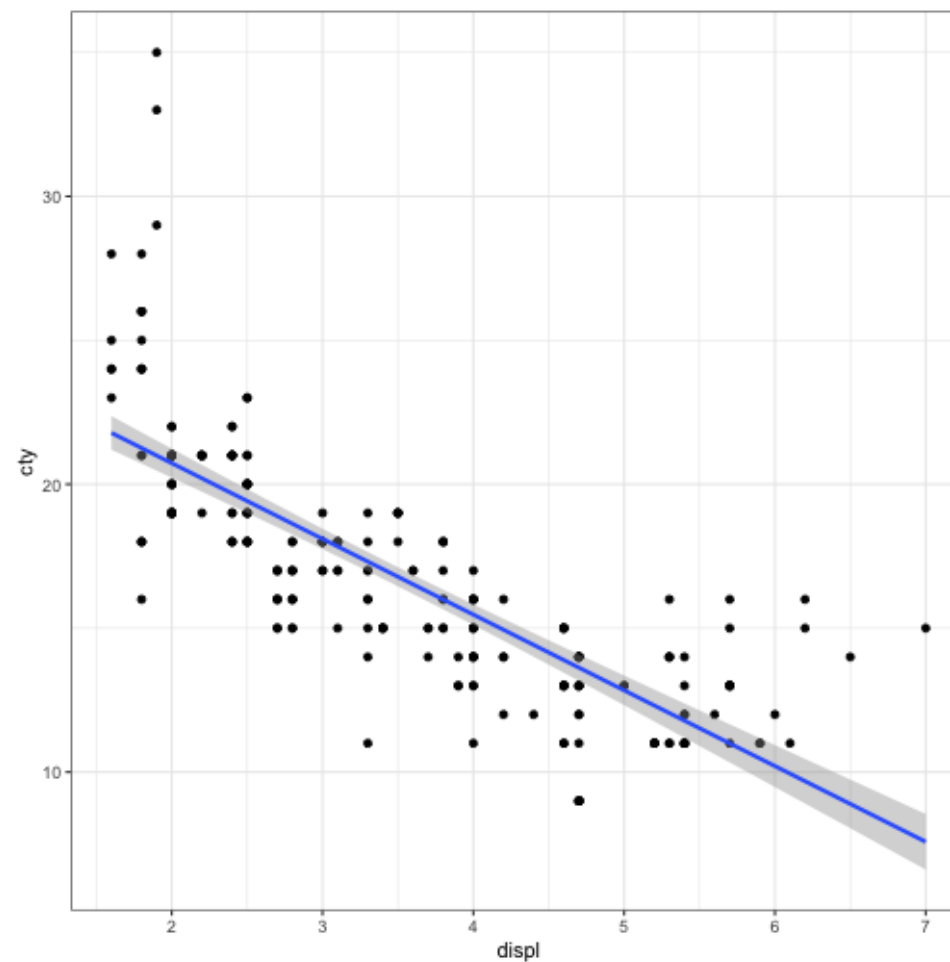

Adding layers

```
ggplot(data = mpg,  
  aes(x = displ,  
    y = cty,  
    color = factor(cyl)))+  
  geom_point()
```

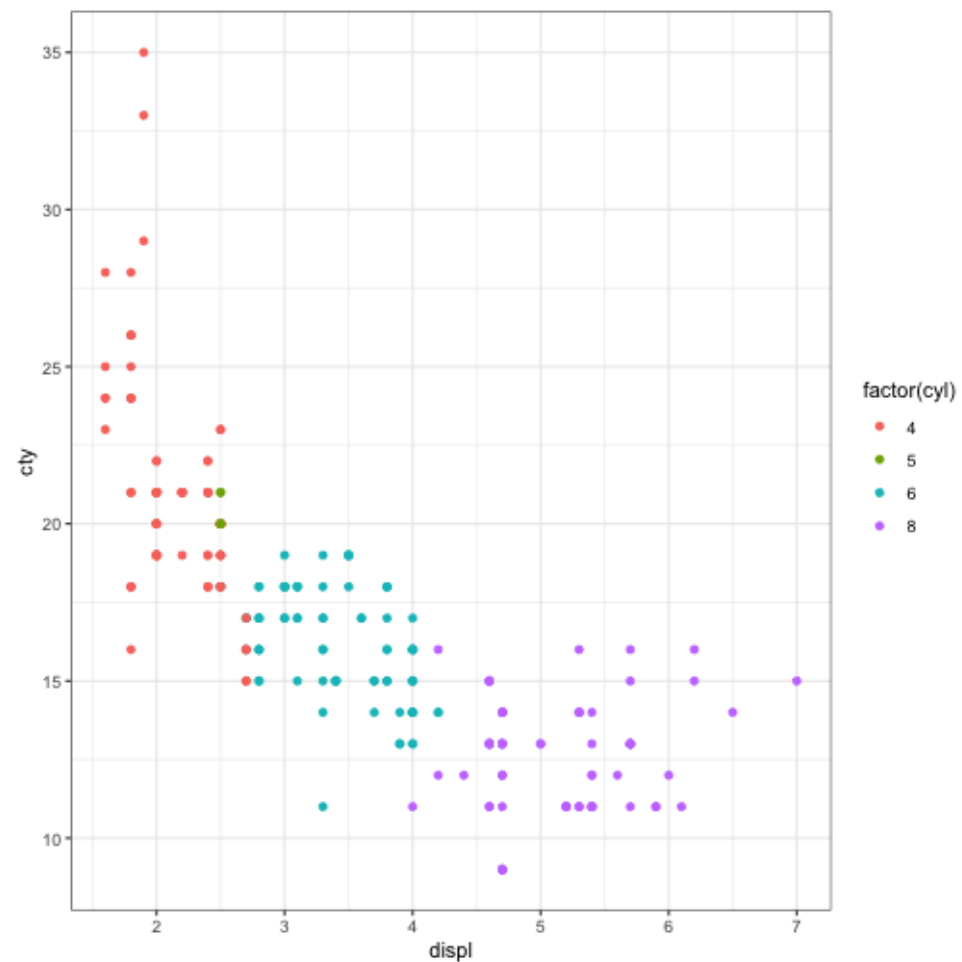


Adding layers

```
ggplot(data = mpg,
       aes(x = displ,
           y = cty,
           color = factor(cyl)))+
  geom_point() +
  geom_smooth(se = F)
```

Separate lines for separate groups

se=F suppresses the confidence bands

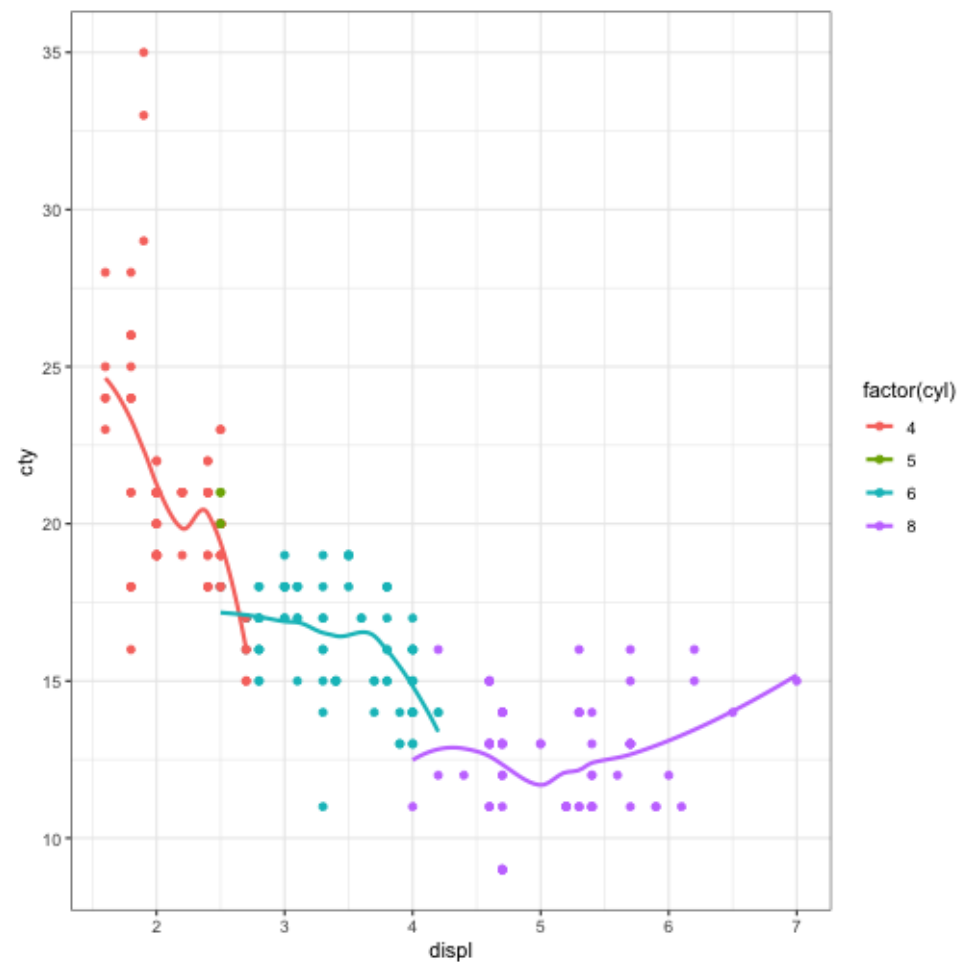


Classwork checkin

What would happen if I tried to do the previous graph without transforming `cyl` to factor?

Adding layers

```
ggplot(data = mpg,
       aes(x = displ,
           y = cty)) +
  geom_point(aes(color=factor(cyl))) +
  geom_smooth(aes(color=factor(cyl)), se=F) +
  geom_smooth(color = 'black',se=F)
```


- You can limit mappings to particular geometries
- Anything mapped from the original dataset has to be in aes()
- Anything that doesn't come from the data can be on its own

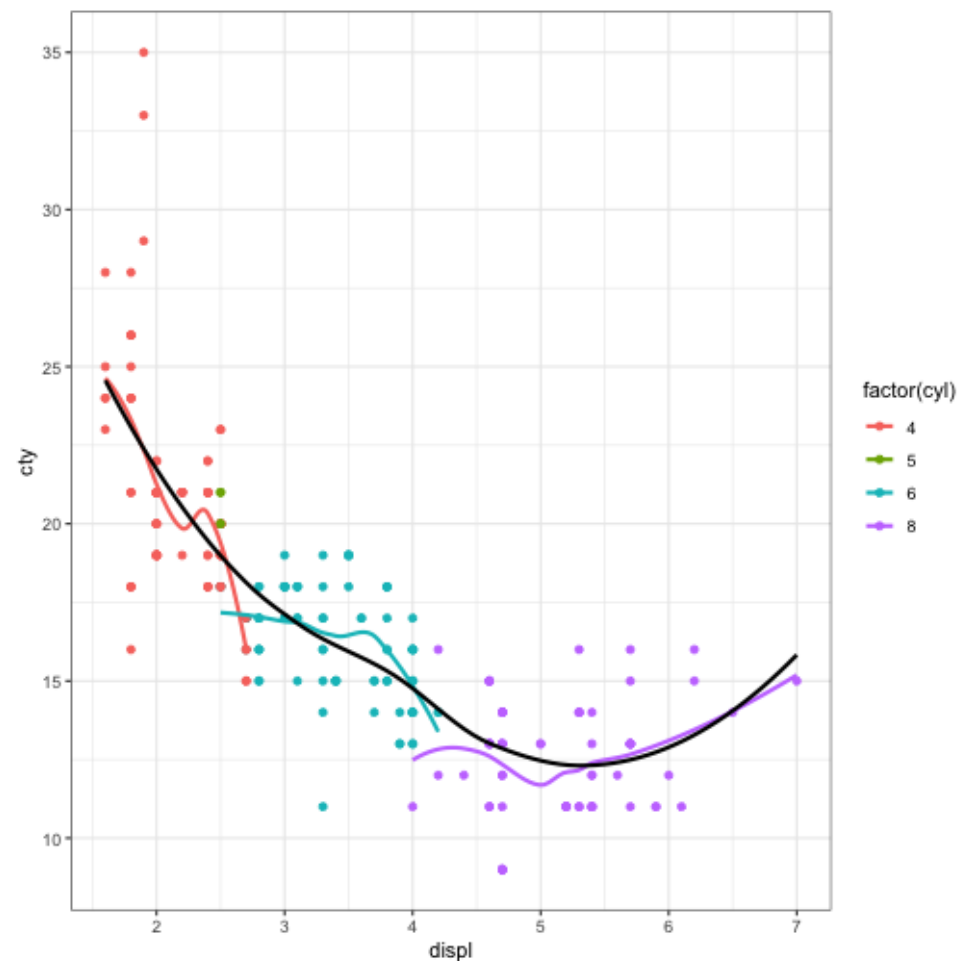

Going back to the boxplots

```
ggplot(data = brca_clean,  
       aes(x = brca_cat,  
           y = Age)) +  
  geom_boxplot() +  
  geom_point()
```


- Can't see the points since they are overlaid

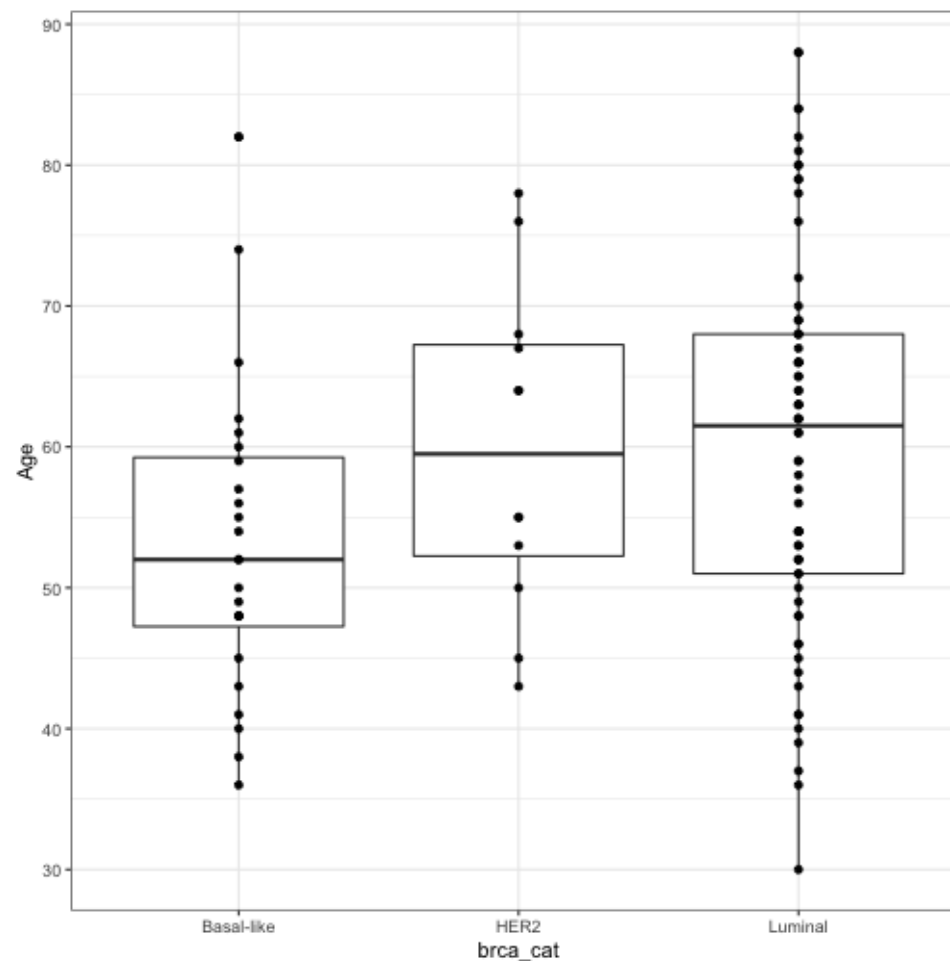

Going back to the boxplots


```
ggplot(data = brca_clean,  
       aes(x = brca_cat,  
           y = Age)) +  
  geom_boxplot() +  
  geom_jitter()
```

- Maybe too wide?

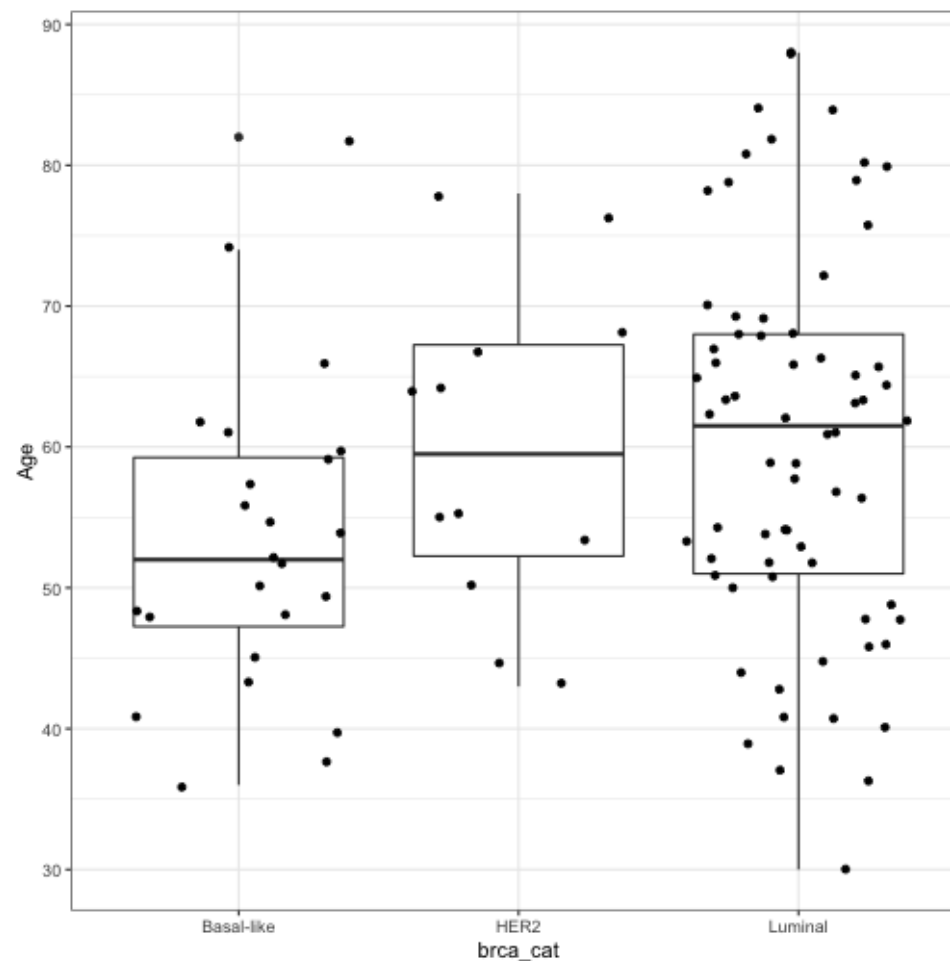

Going back to the boxplots

```
ggplot(data = brca_clean,  
       aes(x = brca_cat,  
           y = Age)) +  
  geom_boxplot() +  
  geom_jitter(width = 0.3)
```

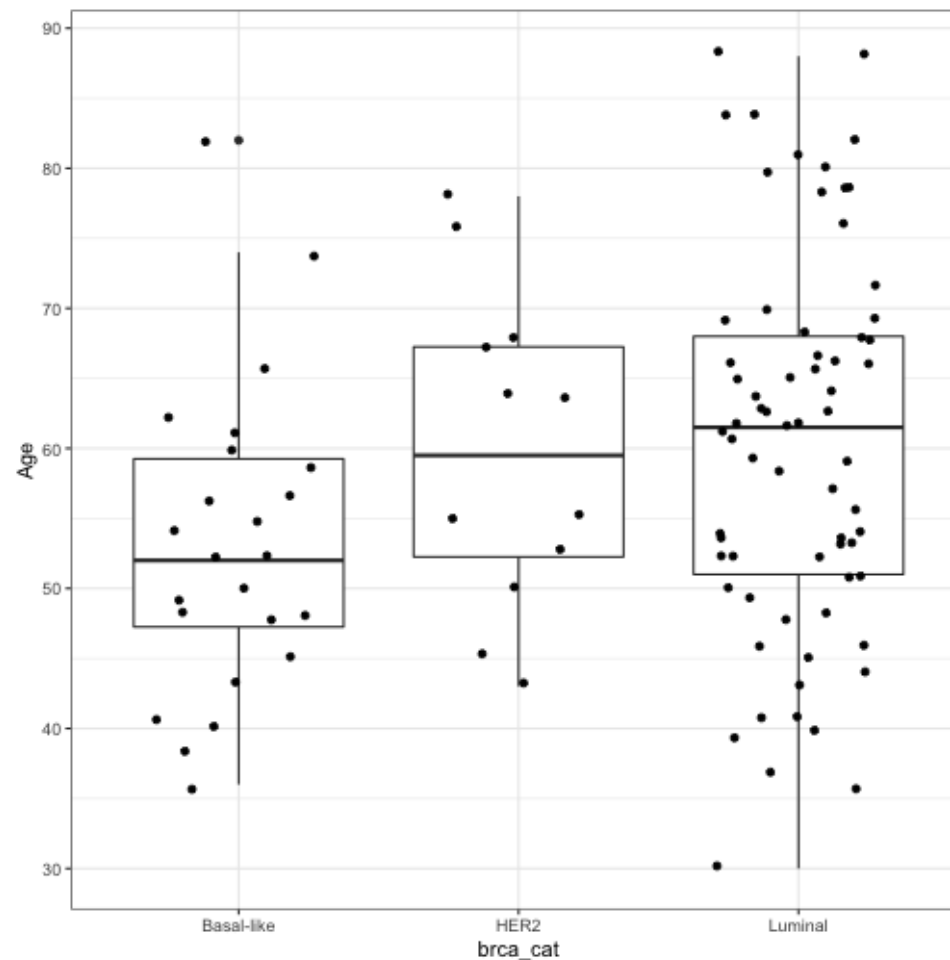

Manhattan plots

Manhattan plot

```
library(qqman)
data(gwasResults)
head(gwasResults)
```


```
#>      SNP CHR BP          P
#> 1  rs1   1  1 0.9148060
#> 2  rs2   1  2 0.9370754
#> 3  rs3   1  3 0.2861395
#> 4  rs4   1  4 0.8304476
#> 5  rs5   1  5 0.6417455
#> 6  rs6   1  6 0.5190959
```

```
gwasResults <- gwasResults %>%
  mutate(x_position = 1:n())
head(gwasResults)
```

```
#>      SNP CHR BP          P x_position
#> 1  rs1   1  1 0.9148060         1
#> 2  rs2   1  2 0.9370754         2
#> 3  rs3   1  3 0.2861395         3
#> 4  rs4   1  4 0.8304476         4
#> 5  rs5   1  5 0.6417455         5
#> 6  rs6   1  6 0.5190959         6
```

Manhattan plot

```
ggplot(gwasResults,  
  aes(x = x_position,  
      y = -log(P, base=10))  
)+  
geom_point(size = 0.2)
```

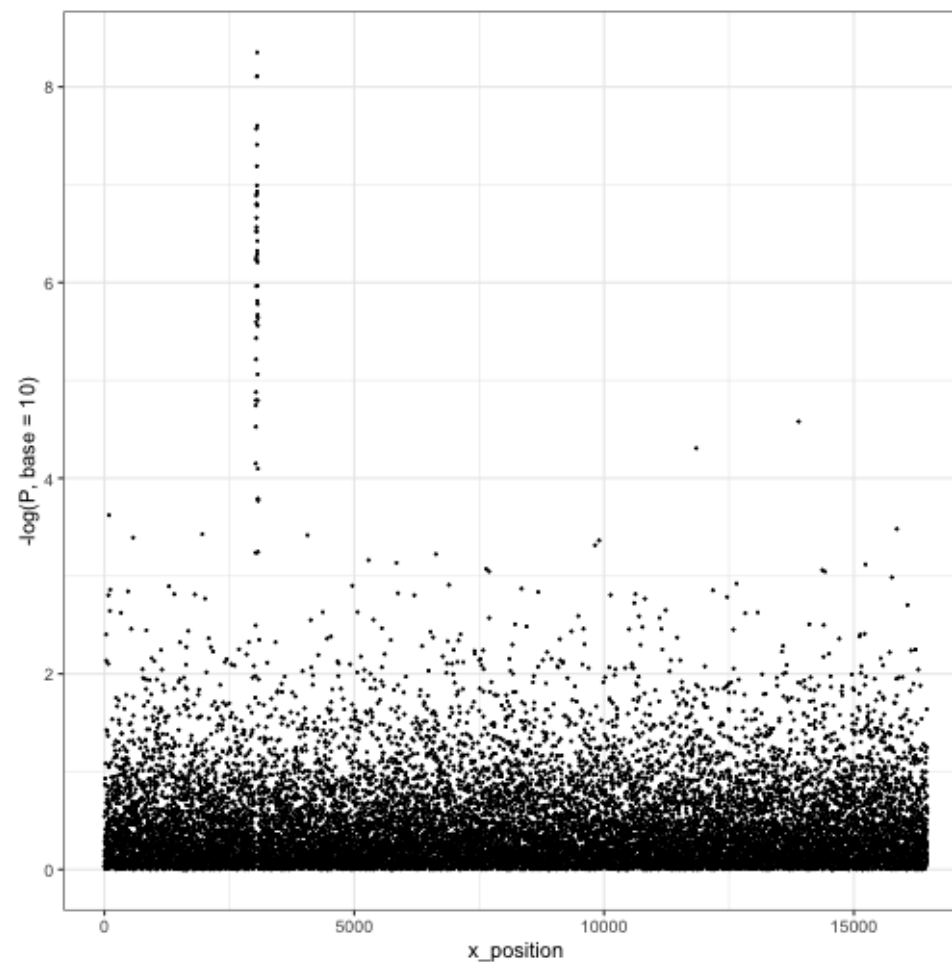


Manhattan plot

```
ggplot(gwasResults,  
  aes(x = x_position,  
      y = -log(P, base=10),  
      group=CHR,  
      color=CHR))+  
  geom_point(size=0.2)
```

Oops!! We wanted points colored by chromosome.


But that didn't happen because we put CHR in as numeric.

Need to convert to factor, i.e., discrete

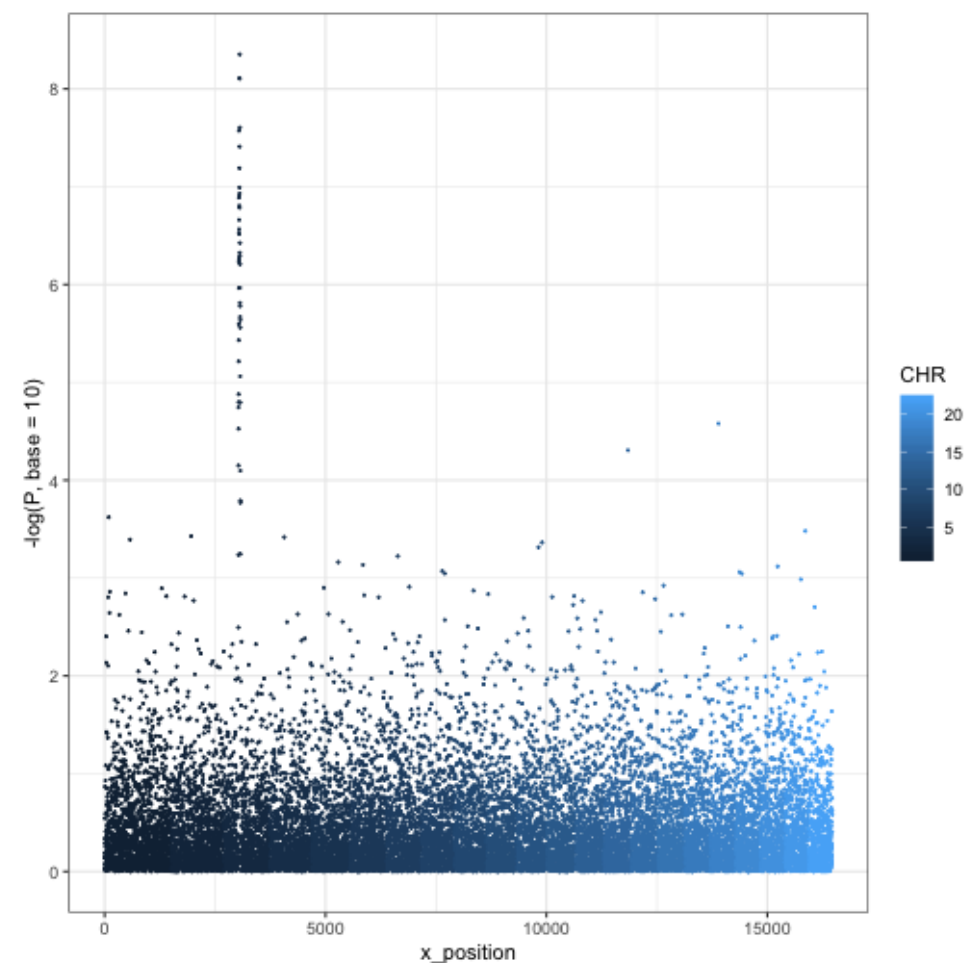


Manhattan plot

```
ggplot(gwasResults,  
  aes(x = x_position,  
      y = -log(P, base=10),  
      group=factor(CHR),  
      color=factor(CHR)))+  
  geom_point(size=0.2)
```

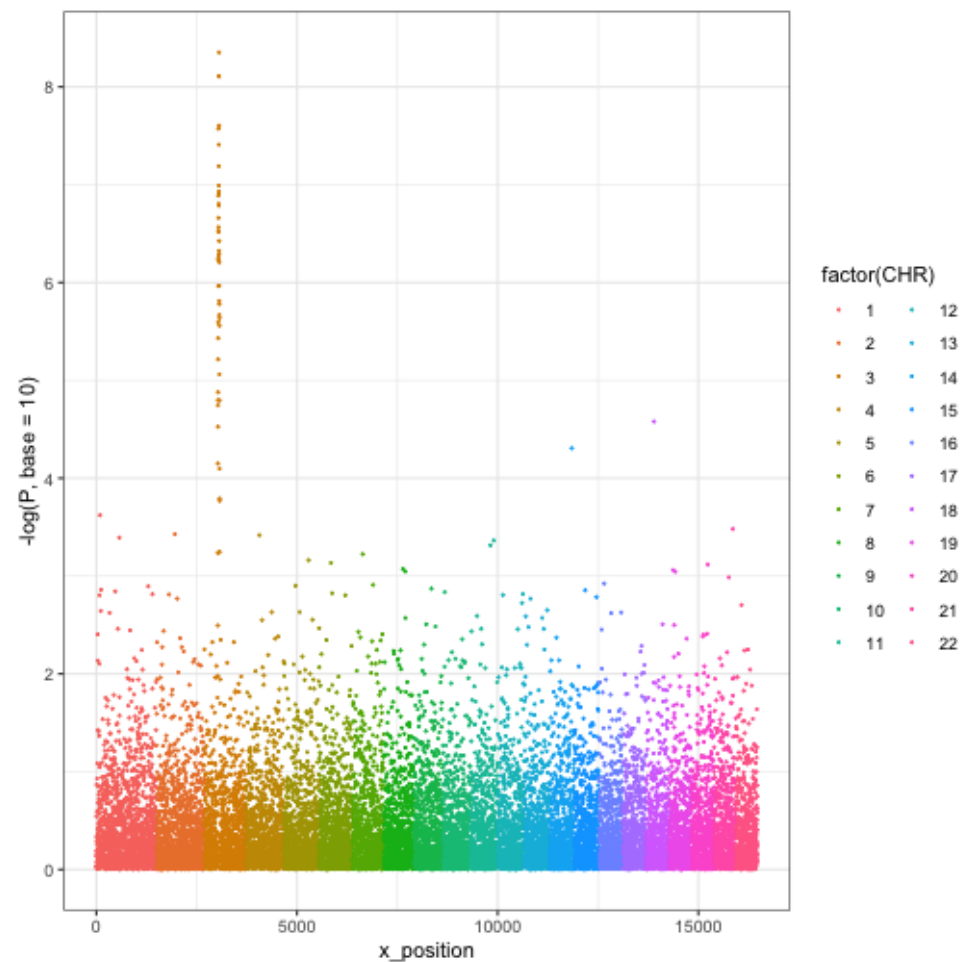

Manhattan plot


```
ggplot(gwasResults,  
  aes(x = x_position,  
    y = -log(P, base=10),  
    group=factor(CHR), color=factor(CHR)))+  
  geom_point(size=0.2)+  
  geom_hline(yintercept = 8, color='red', linetype=2)
```

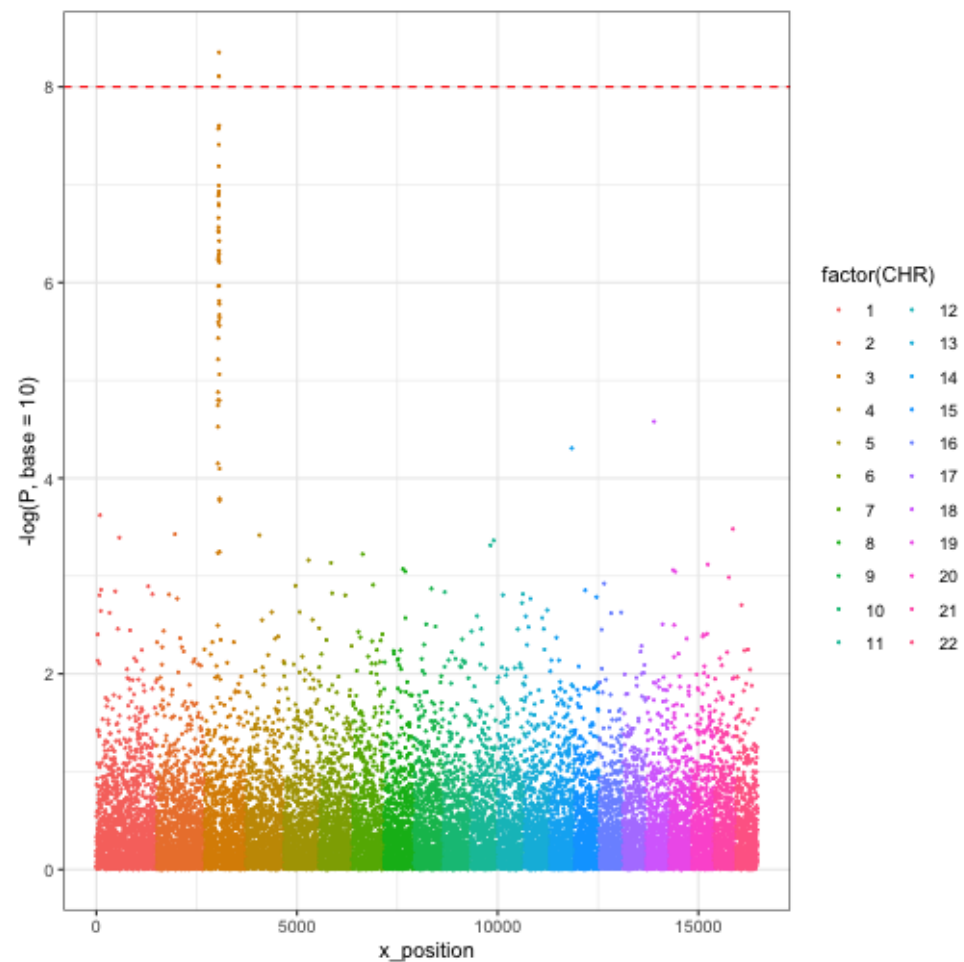


Manhattan plot, exploded

```
ggplot(gwasResults,
  aes(x = BP,
      y = -log(P, base=10)))+
  geom_point(size=0.2)+
  facet_wrap(~ CHR, nrow=4)+
  geom_hline(yintercept = 8,
    color='red',
    linetype=2)
```

- No more grouping variable
- A new function `facet_wrap`

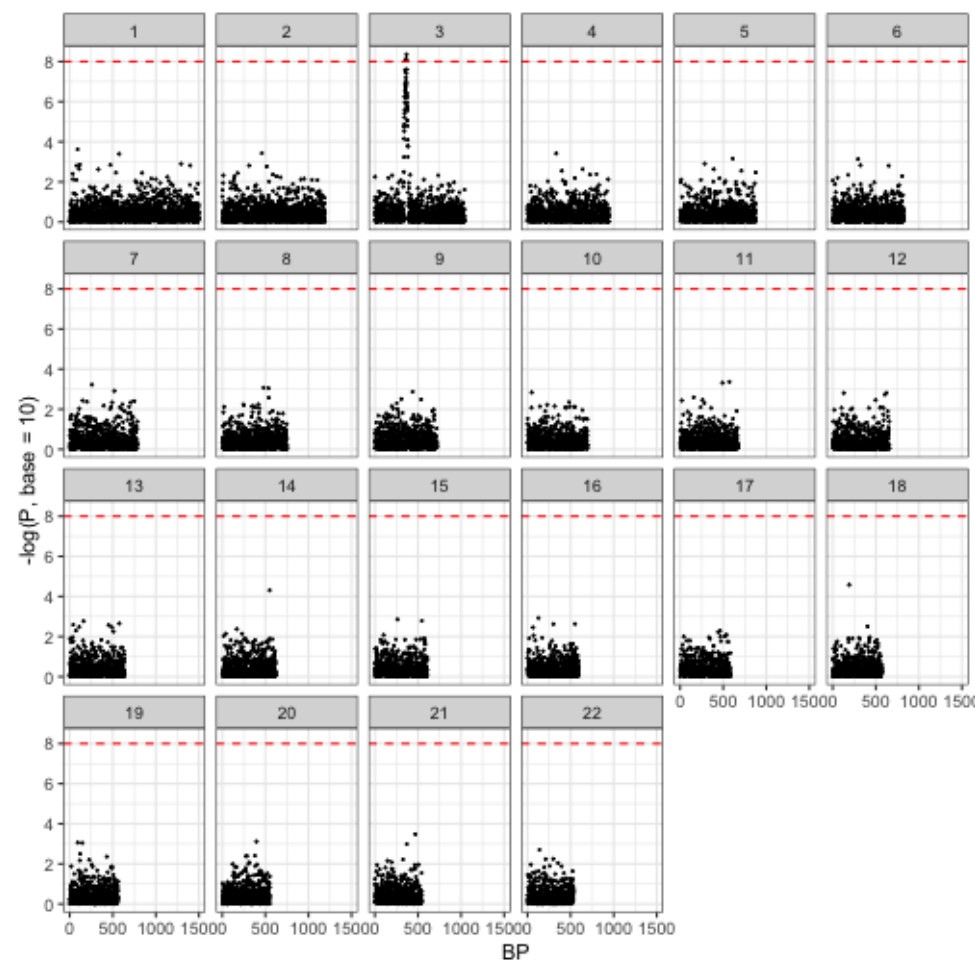

Resources

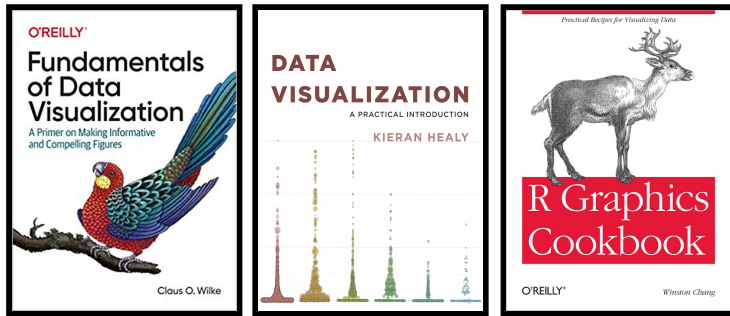

Data visualization cheatsheet (RStudio)

Chapter 3 of R4DS