


Event Ledger — Submission Document


- **Name :** Rachit Bhardwaj
- **Date :** 04-Jun-2026
- **GitHub repo link:** <https://github.com/Rachit-Bhardwaj-git-16/event-ledger-assessment>

Architecture Diagram:

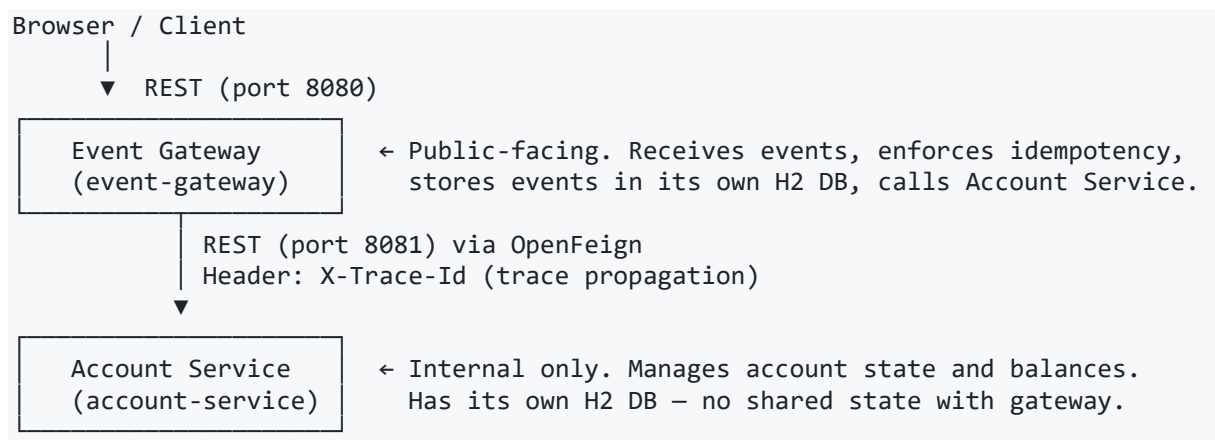


Running Services:

Account Service running — localhost:8081/actuator/health

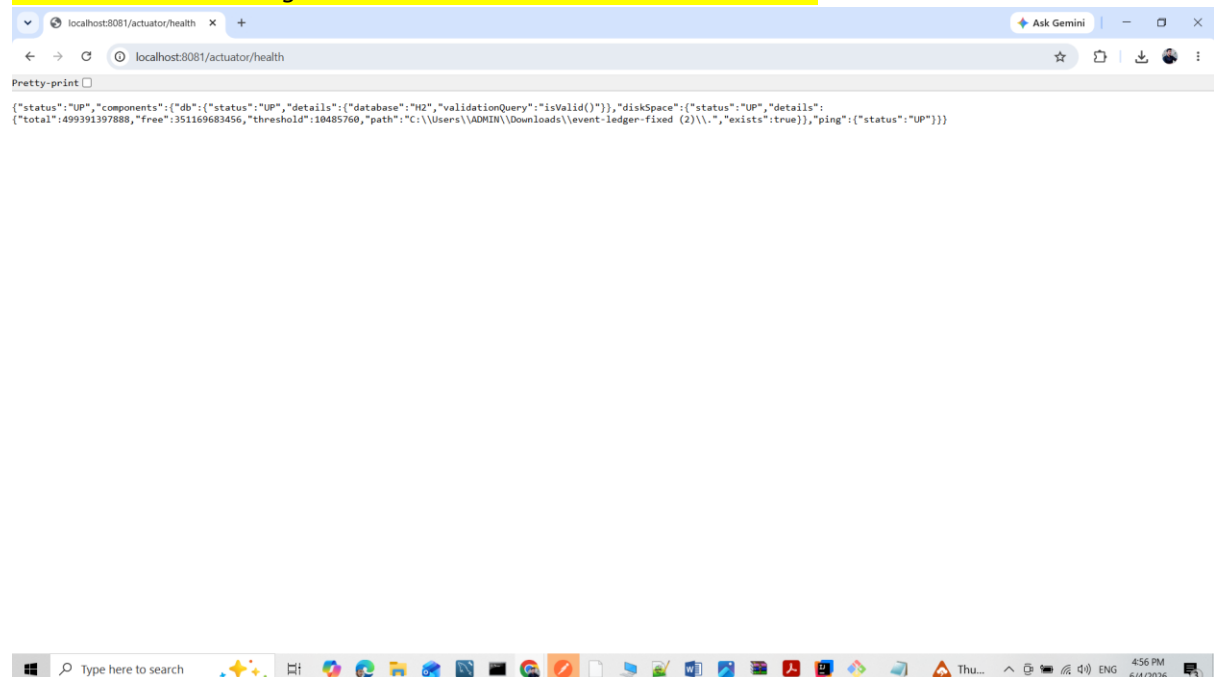


Event Gateway running — localhost:8080/actuator/health

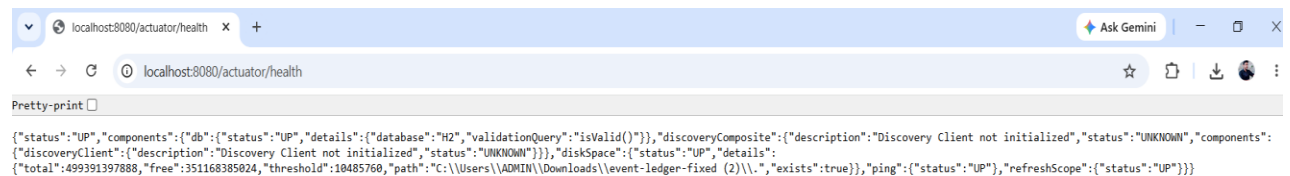


Swagger UI

Account service

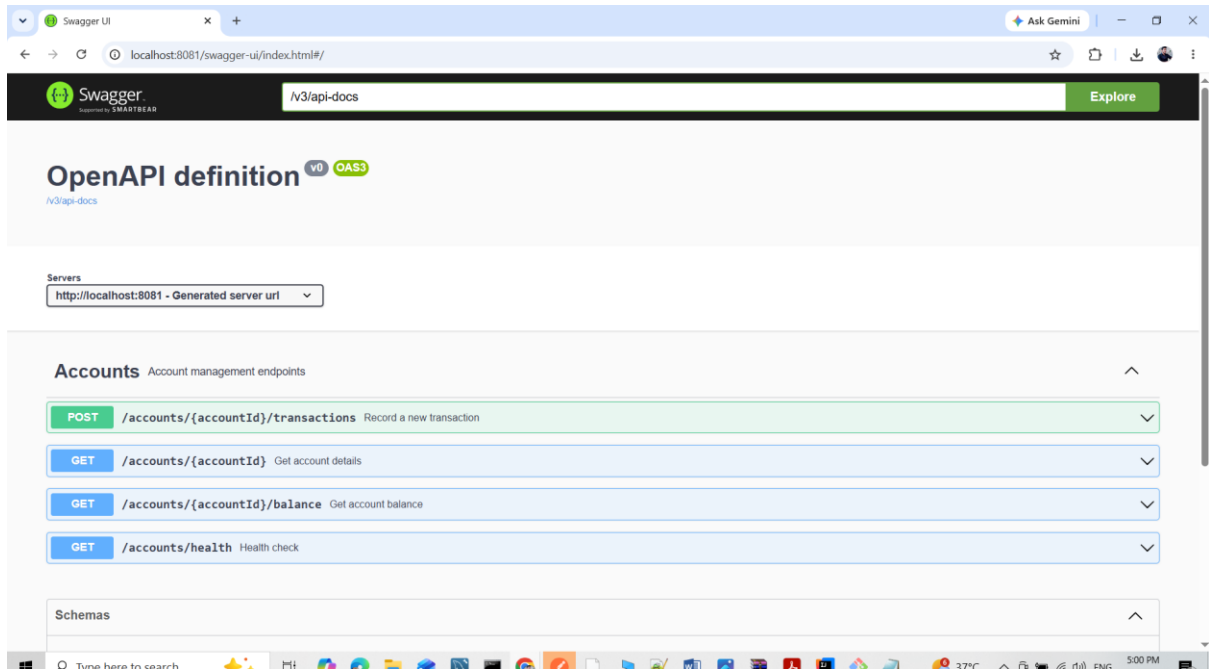

Event Gateway

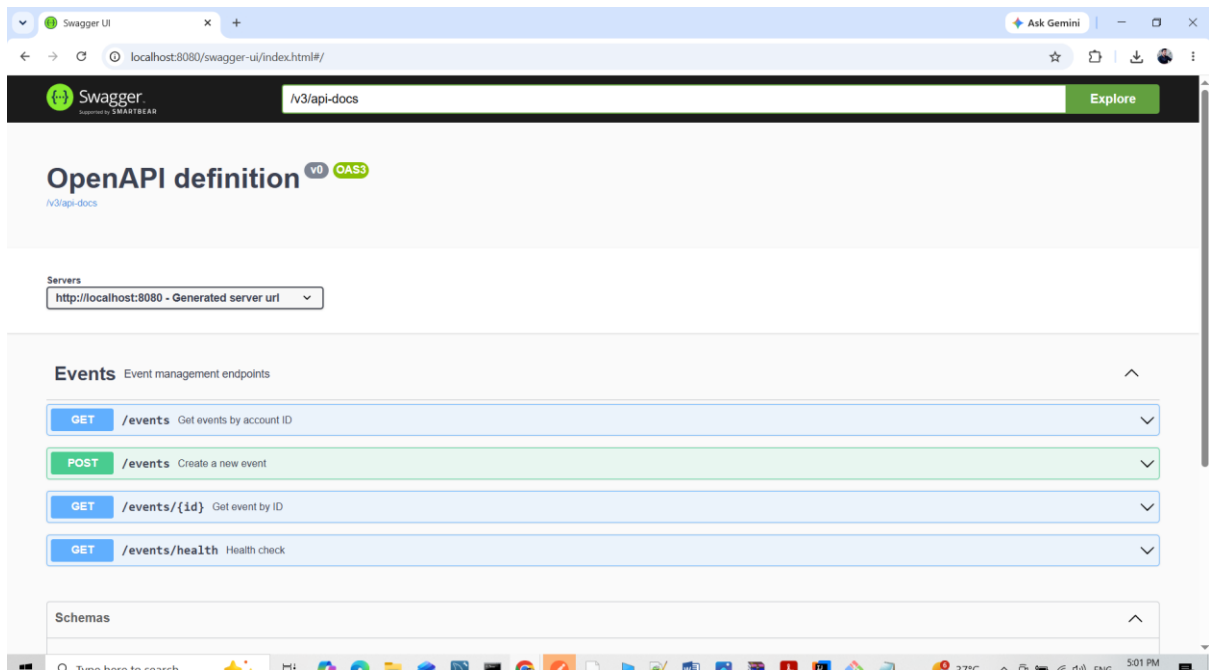

Core Functionality Demo

This section demonstrates the core functionality of the Event Ledger system.

The Event Gateway API successfully accepted and processed transaction events through the POST /events endpoint. Event details were validated before processing and persisted locally within the Gateway service.

Idempotency was verified by submitting the same eventId multiple times. The system returned the original event without creating duplicate records or modifying account balances.

Event retrieval functionality was validated through the GET /events endpoint, allowing events to be fetched by account ID. Events were returned successfully from the Gateway's local datastore. Input validation was tested using invalid requests containing negative amounts and missing required fields. The API correctly rejected invalid requests and returned meaningful validation error responses with appropriate HTTP status codes.

TEST 1 - Create Event (Core Functionality)

The screenshot shows the Swagger UI interface in a web browser. The browser's address bar displays the URL `localhost:8080/swagger-ui/index.html#/Events/createEvent`. The Swagger UI shows a 'Curl' section with a `curl` command for a POST request to `http://localhost:8080/events`. The request body is a JSON object representing an event. Below the curl command, the 'Request URL' is shown as `http://localhost:8080/events`. The 'Server response' section shows a '201' status code. The 'Response body' section displays the JSON response, which includes an 'id' of 1 and the event details. A 'Download' button is visible next to the response body. The 'Response headers' section shows `connection: keep-alive` and `content-length: 258`.

```
Curl
curl -X 'POST' \
  'http://localhost:8080/events' \
  -H 'accept: */*' \
  -H 'Content-Type: application/json' \
  -d '{
    "eventId": "evt-001",
    "accountId": "acct-123",
    "type": "CREDIT",
    "amount": 150,
    "currency": "USD",
    "eventTimestamp": "2026-06-04T10:00:00Z",
    "metadata": {
      "source": "swagger"
    }
  }'
```

Request URL

```
http://localhost:8080/events
```

Server response

Code Details

201

Response body

```
{
  "id": 1,
  "eventId": "evt-001",
  "accountId": "acct-123",
  "type": "CREDIT",
  "amount": 150,
  "currency": "USD",
  "eventTimestamp": "2026-06-04T10:00:00Z",
  "createdAt": "2026-06-04T11:38:26.517989Z",
  "traceId": "18118966-097f-4018-a747-6879e97108ac",
  "metadata": {
    "source": "swagger"
  }
}
```

Response headers

```
connection: keep-alive
content-length: 258
```

TEST 2 – Idempotency

Swagger UI

H2 Console

Ask Gemini

localhost:8080/swagger-ui/index.html#/Events/createEvent

```
-H 'accept: */*' \
-H 'Content-Type: application/json' \
-d '{
  "eventId": "evt-001",
  "accountId": "acct-123",
  "type": "CREDIT",
  "amount": 150,
  "currency": "USD",
  "eventTimestamp": "2026-06-04T10:00:00Z",
  "metadata": {
    "source": "swagger"
  }
}'
```

Request URL

http://localhost:8080/events

Server response

Code Details

201

Response body

```
{
  "id": 1,
  "eventId": "evt-001",
  "accountId": "acct-123",
  "type": "CREDIT",
  "amount": 150,
  "currency": "USD",
  "eventTimestamp": "2026-06-04T10:00:00Z",
  "createdAt": "2026-06-04T11:38:26.517989Z",
  "traceId": "18118966-097f-4018-a747-6879e97108ac",
  "metadata": {
    "source": "swagger"
  }
}
```

Response headers

```
connection: keep-alive
content-length: 263
content-type: application/json
date: Thu, 04 Jun 2026 11:43:59 GMT
keep-alive: timeout=60
x-trace-id: a09095fc-a319-4d25-9b4c-d961426fe6d8
```

Responses

Swagger UI

H2 Console

Ask Gemini

localhost:8080/h2-console/login.do?sessionId=5d5089ca2f43613ab5555ab605ef3ef9

Auto commit ☒ Max rows: 1000 ☐ Auto complete ☐ Auto select ☐

jdbc:h2:mem:eventdb

EVENTS

INFORMATION_SCHEMA

Users

H2 2.2.224 (2023-09-17)

Run Run Selected Auto complete Clear SQL statement:

SELECT * FROM EVENTS

SELECT * FROM EVENTS;

AMOUNT	CURRENCY	CREATED_AT	EVENT_TIMESTAMP	ID	ACCOUNT_ID	EVENT_ID	TRACE_ID	METADATA_JSON	TYPE
150.00	USD	2026-06-04 11:38:26.517989+00	2026-06-04 10:00:00+00	1	acct-123	evt-001	18118966-097f-4018-a747-6879e97108ac	{"source":"swagger"}	CREDIT

(1 row, 1 ms)

Edit

TEST 3 – Validation

Swagger UI H2 Console Ask Gemini

localhost:8080/swagger-ui/index.html#/Events/createEvent

Curl

```
curl -X 'POST' \
  'http://localhost:8080/events' \
  -H 'accept: */*' \
  -H 'Content-Type: application/json' \
  -d '{
    "eventId": "evt-002",
    "accountId": "acct-123",
    "type": "CREDIT",
    "amount": -100,
    "currency": "USD",
    "eventTimestamp": "2026-06-04T10:00:00Z"
  }'
```

Request URL

http://localhost:8080/events

Server response

Code	Details
400	Error: response status is 400

Response body

```
{
  "error": "Validation Failed",
  "errors": {
    "amount": "Amount must be greater than 0"
  },
  "timestamp": "2026-06-04T11:46:18.556073500Z",
  "status": 400
}
```

Response headers

```
connection: close
content-length: 139
content-type: application/json
date: Thu, 04 Jun 2026 11:46:18 GMT
x-trace-id: 70291276-6a96-4203-8e26-49e61252cdc7
```

Responses

Type here to search

35°C 5:16 PM

TEST 4 - Unknown Event Type

Swagger UI H2 Console Ask Gemini

localhost:8080/swagger-ui/index.html#/Events/createEvent

Curl

```
-H 'accept: */*' \
-H 'Content-Type: application/json' \
-d '{
  "eventId": "evt-003",
  "accountId": "acct-123",
  "type": "ABC",
  "amount": 100,
  "currency": "USD",
  "eventTimestamp": "2026-06-04T10:00:00Z"
}'
```

Request URL

http://localhost:8080/events

Server response

Code	Details
400	Error: response status is 400

Response body

```
{
  "error": "Validation Failed",
  "errors": {
    "type": "Event type must be CREDIT or DEBIT"
  },
  "timestamp": "2026-06-04T11:48:12.838423Z",
  "status": 400
}
```

Response headers

```
connection: close
content-length: 139
content-type: application/json
date: Thu, 04 Jun 2026 11:48:12 GMT
x-trace-id: 508d5f48-ce04-4ff5-934c-e66289670de7
```

Responses

Code	Description	Links
201	Event created successfully	No links

Type here to search

35°C 5:18 PM

TEST 5 - Out Of Order Events

Swagger UI H2 Console Ask Gemini

localhost:8080/swagger-ui/index.html#/Events/getEventsByAccount

Events Event management endpoints

GET /events Get events by account ID

Parameters Cancel

Name	Description
account string (query)	Account ID

Execute **Clear**

Responses

Curl

```
curl -X 'GET' \
  'http://localhost:8080/events?account=acct-123' \
  -H 'accept: */*'
```

Request URL

```
http://localhost:8080/events?account=acct-123
```

Server response

Swagger UI H2 Console Ask Gemini

localhost:8080/swagger-ui/index.html#/Events/getEventsByAccount

Request URL

```
http://localhost:8080/events?account=acct-123
```

Server response

Code **Details**

200

Response body

```
{
  "id": 3,
  "eventId": "evt-005",
  "accountId": "acct-123",
  "type": "DEBIT",
  "amount": 20,
  "currency": "USD",
  "eventTimestamp": "2026-06-04T09:00:00Z",
  "createdAt": "2026-06-04T11:50:26.111996Z",
  "traceId": "ce763de8-17bf-4ca2-9109-8957fee86d86",
  "metadata": null
},
{
  "id": 1,
  "eventId": "evt-001",
  "accountId": "acct-123",
  "type": "CREDIT",
  "amount": 150,
  "currency": "USD",
  "eventTimestamp": "2026-06-04T10:00:00Z",
  "createdAt": "2026-06-04T11:38:26.517909Z",
  "traceId": "18118966-097f-4018-a747-6879e97108ac",
  "metadata": {
    "source": "swagger"
  }
},
{
  "id": 2,
  "eventId": "evt-002",
  "accountId": "acct-123",
  "type": "DEBIT",
  "amount": 10,
  "currency": "USD",
  "eventTimestamp": "2026-06-04T10:00:00Z",
  "createdAt": "2026-06-04T11:38:26.517909Z",
  "traceId": "18118966-097f-4018-a747-6879e97108ac",
  "metadata": {
    "source": "swagger"
  }
}

```

Response headers

```
connection: keep-alive
content-length: 759
content-type: application/json
date: Thu, 04 Jun 2026 11:50:53 GMT
keep-alive: timeout=60
x-trace-id: b659fe2b-b925-40d3-8b1c-2927dda7f08a

```

Type here to search 35°C 5:21 PM

TEST 6 - Balance Computation

localhost:8080/swagger-ui/index.html#

Responses

Curl

```
curl -X 'POST' \
  'http://localhost:8080/events' \
  -H 'accept: */*' \
  -H 'Content-Type: application/json' \
  -d '{
    "eventId": "evt-006",
    "accountId": "acct-balance",
    "type": "CREDIT",
    "amount": 150,
    "currency": "USD",
    "eventTimestamp": "2026-06-04T10:00:00Z"
  }'
```

Request URL

http://localhost:8080/events

Server response

Code	Details
201	Response body <pre>{ "id": 4, "eventId": "evt-006", "accountId": "acct-balance", "type": "CREDIT", "amount": 150, "currency": "USD", "eventTimestamp": "2026-06-04T10:00:00Z", "createdAt": "2026-06-04T11:53:59.025002Z", "traceId": "5fe74e2f-f340-49eb-99f2-ca41d0915a32", "metadata": null }</pre> Response headers <pre>connection: keep-alive content-length: 248 content-type: application/json</pre>

Download

Swagger UI | H2 Console | Ask Gemini

localhost:8080/swagger-ui/index.html#

Responses

Curl

```
curl -X 'POST' \
  'http://localhost:8080/events' \
  -H 'accept: */*' \
  -H 'Content-Type: application/json' \
  -d '{
    "eventId": "evt-007",
    "accountId": "acct-balance",
    "type": "DEBIT",
    "amount": 50,
    "currency": "USD",
    "eventTimestamp": "2026-06-04T10:05:00Z"
  }'
```

Request URL

http://localhost:8080/events

Server response

Code	Details
201	Response body <pre>{ "id": 5, "eventId": "evt-007", "accountId": "acct-balance", "type": "DEBIT", "amount": 50, "currency": "USD", "eventTimestamp": "2026-06-04T10:05:00Z", "createdAt": "2026-06-04T11:54:47.692774Z", "traceId": "633c709d-2a1e-4b23-ba15-a41fd3e1c523", "metadata": null }</pre> Response headers <pre>connection: keep-alive content-length: 246 content-type: application/json</pre>

Download

CREDIT

```
{
  "eventId": "evt-006",
  "accountId": "acct-balance",
  "type": "CREDIT",
  "amount": 150,
  "currency": "USD",
  "eventTimestamp": "2026-06-04T10:00:00Z"
}
```

DEBIT

```
{
  "eventId": "evt-007",
  "accountId": "acct-balance",
  "type": "DEBIT",
  "amount": 50,
  "currency": "USD",
  "eventTimestamp": "2026-06-04T10:05:00Z"
}
```

Open:

`http://localhost:8081/swagger-ui`

Find:

`GET /accounts/{accountId}/balance`

Enter:

`acct-balance`

Execute.

```
{
  "balance": 100
}
```

Swagger UI

H2 Console

Swagger UI

+

Ask Gemini

localhost:8081/swagger-ui/index.html#/Accounts/getBalance

ExecuteClear

Responses

Curl

curl -X 'GET' \n'http://localhost:8081/accounts/acct-balance/balance' \n-H 'accept: */*'

Request URL

http://localhost:8081/accounts/acct-balance/balance

Server response

CodeDetails

200

Response body

{\n "accountId": "acct-balance",\n "balance": 100,\n "currency": "USD"\n}

Download

Response headers

connection: keep-alive\ncontent-length: 62\ncontent-type: application/json\ndate: Thu, 04 Jun 2026 11:57:09 GMT\nkeep-alive: timeout=60

Responses

CodeDescriptionLinks

200OKNo links

Swagger UI

H2 Console

Swagger UI

+

Ask Gemini

localhost:8081/swagger-ui/index.html#/Accounts/getBalance

GET/accounts/{accountId}/balanceGet account balance

ParametersCancel

NameDescription

accountId * requiredAccount ID

string(path)

acct-balance

X-Trace-IdX-Trace-Id

string(header)

ExecuteClear

Responses

Curl

curl -X 'GET' \n'http://localhost:8081/accounts/acct-balance/balance' \n-H 'accept: */*'

Request URL

http://localhost:8081/accounts/acct-balance/balance

Server response

TEST 7 - Graceful Degradation

Stop:

Account Service

(8081 application stop)

Gateway still running.



Now:


POST /events

Execute.

Expected

503 Service Unavailable

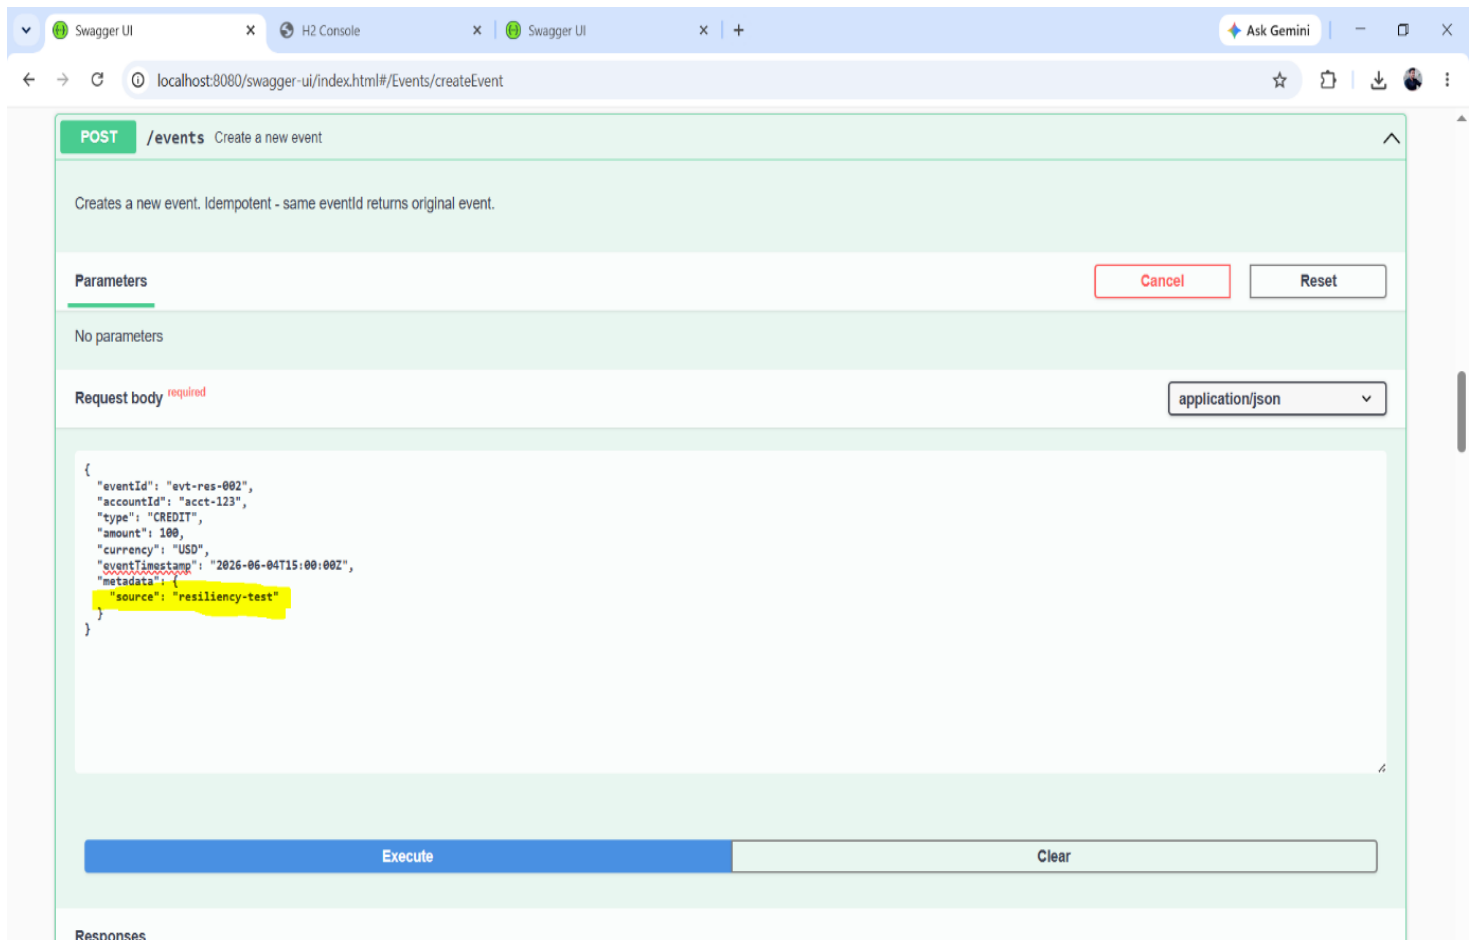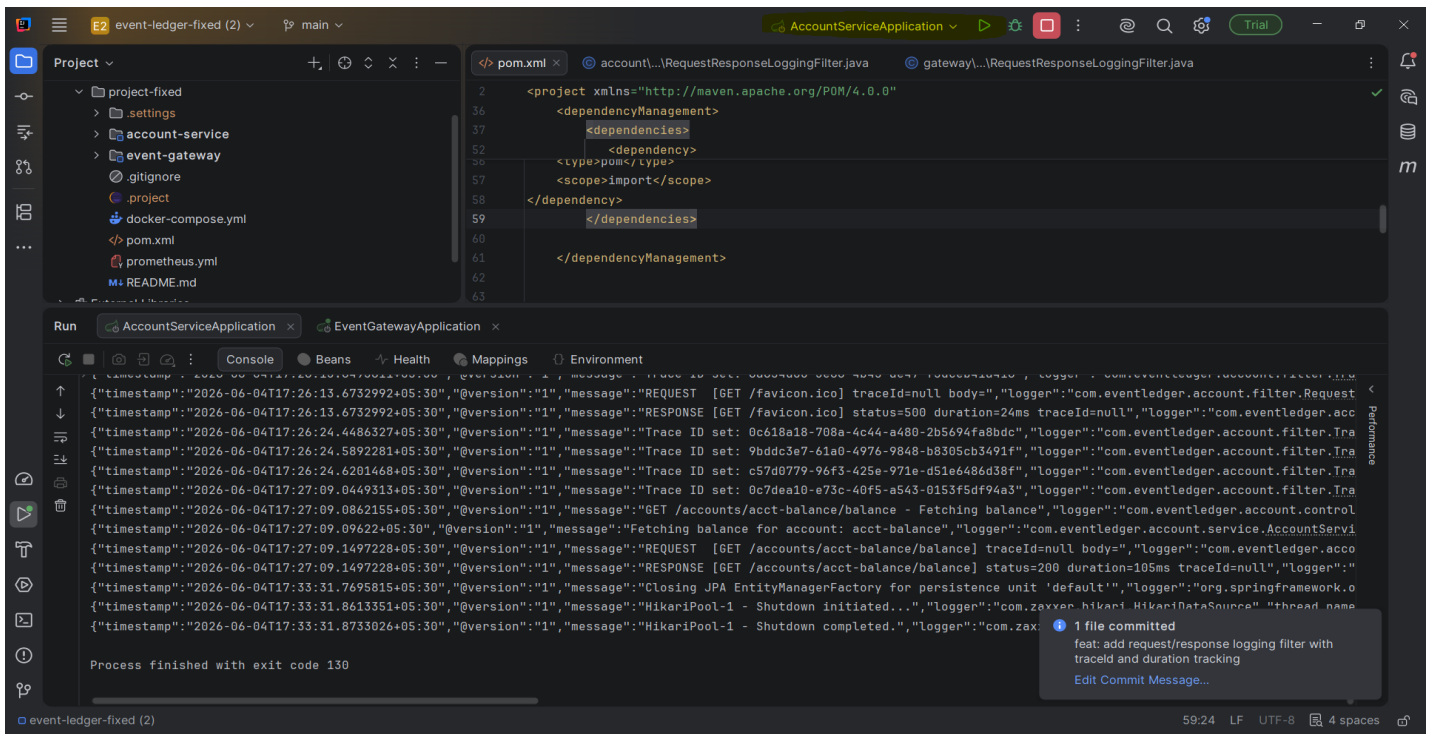

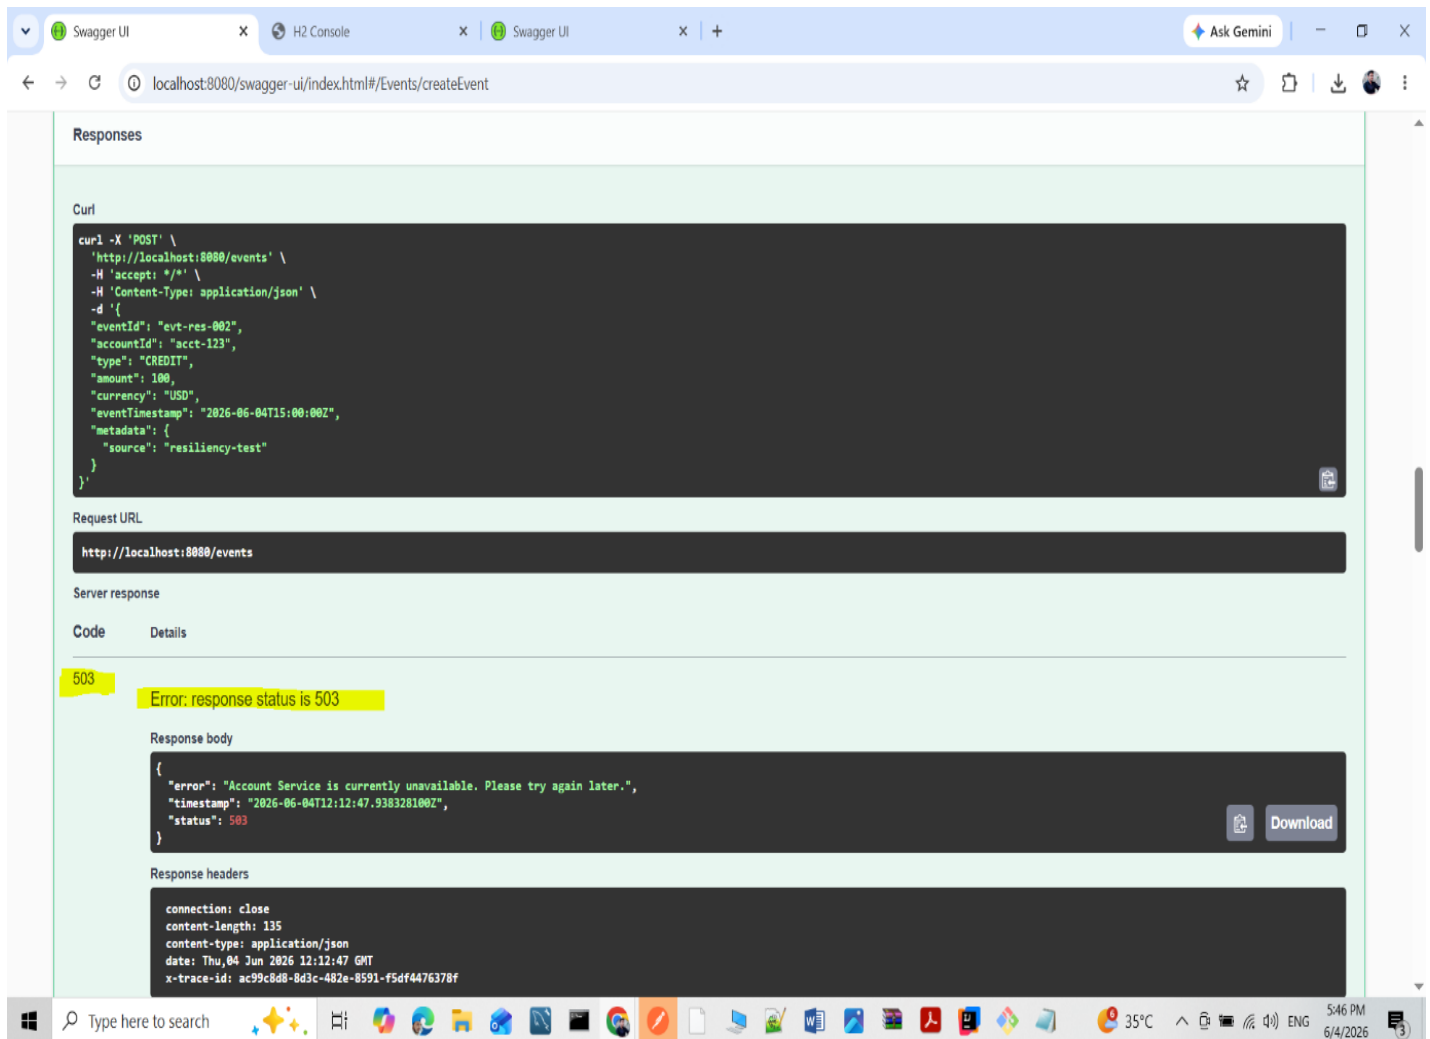

This section demonstrates resiliency and graceful degradation behavior.

The Account Service was intentionally stopped to simulate a downstream service outage. When a new transaction event was submitted through the Gateway, the request failed gracefully with a 503 Service Unavailable response instead of hanging or returning an unexpected internal server error.

While the Account Service was unavailable, event retrieval operations continued to function correctly. Existing events were successfully fetched through the Gateway because event data is stored locally within the Gateway service.

This validates the resiliency mechanism and confirms that the system degrades gracefully during partial service outages.

TEST 8 - Distributed Tracing

This test verifies end-to-end trace propagation across microservices.

A transaction event was submitted through the Event Gateway. The Gateway generated a unique trace ID for the incoming request and propagated the same trace ID to the Account Service through HTTP headers.

Log entries from both services were inspected and verified to contain the same trace ID. This confirms successful distributed tracing and enables complete request tracking across service boundaries for debugging and monitoring purposes.

How to Perform the Test


1. Start both services (Gateway and Account Service).
2. Create a new event using POST /events.
3. Open Gateway application logs and locate the generated trace ID.
4. Open Account Service logs and verify that the same trace ID appears.
5. Capture screenshots from both service consoles showing the matching trace ID.

Account service Trace Id: **f598fba5-6a0a-42ef-86dc-40f0ee3b305d**

```
3 > import ...
11
12 @Component
13 @Slf4j
14 public class TraceFilter implements Filter {
15
16     private static final String TRACE_ID_HEADER = "X-Trace-Id";
17     private static final String TRACE_ID_MDC_KEY = "traceId";
18
19     @Override
20     public void doFilter(ServletRequest request, ServletResponse response, FilterChain chain)
21         throws IOException, ServletException {
```

```
> Q: trace
80312+05:30,"@version":"1","message":"Starting TomcatServer { http-nio-8081 }, logger":"org.apache.catalina.core.StandardEngine", "thread_name":"main", "level":"INFO"
09697+05:30,"@version":"1","message":"Tomcat started on port 8081 (http) with context path ''", "logger":"org.springframework.boot.web.embedded.tomcat.TomcatWebServer", "th
62054+05:30,"@version":"1","message":"Started AccountServiceApplication in 11.65 seconds (process running for 13.587)", "logger":"com.eventledger.account.AccountServiceApp
72099+05:30,"@version":"1","message":"Initializing Spring DispatcherServlet 'dispatcherServlet'", "logger":"org.apache.catalina.core.ContainerBase.[Tomcat].[localhost].[/]
11917+05:30,"@version":"1","message":"Initializing Servlet 'dispatcherServlet'", "logger":"org.springframework.web.servlet.DispatcherServlet", "thread_name":"RMI TCP Connec
16251+05:30,"@version":"1","message":"Completed initialization in 3 ms", "logger":"org.springframework.web.servlet.DispatcherServlet", "thread_name":"RMI TCP Connection(4)-
90421+05:30,"@version":"1","message":"Trace ID set: f598fba5-6a0a-42ef-86dc-40f0ee3b305d", "logger":"com.eventledger.account.filter.TraceFilter", "thread_name":"http-nio-80
60636+05:30,"@version":"1","message":"POST /accounts/acct-123/transactions - Recording transaction", "logger":"com.eventledger.account.controller.AccountController", "threa
55397+05:30,"@version":"1","message":"Recording transaction for account: acct-123 with event: evt-trace-001", "logger":"com.eventledger.account.service.AccountService", "th
389+05:30,"@version":"1","message":"Creating new account: acct-123", "logger":"com.eventledger.account.service.AccountService", "thread_name":"http-nio-8081-exec-1", "leve
57957+05:30,"@version":"1","message":"Transaction recorded: 1", "logger":"com.eventledger.account.service.AccountService", "thread_name":"http-nio-8081-exec-1", "level":"INFO"
67799+05:30,"@version":"1","message":"Balance recalculated for account acct-123: 100", "logger":"com.eventledger.account.service.AccountService", "thread_name":"http-nio-80
67799+05:30,"@version":"1","message":"REQUEST [POST /accounts/acct-123/transactions] traceId=f598fba5-6a0a-42ef-86dc-40f0ee3b305d body={\"eventId\":\"evt-trace-001\", \"t
67799+05:30,\"@version":"1","message":"RESPONSE [POST /accounts/acct-123/transactions] status=201 duration=336ms traceId=f598fba5-6a0a-42ef-86dc-40f0ee3b305d", "logger":"com
```


f598fba5-6a0a-42ef-86dc-40f0ee3b305d

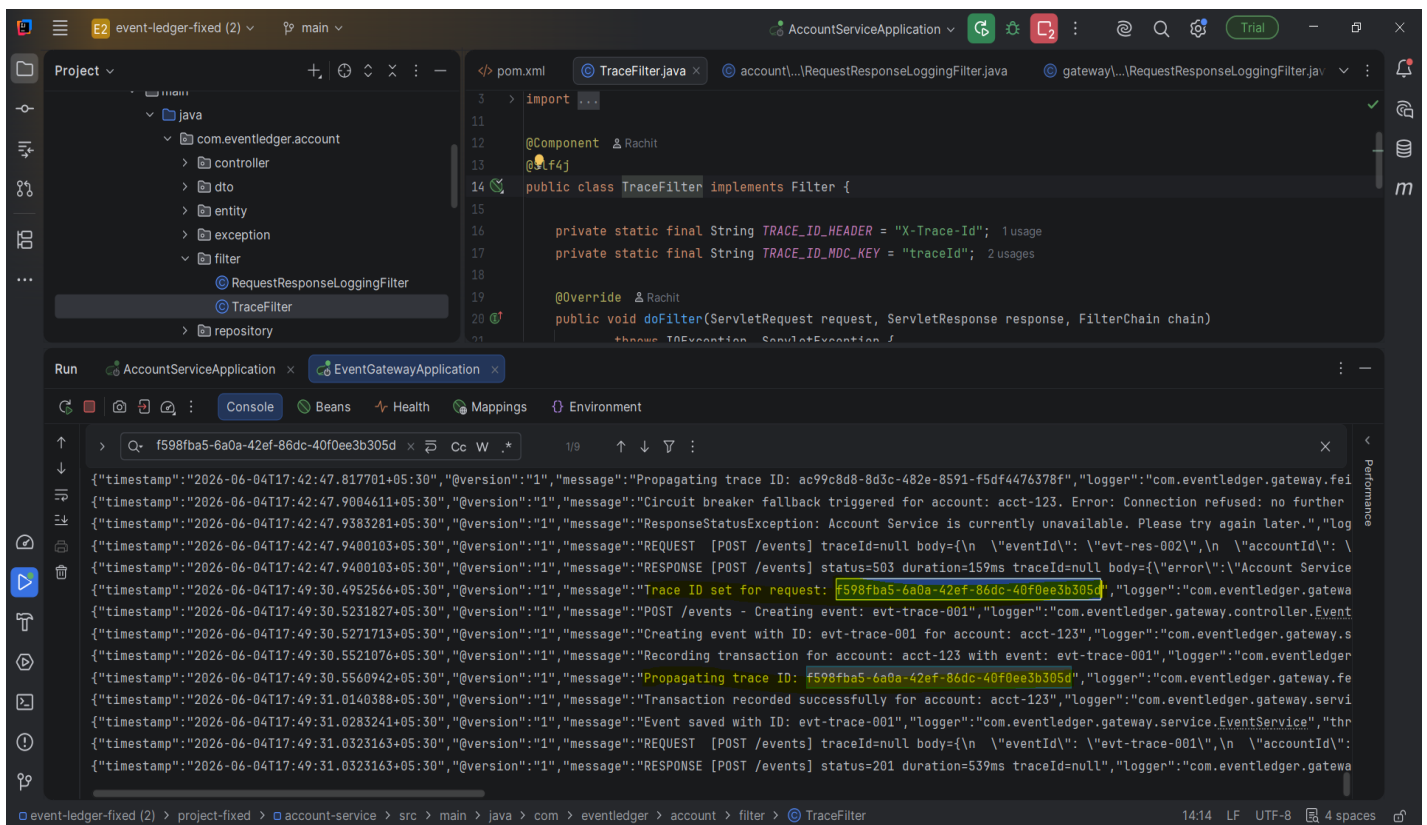

TEST 9 - Health Checks


Browser:

```
http://localhost:8080/actuator/health
```

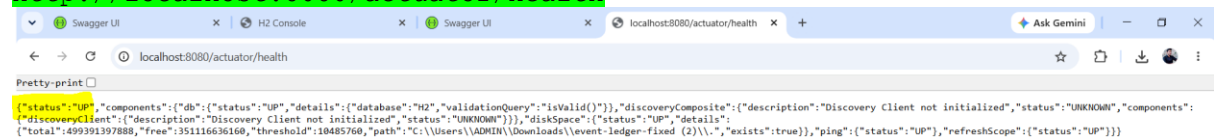

Browser:

`http://localhost:8081/actuator/health`

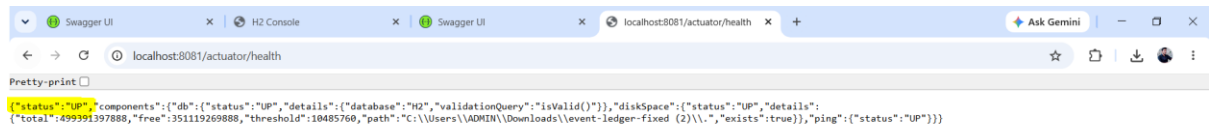

Requirement:

Observability ✓

Expected:

```
{
  "status": "UP"
}
```

TEST 10 – Observability


Observability features were verified to ensure operational visibility of the system.

Health check endpoints were validated for both microservices and confirmed that all services were running successfully. Prometheus metrics were exposed through the actuator endpoint, providing runtime monitoring information such as request counts, JVM metrics, and application statistics.

Both services maintain independent H2 databases, demonstrating proper service separation and independent data management.

Browser:

<http://localhost:8080/actuator/prometheus>

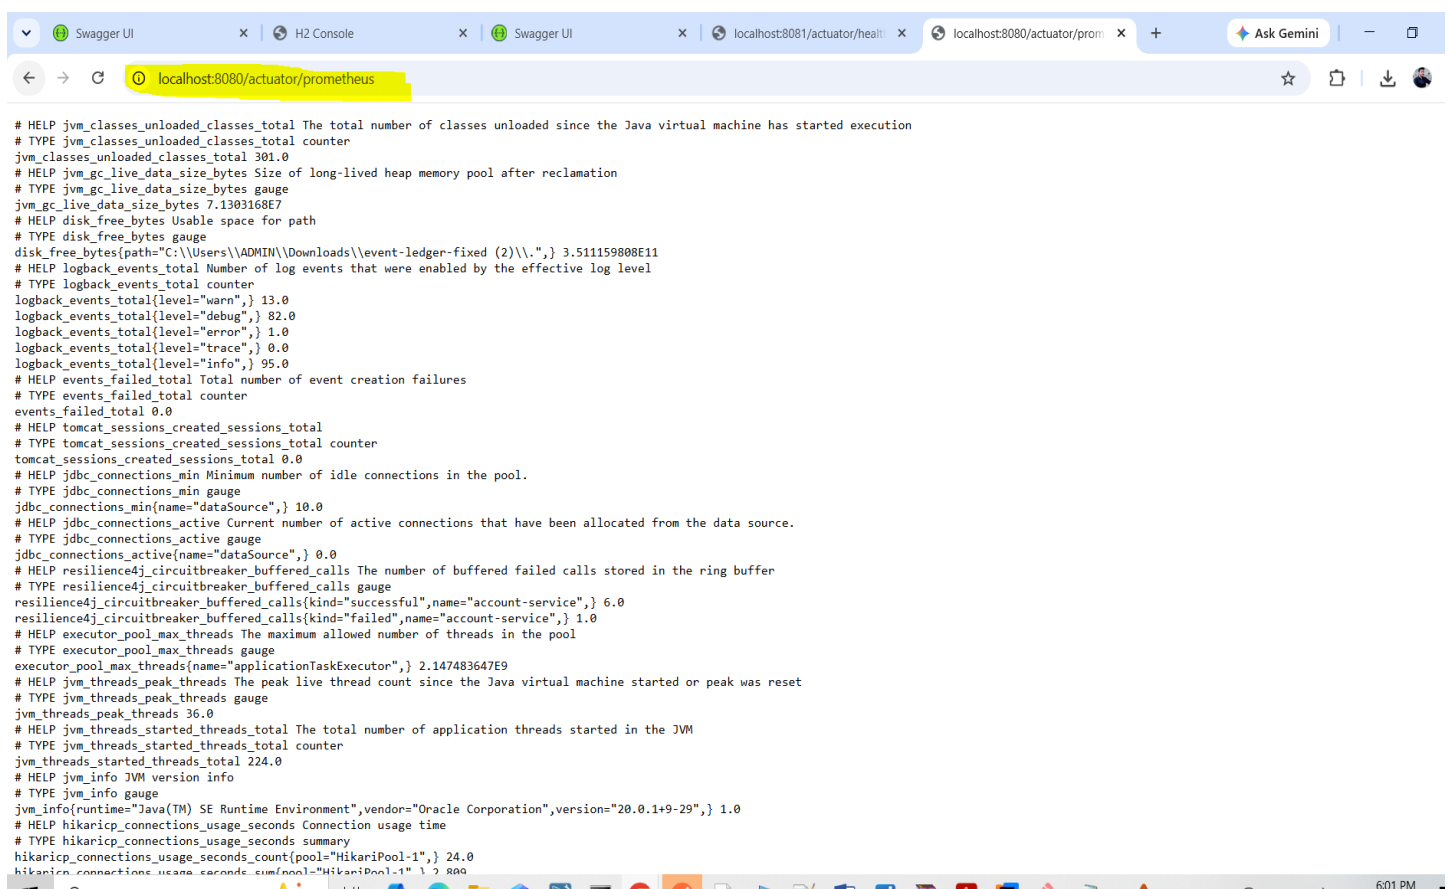

```
# HELP jvm_classes_unloaded_classes_total The total number of classes unloaded since the Java virtual machine has started execution
# TYPE jvm_classes_unloaded_classes_total counter
jvm_classes_unloaded_classes_total 301.0
# HELP jvm_gc_live_data_size_bytes Size of long-lived heap memory pool after reclamation
# TYPE jvm_gc_live_data_size_bytes gauge
jvm_gc_live_data_size_bytes 7.1303168E7
# HELP disk_free_bytes Usable space for path
# TYPE disk_free_bytes gauge
disk_free_bytes{path="C:\\Users\\ADMIN\\Downloads\\event-ledger-fixed (2)\\.\\.\\."} 3.511159808E11
# HELP logback_events_total Number of log events that were enabled by the effective log level
# TYPE logback_events_total counter
logback_events_total{level="warn",} 13.0
logback_events_total{level="debug",} 82.0
logback_events_total{level="error",} 1.0
logback_events_total{level="trace",} 0.0
logback_events_total{level="info",} 95.0
# HELP events_failed_total Total number of event creation failures
# TYPE events_failed_total counter
events_failed_total 0.0
# HELP tomcat_sessions_created_sessions_total
# TYPE tomcat_sessions_created_sessions_total counter
tomcat_sessions_created_sessions_total 0.0
# HELP jdbc_connections_min Minimum number of idle connections in the pool.
# TYPE jdbc_connections_min gauge
jdbc_connections_min{name="dataSource",} 10.0
# HELP jdbc_connections_active Current number of active connections that have been allocated from the data source.
# TYPE jdbc_connections_active gauge
jdbc_connections_active{name="dataSource",} 0.0
# HELP resilience4j_circuitbreaker_buffered_calls The number of buffered failed calls stored in the ring buffer
# TYPE resilience4j_circuitbreaker_buffered_calls gauge
resilience4j_circuitbreaker_buffered_calls(kind="successful",name="account-service",) 6.0
resilience4j_circuitbreaker_buffered_calls(kind="failed",name="account-service",) 1.0
# HELP executor_pool_max_threads The maximum allowed number of threads in the pool
# TYPE executor_pool_max_threads gauge
executor_pool_max_threads{name="applicationTaskExecutor",} 2.147483647E9
# HELP jvm_threads_peak_threads The peak live thread count since the Java virtual machine started or peak was reset
# TYPE jvm_threads_peak_threads gauge
jvm_threads_peak_threads 36.0
# HELP jvm_threads_started_threads_total The total number of application threads started in the JVM
# TYPE jvm_threads_started_threads_total counter
jvm_threads_started_threads_total 224.0
# HELP jvm_info JVM version info
# TYPE jvm_info gauge
jvm_info{runtime="Java(TM) SE Runtime Environment",vendor="Oracle Corporation",version="20.0.1+9-29",} 1.0
# HELP hikaricp_connections_usage_seconds Connection usage time
# TYPE hikaricp_connections_usage_seconds summary
hikaricp_connections_usage_seconds_count(pool="HikariPool-1",) 24.0
hikaricp_connections_usage_seconds_sum(pool="HikariPool-1",) 2.880
```

H2 Database

<http://localhost:8080/h2-console>

The screenshot shows the H2 Database console interface. The left sidebar displays the database schema, including tables like EVENTS, ACCOUNTS, and TRANSACTIONS. The main area shows a SQL query: `SELECT * FROM EVENTS;`. Below the query, the results are displayed as a table with 10 columns: AMOUNT, CURRENCY, CREATED_AT, EVENT_TIMESTAMP, ID, ACCOUNT_ID, EVENT_ID, TRACE_ID, METADATA_JSON, and TYPE. The results show 6 rows of data, including transactions and account balances.

AMOUNT	CURRENCY	CREATED_AT	EVENT_TIMESTAMP	ID	ACCOUNT_ID	EVENT_ID	TRACE_ID	METADATA_JSON	TYPE
150.00	USD	2026-06-04 11:38:26.517909+00	2026-06-04 10:00:00+00	1	acct-123	evt-001	18118966-0971-4018-a747-6879e97108ac	("source":"swagger")	CREDIT
100.00	USD	2026-06-04 11:49:49.882008+00	2026-06-04 12:00:00+00	2	acct-123	evt-004	f374c846-b6c6-4a0e-9eae-f94a7b378686	null	CREDIT
20.00	USD	2026-06-04 11:50:26.111996+00	2026-06-04 09:00:00+00	3	acct-123	evt-005	ce763de8-17bf-4ca2-9109-8957fee86d86	null	DEBIT
150.00	USD	2026-06-04 11:53:59.025002+00	2026-06-04 10:00:00+00	4	acct-balance	evt-006	5fe74e2f-f340-49eb-9902-ea41d0915a32	null	CREDIT
50.00	USD	2026-06-04 11:54:47.692774+00	2026-06-04 10:05:00+00	5	acct-balance	evt-007	633c709d-2a1e-4b23-ba15-a41fd3e1c523	null	DEBIT
100.00	USD	2026-06-04 12:19:31.020603+00	2026-06-04 16:00:00+00	6	acct-123	evt-trace-001	f5988ba5-8a0a-42ef-86dc-400ee3b305d	null	CREDIT

<http://localhost:8081/h2-console>

The screenshot shows the H2 Database console interface. The left sidebar displays the database schema, including tables like ACCOUNTS, TRANSACTIONS, and INFORMATION_SCHEMA. The main area shows a SQL query: `SELECT * FROM ACCOUNTS;`. Below the query, the results are displayed as a table with 6 columns: BALANCE, CURRENCY, CREATED_AT, ID, UPDATED_AT, and ACCOUNT_ID. The results show 1 row of data for account ID acct-123.

BALANCE	CURRENCY	CREATED_AT	ID	UPDATED_AT	ACCOUNT_ID
100.00	USD	2026-06-04 12:19:30.919429+00	1	2026-06-04 12:19:30.97082+00	acct-123