5 Dodanie obiektów DTO

backend > DTOs > TaskReadDto.cs

```
namespace CloudBackend.DTOs;
public class TaskReadDto
{
    public int Id { get; set; }
    public string Name { get; set; } = string.Empty;
    public bool IsCompleted { get; set; }
}
```

```
namespace CloudBackend.DTOs;
public class TaskCreateDto
{
    public string Name { get; set; } = string.Empty;

}
```

5 Aktualizacja kontrolerów

```
using Microsoft.AspNetCore.Mvc;
using Microsoft.EntityFrameworkCore;
using CloudBackend.Data;
using CloudBackend.Models;

namespace CloudBackend.Controllers;

[ApiController]
[Route("api/[controller]")] // Adres: http://localhost:8081/api/tasks
public class TasksController : ControllerBase
{
    private readonly AppDbContext _context;

    public TasksController(AppDbContext context)
    {
        _context = context;
    }

    [HttpGet]
    public async Task<ActionResult<IEnumerable<TaskReadDto>>> GetAll()
    {
        var tasks = await _context.Tasks.ToListAsync();

        var tasksDto = tasks.Select(t => new TaskReadDto
        {
            Id = t.Id,
            Name = t.Name,
            IsCompleted = t.IsCompleted
        });
        return Ok(tasksDto);
    }

    [HttpGet("{id}")]
    public async Task<ActionResult<TaskReadDto>> GetById(int id)
    {
        var task = await _context.Tasks.FindAsync(id);
        if (task == null) return NotFound();
        return Ok(new TaskReadDto
        {
            Id = task.Id,
            Name = task.Name,
            IsCompleted = task.IsCompleted
        });
    }
```

```
45
46      [HttpPost]
47      public async Task<ActionResult<TaskReadDto>> Create(TaskCreateDto taskDto)
48      {
49          var newTask = new CloudTask
50          {
51              Name = taskDto.Name,
52              IsCompleted = false
53          };
54
55          _context.Tasks.Add(newTask);
56          await _context.SaveChangesAsync();
57
58          var readDto = new TaskReadDto
59          {
60              Id = newTask.Id,
61              Name = newTask.Name,
62              IsCompleted = newTask.IsCompleted
63          };
64
65          return CreatedAtAction(nameof(GetById), new { id = readDto.Id }, readDto);
66      }
67
68
69      [HttpPut("{id}")]
70      public async Task<ActionResult> Update(int id, CloudTask task)
71      {
72          if (id != task.Id)
73              return BadRequest("ID mismatch");
74
75          _context.Entry(task).State = EntityState.Modified;
76          await _context.SaveChangesAsync();
77
78          return NoContent(); // 204 - operacja udana
79      }
```

Aktulizacja compose:

```
      - cloud-network
    depends_on:
      cloud-db:
        condition: service_healthy

  # Warstwa Danych (SQL Edge)
  cloud-db:
    image: mcr.microsoft.com/azure-sql-edge
    container_name: cloud-db
    environment:
      SA_PASSWORD: "StrongPassword123!"
      ACCEPT_EULA: "Y"
    ports:
      - "1433:1433"
    networks:
      - cloud-network
    volumes:
      - sql-data:/var/opt/mssql
    healthcheck:
      test: ["CMD", "/opt/mssql-tools/bin/sqlcmd", "-S", "localhost", "-U", "sa", "-P", "StrongPassword123!", "-Q"
      interval: 10s
      timeout: 5s
      retries: 10

networks:
  cloud-network:
    driver: bridge

volumes:
  sql-data:
```

Dodanie zadania przez api

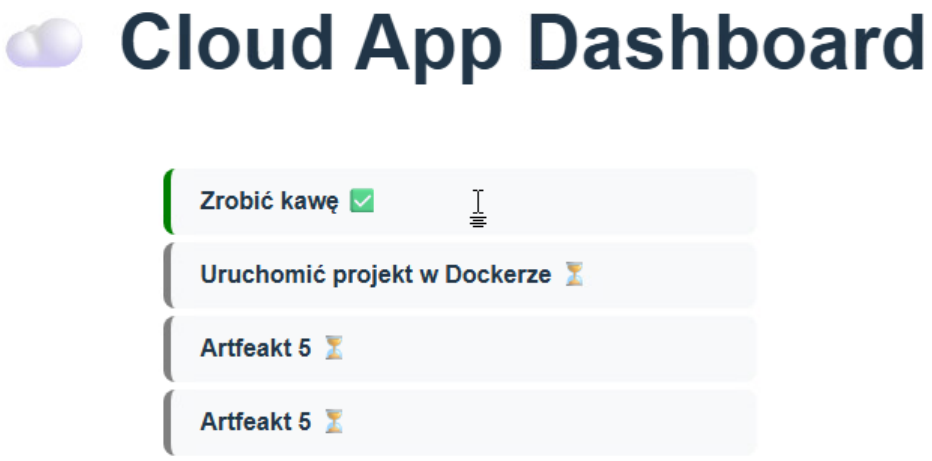

Dodanie przez frontent

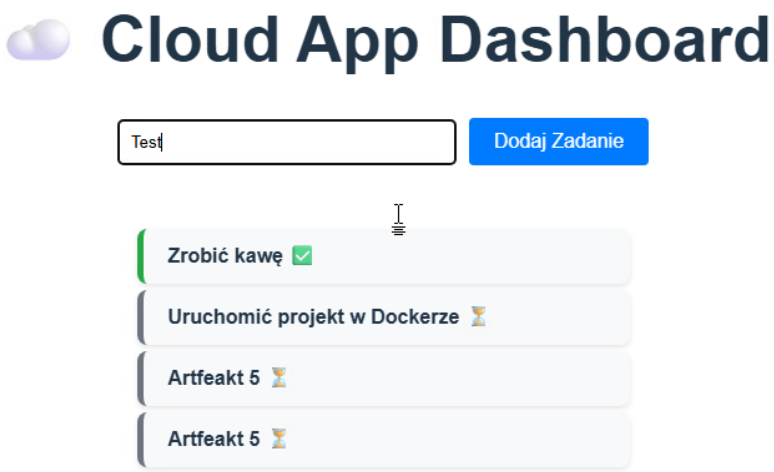

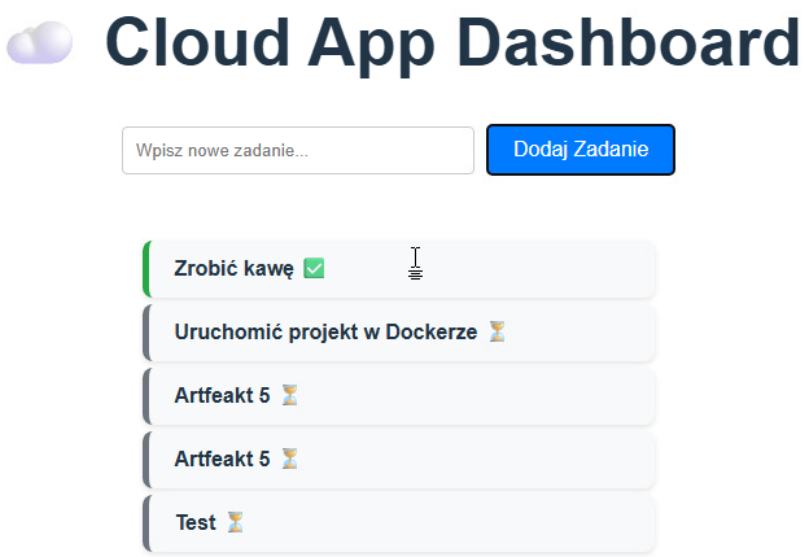

ReadMe

```
# Cloud Task Manager - Radosław Miczulski

Projekt natywnej aplikacji chmurowej realizowany w architekturze
3-warstwowej.

## Deklaracja Architektury (Mapowanie Azure)

Ten projekt został zaplanowany z myślą o usługach PaaS (Platform as a
Service) w chmurze Azure.

  Warstwa            Komponent Lokalny        Usługa Azure
  ------------------ ------------------------ ---------------------------------
  **Presentation**   React 19 (Vite)          Azure Static Web Apps
  **Application**    API (.NET 9 / Node 24)   Azure App Service
  **Data**           SQL Server (Dev)         Azure SQL Database (Serverless)

## 📋 Status Projektu i Dokumentacja

-   [x] **Artefakt 1:** Zaplanowano strukturę folderów i diagram C4
    (dostępny w `/docs`).
-   [x ] **Artefakt 2:** Konfiguracja środowiska Docker (w trakcie...).
   [x ] **Artefakt 3:**
   [x} Artfekakt 4
   [x] Artefakt 5

> **Informacja:** Ten plik będzie ewoluował. W kolejnych etapach dodamy
> tutaj sekcje 'Quick Start', opis zmiennych środowiskowych oraz
> instrukcję wdrożenia (CI/CD).
```

Push

```
 5 files changed, 104 insertions(+), 34 deletions(-)

C:\Users\vdi-terminal\cloud-app>git push
Enumerating objects: 25, done.
Counting objects: 100% (25/25), done.
Delta compression using up to 8 threads
Compressing objects: 100% (10/10), done.
Writing objects: 100% (13/13), 2.63 KiB | 539.00 KiB/s, done.
Total 13 (delta 6), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (6/6), completed with 6 local objects.
To https://github.com/RadeM1112/cloud-app.git
   7fdba23..5271499  main -> main

C:\Users\vdi-terminal\cloud-app>
```