
Setup Radmind Server (beta 0.9.5)


The intended audience for this document is department system administrators (DSA's)




• **Install Radmind Tools**
  - Download Radmind from http://radmind.org/
  - Launch Radmind Assistant
  - You will get a warning message about installing the Radmind tools
  - Press OK to install the tools
  - Follow default installation options

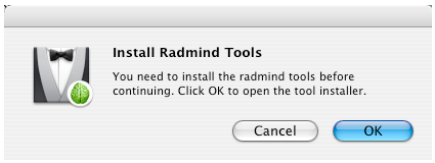


• **Setup Radmind Server**
  - Click "I'm new, and I want to set up a radmind server."
  - Click CONTINUE

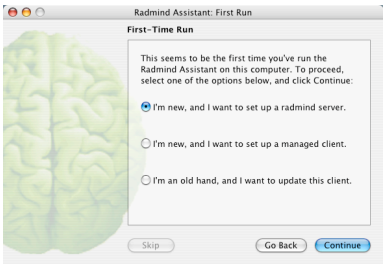

  - Click "Start the radmind server with Rendezvous on"
  - Click CONTINUE

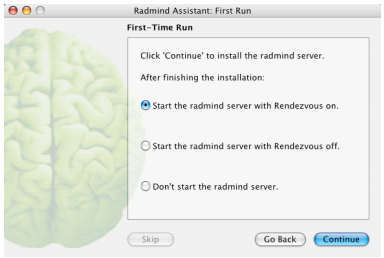

  - If you have the firewall on, the radmind ports will be opened
  - Click FINISH

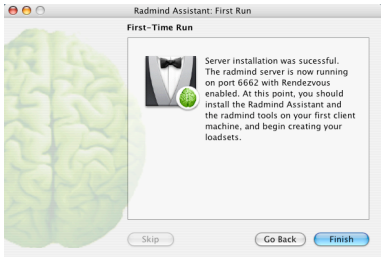

Setup Radmind Client (beta 0.9.5)

The intended audience for this document is department system administrators (DSA's)

• Install Radmind Tools




- Download Radmind from http://radmind.org/
- Launch Radmind Assistant
- You will get a warning message about installing the Radmind tools
- Press OK to install the tools
- Follow default installation options




• Setup Radmind Client


- Click "I'm new, and I want to set up a managed client."
- Click CONTINUE

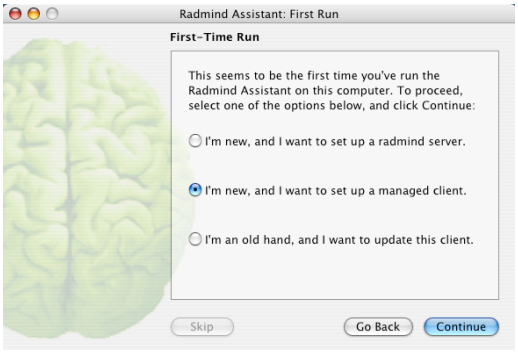


- In the "RadmindServer" field, type the name of your server
- In the "Comparison Path" field, select / for root
- In the "SSL Security Level" field, select NONE if you are not using certificates
- Click ENABLE CHECKSUMS GLOBALLY (for better security)
- Click CONTINUE

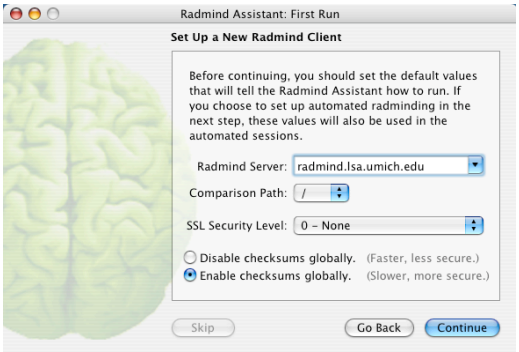


- Click on the CONFIGURE RADMIND AUTOMATION button

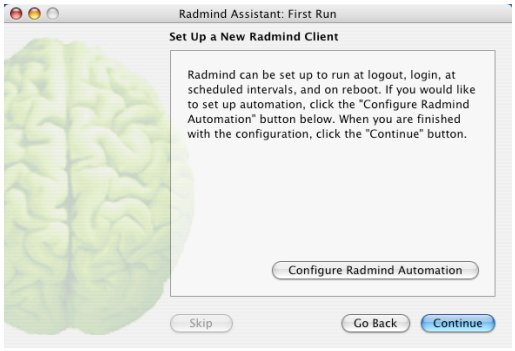


- You will get the following alert window
- Click OK

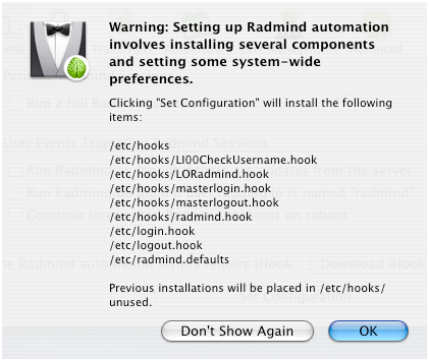


- A new window will open, called the "Radmind Assistant: Automation Preferences"
- In the GENERAL pane, put a check next to "Run a full Radmind session"
- Select DAILY from the pull-down menu
- Put a check in all the boxes under "User Events Triggering Radmind Sessions"
- Click the SET CONFIGURATION button

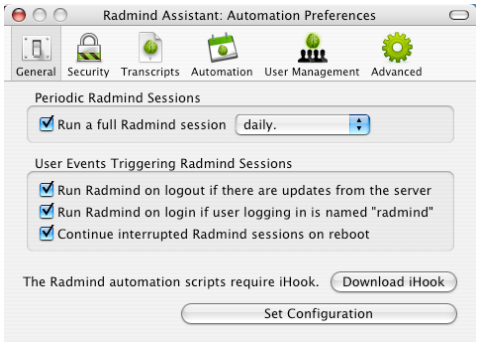


- There are no changes to the SECURITY pane

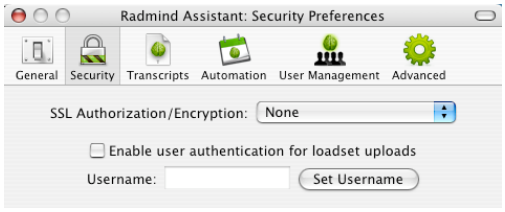

- There are no changes to the TRANSCRIPTS pane

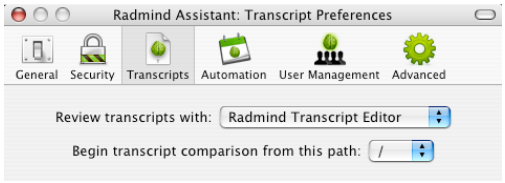


- There are no changes to the AUTOMATION pane, but this alert window will appear
- Click OK

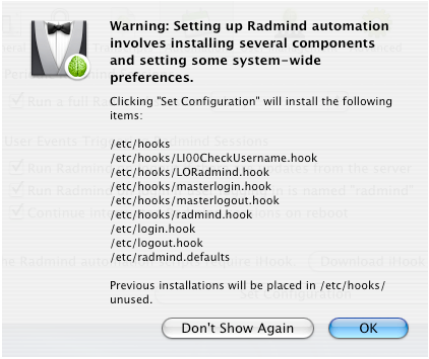

- Under USER MANAGEMENT, the following alert window will appear
- Click OK



- Put a check next to "Automate creation and management of temporary users"
- In the field "Template User Name," type "TemplateUser" (without quotes)
- Click the "Save User Management Settings" button

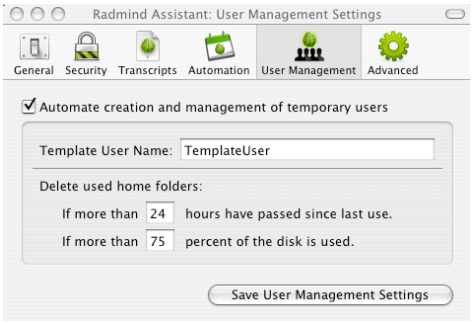


- In the "Template user creation was successful" window, click the OPEN PREFERENCES button




- In the "Accounts" System Preferences pane, give the TemplateUser a password
- Close the System Preferences pane
- In the "User Management setup complete" pane, click OK




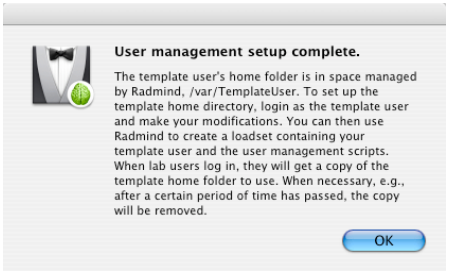


- In ADVANCED pane, click the MAKE PREFERENCES GLOBAL button
- Close the "Radmind Assistant: Advanced Preferences" window

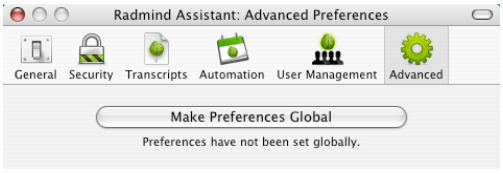


- You will be retuned to the "Radmind Assistant: First Run"
- At the "Set Up a New Radmind Client" window, Click CONTINUE

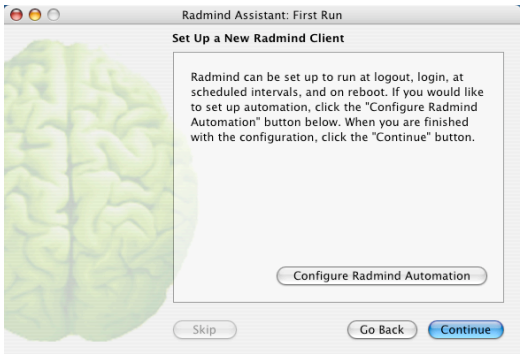


- Click on the 10.3-LAB-NEGATIVE transcript, and click CONTINUE
- An alert window for "Radmind Server Detected" will appear
- Click the SET DEFAULT button

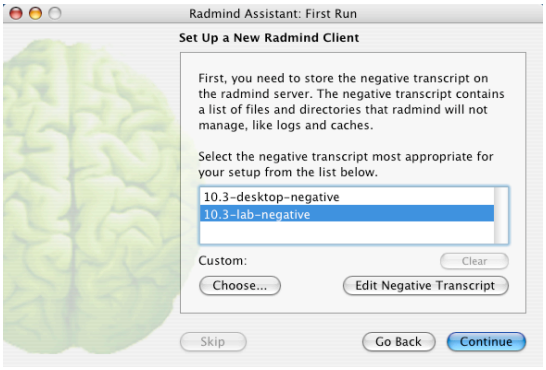

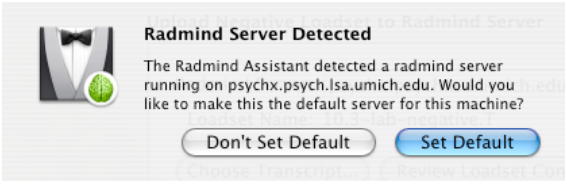


- The "Upload Negative Loadset to Radmind Server" window will open
- Click the ENABLE CHECKSUMS option
- "Store loadset as empty files on the server" is selected by default
- Click CONTINUE
- The alert window "Quit other open applications" will appear
- Click QUIT OTHER APPLICATIONS

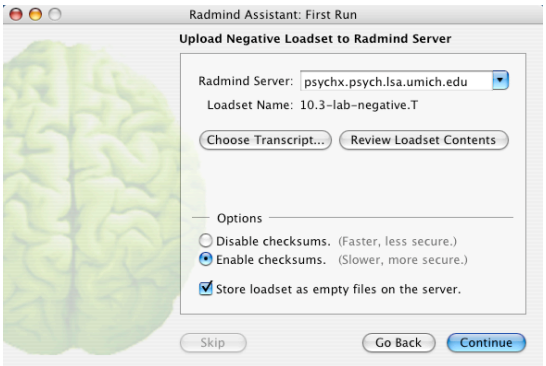




- The window "New Loadset Successfully Created" will appear
- Click CONTINUE

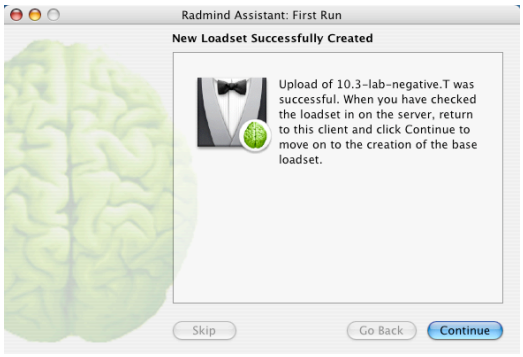


- **MOVE BACK TO YOUR SERVER**
- Open the "Radmind Loadsets" window
- Click REFRESH and the "Newly Uploaded Loadsets" will appear in the lower pane of the window

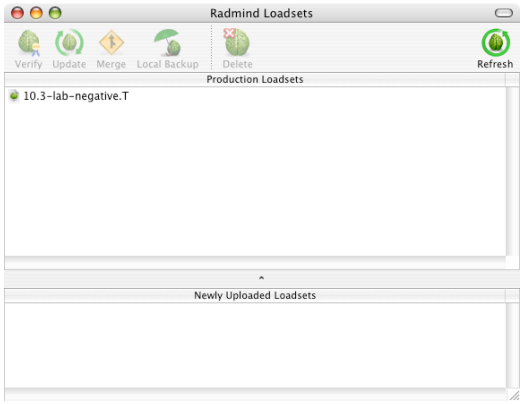


- Radmind will notify you that "A newly-uploaded loadset has been detected"
- Click OK




- Radmind will notify you "Loadset updated and checked in."
- Click OK

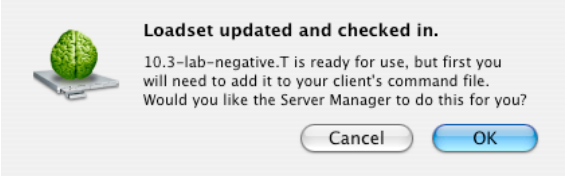


- Radmind will notify you "Command file modification complete."
- Click OK

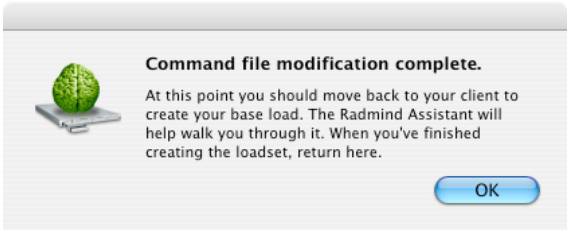


- **MOVE BACK TO YOUR CLIENT**
- Click CONTINUE at the "New Loadset Successfully Created" window
- The window "Check for Updates on the Radmind Server" will appear
- Click CONTINUE

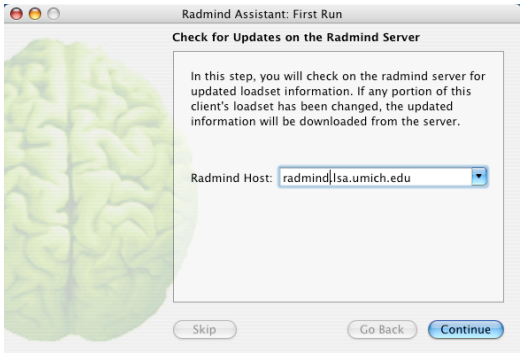


- In the "New Loadset Name" field, use the default loadset name, base-loadset.T
- Make sure that "Enable Checksums" is selected
- Click CONTINUE

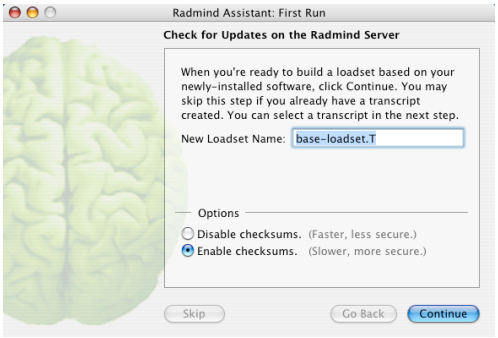


- Radmind will proceed to build your first transcript

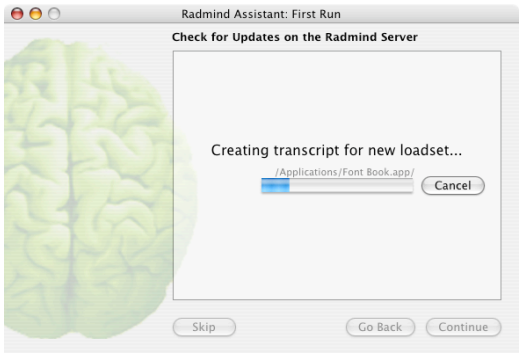


- In the "Upload new Loadset to Radmind Server" window
- Make sure ENABLE CHECKSUMS is selected
- Click CONTINUE

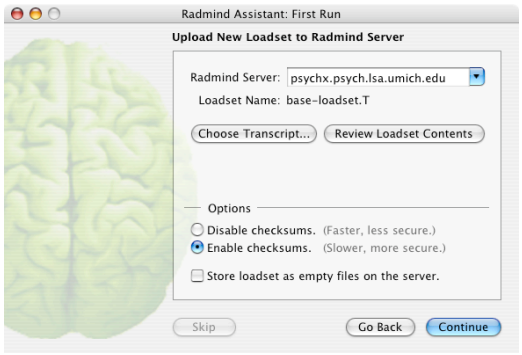


- Radmind will upload the new loadset to the radmind server

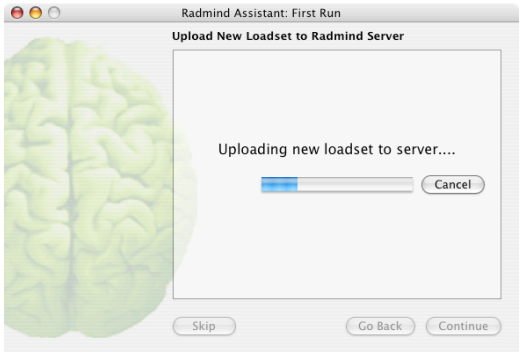


- Radmind Assistant tells you that the base-loadset.T has been uploaded

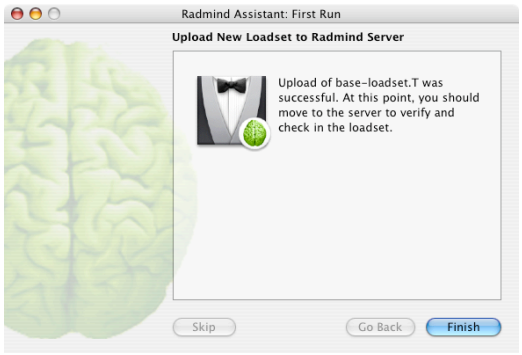


- **MOVE BACK TO YOUR SERVER**
- Radmind will report that "A newly-uploaded loadset has been detected."
- Click VERIFY AND CHECK IN

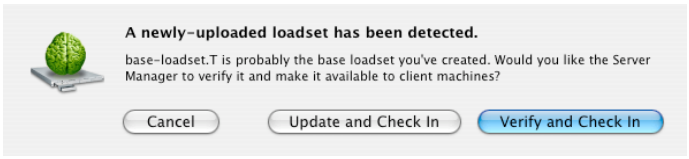


- Radmind will report "Loadset updated and checked in."
- Click OK

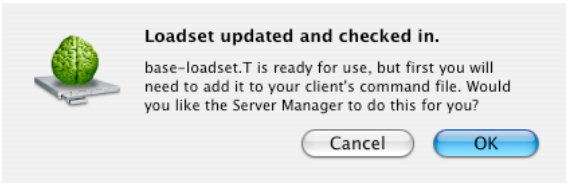

- Radmind will report "Command file modification complete."
- Click OK

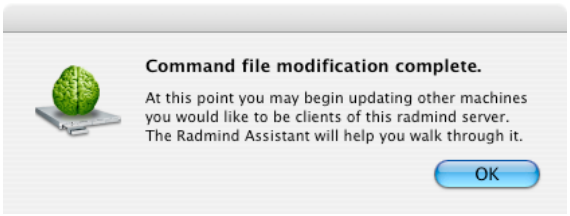

- **MOVE BACK TO YOUR CLIENT**
- Click FINISH

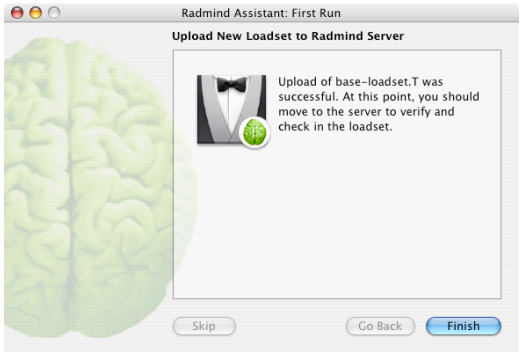


Build Additional Radmind Clients (beta 0.9.5)

The intended audience for this document is department system administrators (DSA's)




• **Install Radmind Tools**


- Download Radmind from http://radmind.org/
- Launch Radmind Assistant
- You will get a warning message about installing the Radmind tools
- Press OK to install the tools
- Follow default installation options

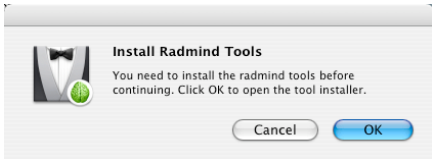


- In the "Session" menu, select UPDATE THIS MACHINE
- In the window "Welcome to the Radmind Client Updater"
- Click CONTINUE

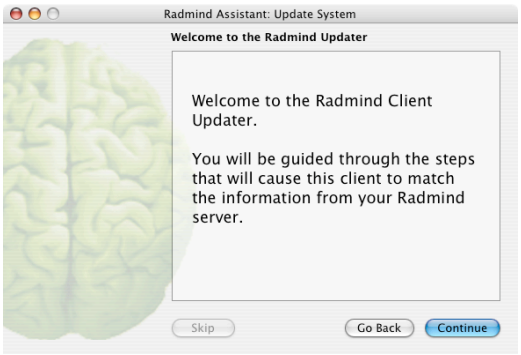


- In the window "Check with Radmind Server for Updates" make sure your Radmind server is selected
- Click CONTINUE

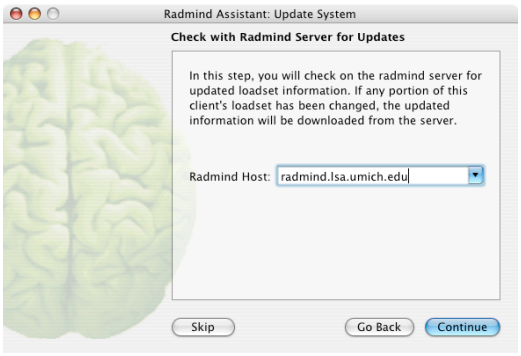


- In the window "Check Filesystem for Changes to Make"
- Make sure that "Enable Checksums" is selected
- Click CONTINUE

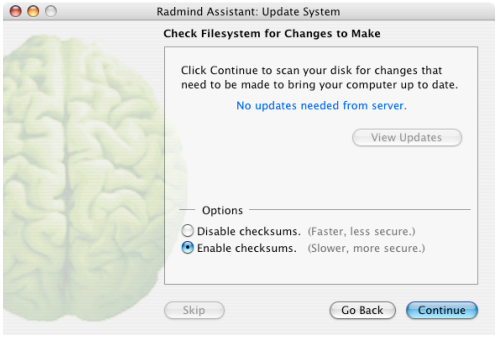


- Radmind will scan your local computer for differences

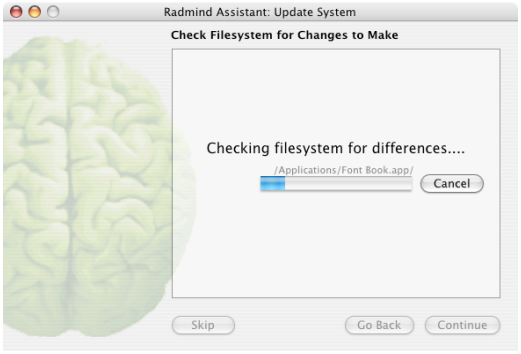

- Radmind will apply the necessary changes to the computer
- Make sure ENABLE CHECKSUMS is selected
- Click CONTINUE

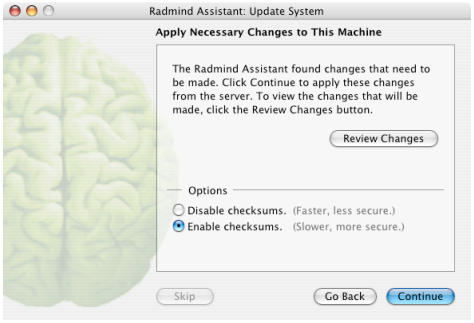

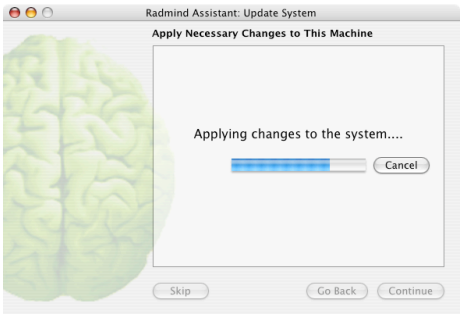

- When the machine has been successfully updated
- Click FINISH
- Then REBOOT

