
## **Mongo DB Installation Guide**

Guide for downloading and installation of MongoDB on Windows.

## **Download the MongoDB MSI Installer Package**

Download the current version of MongoDB from <a href="here">here</a>. Make sure you select MSI as the package you want to download:

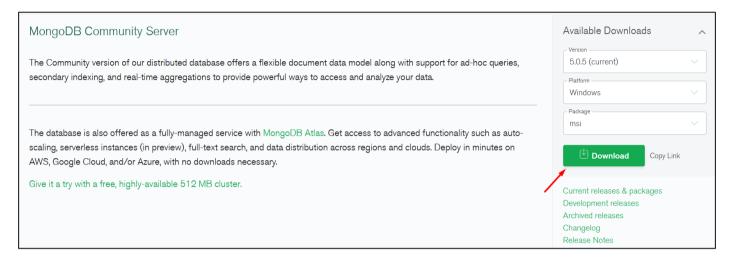

## **Installing MongoDB 5.0.5**

Navigate to your downloads folder and double click on the .msi package you just downloaded. This will launch the installation wizard.



Click **Next**, then accept the license agreement and click **Next** again. Choose the **Complete** setup type:



















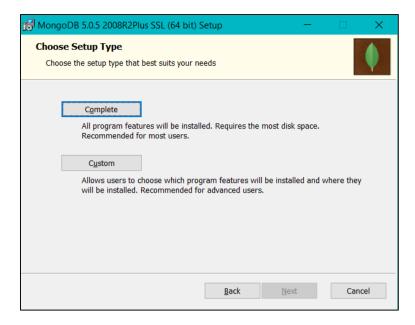



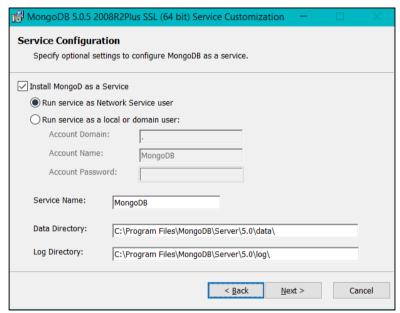

Here we stay with the default option Install MongoDB as a Service and Run service as Network Service user.

Then go through Install and Finish like this:



















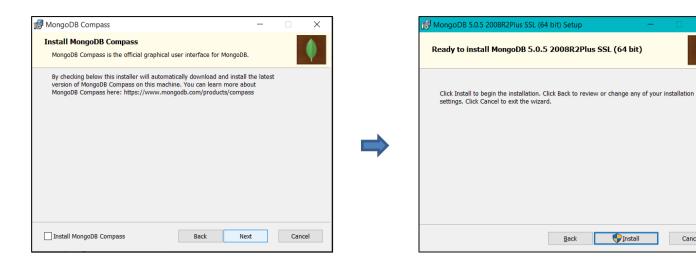


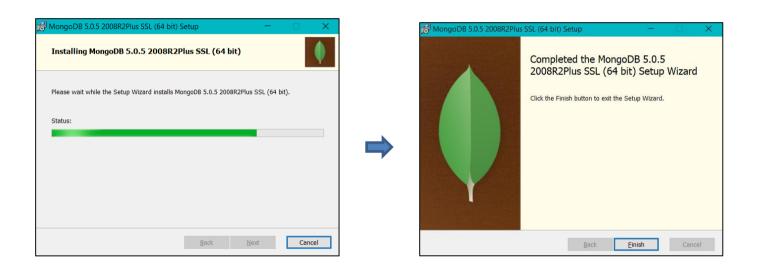

After finishing the installation you need to **restart** your system.

## **Setups and test**

Navigate to the installed MongoDB bin folder

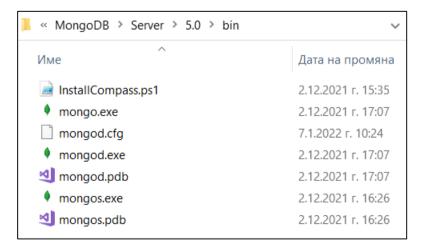

Open the folder in command prompt and run **>mongo** command.

















```
C:\Windows\System32\cmd.exe
Microsoft Windows [Version 10.0.19044.1415]
(c) Microsoft Corporation. Всички права запазени.
C:\Program Files\MongoDB\Server\5.0\bin>mongo_
```

```
C:\Program Files\MongoDB\Server\5.0\bin>mongo
MongoDB shell version v5.0.5
connecting to: mongodb://127.0.0.1:27017/?compressors=disabled&gssapiServiceName=mongodb
Implicit session: session { "id" : UUID("a4e47d01-f93e-4e8e-bb28-d209cb33b47a") }
MongoDB server version: 5.0.5
warning: the "mongo" shell has been superseded by "mongosh",
which delivers improved usability and compatibility.The "mongo" shell has been deprecated and will be removed in
an upcoming release.
For installation instructions, see
https://docs.mongodb.com/mongodb-shell/install/
The server generated these startup warnings when booting:
       2022-01-07T10:24:52.764+02:00: Access control is not enabled for the database. Read and write access to data and
configuration is unrestricted
       Enable MongoDB's free cloud-based monitoring service, which will then receive and display
       metrics about your deployment (disk utilization, CPU, operation statistics, etc).
       The monitoring data will be available on a MongoDB website with a unique URL accessible to you
       and anyone you share the URL with. MongoDB may use this information to make product
       improvements and to suggest MongoDB products and deployment options to you.
       To enable free monitoring, run the following command: db.enableFreeMonitoring()
        To permanently disable this reminder, run the following command: db.disableFreeMonitoring()
```

This will run the MongoDB shell. You can use the mongo shell to query and update data as well as perform administrative operations. Here we can test and manually create a new database, add a collection to it.

To print a list of all databases on the server we use the **>show dbs** command.

```
show dbs
admin
        0.000GB
config 0.000GB
local
        0.000GB
```

Creat new database by > use <databaseName>

```
use myDB
switched to db myDB
```

To see the new database with the show command we should first put the same data in it. We can create a new collection with a document using > db.<collectionName>.insert(document) . Example:

```
db.courses.insert({"name":"mongoDB course"})
```

Now > **show dbs** will show us our new database:





















```
show dbs
admin
        0.000GB
config
        0.000GB
local
        0.000GB
myDB
        0.000GB
```

And > show collections will show us the new collection:

```
> show collections;
courses
```

Executing > db.collection.find() in the mongo shell automatically iterates the cursor to display up to the first 20 documents if any.

```
db.courses.find()
"_id" : ObjectId("5e56c9f2dc6ce40322dd9e47"), "name" : "mongoDB course" }
```

Now you have MongoDB installed, tested, and ready to work. More info read on The MongoDB 4.2 Manual.













