Operacje na zmiennych tekstowych
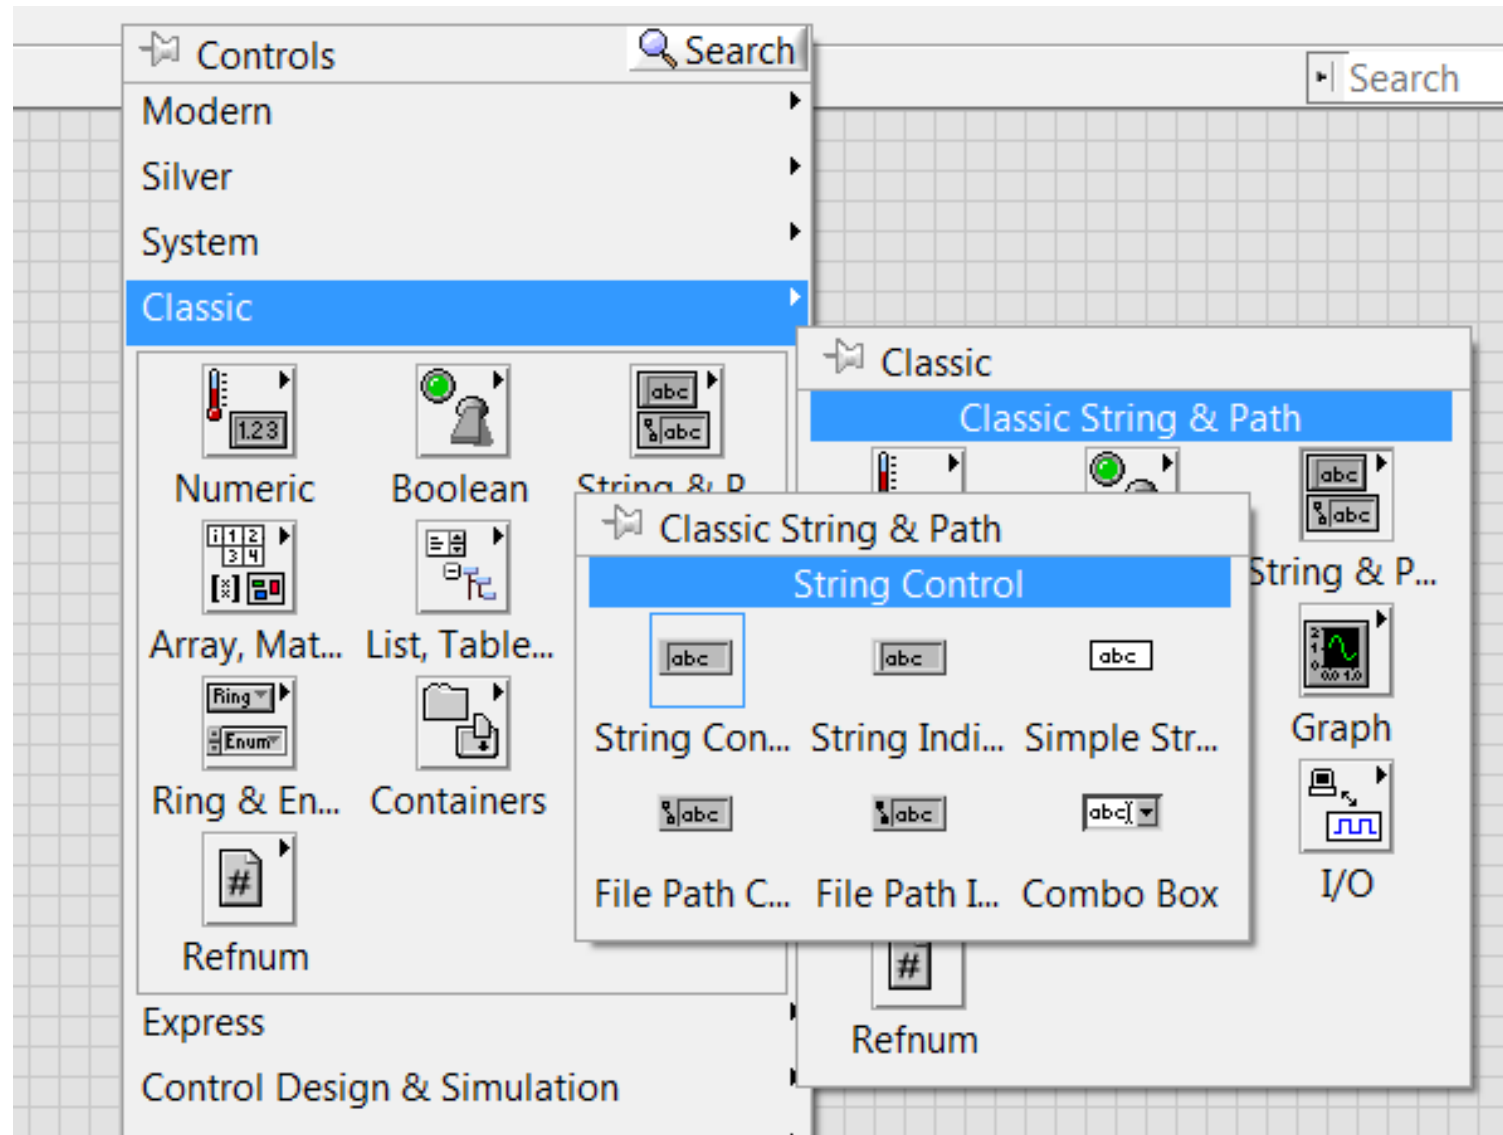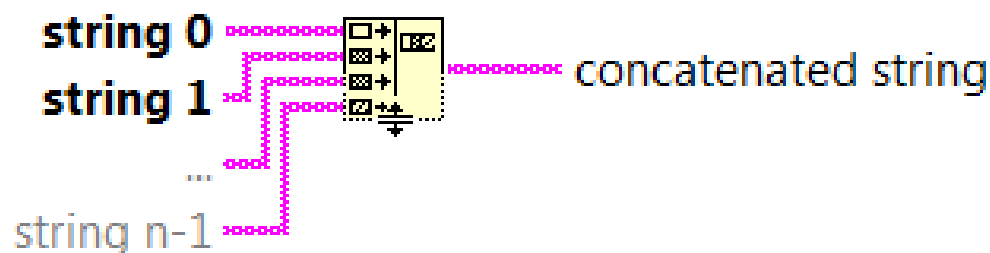
Front Panel (M61X95412)

Block Diagram

Concatenate Strings
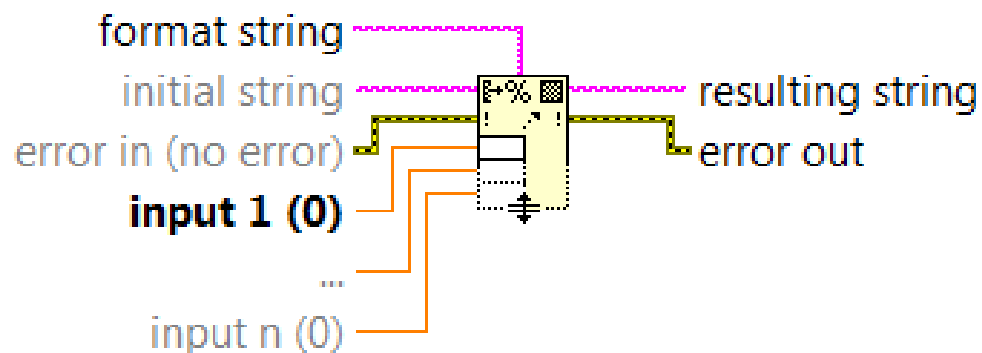
string 0
string 1
...
string n-1
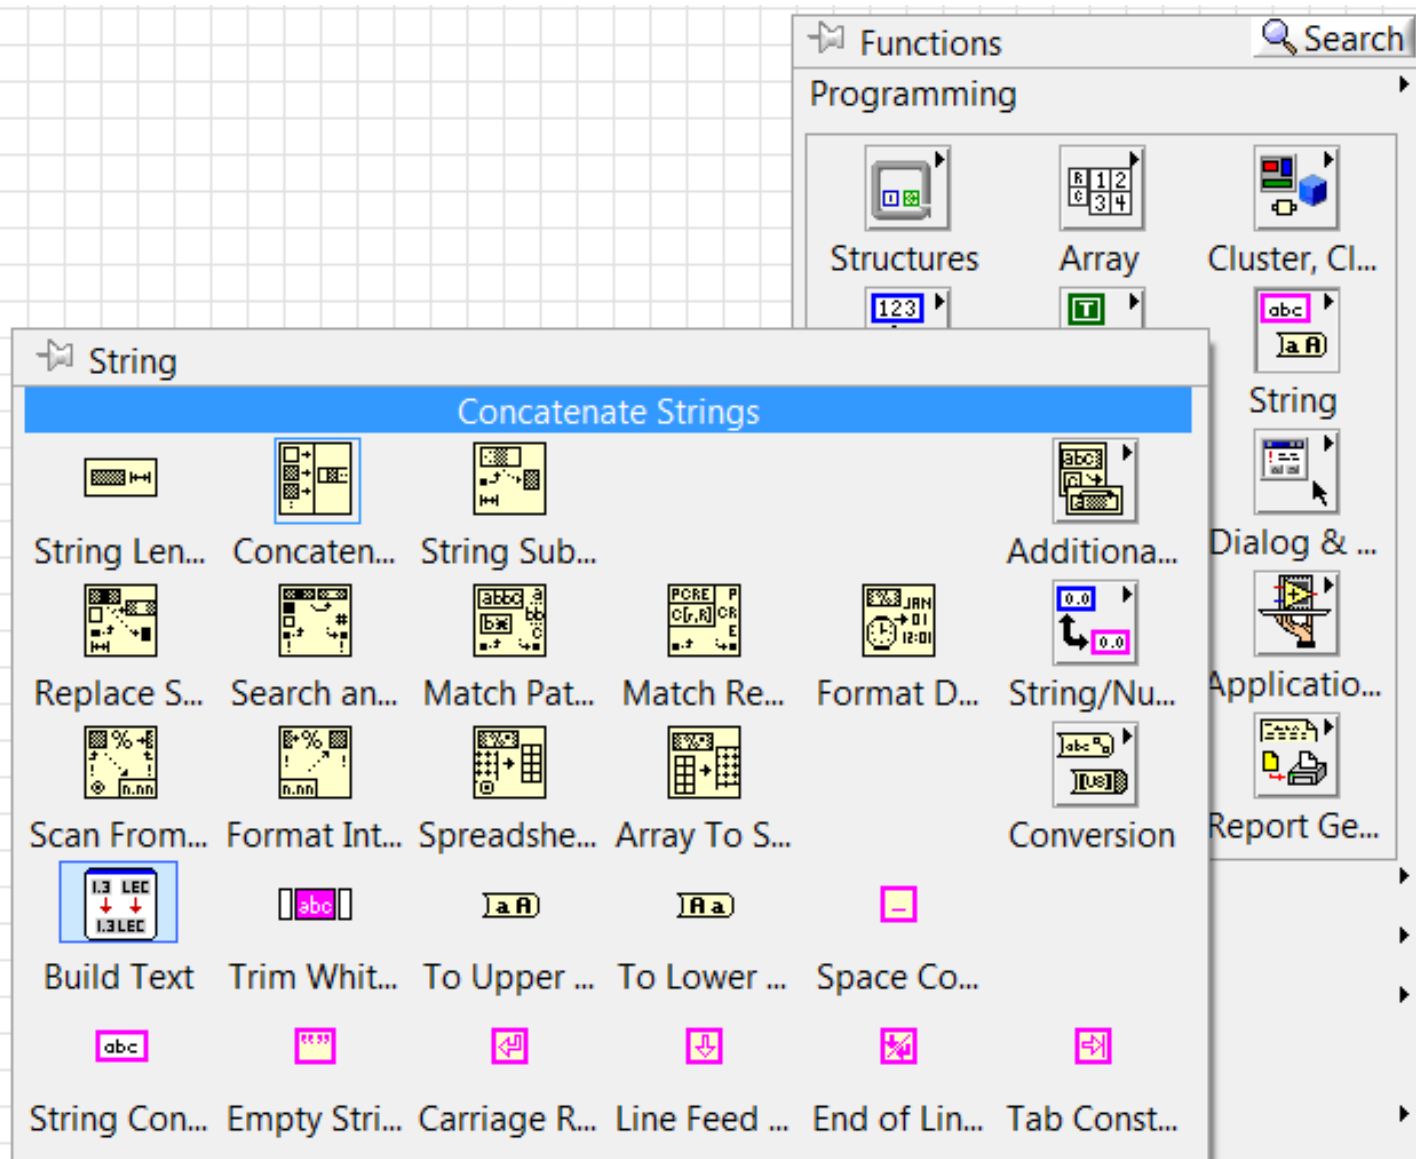
concatenated string

Concatenates input strings and 1D arrays of strings into a single output string. For array inputs, this function concatenates each element of the array.
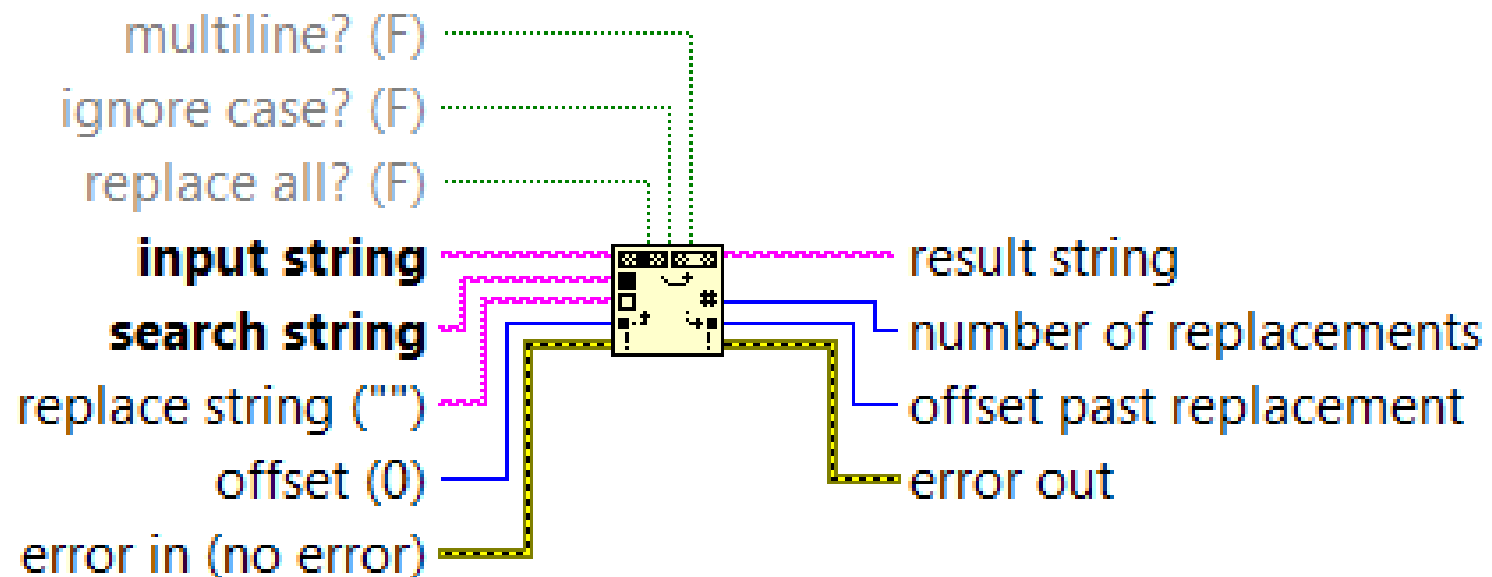
Format Into String

format string
initial string
error in (no error)
input 1 (0)
...
input n (0)

resulting string
error out

Formats string, path, enumerated type, time stamp, Boolean, or numeric data as text.

Format Specifier Examples

Type	Argument(s)	Format String	Resulting String
Automatic Formatting (%g)	12.00	%#g	12
	12000000	%#g	1.2E+6
Decimal (%d)	12.67	score= %d%%	score= 13%
Floating-Point (%f)	12.67	Temp: %5.1f	Temp: 12.7
	12.67 N	%5.3f	12.670 N
	12.67 N	%5.3{mN}f	12670.000 mN
	12.67 N	%5.3{kg}f	12.670 ?kg
Scientific Notation (%e)	12.67	%.3e	1.267E+1
	12.67	%^.3e	12.670E+0

Search and Replace String

multiline? (F)
ignore case? (F)
replace all? (F)
input string
search string
replace string ("")
offset (0)
error in (no error)

result string
number of replacements
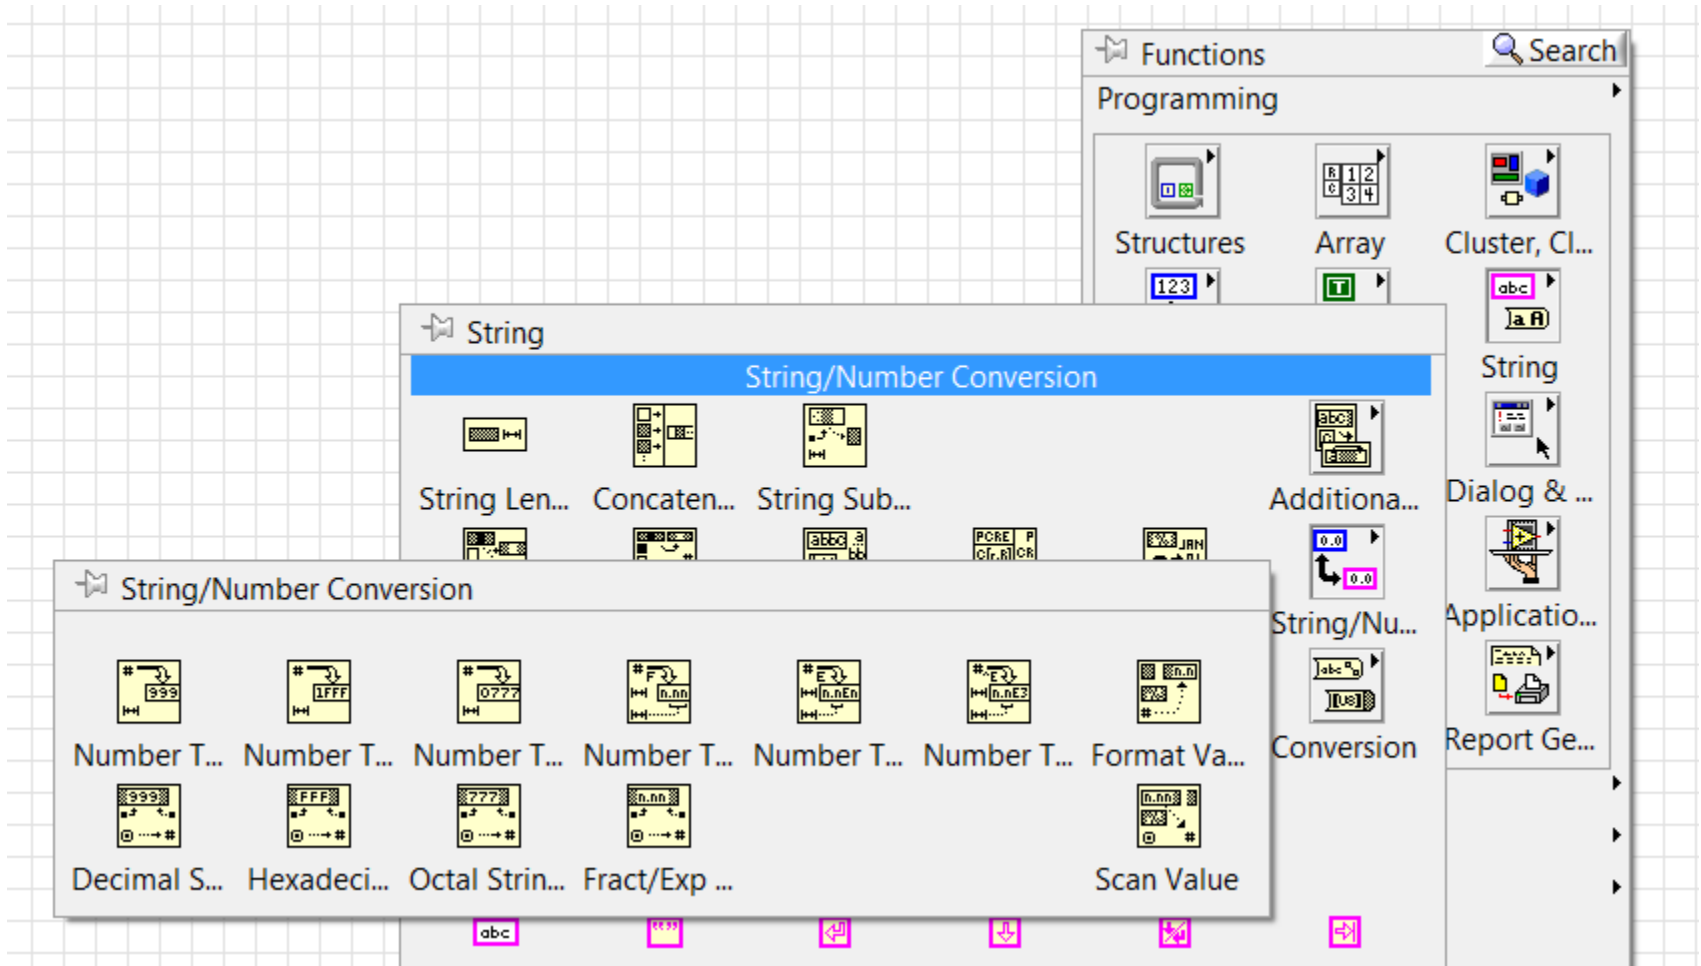offset past replacement
error out

Replaces one or all instances of a substring with another substring. To include the **multiline?** Boolean input, right-click the function and select **Regular Expression**.

Match Pattern

string ━━━━━━━┓ ┏━━━━━━━ before substring

regular expression ━━━┫ ┣━━━━━━ match substring

offset (0) ━━━━━━━┛ ┣━━━━━━ after substring

┗━━━━━━ offset past match
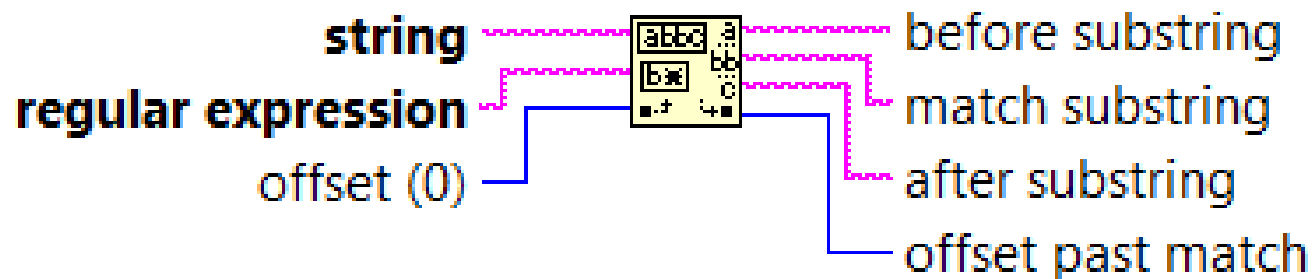
Searches for **regular expression** in **string** beginning at **offset**, and if it finds a match, splits **string** into three substrings. A regular expression requires a specific combination of characters for pattern matching. For more information about special characters in regular expressions, refer to the **regular expression** input description in the detailed help.
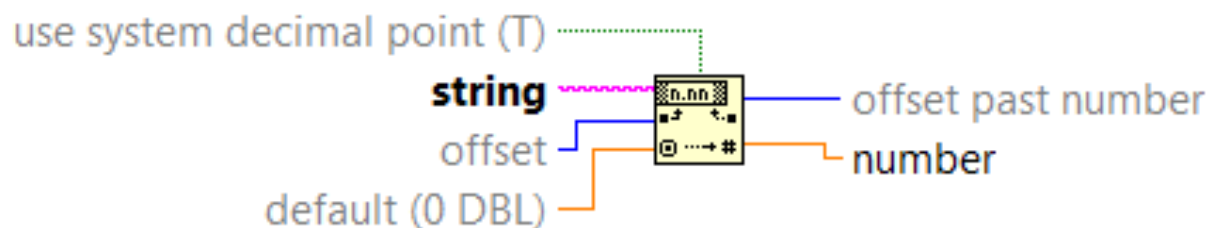
String/Number Conversion

Number To Fractional String

use system decimal point (T) ······································
number ─────────
width (-) ─────
precision (6) ─────
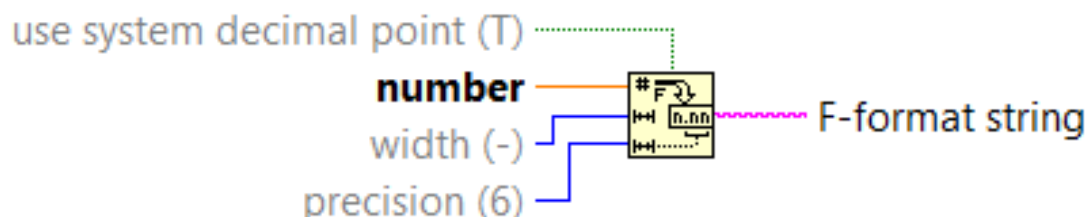
⬡ F-format string

Converts **number** to an F-format (fractional notation), floating-point string at least **width** characters wide or wider if necessary.

Fract/Exp String To Number

use system decimal point (T) ······································
string ~~~~~~~~
offset ─────
default (0 DBL) ─────

───── offset past number
───── number

Interprets the characters 0 through 9, plus, minus, e, E, and the decimal point (usually period) in **string** starting at **offset** as a floating-point number in engineering notation, exponential, or fractional format and returns it in **number**.

Zad_1

Zbuduj program łączący kilka dowolnych wyrazów w jedno zdanie (np. **Co się źle zaczyna, to się dobrze kończy**.)

Zad_2

Zmodyfikuj program tak aby w nim następowała automatyczna zamiana wyrazów „**źle**" i „**dobrze**".

Zad_3

Zbuduj program rozdzielający podany ciąg na 8 podciągów: **Jaksięczłowiekśpieszy,to siędiabełcieszy.**

Zad_4

Zbuduj program odczytujący temperaturę z wirtualnego termometru i ciśnienie z wirtualnego manometru. Program ten ma na wyjściu podawać w/w wielkości w formie komunikatu.