



PADUA UNIVERSITY

ENGINEERING COURSE

Master of Computer Engineering

COMPUTER NETWORKS



Raffaele Di Nardo Di Maio

Contents

Chapter 1

C programming

The C is the most powerful language and also can be considered as the language nearest to Assembly language. Its power is the speed of execution and the easy interpretation of the memory.

C can be considered very important in Computer Networks because it doesn't hide the use of system calls. Other languages made the same thing, but hiding all the needs and evolution of Computer Network systems.

1.1 Organization of data

Data are stored in the memory in two possible ways, related to the order of bytes that compose it. There are two main ways, called Big Endian and Little Endian.

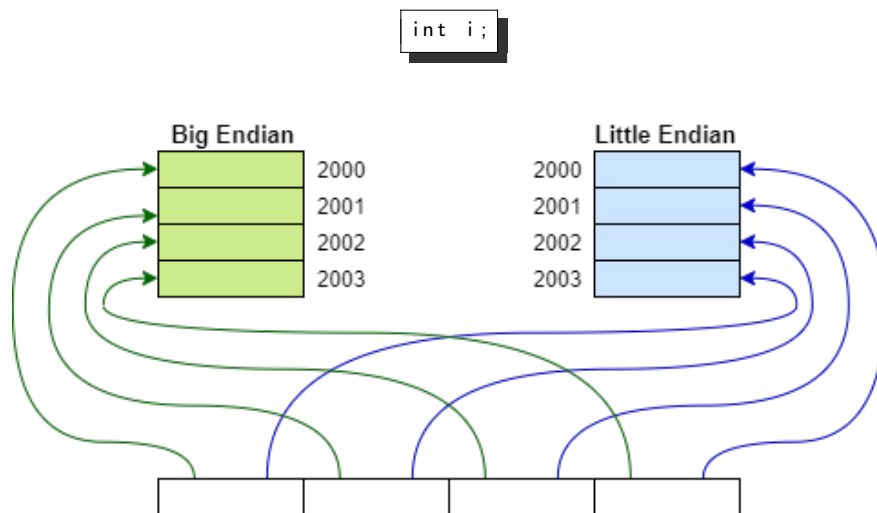


Figure 1.1: Little Endian and Big Endian.

The order of bytes in packets, sent through the network, is Big Endian.

The size of **int**, **float**, **char**, ... types depends on the architecture used. The max size of possible types depends on the architecture (E.g. in 64bits architecture, in one instruction, 8 bytes can be written and read in parallel).

signed	unsigned
int8_t	uint8_t
int16_t	uint16_t
int32_t	uint32_t
int64_t	uint64_t

Table 1.1: <stdint.h>

1.2 Struct organization of memory

The size of a structure depends on the order of fields and the architecture. This is caused by alignment that depends on the number of memory banks, number of bytes read in parallel. For example the size is 4 bytes for 32 bits architecture, composed by 4 banks (Figure 1.2). The Network Packet Representation is made by a stream of 4 Bytes packets as we're using 32 bits architecture.

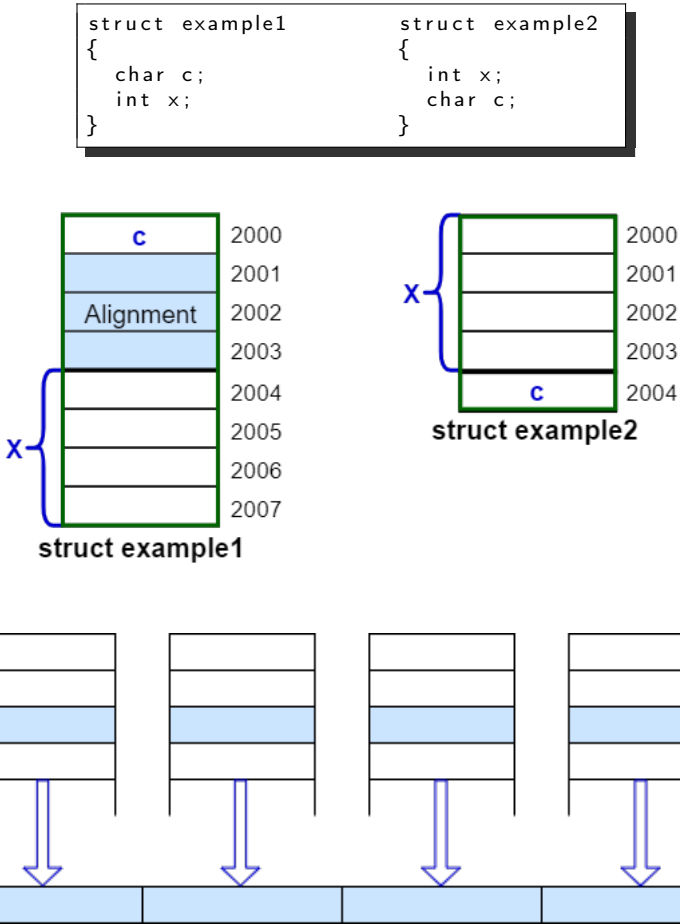


Figure 1.2: Parallel reading in one instruction in 32 bits architecture.

1.3 Structure of C program

The program stores the variable in different section (Figure 1.3):

- **Static area**
where global variables and static library are stored, it's initialized immediately at the creation of the program. Inside this area, a variable doesn't need to be initialized by the programmer because it's done automatically at the creation of the program with all zeroes.
- **Stack**
allocation of variables, return and parameters of functions
- **Heap**
dynamic allocation



Figure 1.3: Structure of the program.

Chapter 2

Network services in C

2.1 Application layer

We need IP protocol to use Internet. In this protocol, level 5 and 6 are hidden in Application Layer. In this case, Application Layer needs to interact with Transport Layer, that is implemented in OS Kernel (Figure 2.1). Hence Application and Transport can talk each other with System Calls.

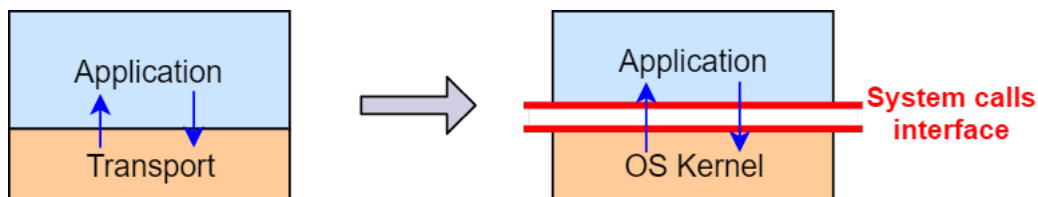


Figure 2.1: System calls interface.

2.2 socket()

Entry-point (system call) that allow us to use the network services. It also allows application layer to access to level 4 of IP protocol.

```
#include <sys/types.h>
#include <sys/socket.h>

int socket(int domain, int type, int protocol);\\
```

RETURN VALUE *File Descriptor (FD) of the socket*
-1 if some error occurs and errno is set appropriately
(You can check value of errno including <errno.h>).

domain = *Communication domain*
 protocol family which will be used for communication.

AF_INET: IPv4 Internet Protocol
AF_INET6: IPv6 Internet Protocol
AF_PACKET: Low level packet interface

type = *Communication semantics*

SOCK_STREAM: Provides sequenced, reliable, two-way, connection-based bytes stream. An OUT-OF-BAND data mechanism may be supported.

SOCK_DGRAM Supports datagrams (connectionless, unreliable messages of a fixed maximum length).

protocol = *Particular protocol to be used within the socket*
 Normally there is only a protocol for each socket type and protocol family (protocol=0), otherwise ID of the protocol you want to use

2.3 TCP connection

In TCP connection, defined by type **SOCK_STREAM** as written in the Section 2.2, there is a client that connects to a server. It uses three primitives (related to File System primitives for management of files on disk) that do these logic actions:

1. start (open bytes stream)
2. add/remove bytes from stream
3. finish (close bytes stream)

TCP is used transferring big files on the network and for example with HTTP, that supports parallel download and upload (FULL-DUPLEX). The length of the stream is defined only at closure of the stream.

2.3.1 Client

2.3.1.1 connect()

The client calls **connect()** function, after **socket()** function of Section 2.2. This function is a system call that client can use to define what is the remote terminal to which he wants to connect.

```
#include <sys/types.h>
#include <sys/socket.h>

int connect(int sockfd, const struct sockaddr *addr, socklen_t addrlen);
```

RETURN VALUE *0* if connection succeeds
 -1 if some error occurs and `errno` is set appropriately

sockfd = *Socket File Descriptor* returned by `socket()`.

addr = *Reference to struct sockaddr*

`sockaddr` is a general structure that defines the concept of address.

In practice it's a union of all the possible specific structures of each protocol.

This approach is used to leave the function written in a generic way.

addrlen = *Length of specific data structure used for sockaddr.*

In the following there is the description of struct `sockaddr_in`, that is the specific `sockaddr` structure implemented for family of protocols **AF_INET**:

```
#include <netinet/in.h>

struct sockaddr_in {
    sa_family_t   sin_family; /* address family: AF_INET */
    in_port_t     sin_port;   /* port in network byte order */
    struct in_addr sin_addr;   /* internet address */
};

/* Internet address. */
struct in_addr {
    uint32_t      s_addr;     /* address in network byte order */
};\
```

The two addresses, needed to define a connection, are (see Figure 2.2):

- **IP address** (`sin_addr` in `sockaddr_in` struct)
 identifies a virtual interface in the network. It can be considered the entry-point for data arriving to the computer. *It's unique in the world.*
- **Port number** (`sin_port` in `sockaddr_in` struct)
 identifies to which application data are going to be sent. The port so must be open for that stream of data and it can be considered a service identifier. There are well known port numbers, related to standard services and others that are free to be used by the programmer for its applications (see Section ?? to find which file contains well known port numbers). *It's unique in the system.*

As mentioned in Section 1.1, network data are organized as Big Endian, so in this case we need to insert the IP address according to this protocol. It can be done as in previous example or with the follow function:

```
#include <sys/socket.h>
#include <netinet/in.h>
#include <arpa/inet.h>

int inet_aton(const char *cp, struct in_addr *inp);
```

The port number is written according to Big Endian architecture, through the next function:

```
#include <arpa/inet.h>

uint16_t htons(uint16_t hostshort);
```

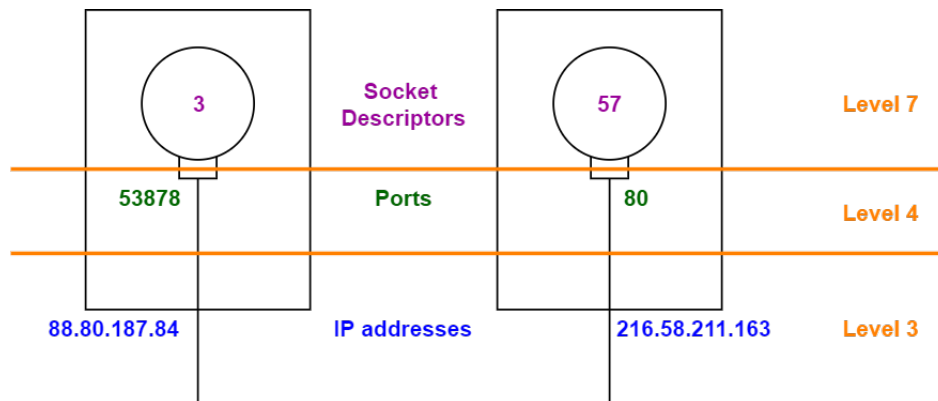


Figure 2.2: After successful connection.

2.3.1.2 write()

Application protocol uses a readable string, to exchange readable information (as in HTTP). This technique is called simple protocol and commands, sent by the protocol, are standardized and readable strings.

```
#include <unistd.h>
ssize_t write(int fd, const void *buf, size_t count);
```

RETURN VALUE *Number of bytes written on success*
 -1 if some error occurs and errno is set appropriately

fd = *Socket File Descriptor* returned by socket().

buf = *Buffer of characters to write*

count = *Max number of bytes to write in the file (stream).*

The write buffer is usually a string but we don't consider the null value (`\0` character), that determine the end of the string, in the evaluation of count (`strlen(buf)-1`). This convention is used because `\0` can be part of characters stream.

2.3.1.3 read()

The client uses this blocking function to wait and obtain response from the remote server. Not all the request are completed immediat from the server, for the meaning of stream type of protocol. Infact in this protocol, there is a flow for which the complete sequence is defined only at the closure of it2.2.

read() is consuming bytes fom the stream asking to level 4 a portion of them, because it cannot access directly to bytes in Kernel buffer. Lower layer controls the stream of information that comes from the same layer of remove system.

```
#include <unistd.h>

ssize_t read(int fd, void *buf, size_t count);
```

RETURN VALUE *Number of bytes read on success*
0 if EOF is reached (end of the stream)
-1 if some error occurs and errno is set appropriately

fd = *Socket File Descriptor* returned by `socket()`.

buf = *Buffer of characters in which it reads and stores info*

count = *Max number of bytes to read from the file (stream).*

So if `read()` doesn't return, this means that the stream isn't ended but the system buffer is empty. If `read=0`, the function met EOF and the local system buffer is now empty. This helps client to understand that server ended before the connection.

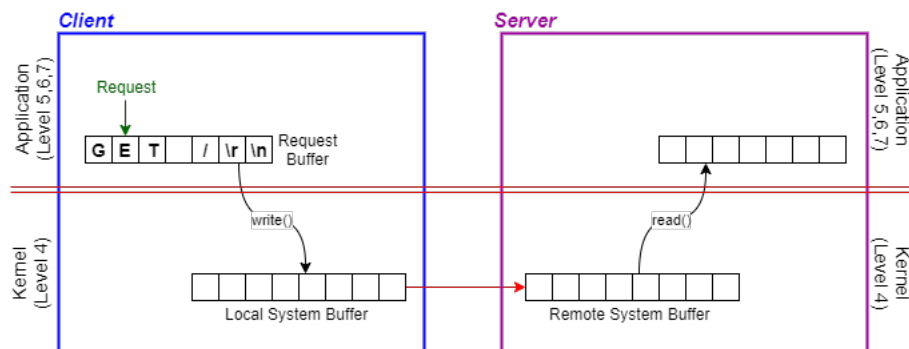


Figure 2.3: Request by the client.

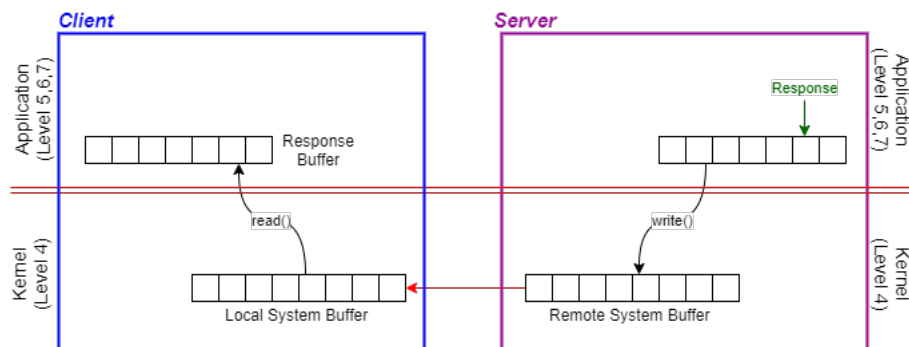


Figure 2.4: Response from the server.

A server is a daemon, an application that works in background forever. The end of this process can be made only through the use of the Operating System.

```
#include <sys/types.h>
#include <sys/socket.h>

int bind(int sockfd, const struct sockaddr *addr, socklen_t addrlen);
```

sockfd = *Socket File Descriptor* returned by `socket()`.

addr = *Reference to struct sockaddr*
sockaddr is a general structure that defines the concept of address.

addrlen = *Length of specific data structure used for sockaddr.*

```
#include <sys/types.h>
#include <sys/socket.h>

int listen(int sockfd, int backlog);
```

sockfd = *Socket File Descriptor* returned by `socket()`.

backlog = *Maximum length of queue of pending connections*

The number of pending connections for `sockfd` can grow up to this value.

The normal distribution of new requests by clients is usually Poisson, organized as in Figure 2.5.

The listening socket, identified by **sockfd**, is unique for each association of a port number and a IP address of the server (Figure 2.6).




Figure 2.5: Poisson distribution of connections by clients.

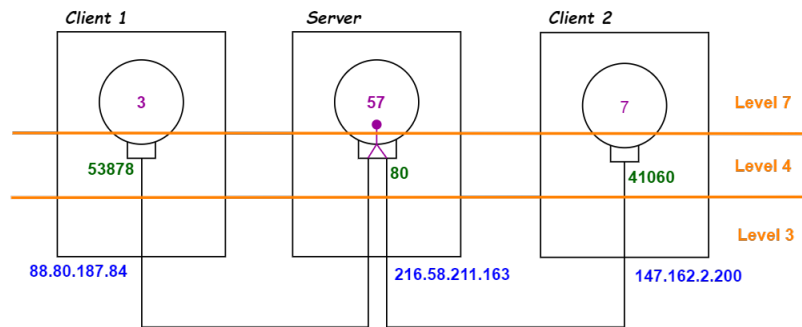


Figure 2.6: listen() function.

2.3.2.3 accept()

```
#include <sys/types.h>
#include <sys/socket.h>

int accept(int sockfd, struct sockaddr *addr, socklen_t *addrlen);
```

RETURN VALUE *Accepted Socket Descriptor*

it will be used by server, to manage requests and responses from that specific client.

-1 if some error occurs and errno is set appropriately
(You can check value of errno including <errno.h>).

sockfd = *Listen Socket File Descriptor*

addr = *Reference to struct sockaddr*

It's going to be filled by the accept() function.

addrlen = *Length of the struct of addr.*



It's going to be filled by accept() function.

(accept() is used in different cases so it can return different type of specific implementation of struct addr.)

To manage many clients requests, we use the **accept()** function to establish the connection one-to-one with each client, creating a uniquely socket with each client.

This function extracts the first connection request on the queue of pending connections for the listening socket **sockfd** creates a new connected socket, and returns a new file descriptor referring to that socket. The accept() is blocking for the server when the queue of pending requests is empty (Figure 2.8).

At lower layers of ISO/OSI, the port number and the IP Address are the same identifiers, to which listening socket is associated (Figure 2.7).

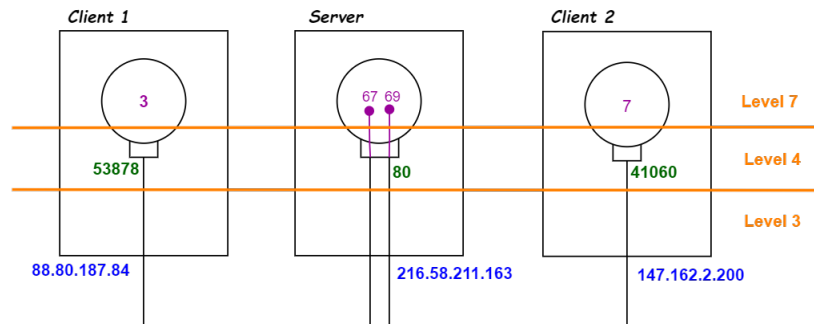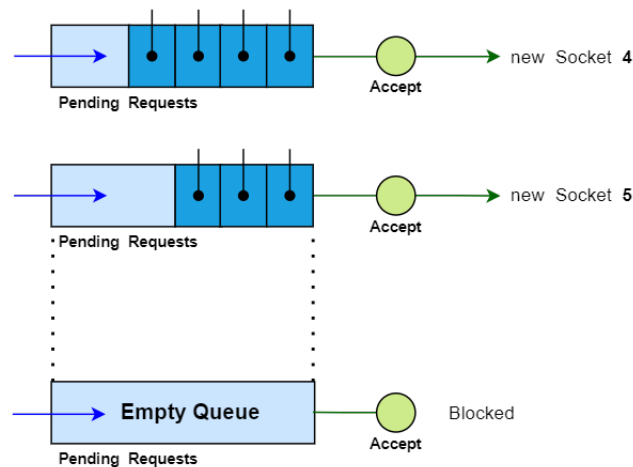Figure 2.7: `accept()` function.Figure 2.8: Management of pending requests with `accept()`.

2.4 UDP connection

UDP connection is defined by type `SOCK_DGRAM` as specified in Section 2.2. It's used for application in which we use small packets and we want immediate feedback directly from application. It isn't reliable because it doesn't need confirmation in transport layer. It's used in Twitter application and in video streaming.

Chapter 3

HTTP protocol

HTTP protocol was presented for the first time in the RFC 1945 (Request for Comment).

The Hypertext Transfer Protocol (HTTP) is an application-level protocol with the lightness and speed necessary for distributed, collaborative, hypermedia information systems. It is a generic, stateless, object-oriented protocol which can be used for many tasks, such as name servers and distributed object management systems, through extension of its request methods (commands).

It's not the first Hypertext protocol in history because there was Hypertalk, made by Apple before.

A feature of HTTP is the typing of data representation, allowing systems to be built independently of the data being transferred. HTTP has been in use by the World-Wide Web global information initiative since 1990.

3.1 Terminology

- **connection**
a transport layer virtual circuit established between two application programs for the purpose of communication.
- **message**
the basic unit of HTTP communication, consisting of a structured sequence of octets matching the syntax defined in Section 4 and transmitted via the connection.
- **request**
an HTTP request message.
- **response**
an HTTP response message.
- **resource**
a network data object or service which can be identified by a URI.
- **entity**
a particular representation or rendition of a data resource, or reply from a service resource, that may be enclosed within a request or response message. An entity consists of metainformation in the form of entity headers and content in the form of an entity body.
- **client**
an application program that establishes connections for the purpose of sending requests.
- **user agent**
the client which initiates a request. These are often browsers, editors, spiders (web-traversing robots), or other end user tools.
- **server**
an application program that accepts connections in order to service requests by sending back responses.

- **origin server**
the server on which a given resource resides or is to be created.
- **proxy**
an intermediary program which acts as both a server and a client for the purpose of making requests on behalf of other clients. Requests are serviced internally or by passing them, with possible translation, on to other servers. A proxy must interpret and, if necessary, rewrite a request message before forwarding it. Proxies are often used as client-side portals through network firewalls and as helper applications for handling requests via protocols not implemented by the user agent.
- **gateway**
a server which acts as an intermediary for some other server. Unlike a proxy, a gateway receives requests as if it were the origin server for the requested resource; the requesting client may not be aware that it is communicating with a gateway.
Gateways are often used as server-side portals through network firewalls and as protocol translators for access to resources stored on non-HTTP systems.
- **tunnel**
a tunnel is an intermediary program which is acting as a blind relay between two connections. Once active, a tunnel is not considered a party to the HTTP communication, though the tunnel may have been initiated by an HTTP request. The tunnel ceases to exist when both ends of the relayed connections are closed.
Tunnels are used when a portal is necessary and the intermediary cannot, or should not, interpret the relayed communication.
- **cache**
a program's local store of response messages and the subsystem that controls its message storage, retrieval, and deletion. A cache stores cachable responses in order to reduce the response time and network bandwidth consumption on future, equivalent requests. Any client or server may include a cache, though a cache cannot be used by a server while it is acting as a tunnel.

Any given program may be capable of being both a client and a server; our use of these terms refers only to the role being performed by the program for a particular connection, rather than to the program's capabilities in general. Likewise, any server may act as an origin server, proxy, gateway, or tunnel, switching behavior based on the nature of each request.

3.2 Basic rules

The following rules are used throughout are used to describe the grammar used in the RFC 1945.

```

OCTET = <any 8-bit sequence of data>
CHAR  = <any US-ASCII character (octets 0 - 127)>
UPALPHA = <any US-ASCII uppercase letter "A".."Z">
LOALPHA = <any US-ASCII lowercase letter "a".."z">
ALPHA  = UPALPHA | LOALPHA
DIGIT  = <any US-ASCII digit "0".."9">
CTL    = <any US-ASCII control character (octets 0 - 31) and DEL (127)>
CR     = <US-ASCII CR, carriage return (13)>
LF     = <US-ASCII LF, linefeed (10)>
SP     = <US-ASCII SP, space (32)>
HT     = <US-ASCII HT, horizontal-tab (9)>
">    = <US-ASCII double-quote mark (34)>

```

3.3 Messages

3.3.1 Different versions of HTTP protocol

- **HTTP/0.9 Messages**

Simple-Request and Simple-Response do not allow the use of any header information and are limited to a single request method (GET).

Use of the Simple-Request format is discouraged because it prevents the server from identifying the media type of the returned entity.

```
HTTP-message = Simple-Request | Simple-Response
```

```
Simple-Request  = "GET" SP Request-URI CRLF
```

```
Simple-Response = [ Entity-Body ]
```

- **HTTP/1.0 Messages**

Full-Request and Full-Response use the generic message format of RFC 822 for transferring entities. Both messages may include optional header fields (also known as "headers") and an entity body. The entity body is separated from the headers by a null line (i.e., a line with nothing preceding the CRLF).

```
HTTP-message = Full-Request | Full-Response
```

```
Full-Request = Request-Line
               *(General-Header | Request-Header | Entity-Header)
               CRLF
               [ Entity-Body ]

Full-Response = Status-Line
               *(General-Header | Request-Header | Entity-Header)
               CRLF
               [ Entity-Body ]
```

3.3.2 Headers

The order in which header fields are received is not significant. However, it is "good practice" to send General-Header fields first, followed by Request-Header or Response-Header fields prior to the Entity-Header fields. Multiple HTTP-header fields with the same field-name may be present in a message if and only if the entire field-value for that header field is defined as a comma-separated list.

```
HTTP-header = field-name ":" [ field-value ] CRLF
```

3.3.3 Request-Line

```
Request-Line = Method SP Request-URI SP HTTP-Version CRLF

Method       = "GET" | "HEAD" | "POST" | extension-method

extension-method = token
```

The list of methods acceptable by a specific resource can change dynamically; the client is notified through the return code of the response if a method is not allowed on a resource.

Servers should return the status code 501 (not implemented) if the method is unrecognized or not implemented.

3.3.4 Request-URI

The Request-URI is a Uniform Resource Identifier and identifies the resource upon which to apply the request.

```
Request-URI = absoluteURI | abs_path
```

The absoluteURI form is only allowed when the request is being made to a proxy. The proxy is requested to forward the request and return the response. If the request is GET or HEAD and a prior response is cached, the proxy may use the cached message if it passes any restrictions in the Expires header field.

Note that the proxy may forward the request on to another proxy or directly to the server specified by the absoluteURI. In order to avoid request loops, a proxy must be able to recognize all of its server names, including any aliases, local variations, and the numeric IP address.

The most common form of Request-URI is that used to identify a resource on an origin server or gateway. In this case, only the absolute path of the URI is transmitted.

3.3.5 Request Header

The request header fields allow the client to pass additional information about the request, and about the client itself, to the server.

These fields act as request modifiers, with semantics equivalent to the parameters on a programming language method (procedure) invocation.

```
Request-Header = Authorization | From | If-Modified-Since | Referer | User-Agent
```

3.3.6 Status line

```
Status-Line = HTTP-Version SP Status-Code SP Reason-Phrase CRLF
```

General Status code

1xx: Informational	Not used, but reserved for future use
2xx: Success	The action was successfully received, understood, and accepted.
3xx: Redirection	Further action must be taken in order to complete the request
4xx: Client Error	The request contains bad syntax or cannot be fulfilled
5xx: Server Error	The server failed to fulfill an apparently valid request

Known service code

200	OK
201	Created
202	Accepted
204	No Content
301	Moved Permanently
302	Moved Temporarily
304	Not Modified
400	Bad Request
401	Unauthorized
403	Forbidden
404	Not Found
500	Internal Server Error
501	Not Implemented
502	Bad Gateway
503	Service Unavailable

3.4 Examples

The following pieces of code are examples of TCP client connection to **www.google.it**, using functions explained in Chapter 2.

3.4.1 HTTP 0.9

The following piece of code define a structure, used to connect to Google server.

The most important thing is that **socket()** is entry-point for level 4, but also **connect()** is the request to Kernel to establish the connection.

read() and **write()** are system calls used respectively to obtain result(response) of a request and to generate request.

These function permit us to ask to lower level to do this things, without knowing content of system buffers (stream). The second part is only used to read the input.

3.4.2 HTTP 1.0

The protocol has no mandatory headers to be added in the request field. This protocol is compliant with HTTP 0.9. To keep the connection alive, "Connection" header with "keep-alive" as header field must be added to request message. The server, receiving the request, replies with a message with the same header value for "Connection".

This is used to prevent the closure of the connection, so if the client needs to send another request, he can use the same connection. This is usually used to send many files and not only one.

The connection is kept alive until either the client or the server decides that the connection is over and one of them drops the connection. If the client doesn't send new requests to the server, the second one usually drops the connection after a couple of minutes.

The client could read the response of request, with activated keep alive option, reading only header and looking to "Content-length" header field value to understand the length of the message body. This header is added only if a request with keep-alive option is done.

This must be done because we can't look only to empty system stream, because it could be that was send only the response of the first request or a part of the response.

Otherwise, when the option keep alive is not used, the client must fix a max number of characters to read from the specific response to his request, because he doesn't know how many character compose the message body. If you make many requests to server without keep-alive option, the server will reply requests, after the first, with only headers but empty body.

3.4.3 HTTP 1.1

It has by default the option keep alive activated by default with respect to HTTP 1.0. It has the mandatory header "Host" followed by the hostname of the remote system to which the request or the response is sent. The body is organized in chunks, so we need the connection kept alive to manage future new chunks.

This is useful with dynamic pages, in which the server doesn't know the length of the stream in advance and can update the content of the stream during the established connection, sending a fixed amount of bytes to client. We can check if the connection is chunked oriented, looking for the header "Transfer-Encoding" with value "chunked".

Each connection is composed by many chunks and each of them is composed by chunk length followed by chunk body, except for the last one that has length 0 (see Figure 3.1). The following grammar represents how the body is organized:

```

Chunked-Body    = *chunk
                  last-chunk
                  trailer
                  CRLF

chunk           = chunk-size [ chunk-extension ] CRLF
                  chunk-data CRLF

chunk-size      = 1*HEX
last-chunk      = 1*("0") [ chunk-extension ] CRLF

chunk-extension = *( ";" chunk-ext-name [ "=" chunk-ext-val ] )

chunk-ext-name  = token
chunk-ext-val   = token | quoted-string
chunk-data      = chunk-size(OCTET)
trailer         = *(entity-header CRLF)
  
```

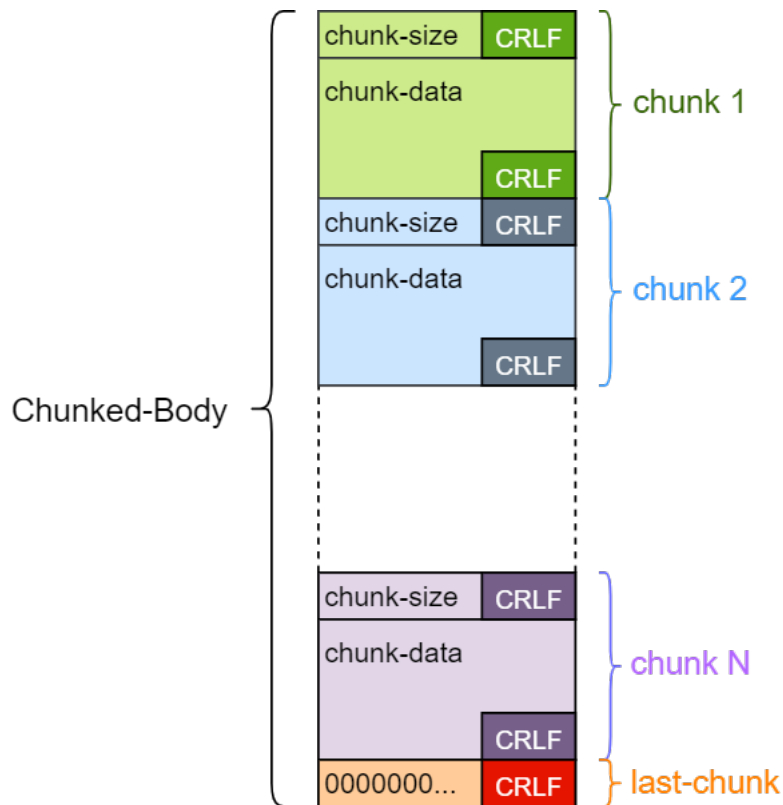


Figure 3.1: Chunked body.

3.5 HTML

The body of an HTTP request, it's often composed from the HTML related page. Each click, of a link inside the web page, generates a new request to the server with GET method.

Chapter 4

Code examples

4.1 Header

```
1 #ifndef NET_UTILITY
2 #define NET_UTILITY
3
4 typedef struct {
5     char* name;
6     char* value;
7 }header;
8
9 #define LINE "_____\\n"
10
11 int my_strlen(char* string);
12 void control(int code, char* message);
13 void parse_header(int sd, char* response, char** status_tokens, int* header_size);
14 void analysis_headers(char **status_tokens, header* h, int* body_length, char* website);
15 void body_acquire(int sd, int body_length, char* entity, int *size);
16 char dec2bin(char c);
17 void print_body(char* entity, int size);
18
19 #endif
```

4.2 Client HTTP 0.9

```
1 #include <unistd.h>
2 #include <sys/socket.h>
3 #include <netinet/in.h>
4 #include <netinet/ip.h>
5 #include <arpa/inet.h>
6 #include <stdio.h>
7 #include <errno.h>
8 #include <stdlib.h>
9
10 struct sockaddr_in server;
11
12 int main(int argc, char ** argv)
13 {
14     int sd; //Socket Descriptor
15     int t; //Control value returned by connect, write and read
16     int i;
17     int size;
18     char request[100];
19     char response[1000000];
20
21     unsigned char ipaddr[4] = {216,58,211, 163};
22
23     sd = socket(AF_INET, SOCK_STREAM, 0);
24
25     if(argc>3)
26     {
```

```

27     perror("Too many arguments");
28     return 1;
29 }
30
31 if(sd==-1)
32 {
33     printf("Errno = %d \n", errno);
34     perror("Socket failed");
35     return 1;
36 }
37
38 server.sin_family=AF_INET;
39 server.sin_port = htons(80); //HTTP port number
40
41 if(argc>1)
42 {
43     server.sin_addr.s_addr=inet_addr(argv[1]);
44     //or inet_aton(argv[1], &server.sin_addr);
45
46     if(argc==3)
47         server.sin_port = htons(atoi(argv[2])); //HTTP port number
48 }
49 else
50 {
51     server.sin_addr.s_addr = *(uint32_t *) ipaddr;
52     server.sin_port = htons(80); //HTTP port number
53 }
54 t = connect(sd, (struct sockaddr *)&server, sizeof(server));
55
56 if(t==-1)
57 {
58     printf("Errno = %d \n", errno);
59     perror("Connection failed \n");
60     return 1;
61 }
62
63 sprintf(request, "GET /\r\n");
64
65 for(size=0; request[size]; size++);
66 t = write(sd, request, size);
67
68 if(t == -1)
69 {
70     printf("Errno = %d\n", errno);
71     perror("Write failed");
72     return 1;
73 }
74
75
76 for(size=0; (t=read(sd, response+size, 1000000-size))>0; size=size+t);
77
78 if(t==-1)
79 {
80     printf("Errno = %d\n", errno);
81     perror("Read failed");
82     return 1;
83 }
84
85 for(i=0; i<size; i++)
86     printf("%c", response[i]);
87
88 return 0;
89 }

```

4.3 Client HTTP 1.0

```

1 #include <unistd.h>
2 #include <sys/socket.h>
3 #include <netinet/in.h>
4 #include <netinet/ip.h>

```

```

5  #include <arpa/inet.h>
6  #include <stdio.h>
7  #include <errno.h>
8  #include <stdlib.h>
9  #include <string.h>
10
11 #define LINE "_____\\n"
12 struct sockaddr_in server;
13
14 struct header{
15     char* name;
16     char* value;
17 }h[30];
18
19 int main(int argc, char ** argv)
20 {
21     int sd; //Socket Descriptor
22     int t; //Control value returned by connect, write and read
23     int i;
24     int j;
25     int k;
26     int status_length;
27     int size;
28     int code;
29     int body_length;
30     char request[100];
31     char response[1000000];
32     char *website;
33     /*
34     char *version;
35     char *code;
36     char *phrase;
37     */
38     char *status_tokens[3];
39     unsigned char ipaddr[4] = {216, 58, 208, 131};
40
41     sd = socket(AF_INET, SOCK_STREAM, 0);
42
43     if(argc>3)
44     {
45         perror("Too many arguments");
46         return 1;
47     }
48
49     if(sd==-1)
50     {
51         printf("Errno = %d \\n", errno);
52         perror("Socket failed");
53         return 1;
54     }
55
56     server.sin_family=AF_INET;
57     server.sin_port = htons(80); //HTTP port number
58
59     if(argc>1)
60     {
61         server.sin_addr.s_addr=inet_addr(argv[1]);
62         //or inet_aton(argv[1], &server.sin_addr);
63
64         if(argc==3)
65             server.sin_port = htons(atoi(argv[2])); //HTTP port number
66     }
67     else
68     {
69         server.sin_addr.s_addr = *(uint32_t *) ipaddr;
70         server.sin_port = htons(80); //HTTP port number
71     }
72     t = connect(sd, (struct sockaddr *)&server, sizeof(server));
73
74     if(t==-1)

```

```

75     {
76         printf("Errno = %d \n", errno);
77         perror("Connection failed \n");
78         return 1;
79     }
80
81     //sprintf(request, "GET / HTTP/1.0\r\n\r\n");
82     sprintf(request, "GET / HTTP/1.0\r\nConnection: keep-alive\r\n\r\n");
83
84     for(size=0; request[size]; size++);
85
86     t = write(sd, request, size);
87
88     if(t == -1)
89     {
90         printf("Errno = %d\n", errno);
91         perror("Write failed");
92         return 1;
93     }
94
95     j = 0;
96     k = 0;
97     h[k].name = response;
98
99     while(read(sd, response+j, 1))
100     {
101         if((response[j]=='\n') && (response[j-1]!='\r'))
102         {
103             response[j-1]=0;
104
105             if(h[k].name[0]==0)
106                 break;
107
108             h[++k].name = response+j+1;
109         }
110
111         if(response[j]==':' && h[k].value==0)
112         {
113             response[j]=0;
114             h[k].value=response+j+1;
115         }
116         j++;
117     }
118
119     //Print content of Status line + HTTP headers
120
121     /*
122     printf("Status line: %s\n", h[0].name);
123     version = strtok(h[0].name, " ");
124     code = strtok(NULL, " ");
125     phrase = strtok(NULL, " ");
126     */
127
128
129     for(status_length=0; h[0].name[status_length]; status_length++);
130
131     status_tokens[0]=h[0].name;
132     i=1;
133     k=1;
134     for(i=0; i<status_length && k<3; i++)
135     {
136         if(h[0].name[i]==' ')
137         {
138             h[0].name[i]=0;
139             status_tokens[k]=h[0].name+i+1;
140             k++;
141         }
142     }
143
144     printf(LINE);

```

```

145     printf("Status line:\n");
146     printf(LINE);
147     /*
148     printf("HTTP version: %30s\n", version);
149     printf("HTTP code: %30s\n", code);
150     printf("HTTP version: %30s\n", phrase);
151     */
152     printf("HTTP version: %30s\n", status_tokens[0]);
153     code = atoi(status_tokens[1]);
154     printf("HTTP code: %30d\n", code);
155     printf("HTTP version: %30s\n", status_tokens[2]);
156     printf(LINE);
157
158
159     website=NULL;
160     for(i=1; h[i].name[0]; i++)
161     {
162         if(!strcmp(h[i].name, "Content-Length"))
163             body_length = atoi(h[i].value);
164
165         if(!strcmp(h[i].name, "Location") && code>300 && code<303)
166             website=h[i].value;
167
168         printf("Name=%s ———> Value=%s\n", h[i].name, h[i].value);
169     }
170
171
172     if(body_length)
173         for(size=0; (t=read(sd, response+j+size, body_length-size))>0; size+=t);
174     else
175         for(size=0; (t=read(sd, response+j+size, 1000000-size))>0; size+=t);
176
177
178     if(t==−1)
179     {
180         printf("Errno = %d\n", errno);
181         perror("Read failed");
182         return 1;
183     }
184
185
186     //if(website!=NULL)
187         printf("\nRedirection: %s \n\n", website);
188
189     for(i=j; i<size+j; i++)
190         printf("%c", response[i]);
191
192     return 0;
193 }

```

4.4 Client HTTP 1.1

```

1  #include "net_utility.h"
2
3  #include <unistd.h>
4  #include <sys/socket.h>
5  #include <netinet/in.h>
6  #include <netinet/ip.h>
7  #include <arpa/inet.h>
8  #include <stdio.h>
9  #include <errno.h>
10 #include <stdlib.h>
11 #include <string.h>
12 #include <stdint.h>
13
14 struct sockaddr_in server;
15
16 header h[30];
17
18 int main(int argc, char ** argv)

```

```

19 {
20     int sd; //Socket Descriptor
21     int t; //Control value returned by connect, write and read
22     int i;
23     int size;
24     int header_size;
25     int body_length=0;
26     char request[100];
27     char response[1000000];
28     char entity[1000000];
29     char *website=NULL;
30     char *status_tokens[3];
31     unsigned char ipaddr[4] = {216,58,211,163};
32
33     sd = socket(AF_INET, SOCK_STREAM, 0);
34
35     if(argc>3)
36     {
37         perror("Too many arguments");
38         return 1;
39     }
40
41     control(sd, "Socket failed\n");
42
43     server.sin_family=AF_INET;
44     server.sin_port = htons(80); //HTTP port number
45
46     if(argc>1)
47     {
48         server.sin_addr.s_addr=inet_addr(argv[1]);
49         //or inet_aton(argv[1], &server.sin_addr);
50
51         if(argc==3)
52             server.sin_port = htons(atoi(argv[2])); //HTTP port number
53     }
54     else
55     {
56         server.sin_addr.s_addr = *(uint32_t *) ipaddr;
57         server.sin_port = htons(80); //HTTP port number
58     }
59
60     t = connect(sd, (struct sockaddr *)&server, sizeof(server));
61     control(t, "Connection failed \n");
62
63     i=0;
64     while(i<3)
65     {
66         sprintf(request, "GET / HTTP/1.1\r\nHost:192.168.43.121:8080\r\n\r\n");
67
68         size = my_strlen(request);
69
70         t = write(sd, request, size);
71         control(t, "Write failed \n");
72
73         parse_header(sd, response, status_tokens, &header_size);
74
75         analysis_headers(status_tokens, h, &body_length, website);
76
77         body_acquire(sd, body_length, entity, &size);
78
79         control(t, "Read failed");
80
81         print_body(entity, size);
82         i++;
83     }
84
85     return 0;
86 }
87
88 int my_strlen(char* string)

```

```

89 {
90     int size;
91     for(size=0; string[size]; size++);
92
93     return size;
94 }
95
96 void control(int code, char* message)
97 {
98     if(code==-1)
99     {
100         printf("Errno = %d \n", errno);
101         printf("%s \n", message);
102         exit(0);
103     }
104 }
105
106 void parse_header(int sd, char* response, char** status_tokens, int* header_size)
107 {
108     int j = 0;
109     int k = 0;
110     h[k].name= response;
111
112     while(read(sd, response+j, 1))
113     {
114         if((response[j]=='\n') && (response[j-1]!='\r'))
115         {
116             response[j-1]=0;
117
118             if(h[k].name[0]==0)
119                 break;
120
121             h[++k].name = response+j+1;
122         }
123
124         if(response[j]==':' && h[k].value==0)
125         {
126             response[j]=0;
127             h[k].value=response+j+1;
128         }
129         j++;
130     }
131
132     *header_size = k;
133
134     status_tokens[0]=h[0].name;
135     j=1;
136     k=1;
137     for(j=0; k<3; j++)
138     {
139         if(h[0].name[j]==' ')
140         {
141             h[0].name[j]=0;
142             status_tokens[k++]=h[0].name+j+1;
143         }
144     }
145 }
146
147 void analysis_headers(char **status_tokens, header* h, int* body_length, char* website)
148 {
149     int code;
150     int i;
151
152     printf("\n");
153     printf(LINE);
154     printf(LINE);
155     printf("                                HEADERS\n");
156     printf(LINE);
157     printf("Status line:\n");
158     printf(LINE);

```

```

159 printf("HTTP version: %30s\n", status_tokens[0]);
160 code = atoi(status_tokens[1]);
161 printf("HTTP code: %30d\n", code);
162 printf("HTTP version: %30s\n", status_tokens[2]);
163 printf(LINE);
164
165
166 website=NULL;
167 for(i=1; h[i].name[0]; i++)
168 {
169     if(!strcmp(h[i].name, "Content-Length"))
170         (*body_length) = atoi(h[i].value);
171
172     if(!strcmp(h[i].name, "Location") && code>300 && code<303)
173         website=h[i].value;
174
175     if(!strcmp(h[i].name, "Transfer-Encoding") && !strcmp(h[i].value, " chunked"))
176         (*body_length)=-1;
177
178     printf("Name= %s ———> Value= %s\n", h[i].name, h[i].value);
179 }
180 printf(LINE);
181 printf("\n\n");
182 }
183
184
185 void body_acquire(int sd, int body_length, char* entity, int *size)
186 {
187     char c;
188     int t;
189     int chunk_size;
190
191     printf(LINE);
192     printf(LINE);
193     if(body_length>0)
194     {
195         printf("Reading of HTTP/1.0 (Content-length specified)\n");
196         for((*size)=0; (t=read(sd, entity+(*size), body_length-(*size)))>0; (*size)+=t);
197     }
198     if(body_length<0)
199     {
200         printf("Reading of HTTP/1.0 (chunked read)\n");
201         printf(LINE);
202         body_length=0;
203
204         do
205         {
206             chunk_size=0;
207             printf("HEX chunk size:");
208
209             while((t=read(sd, &c, 1))>0)
210             {
211                 if(c=='\n')
212                     break;
213
214                 else if(c=='\r')
215                     continue;
216
217                 else
218                     c = dec2bin(c);
219
220                 chunk_size = chunk_size*16+c;
221             }
222
223             control(t, "Chunk body read failed");
224
225             printf("\nChunk size: %d\n", chunk_size);
226             for((*size)=0; (t=read(sd, entity+body_length+(*size), chunk_size-(*size)))>0; (*size)+=t);
227
228             read(sd, &c, 1);

```



```

229         read(sd, &c, 1);
230
231         body_length+=chunk_size;
232         printf(LINE);
233     }
234     while(chunk_size>0);
235
236     (*size)=body_length;
237     printf("Size: %10d\n", *size);
238 }
239 else if(body_length==0)
240 {
241     printf("Reading of HTTP/0.9 (no Content-length specified)\n");
242     for(*size=0; (t=read(sd, entity+(*size), 1000000-(*size)))>0; (*size)+=t);
243 }
244 printf(LINE);
245 printf("\n\n");
246 }
247
248 char dec2bin(char c)
249 {
250     switch(c)
251     {
252         case '0' ... '9':
253             printf("%c", c);
254             c = c - '0';
255             break;
256
257         case 'A' ... 'F':
258             printf("%c", c);
259             c = c - 'A' +10;
260             break;
261
262         case 'a' ... 'f':
263             printf("%c", c);
264             c = c - 'a' +10;
265             break;
266
267         default:
268             control(-1,"Error in chunk size format");
269     }
270
271     return c;
272 }
273
274 void print_body(char* entity, int size)
275 {
276     printf(LINE);
277     printf(LINE);
278     printf("                BODY\n");
279     printf(LINE);
280
281     int i;
282     for(i=0; i<size; i++)
283         printf("%c", entity[i]);
284
285     printf("\n");
286     printf(LINE);
287     printf("\n");
288 }

```

4.5 Server HTTP 1.1

```

1  #include <sys/types.h>
2  #include <sys/socket.h>
3  #include <netinet/in.h>
4  #include <netinet/ip.h>
5  #include <arpa/inet.h>
6  #include <unistd.h>
7  #include <stdio.h>

```

```

8  #include <string.h>
9  #include <errno.h>
10
11 #define QUEUE_MAX 10
12 #define ROOT_PATH "../dat"
13 void request_line(char* request, char** method, char** path, char** version);
14 void manage_request(char* method, char* path, char* version, char* response, FILE** f);
15 void send_body(int sd2, FILE* f);
16
17 struct sockaddr_in local, remote;
18
19 int main()
20 {
21     char request[2000], response[2000];
22     char *method, *path, *version;
23     int sd, sd2;
24     int t;
25     socklen_t len;
26     int yes = 1;
27     FILE *f=NULL;
28
29     sd = socket(AF_INET, SOCK_STREAM, 0);
30
31     if(sd == -1)
32     {
33         printf("Errno: %d\n", errno);
34         perror("Socket failed");
35         return 1;
36     }
37
38     local.sin_family=AF_INET;
39     //local.sin_port = htons(80); no possible because port 80 already used
40     local.sin_port = htons(8080); //we need to use a port not in use
41     local.sin_addr.s_addr = 0; //By default, it
42
43     setsockopt(sd, SOL_SOCKET, SO_REUSEADDR, &yes, sizeof(int));
44     t = bind(sd, (struct sockaddr*) &local, sizeof(struct sockaddr_in));
45
46     if(t==-1)
47     {
48         printf("Errno: %d\n", errno);
49         perror("Bind failed");
50         return 1;
51     }
52
53     //To prevent the connection to the server
54     //Queue of pending clients that want to connect
55     t = listen(sd, QUEUE_MAX);
56
57     if(t==-1)
58     {
59         printf("Errno: %d\n", errno);
60         perror("Listen Failed");
61         return 1;
62     }
63
64     //The server can have more file descriptors mapped on the same port
65     //only one socket = listening socket to establish the connection (bind is unique)
66     //then with accept a new socket is created (unique for each connection) that is bound to the same port
67     //accept has all the info to disambiguate the connection
68     //sd only to accept the connection, sd2 to read and write
69     //sd1 = accept(socket);
70
71     while(1)
72     {
73         remote.sin_family = AF_INET;
74         len = sizeof(struct sockaddr_in);
75
76         sd2 = accept(sd, (struct sockaddr*) &remote, &len);
77

```

```

78     if(sd2==-1)
79     {
80         perror("Accept failed\n");
81         return 1;
82     }
83
84     t = read(sd2, request, 1999);
85     request[t]=0;
86
87     request_line(request, &method, &path, &version);
88     printf("Method: %s\n", method);
89     printf("Path: %s\n", path);
90     printf("Version: %s\n", version);
91
92     manage_request(method, path, version, response, &f);
93     printf("%s", response);
94     write(sd2, response, strlen(response));
95     send_body(sd2, f);
96
97     shutdown(sd2, SHUT_RDWR);
98     close(sd2);
99 }
100 }
101
102 void request_line(char* request, char** method, char** path, char** version)
103 {
104     int i;
105     *method = request;
106
107     for(i=1; request[i]!=' '; i++);
108
109     request[i]=0;
110     *path=request+i+1;
111
112     for(; request[i]!=' '; i++);
113
114     request[i]=0;
115     *version=request+i+1;
116
117     for(; (request[i]!='\n' || request[i-1]!='\r') ; i++);
118
119     request[i-1]=0;
120 }
121
122 void manage_request(char* method, char* path, char* version, char* response, FILE** f)
123 {
124     if(strcmp(method,"GET")) //it's not GET request
125         sprintf(response, "HTTP/1.1 501 Not Implemented\r\n\r\n");
126     /*
127     * else if((*f=fopen(path+1,"r"))==NULL) //it's GET request for a file
128     //path+1 is used to remove the / root directory
129     sprintf(response, "HTTP/1.1 404 Not Found\r\nConnection: close\r\n\r\n");
130     else
131         sprintf(response, "HTTP/1.1 200 Not Found\r\nConnection: close\r\n\r\n");
132     */
133     else
134     {
135         char file_name[40];
136         sprintf(file_name, "%s%s", ROOT_PATH, path);
137
138         if((*f=fopen(file_name,"r"))==NULL) //it's GET request for a file
139             sprintf(response, "HTTP/1.1 404 Not Found\r\nConnection: close\r\n\r\n");
140         else
141             sprintf(response, "HTTP/1.1 200 Not Found\r\nConnection: close\r\n\r\n");
142     }
143 }
144
145 void send_body(int sd2, FILE* f)

```

```
148 {  
149     char c;  
150     if (f!=NULL)  
151     {  
152         while ((c=fgetc(f))!=EOF)  
153             write(sd2, &c, 1);  
154  
155         fclose(f);  
156     }  
157 }
```

Chapter 5

Shell

5.1 Commands

man man	Shows info about man command and lists all the sections of the manual.
strace objFile	Lists all the system calls used in the program.
gcc -o objFile source -v	Lists all the path of libraries and headers used in creation of objFile.
netstat	-t Lists all the active TCP connections showing domain names.
	-u Lists all the active UDP connections showing domain names.
	-n Lists all the active, showing IP and port numbers.
nslookup domain	Shows the IP address related to the domain (E.g. IP of www.google.it)
wc [file]	Prints in order newlines, words, and bytes (characters) counts for file if file not specified or equal to -, counts from stdin.

5.2 Files

/etc/services	List all the applications with their port and type of protocol (TCP/UDP).
/usr/include/x86_64-linux-gnu/bits/socket.h	List all the protocol type possible for socket.
/usr/include/x86_64-linux-gnu/sys/socket.h	Definition of struct sockaddr and specific ones.

5.3 vim

5.3.1 .vimrc

In this section there will be shown the file **.vimrc** that can be put in the user home (~ or **\$HOME** or -) or in the path **/usr/share/vim/** to change main settings of the program.

```
1 syntax on
2 set number
3 filetype plugin indent on
4 set tabstop=4
5 set shiftwidth=4
6 set expandtab
7 set t_Co=256
```

Listing 5.1: .vimrc

5.3.2 Shortcuts

Main

Esc	Gets out of the current mode into the “command mode”. All keys are bound of commands
i	“Insert mode” for inserting text.
:	“Last-line mode” where Vim expects you to enter a command.

Navigation keys

h	moves the cursor one character to the left.
j or Ctrl + J	moves the cursor down one line.
k or Ctrl + P	moves the cursor up one line.
l	moves the cursor one character to the right.
0	moves the cursor to the beginning of the line.
\$	moves the cursor to the end of the line.
^	moves the cursor to the first non-empty character of the line
w	move forward one word (next alphanumeric word)
W	move forward one word (delimited by a white space)
5w	move forward five words
b	move backward one word (previous alphanumeric word)
B	move backward one word (delimited by a white space)
5b	move backward five words
G	move to the end of the file
gg	move to the beginning of the file.

Navigate around the document

h	moves the cursor one character to the left.
(jumps to the previous sentence
)	jumps to the next sentence
{	jumps to the previous paragraph
}	jumps to the next paragraph
[[jumps to the previous section
]]	jumps to the next section
]]	jump to the end of the previous section
[[jump to the end of the next section

Insert text

h	moves the cursor one character to the left.
a	Insert text after the cursor
A	Insert text at the end of the line
i	Insert text before the cursor
o	Begin a new line below the cursor
O	Begin a new line above the cursor

Special inserts

:r [filename]	Insert the file [filename] below the cursor
:r ![command]	Execute [command] and insert its output below the cursor

Delete text

x	delete character at cursor
dw	delete a word.
d0	delete to the beginning of a line.
d\$	delete to the end of a line.
d)	delete to the end of sentence.
dgg	delete to the beginning of the file.
dG	delete to the end of the file.
dd	delete line
3dd	delete three lines

Simple replace text

r {text}	Replace the character under the cursor with {text}
R	Replace characters instead of inserting them

Copy/Paste text

yy	copy current line into storage buffer
["x]yy	Copy the current lines into register x
p	paste storage buffer after current line
P	paste storage buffer before current line
["x]p	paste from register x after current line
["x]P	paste from register x before current line

Undo/Redo operation

u	undo the last operation.
Ctrl+r	redo the last undo.

Search and Replace keys

/search_text	search document for search_text going forward
?search_text	search document for search_text going backward
n	move to the next instance of the result from the search
N	move to the previous instance of the result
:%s/original/replacement	Search for the first occurrence of the string “original” and replace it with “replacement”
:%s/original/replacement/g	Search and replace all occurrences of the string “original” with “replacement”
:%s/original/replacement/gc	Search for all occurrences of the string “original” but ask for confirmation before replacing them with “replacement”

Bookmarks

m {a-z A-Z}	Set bookmark {a-z A-Z} at the current cursor position
:marks	List all bookmarks
' {a-z A-Z}	Jumps to the bookmark {a-z A-Z}

Select text

v	Enter visual mode per character
V	Enter visual mode per line
Esc	Exit visual mode

Modify selected text

	Switch case
d	delete a word.
c	change
y	yank
>	shift right
<	shift left
!	filter through an external command

Save and quit

:q	Quits Vim but fails when file has been changed
:w	Save the file
:w new_name	Save the file with the new_name filename
:wq	Save the file and quit Vim.
:q!	Quit Vim without saving the changes to the file.
ZZ	Write file, if modified, and quit Vim
ZQ	Same as :q! Quits Vim without writing changes

5.3.3 Multiple files

- Opening many files in the buffer

```
vim file1 file2
```

Launching this command, you can see only one file at the same time. To jump between the files you can use the following vim commands:

n(ext)	jumps to the next file
prev	jumps to the previous file

- Opening many files in several tabs

```
vim -p file1 file2 file3
```

All files will be opened in tabs instead of hidden buffers. The tab bar is displayed on the top of the editor. You can also open a new tab with file *filename* when you're already in Vim in the normal mode with command:

```
:tabe filename
```

To manage tabs you can use the following vim commands:

:tabn[ext] (command-line command)	Jumps to the next tab
gt (normal mode command)	
:tabp[revious] (command-line command)	Jumps to the previous tab
gT (normal mode command)	
ngT (normal mode command)	Jumps to a specific tab index n= index of tab (starting by 1)
:tabc[lose] (command-line command)	Closes the current tab

- Open multiple files splitting the window

splits the window horizontally

```
vim -o file1 file2
```

You can also split the window horizontally, opening the file *filename*, when you're already in Vim in the normal mode with command:

```
:sp[lit] filename
```

splits the window vertically

```
vim -O file1 file2
```

You can also split the window vertically, opening the file *filename*, when you're already in Vim in the normal mode with command:

```
:vs[plit] filename
```

Management of the windows can be done, staying in the normal mode of Vim, using the following commands:

Ctrl+w <cursor-keys>	Jumps between windows
Ctrl+w [hjk]	
Ctrl+w Ctrl+[hjk]	
Ctrl+w w	Jumps to the next window
Ctrl+w Ctrl+w	
Ctrl+w W	Jumps to the previous window
Ctrl+w p	Jumps to the last accessed window
Ctrl+w Ctrl+p	
Ctrl+w c	Closes the current window
:clo[se]	
Ctrl+w o	Makes the current window the only one and closes all other ones
:on[ly]	