

CRUD (tabel jenis mobil)

The screenshot shows the Postman application with a POST request configured. The URL is `localhost:8000/api/simpan_jenis`. The request body is set to `form-data` and contains a single key-value pair: `jenis_mobil` with the value `matic`. The response is displayed in the 'Body' tab, showing a JSON object: `{ "status": "Sukses menambahkan data!" }`. The status is 200 OK, with a response time of 727 ms and a size of 314 B.

History list (Today):

- POST localhost:8000/api/simpan_jenis
- POST localhost:8000/api/simpan_jenis
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/login
- POST localhost:8000/api/register
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/login
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/login
- POST localhost:8000/api/login
- POST localhost:8000/api/register
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/login
- POST localhost:8000/api/register

History list (April 13):

- POST localhost:8000/api/register

The screenshot shows the Postman application with a GET request configured. The URL is `localhost:8000/api/tampil_jenis`. The response is displayed in the 'Body' tab, showing a JSON array of two objects:

```
[
  {
    "id_jenis_mobil": 1,
    "jenis_mobil": "manual"
  },
  {
    "id_jenis_mobil": 2,
    "jenis_mobil": "matic"
  }
]
```

The status is 200 OK, with a response time of 810 ms and a size of 365 B.

History list (Today):

- GET localhost:8000/api/tampil_jenis
- POST localhost:8000/api/simpan_jenis
- POST localhost:8000/api/simpan_jenis
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/login
- POST localhost:8000/api/register
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/login
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/login
- POST localhost:8000/api/register
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/login
- POST localhost:8000/api/register

History list (April 13):

- POST localhost:8000/api/register

Postman

File Edit View Help

New Import Runner

My Workspace Invite

Filter

History Collections APIs

Save Responses Clear all

Today

- PUT localhost:8000/api/ubah_jenis/1
- GET localhost:8000/api/ubah_jenis/1
- GET localhost:8000/api/tampil_jenis
- POST localhost:8000/api/simpan_jenis
- POST localhost:8000/api/simpan_jenis
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/login
- POST localhost:8000/api/register
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/login
- POST localhost:8000/api/login
- POST localhost:8000/api/login
- POST localhost:8000/api/register
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/login

Untitled Request

PUT localhost:8000/api/ubah_jenis/1

Send Save

Params Authorization Headers (10) Body Pre-request Script Tests Settings

none form-data x-www-form-urlencoded raw binary GraphQL

KEY	VALUE	DESCRIPTION
jenis_mobil	manual paddle shift	
Key	Value	Description

Body Cookies Headers (9) Test Results

Status: 200 OK Time: 735 ms Size: 311 B Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": "Data berhasil diubah!"
3 }
```

Postman

File Edit View Help

New Import Runner

My Workspace Invite

Filter

History Collections APIs

Save Responses Clear all

Today

- DEL localhost:8000/api/hapus_jenis/3
- POST localhost:8000/api/simpan_jenis
- DEL localhost:8000/api/simpan_jenis
- DEL localhost:8000/api/hapus_jenis/3
- DEL localhost:8000/api/hapus_jenis/3
- PUT localhost:8000/api/simpan_jenis
- PUT localhost:8000/api/ubah_jenis/1
- PUT localhost:8000/api/ubah_jenis/1
- GET localhost:8000/api/ubah_jenis/1
- GET localhost:8000/api/tampil_jenis
- POST localhost:8000/api/simpan_jenis
- POST localhost:8000/api/simpan_jenis
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/login
- POST localhost:8000/api/register
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/simpan_mobil

Untitled Request

DELETE localhost:8000/api/hapus_jenis/3

Send Save

Params Authorization Headers (10) Body Pre-request Script Tests Settings

none form-data x-www-form-urlencoded raw binary GraphQL

KEY	VALUE	DESCRIPTION
jenis_mobil	paddle shift	
Key	Value	Description

Body Cookies Headers (9) Test Results

Status: 200 OK Time: 709 ms Size: 312 B Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": "Data berhasil dihapus!"
3 }
```

CRUD (tabel mobil)

Postman interface showing a POST request to `localhost:8000/api/simpan_mobil`. The request body is a JSON object with the following fields:

KEY	VALUE	DESCRIPTION
nama_mobil	fortuner	
id_jenis_mobil	1	
plat_nomor	AE 17 YZ	
kondisi	baru	
harga_sewa_per_hari	1200000	

The response is a JSON object with the following fields:

```
{
  "status": "Sukses menambahkan data!"
}
```

Postman interface showing a GET request to `localhost:8000/api/tampil_mobil`. The response is a JSON array of three objects, each representing a car with the following fields:

id_mobil	nama_mobil	id_jenis_mobil	plat_nomor	kondisi	harga_sewa_per_hari
5	fortuner	1	AE 17 YZ	baru	1200000
6	pajero	1	AE 8 YZ	baru	1500000
7	innova	1	AE 50 YZ	baru	900000

Postman

File Edit View Help

New Import Runner My Workspace Invite

Filter

History Collections APIs

Save Responses Clear all

Today

- PUT localhost:8000/api/ubah_mobil/6
- PUT localhost:8000/api/ubah_mobil/6
- PUT localhost:8000/api/ubah_mobil/6
- PUT localhost:8000/api/ubah_mobil/6
- PUT localhost:8000/api/ubah_mobil/6
- PUT localhost:8000/api/ubah_mobil/7
- PUT localhost:8000/api/ubah_mobil/7
- PUT localhost:8000/api/ubah_mobil/7
- GET localhost:8000/api/tampil_mobil
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/simpan_mobil
- DEL localhost:8000/api/hapus_jenis/3
- POST localhost:8000/api/simpan_jenis
- DEL localhost:8000/api/simpan_jenis
- DEL localhost:8000/api/hapus_jenis/3

Untitled Request

PUT localhost:8000/api/ubah_mobil/6

Send Save

Params Authorization Headers (10) Body Pre-request Script Tests Settings

none form-data x-www-form-urlencoded raw binary GraphQL

KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/> nama_mobil	innova	
<input checked="" type="checkbox"/> id_jenis_mobil	1	
<input checked="" type="checkbox"/> plat_nomor	AE 50 YZ	
<input checked="" type="checkbox"/> kondisi	baru	
<input checked="" type="checkbox"/> harga_sewa_per_hari	900000	
Key	Value	Description

Body Cookies Headers (9) Test Results

Status: 200 OK Time: 752 ms Size: 311 B Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": "Data berhasil diubah!"
3 }
```

Postman

File Edit View Help

New Import Runner My Workspace Invite

Filter

History Collections APIs

Save Responses Clear all

Today

- DEL localhost:8000/api/hapus_mobil/7
- PUT localhost:8000/api/ubah_mobil/6
- PUT localhost:8000/api/ubah_mobil/6
- PUT localhost:8000/api/ubah_mobil/6
- PUT localhost:8000/api/ubah_mobil/6
- PUT localhost:8000/api/ubah_mobil/6
- PUT localhost:8000/api/ubah_mobil/7
- PUT localhost:8000/api/ubah_mobil/7
- PUT localhost:8000/api/ubah_mobil/7
- GET localhost:8000/api/tampil_mobil
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/simpan_mobil
- POST localhost:8000/api/simpan_mobil
- DEL localhost:8000/api/hapus_jenis/3
- POST localhost:8000/api/simpan_jenis
- DEL localhost:8000/api/simpan_jenis

Untitled Request

DELETE localhost:8000/api/hapus_mobil/7

Send Save

Params Authorization Headers (10) Body Pre-request Script Tests Settings

none form-data x-www-form-urlencoded raw binary GraphQL

KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/> nama_mobil	innova	
<input checked="" type="checkbox"/> id_jenis_mobil	1	
<input checked="" type="checkbox"/> plat_nomor	AE 50 YZ	
<input checked="" type="checkbox"/> kondisi	baru	
<input checked="" type="checkbox"/> harga_sewa_per_hari	900000	
Key	Value	Description

Body Cookies Headers (9) Test Results

Status: 200 OK Time: 829 ms Size: 312 B Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "status": "Data berhasil dihapus!"
3 }
```

CRUD (tabel penyewa)

The screenshot shows the Postman application with a POST request configured. The URL is `localhost:8000/api/simpan_penyewa`. The request body is set to `form-data` with the following fields:

KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/> nama_penyewa	dia	
<input checked="" type="checkbox"/> alamat	surabaya	
<input checked="" type="checkbox"/> telp	0812345	
<input checked="" type="checkbox"/> no_ktp	01855	
Key	Value	Description

The response is displayed in the `Body` tab, showing a JSON object:

```
1 {
2   "status": "Sukses menambahkan data!"
3 }
```

The status bar indicates a `200 OK` response with a time of `746 ms` and a size of `314 B`.

The screenshot shows the Postman application with a GET request configured. The URL is `localhost:8000/api/tampil_penyewa`. The response is displayed in the `Body` tab, showing a JSON array of three objects:

```
1 [
2   {
3     "id_penyewa": 1,
4     "nama_penyewa": "dia",
5     "telp": 812345,
6     "no_ktp": "01855",
7     "alamat": "surabaya"
8   },
9   {
10    "id_penyewa": 2,
11    "nama_penyewa": "yzh",
12    "telp": 812345,
13    "no_ktp": "01512",
14    "alamat": "bandung"
15  },
16  {
17    "id_penyewa": 3,
18    "nama_penyewa": "firdaus",
19    "telp": 812345,
20    "no_ktp": "04512",
21    "alamat": "madiun"
22  }
23 ]
```

Postman interface showing a PUT request to `localhost:8000/api/ubah_penyewa/3`. The request body is a JSON object with the following data:

KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/> nama_penyewa	firdaus	
<input checked="" type="checkbox"/> alamat	jakarta	
<input checked="" type="checkbox"/> telp	0812345	
<input checked="" type="checkbox"/> no_ktp	04512	
Key	Value	Description

The response status is 200 OK, Time: 745 ms, Size: 311 B. The response body is a JSON object:

```
{  "status": "Data berhasil diubah!"}
```


Postman interface showing a DELETE request to `localhost:8000/api/hapus_penyewa/3`. The request body is a JSON object with the following data:

KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/> nama_penyewa	firdaus	
<input checked="" type="checkbox"/> alamat	jakarta	
<input checked="" type="checkbox"/> telp	0812345	
<input checked="" type="checkbox"/> no_ktp	04512	
Key	Value	Description


The response status is 200 OK, Time: 794 ms, Size: 312 B. The response body is a JSON object:

```
{  "status": "Data berhasil dihapus!"}
```

Script Api

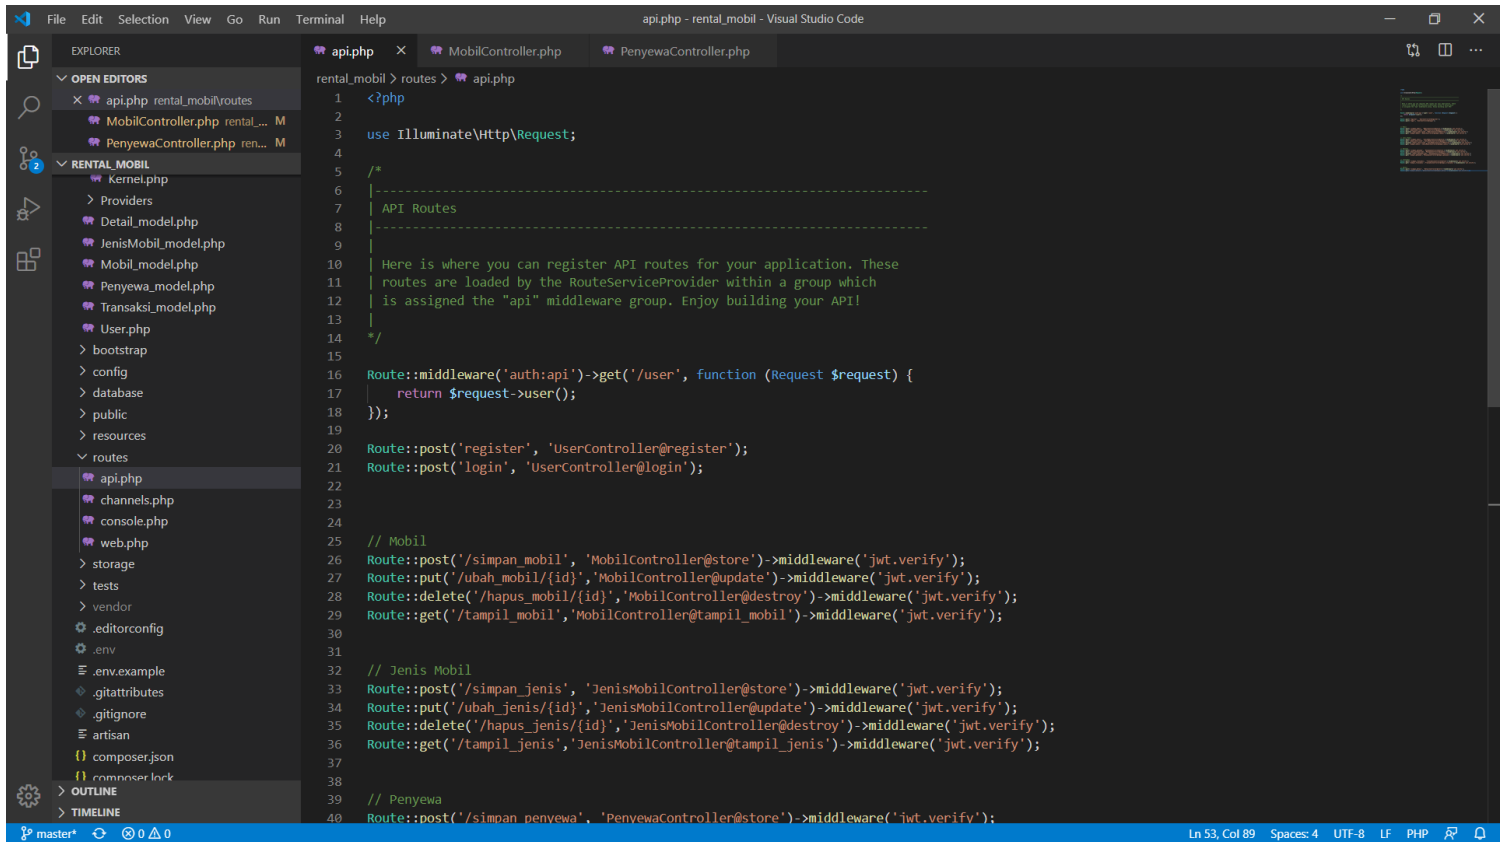


```
1 <?php
2
3 use Illuminate\Http\Request;
4
5 /*
6 |-----
7 | API Routes
8 |-----
9 |
10 | Here is where you can register API routes for your application. These
11 | routes are loaded by the RouteServiceProvider within a group which
12 | is assigned the "api" middleware group. Enjoy building your API!
13 |
14 | */
15
16 Route::middleware('auth:api')->get('/user', function (Request $request) {
17     return $request->user();
18 });
19
20 Route::post('register', 'UserController@register');
21 Route::post('login', 'UserController@login');
22
23 // Mobil
24 Route::post('/simpan_mobil', 'MobilController@store')->middleware('jwt.verify');
25 Route::put('/ubah_mobil/{id}', 'MobilController@update')->middleware('jwt.verify');
26 Route::delete('/hapus_mobil/{id}', 'MobilController@destroy')->middleware('jwt.verify');
27 Route::get('/tampil_mobil', 'MobilController@tampil_mobil')->middleware('jwt.verify');
28
29 // Jenis Mobil
30 Route::post('/simpan_jenis', 'JenisMobilController@store')->middleware('jwt.verify');
31 Route::put('/ubah_jenis/{id}', 'JenisMobilController@update')->middleware('jwt.verify');
32 Route::delete('/hapus_jenis/{id}', 'JenisMobilController@destroy')->middleware('jwt.verify');
33 Route::get('/tampil_jenis', 'JenisMobilController@tampil_jenis')->middleware('jwt.verify');
34
35 // Penyewa
36 Route::post('/simpan_penyewa', 'PenyewaController@store')->middleware('jwt.verify');
```

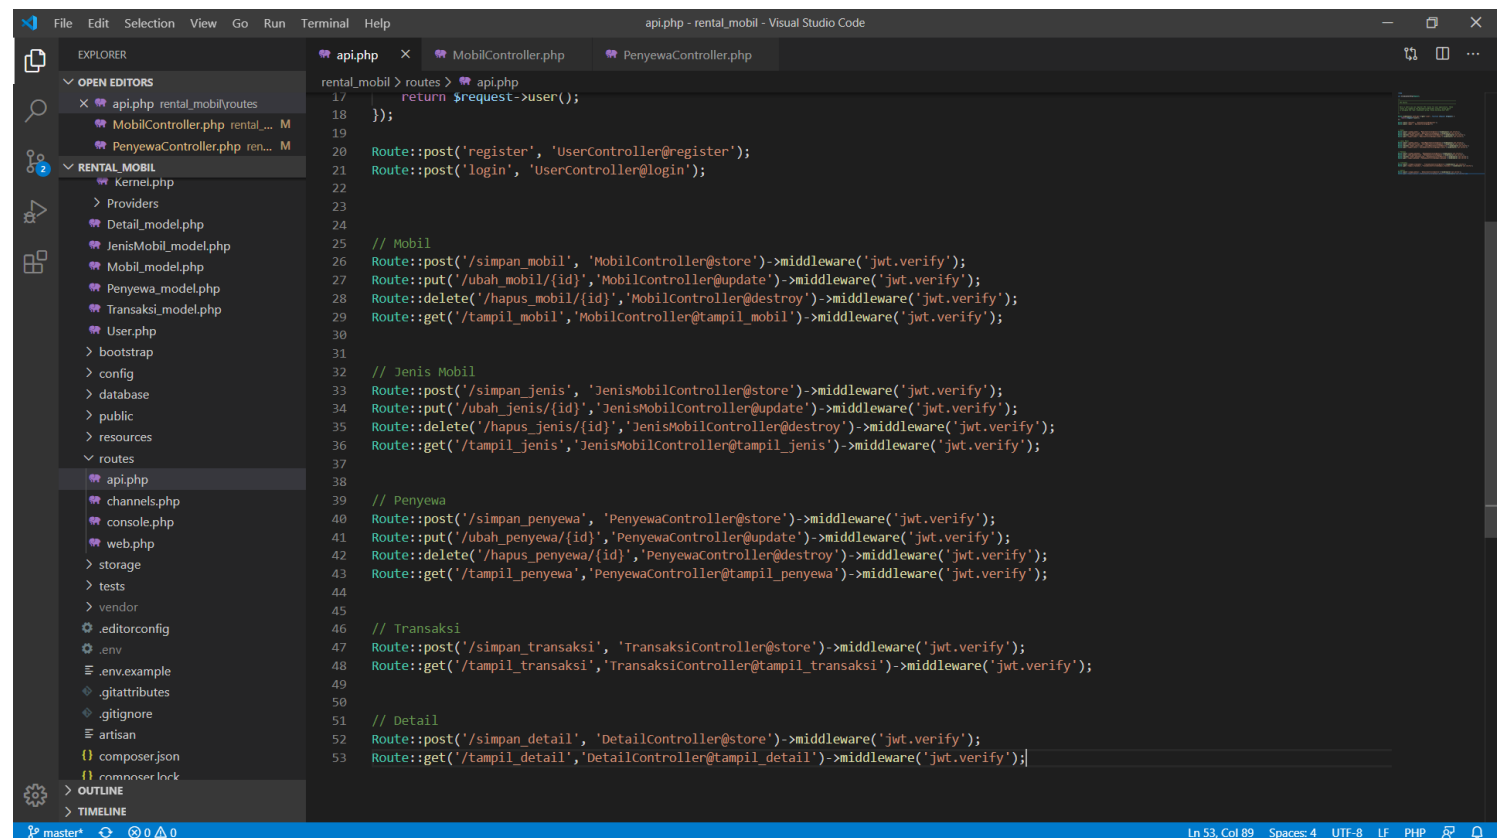


```
37
38
39 // Penyewa
40 Route::post('/simpan_penyewa', 'PenyewaController@store')->middleware('jwt.verify');
41 Route::put('/ubah_penyewa/{id}', 'PenyewaController@update')->middleware('jwt.verify');
42 Route::delete('/hapus_penyewa/{id}', 'PenyewaController@destroy')->middleware('jwt.verify');
43 Route::get('/tampil_penyewa', 'PenyewaController@tampil_penyewa')->middleware('jwt.verify');
44
45 // Transaksi
46 Route::post('/simpan_transaksi', 'TransaksiController@store')->middleware('jwt.verify');
47 Route::get('/tampil_transaksi', 'TransaksiController@tampil_transaksi')->middleware('jwt.verify');
48
49 // Detail
50 Route::post('/simpan_detail', 'DetailController@store')->middleware('jwt.verify');
51 Route::get('/tampil_detail', 'DetailController@tampil_detail')->middleware('jwt.verify');
```

Script UserController

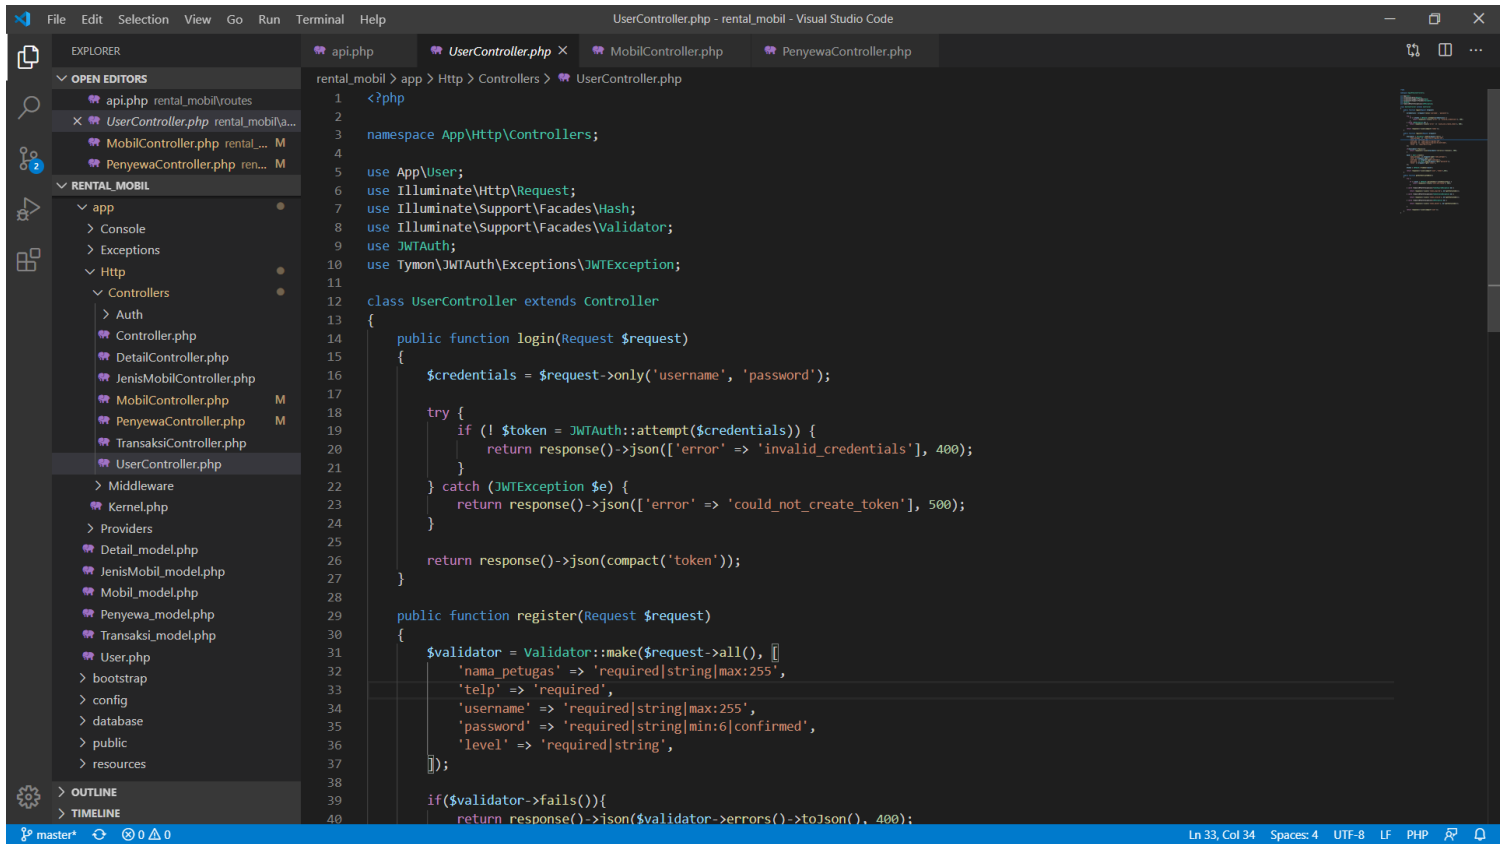


```
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use App\User;
6 use Illuminate\Http\Request;
7 use Illuminate\Support\Facades\Hash;
8 use Illuminate\Support\Facades\Validator;
9 use JWTAuth;
10 use Typhon\JWTAuth\Exceptions\JWTException;
11
12 class UserController extends Controller
13 {
14     public function login(Request $request)
15     {
16         $credentials = $request->only('username', 'password');
17
18         try {
19             if (! $token = JWTAuth::attempt($credentials)) {
20                 return response()->json(['error' => 'invalid_credentials'], 400);
21             }
22         } catch (JWTException $e) {
23             return response()->json(['error' => 'could_not_create_token'], 500);
24         }
25
26         return response()->json(compact('token'));
27     }
28
29     public function register(Request $request)
30     {
31         $validator = Validator::make($request->all(), [
32             'nama_petugas' => 'required|string|max:255',
33             'telp' => 'required',
34             'username' => 'required|string|max:255',
35             'password' => 'required|string|min:6|confirmed',
36             'level' => 'required|string',
37         ]);
38
39         if($validator->fails()){
40             return response()->json($validator->errors()->toJson(), 400);
```

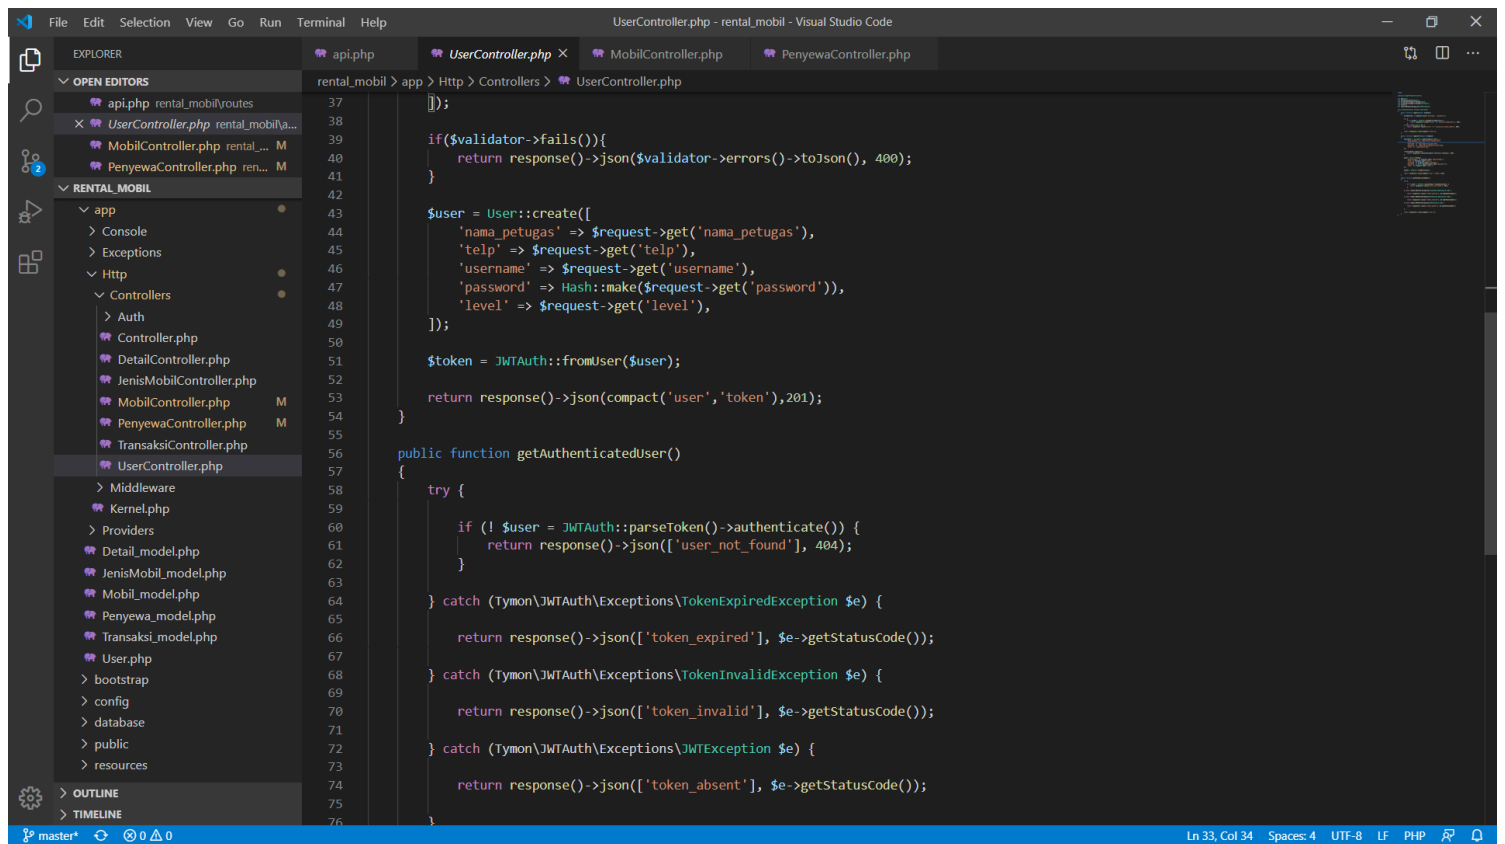


```
41     });
42
43     if($validator->fails()){
44         return response()->json($validator->errors()->toJson(), 400);
45     }
46
47     $user = User::create([
48         'nama_petugas' => $request->get('nama_petugas'),
49         'telp' => $request->get('telp'),
50         'username' => $request->get('username'),
51         'password' => Hash::make($request->get('password')),
52         'level' => $request->get('level'),
53     ]);
54
55     $token = JWTAuth::fromUser($user);
56
57     return response()->json(compact('user','token'),201);
58 }
59
60 public function getAuthenticatedUser()
61 {
62     try {
63         if (! $user = JWTAuth::parseToken()->authenticate()) {
64             return response()->json(['user_not_found'], 404);
65         }
66     } catch (Typhon\JWTAuth\Exceptions\TokenExpiredException $e) {
67         return response()->json(['token_expired'], $e->getStatusCode());
68     } catch (Typhon\JWTAuth\Exceptions\TokenInvalidException $e) {
69         return response()->json(['token_invalid'], $e->getStatusCode());
70     } catch (Typhon\JWTAuth\Exceptions\JWTException $e) {
71         return response()->json(['token_absent'], $e->getStatusCode());
72     }
73 }
```


Script PenyewaController

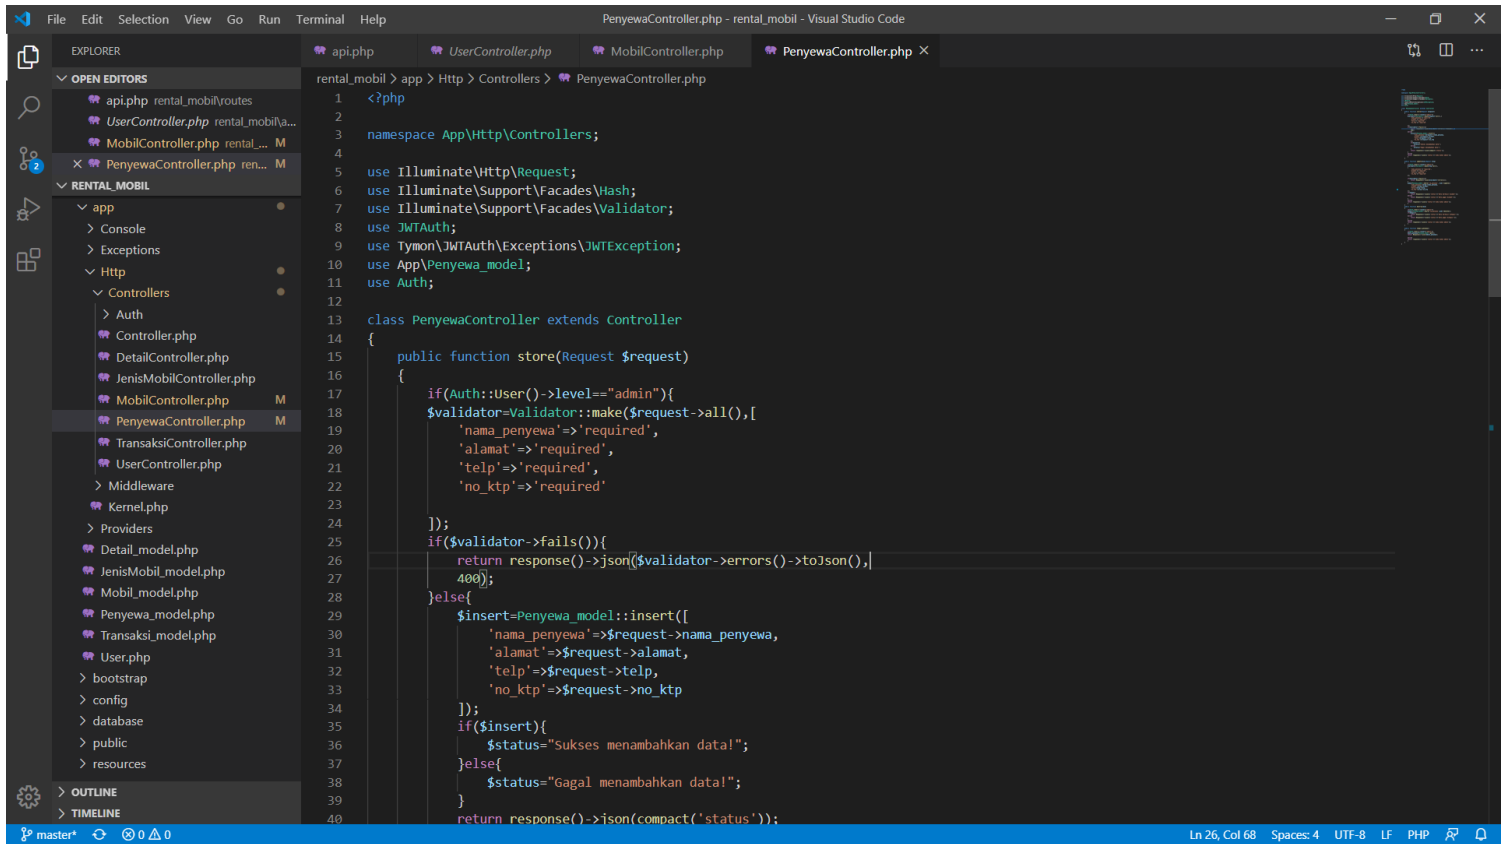

```
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6 use Illuminate\Support\Facades\Hash;
7 use Illuminate\Support\Facades\Validator;
8 use JWTAuth;
9 use Tymon\JWTAuth\Exceptions\JWTException;
10 use App\Penyewa_model;
11 use Auth;
12
13 class PenyewaController extends Controller
14 {
15     public function store(Request $request)
16     {
17         if(Auth::User()->level=="admin"){
18             $validator=Validator::make($request->all(),[
19                 'nama_penyewa'=>'required',
20                 'alamat'=>'required',
21                 'telp'=>'required',
22                 'no_ktp'=>'required'
23             ]);
24             if($validator->fails()){
25                 return response()->json($validator->errors()->toJson(),|
26                     400);
27             }else{
28                 $insert=Penyewa_model::insert([
29                     'nama_penyewa'=>$request->nama_penyewa,
30                     'alamat'=>$request->alamat,
31                     'telp'=>$request->telp,
32                     'no_ktp'=>$request->no_ktp
33                 ]);
34                 if($insert){
35                     $status="Sukses menambahkan data!";
36                 }else{
37                     $status="Gagal menambahkan data!";
38                 }
39                 return response()->json(compact('status'));
```

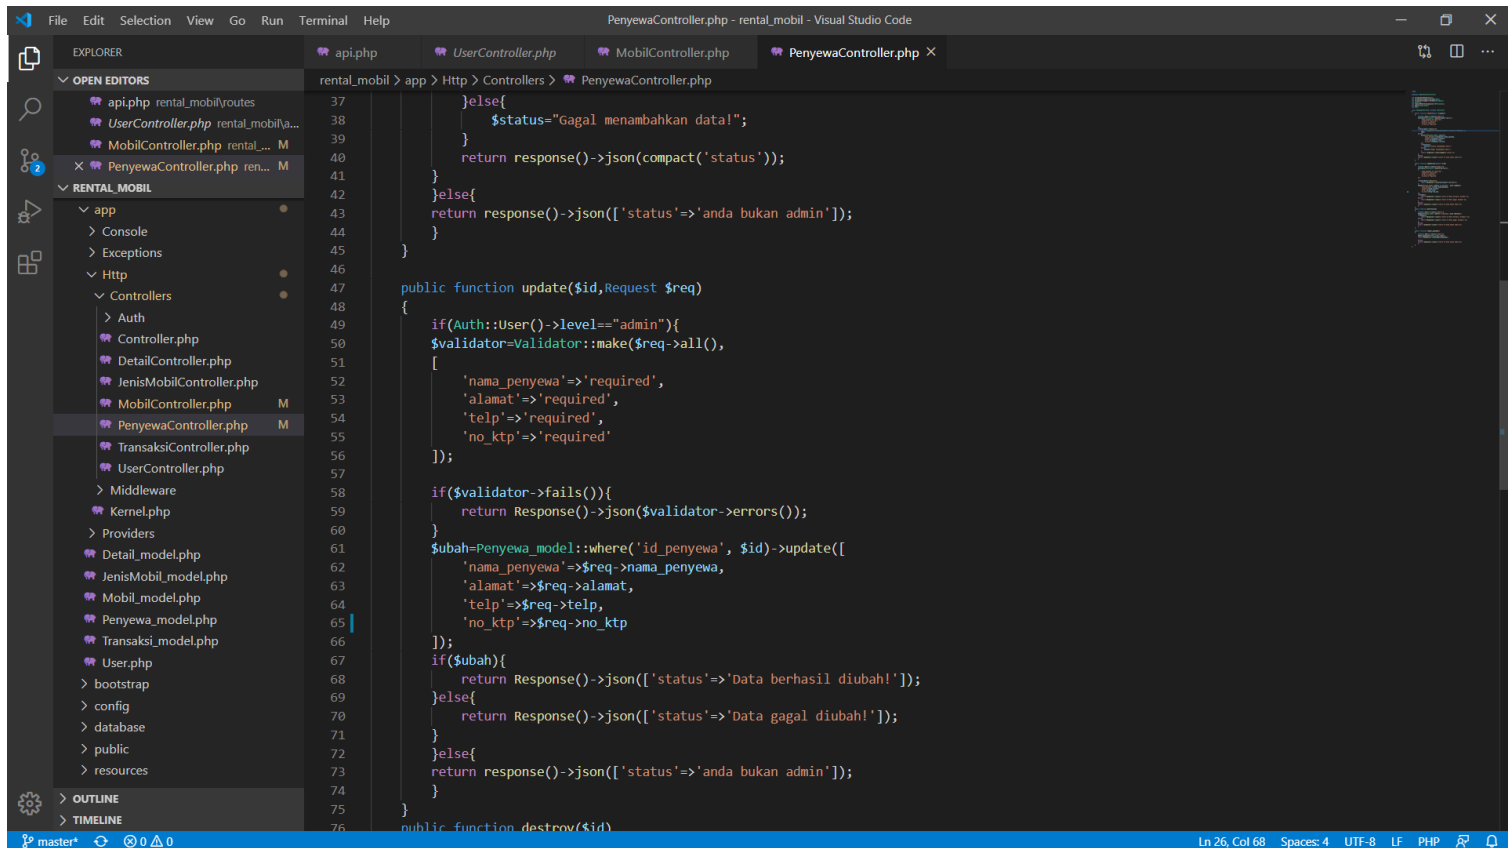

```
37     }else{
38         $status="Gagal menambahkan data!";
39     }
40     return response()->json(compact('status'));
41 }
42 }else{
43     return response()->json(['status'=>'anda bukan admin']);
44 }
45 }
46
47 public function update($id,Request $req)
48 {
49     if(Auth::User()->level=="admin"){
50         $validator=Validator::make($req->all(),
51         [
52             'nama_penyewa'=>'required',
53             'alamat'=>'required',
54             'telp'=>'required',
55             'no_ktp'=>'required'
56         ]);
57         if($validator->fails()){
58             return Response()->json($validator->errors());
59         }
60         $ubah=Penyewa_model::where('id_penyewa', $id)->update([
61             'nama_penyewa'=>$req->nama_penyewa,
62             'alamat'=>$req->alamat,
63             'telp'=>$req->telp,
64             'no_ktp'=>$req->no_ktp
65         ]);
66         if($ubah){
67             return Response()->json(['status'=>'Data berhasil diubah!']);
68         }else{
69             return Response()->json(['status'=>'Data gagal diubah!']);
70         }
71     }else{
72         return response()->json(['status'=>'anda bukan admin']);
73     }
74 }
75
76 public function destroy($id)
```

```
File Edit Selection View Go Run Terminal Help
PenyewaController.php - rental_mobil - Visual Studio Code

EXPLORER
OPEN EDITORS
  api.php rental_mobil/routes
  UserController.php rental_mobil/a...
  MobilController.php rental_... M
  X PenyewaController.php ren... M
RENTAL_MOBIL
  app
    Console
    Exceptions
    Http
      Controllers
        Auth
        Controller.php
        DetailController.php
        JenisMobilController.php
        MobilController.php
        PenyewaController.php M
        TransaksiController.php
        UserController.php
      Middleware
      Kernel.php
      Providers
      Detail_model.php
      JenisMobil_model.php
      Mobil_model.php
      Penyewa_model.php
      Transaksi_model.php
      User.php
      bootstrap
      config
      database
      public
      resources
    OUTLINE
    TIMELINE

rental_mobil > app > Http > Controllers > PenyewaController.php
63 'alamat'=>$req->alamat,
64 'telp'=>$req->telp,
65 'no_ktp'=>$req->no_ktp
66 ];
67 if($ubah){
68     return Response()->json(['status'=>'Data berhasil diubah!']);
69 }else{
70     return Response()->json(['status'=>'Data gagal diubah!']);
71 }
72 }else{
73     return response()->json(['status'=>'anda bukan admin']);
74 }
75 }
76 public function destroy($id)
77 {
78     if(Auth::User()->level=="admin"){
79         $hapus=Penyewa_model::where('id_penyewa',$id)->delete();
80         if($hapus){
81             return Response()->json(['status'=>'Data berhasil dihapus!']);
82         }else{
83             return Response()->json(['status'=>'Data gagal dihapus!']);
84         }
85     }else{
86         return response()->json(['status'=>'anda bukan admin']);
87     }
88 }
89 public function tampil_penyewa()
90 {
91     if(Auth::User()->level=="admin"){
92         $data_penyewa=Penyewa_model::get();
93         return Response()->json($data_penyewa);
94     }else{
95         return response()->json(['status'=>'anda bukan admin']);
96     }
97 }
98 }
99 }
100 }
101 }
```

Script MobilController

```
File Edit Selection View Go Run Terminal Help
MobilController.php - rental_mobil - Visual Studio Code

EXPLORER
OPEN EDITORS
  api.php rental_mobil/routes
  UserController.php rental_mobil/a...
  X MobilController.php rental_... M
  PenyewaController.php ren... M
RENTAL_MOBIL
  app
    Console
    Exceptions
    Http
      Controllers
        Auth
        Controller.php
        DetailController.php
        JenisMobilController.php
        MobilController.php M
        PenyewaController.php M
        TransaksiController.php
        UserController.php
      Middleware
      Kernel.php
      Providers
      Detail_model.php
      JenisMobil_model.php
      Mobil_model.php
      Penyewa_model.php
      Transaksi_model.php
      User.php
      bootstrap
      config
      database
      public
      resources
    OUTLINE
    TIMELINE

rental_mobil > app > Http > Controllers > MobilController.php
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6 use Illuminate\Support\Facades\Validator;
7 use Illuminate\Support\Facades\Validator;
8 use JWTAuth;
9 use Tymon\JWTAuth\Exceptions\JWTException;
10 use App\Mobil_model;
11 use Auth;
12
13 class MobilController extends Controller
14 {
15     public function store(Request $request)
16     {
17         if(Auth::User()->level=="admin"){
18             $validator=Validator::make($request->all(),[
19                 'nama_mobil'=>'required',
20                 'id_jenis_mobil'=>'required',
21                 'plat_nomor'=>'required',
22                 'kondisi'=>'required',
23                 'harga_sewa_per_hari'
24             ]);
25         if($validator->fails()){
26             return response()->json($validator->errors()->toJson(),
27                 400);
28         }else{
29             $insert=Mobil_model::insert([
30                 'nama_mobil'=>$request->nama_mobil,
31                 'id_jenis_mobil'=>$request->id_jenis_mobil,
32                 'plat_nomor'=>$request->plat_nomor,
33                 'kondisi'=>$request->kondisi,
34                 'harga_sewa_per_hari'=>$request->harga_sewa_per_hari
35             ]);
36             if($insert){
37                 $status="Sukses menambahkan data!";
38             }else{
39                 $status="Gagal menambahkan data!";
40             }
41         }
42     }
43 }
```

```
File Edit Selection View Go Run Terminal Help
MobilController.php - rental_mobil - Visual Studio Code

EXPLORER
api.php
UserController.php
MobilController.php X
PenyewaController.php

OPEN EDITORS
rental_mobil > app > Http > Controllers > MobilController.php
api.php rental_mobil/routes 34
UserController.php rental_mobil/a... 35
X MobilController.php rental_... M 36
PenyewaController.php ren... M 37
RENTAL_MOBIL 38
app 39
Console 40
Exceptions 41
Http 42
Controllers 43
Auth 44
Controller.php 45
DetailController.php 46
JenisMobilController.php 47
MobilController.php M 48
PenyewaController.php M 51
TransaksiController.php 52
UserController.php 53
Middleware 54
Kernel.php 55
Providers 56
Detail_model.php 57
JenisMobil_model.php 58
Mobil_model.php 59
Penyewa_model.php 60
Transaksi_model.php 61
User.php 62
bootstrap 63
config 64
database 65
public 66
resources 67
OUTLINE 68
TIMELINE 69

master* 0 0 0

Ln 23, Col 34 Spaces: 4 UTF-8 LF PHP
```

```
        'harga_sewa_per_hari'=>$request->harga_sewa_per_hari
    });
    if($insert){
        $status="Sukses menambahkan data!";
    }else{
        $status="Gagal menambahkan data!";
    }
    return response()->json(compact('status'));
}
}
else{
    return response()->json(['status'=>'anda bukan admin']);
}
}

public function update($id,Request $req)
{
    if(Auth::User()->level=="admin"){
        $validator=Validator::make($req->all(),
        [
            'nama_mobil'=>'required',
            'id_jenis_mobil'=>'required',
            'plat_nomor'=>'required',
            'kondisi'=>'required',
            'harga_sewa_per_hari'
        ]);

        if($validator->fails()){
            return Response()->json($validator->errors());
        }
        $ubah=Mobil_model::where('id_mobil', $id)->update([
            'nama_mobil'=>$req->nama_mobil,
            'id_jenis_mobil'=>$req->id_jenis_mobil,
            'plat_nomor'=>$req->plat_nomor,
            'kondisi'=>$req->kondisi,
            'harga_sewa_per_hari'=>$req->harga_sewa_per_hari
        ]);
        if($ubah){
            return Response()->json(['status'=>'Data berhasil diubah!']);
        }else{
            return Response()->json(['status'=>'Data gagal diubah!']);
        }
    }
    return response()->json(['status'=>'anda bukan admin']);
}
```

```
File Edit Selection View Go Run Terminal Help
MobilController.php - rental_mobil - Visual Studio Code

EXPLORER
api.php
UserController.php
MobilController.php X
PenyewaController.php

OPEN EDITORS
rental_mobil > app > Http > Controllers > MobilController.php
api.php rental_mobil/routes 66
UserController.php rental_mobil/a... 67
X MobilController.php rental_... M 68
PenyewaController.php ren... M 69
RENTAL_MOBIL 70
app 71
Console 72
Exceptions 73
Http 74
Controllers 75
Auth 76
Controller.php 77
DetailController.php 78
JenisMobilController.php 79
MobilController.php M 80
PenyewaController.php M 81
TransaksiController.php 82
UserController.php 83
Middleware 84
Kernel.php 85
Providers 86
Detail_model.php 87
JenisMobil_model.php 88
Mobil_model.php 89
Penyewa_model.php 90
Transaksi_model.php 91
User.php 92
bootstrap 93
config 94
database 95
public 96
resources 97
OUTLINE 98
TIMELINE 99

master* 0 0 0


Ln 23, Col 34 Spaces: 4 UTF-8 LF PHP
```

```
        'plat_nomor'=>$req->plat_nomor,
        'kondisi'=>$req->kondisi,
        'harga_sewa_per_hari'=>$req->harga_sewa_per_hari
    ]);
    if($ubah){
        return Response()->json(['status'=>'Data berhasil diubah!']);
    }else{
        return Response()->json(['status'=>'Data gagal diubah!']);
    }
}
else{
    return response()->json(['status'=>'anda bukan admin']);
}
}


public function destroy($id)
{
    if(Auth::User()->level=="admin"){
        $hapus=Mobil_model::where('id_mobil',$id)->delete();
        if($hapus){
            return Response()->json(['status'=>'Data berhasil dihapus!']);
        }else{
            return Response()->json(['status'=>'Data gagal dihapus!']);
        }
    }
    return response()->json(['status'=>'anda bukan admin']);
}

public function tampil_mobil()
{
    if(Auth::User()->level=="admin"){
        $data_mobil=Mobil_model::get();
        return Response()->json($data_mobil);
    }
    return response()->json(['status'=>'anda bukan admin']);
}
}
```

Script JenisMobilController

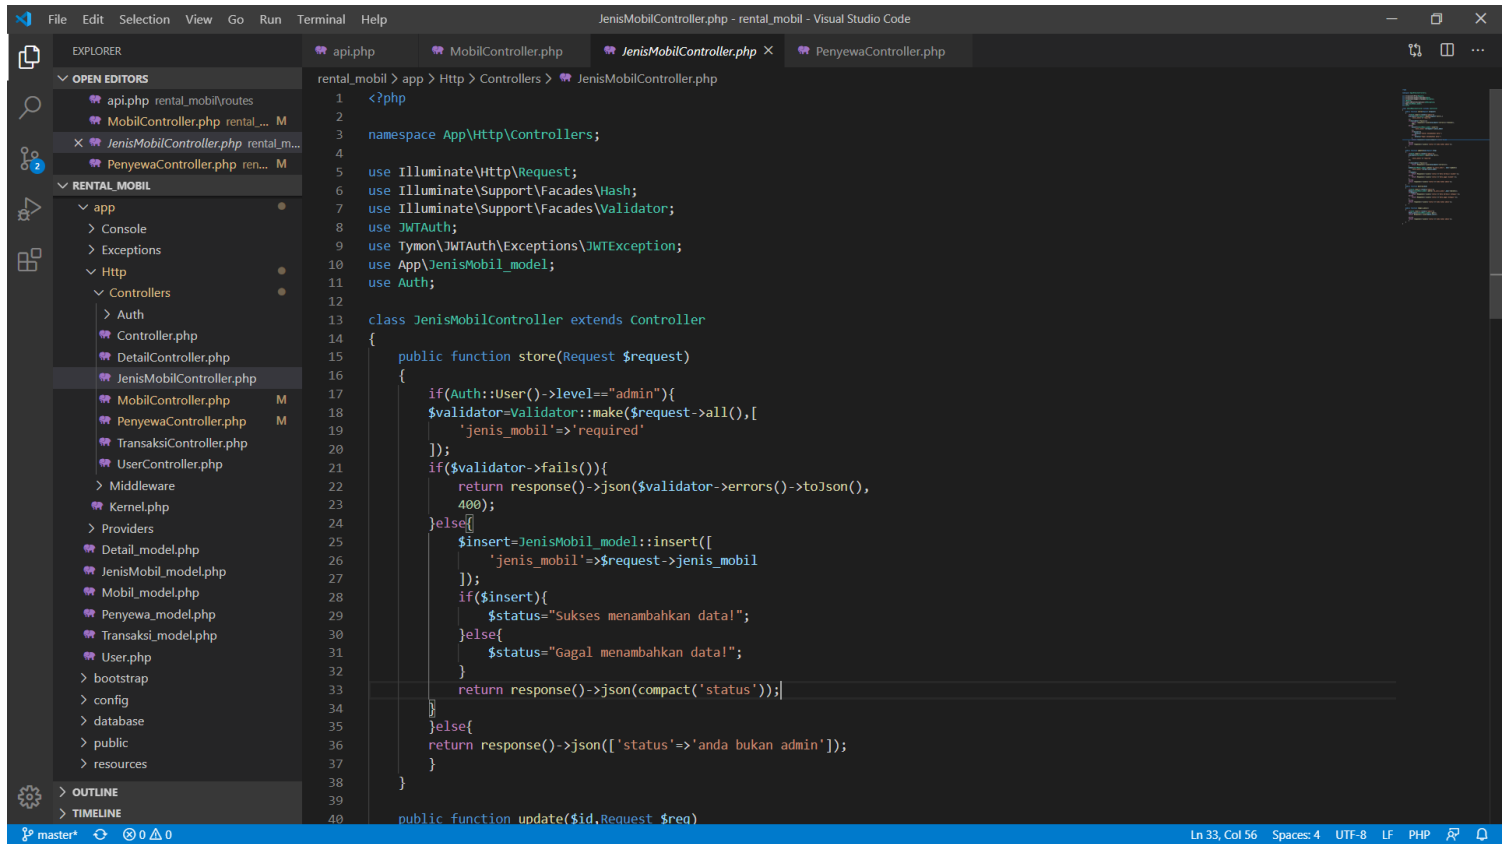

```
1 <?php
2
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6 use Illuminate\Support\Facades\Hash;
7 use Illuminate\Support\Facades\Validator;
8 use JWTAuth;
9 use Tymon\JWTAuth\Exceptions\JWTException;
10 use App\JenisMobil_model;
11 use Auth;
12
13 class JenisMobilController extends Controller
14 {
15     public function store(Request $request)
16     {
17         if(Auth::User()->level=="admin"){
18             $validator=Validator::make($request->all(),[
19                 'jenis_mobil'=>'required'
20             ]);
21         if($validator->fails()){
22             return response()->json($validator->errors()->toJson(),
23                 400);
24         }else{
25             $insert=JenisMobil_model::insert([
26                 'jenis_mobil'=>$request->jenis_mobil
27             ]);
28             if($insert){
29                 $status="Sukses menambahkan data!";
30             }else{
31                 $status="Gagal menambahkan data!";
32             }
33             return response()->json(compact('status'));
34         }
35     }else{
36         return response()->json(['status'=>'anda bukan admin']);
37     }
38 }
39
40 public function update($id,Request $req)
```

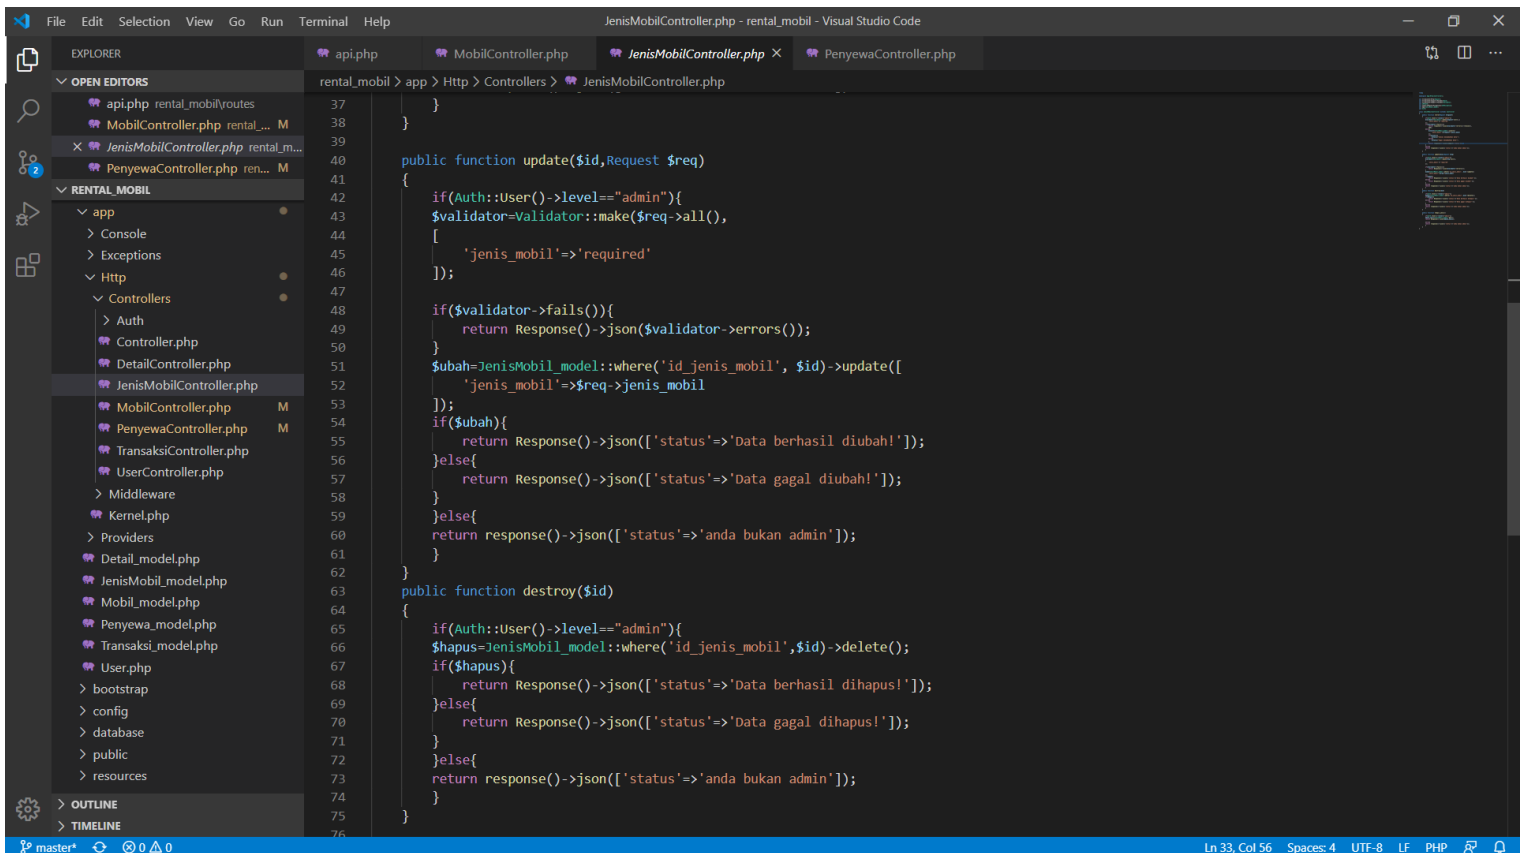

```
37 }
38
39
40 public function update($id,Request $req)
41 {
42     if(Auth::User()->level=="admin"){
43         $validator=Validator::make($req->all(),
44             [
45                 'jenis_mobil'=>'required'
46             ]);
47         if($validator->fails()){
48             return Response()->json($validator->errors());
49         }
50         $ubah=JenisMobil_model::where('id_jenis_mobil', $id)->update([
51             'jenis_mobil'=>$req->jenis_mobil
52         ]);
53         if($ubah){
54             return Response()->json(['status'=>'Data berhasil diubah!']);
55         }else{
56             return Response()->json(['status'=>'Data gagal diubah!']);
57         }
58     }else{
59         return response()->json(['status'=>'anda bukan admin']);
60     }
61 }
62
63 public function destroy($id)
64 {
65     if(Auth::User()->level=="admin"){
66         $hapus=JenisMobil_model::where('id_jenis_mobil',$id)->delete();
67         if($hapus){
68             return Response()->json(['status'=>'Data berhasil dihapus!']);
69         }else{
70             return Response()->json(['status'=>'Data gagal dihapus!']);
71         }
72     }else{
73         return response()->json(['status'=>'anda bukan admin']);
74     }
75 }
76 }
```

```
File Edit Selection View Go Run Terminal Help
JenisMobilController.php - rental_mobil - Visual Studio Code

EXPLORER
api.php
MobilController.php
JenisMobilController.php
PenyewaController.php

OPEN EDITORS
rental_mobil > app > Http > Controllers > JenisMobilController.php

api.php rental_mobil/routes 50
MobilController.php rental_m... 51
JenisMobilController.php rental_m... 52
PenyewaController.php ren... 53
RENTAL_MOBIL
app 54
Console 55
Exceptions 56
Http 57
Controllers 58
Auth 59
Controller.php 60
DetailController.php 61
JenisMobilController.php 62
MobilController.php M 63
PenyewaController.php M 64
TransaksiController.php 65
UserController.php 66
Middleware 67
Kernel.php 68
Providers 69
Detail_model.php 70
JenisMobil_model.php 71
Mobil_model.php 72
Penyewa_model.php 73
Transaksi_model.php 74
User.php 75
bootstrap 76
config 77
database 78
public 79
resources 80
OUTLINE
TIMELINE

master* 0 0 0
Ln 33, Col 56 Spaces: 4 UTF-8 LF PHP
```

```
}
$ubah=JenisMobil_model::where('id_jenis_mobil', $id)->update([
    'jenis_mobil'=>$req->jenis_mobil
]);
if($ubah){
    return Response()->json(['status'=>'Data berhasil diubah!']);
}else{
    return Response()->json(['status'=>'Data gagal diubah!']);
}
}else{
    return response()->json(['status'=>'anda bukan admin']);
}
}

public function destroy($id)
{
    if(Auth::User()->level=="admin"){
        $hapus=JenisMobil_model::where('id_jenis_mobil',$id)->delete();
        if($hapus){
            return Response()->json(['status'=>'Data berhasil dihapus!']);
        }else{
            return Response()->json(['status'=>'Data gagal dihapus!']);
        }
    }else{
        return response()->json(['status'=>'anda bukan admin']);
    }
}

public function tampil_jenis()
{
    if(Auth::User()->level=="admin"){
        $data_jenis=JenisMobil_model::get();
        return Response()->json($data_jenis);
    }else{
        return response()->json(['status'=>'anda bukan admin']);
    }
}
}
```

Script JenisMobil_model

```
File Edit Selection View Go Run Terminal Help
JenisMobil_model.php - rental_mobil - Visual Studio Code

EXPLORER
api.php
MobilController.php
JenisMobil_model.php
PenyewaController.php

OPEN EDITORS
rental_mobil > app > JenisMobil_model.php

api.php rental_mobil/routes 1
MobilController.php rental_m... 2
JenisMobil_model.php rental_mobi... 3
PenyewaController.php ren... 4
RENTAL_MOBIL
app 5
Console 6
Exceptions 7
Http 8
Controllers 9
Auth 10
Controller.php 11
DetailController.php 12
JenisMobilController.php 13
MobilController.php M 14
PenyewaController.php M 15
TransaksiController.php 16
UserController.php 17
Middleware 18
Kernel.php 19
Providers 20
Detail_model.php 21
JenisMobil_model.php 22
Mobil_model.php 23
Penyewa_model.php 24
Transaksi_model.php 25
User.php 26
bootstrap 27
config 28
database 29
public 30
resources 31
OUTLINE
TIMELINE

master* 0 0 0
Ln 1, Col 1 Spaces: 4 UTF-8 LF PHP
```


```
<?php

namespace App;

use Illuminate\Database\Eloquent\Model;

class JenisMobil_model extends Model
{
    protected $table="jenis_mobil";
    protected $primaryKey="id_jenis_mobil";
    public $timestamps=false;
    protected $fillable = [
        'jenis_mobil',
    ];
}
```

Script Mobil_model

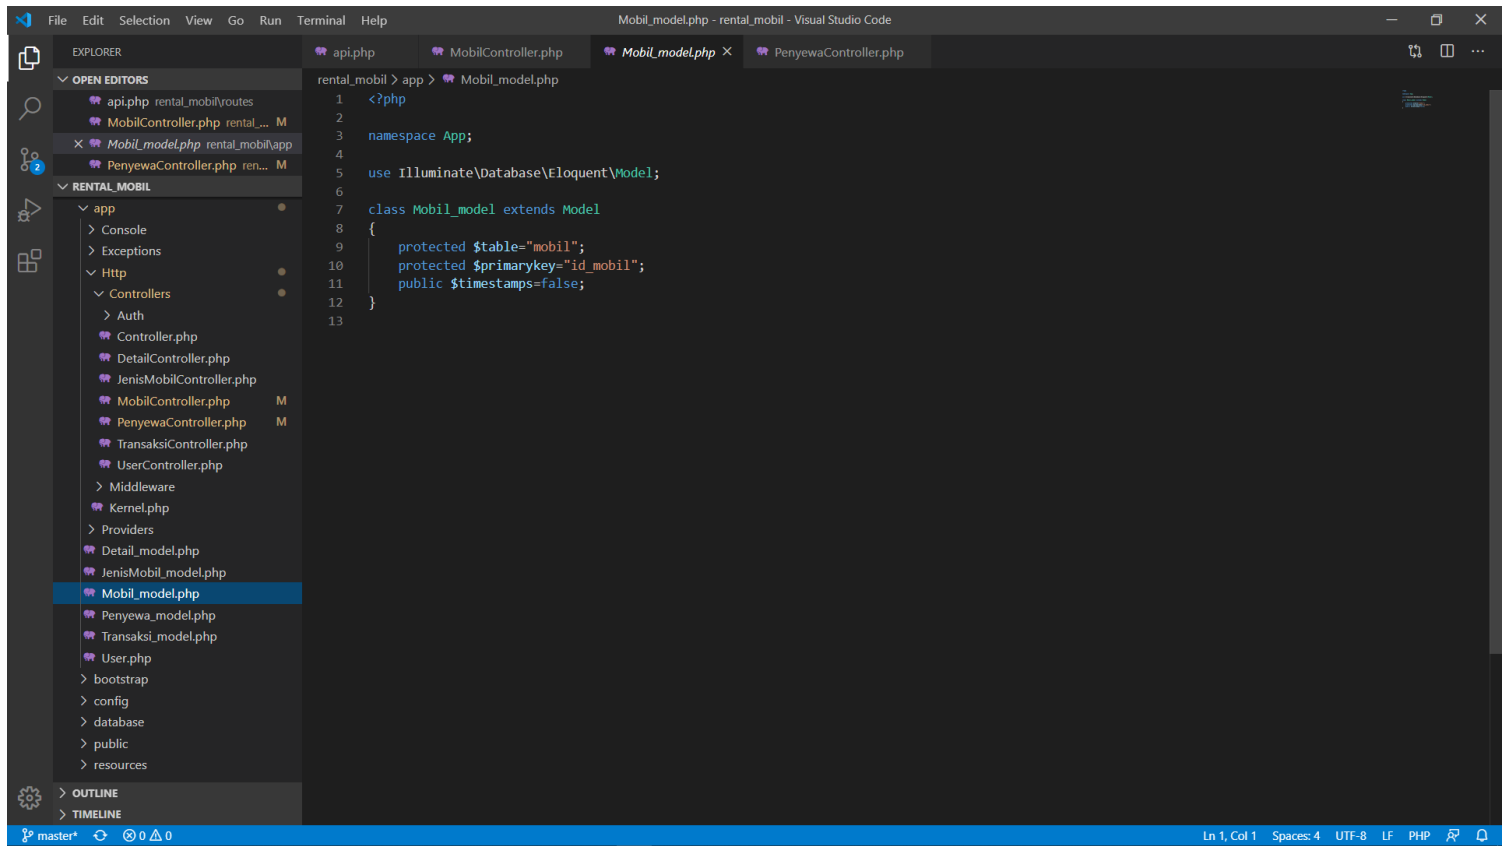

```
File Edit Selection View Go Run Terminal Help
Mobil_model.php - rental_mobil - Visual Studio Code


EXPLORER
OPEN EDITORS
  api.php rental_mobil/routes
  MobilController.php rental_mobil/app
  X Mobil_model.php rental_mobil/app
  PenyewaController.php rental_mobil/app
RENTAL_MOBIL
  app
    Console
    Exceptions
    Http
    Controllers
      Controller.php
      DetailController.php
      JenisMobilController.php
      MobilController.php
      PenyewaController.php
      TransaksiController.php
      UserController.php
    Middleware
    Kernel.php
    Providers
    Detail_model.php
    JenisMobil_model.php
    Mobil_model.php
    Penyewa_model.php
    Transaksi_model.php
    User.php
  bootstrap
  config
  database
  public
  resources
OUTLINE
TIMELINE

master* 0 0 0

Ln 1, Col 1 Spaces: 4 UTF-8 LF PHP
```

```
1 <?php
2
3 namespace App;
4
5 use Illuminate\Database\Eloquent\Model;
6
7 class Mobil_model extends Model
8 {
9     protected $table="mobil";
10    protected $primaryKey="id_mobil";
11    public $timestamps=false;
12 }
13
```

Script Penyewa_model

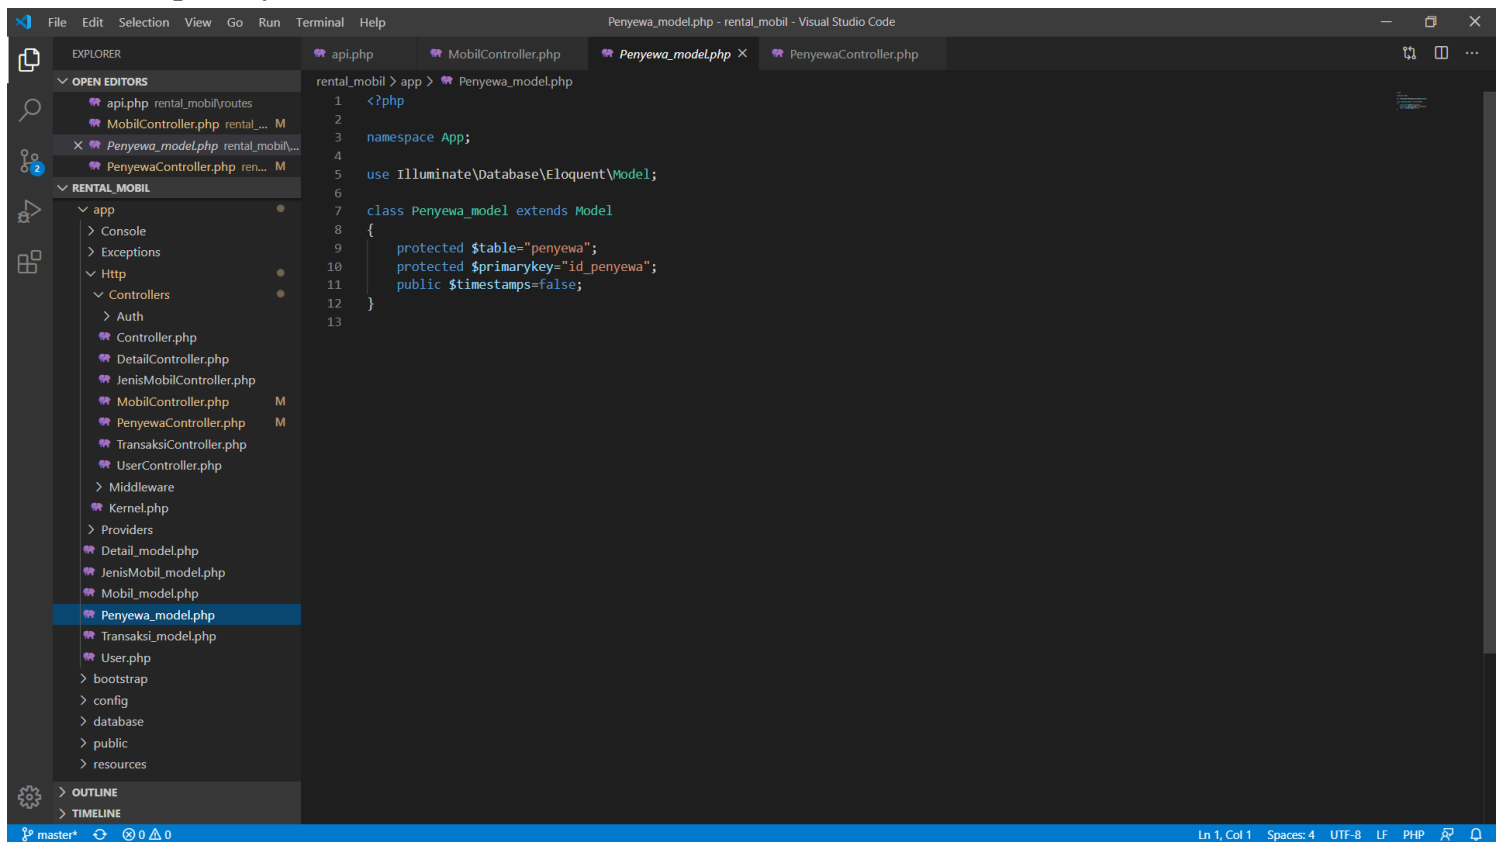

```
File Edit Selection View Go Run Terminal Help
Penyewa_model.php - rental_mobil - Visual Studio Code


EXPLORER
OPEN EDITORS
  api.php rental_mobil/routes
  MobilController.php rental_mobil/app
  X Penyewa_model.php rental_mobil/app
  PenyewaController.php rental_mobil/app
RENTAL_MOBIL
  app
    Console
    Exceptions
    Http
    Controllers
      Controller.php
      DetailController.php
      JenisMobilController.php
      MobilController.php
      PenyewaController.php
      TransaksiController.php
      UserController.php
    Middleware
    Kernel.php
    Providers
    Detail_model.php
    JenisMobil_model.php
    Mobil_model.php
    Penyewa_model.php
    Transaksi_model.php
    User.php
  bootstrap
  config
  database
  public
  resources
OUTLINE
TIMELINE

master* 0 0 0

Ln 1, Col 1 Spaces: 4 UTF-8 LF PHP
```

```
1 <?php
2
3 namespace App;
4
5 use Illuminate\Database\Eloquent\Model;
6
7 class Penyewa_model extends Model
8 {
9     protected $table="penyewa";
10    protected $primaryKey="id_penyewa";
11    public $timestamps=false;
12 }
13
```

Script User

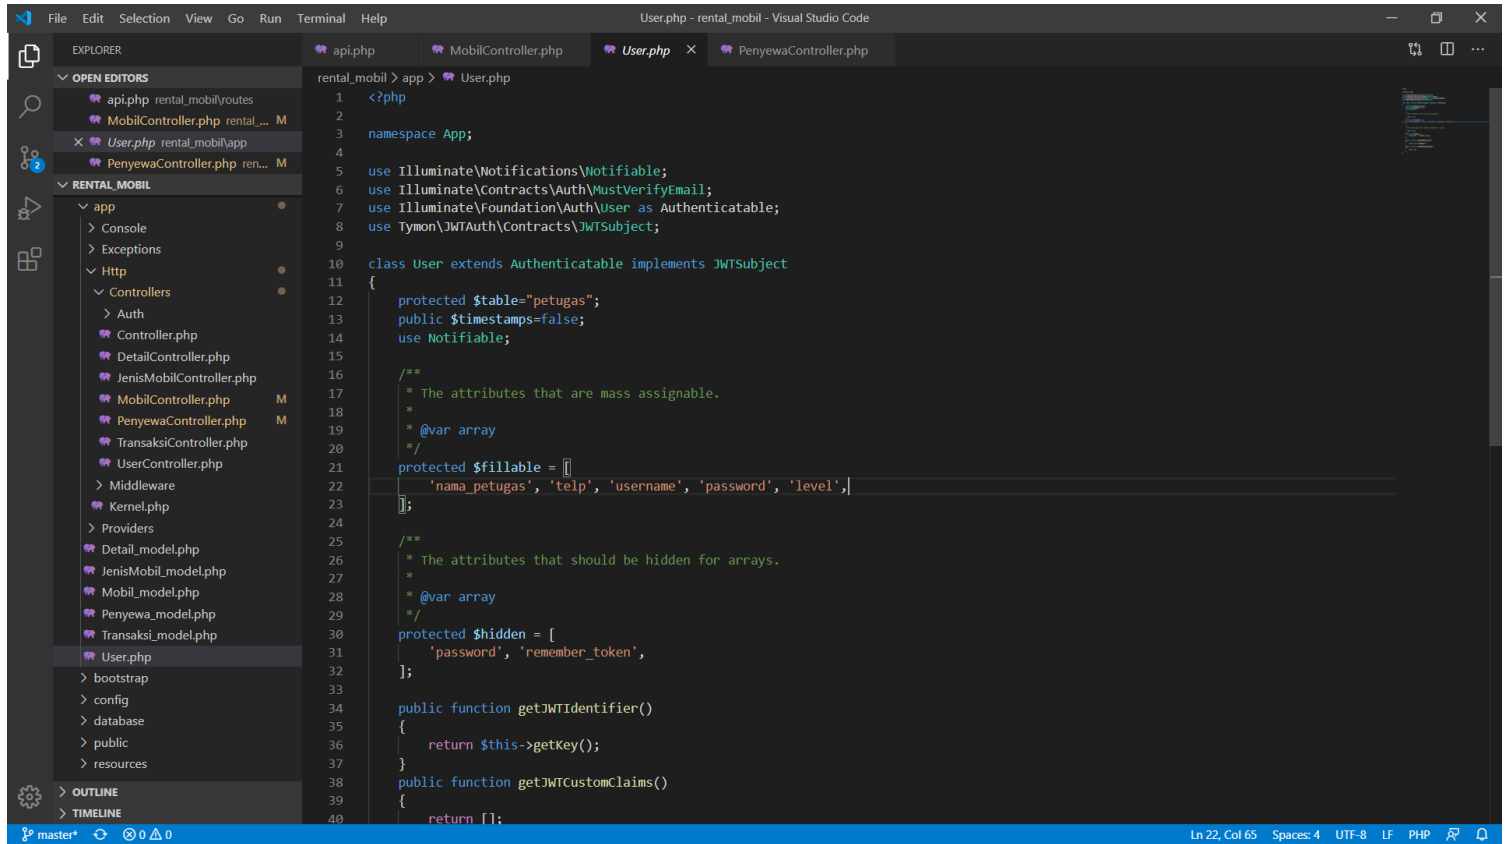

```
1 <?php
2
3 namespace App;
4
5 use Illuminate\Notifications\Notifiable;
6 use Illuminate\Contracts\Auth\MustVerifyEmail;
7 use Illuminate\Foundation\Auth\User as Authenticatable;
8 use Tymon\JWTAuth\Contracts\JWTSubject;
9
10 class User extends Authenticatable implements JWTSubject
11 {
12     protected $table="petugas";
13     public $timestamps=false;
14     use Notifiable;
15
16     /**
17      * The attributes that are mass assignable.
18      *
19      * @var array
20      */
21     protected $fillable = [
22         'nama_petugas', 'telp', 'username', 'password', 'level',
23     ];
24
25     /**
26      * The attributes that should be hidden for arrays.
27      *
28      * @var array
29      */
30     protected $hidden = [
31         'password', 'remember_token',
32     ];
33
34     public function getJWTIdentifier()
35     {
36         return $this->getKey();
37     }
38     public function getJWTCustomClaims()
39     {
40         return [];
```