

29/09/26

Day - 4

We can create multiple bridge N/w & Docker  
we can assign each bridge network for application

1. docker network ls  $\Rightarrow$  list the network types.
2. docker network create n/w name  
docker network create demonet  $\Rightarrow$  defaultly this network create bridge n/w.  
docker network ls
3. docker system prune  $\Rightarrow$  which n/w are <sup>in</sup> use, remove  
delete dangling images. & that n/w.

docker system prune -a  $\Rightarrow$  all images, containers  
are removed.

\*. docker run -d --name demo -p 8081:80 --network=demonet  
 $\hookrightarrow$  image name

--network=demonet  $\Rightarrow$  network name


Customizing

docker inspect demo  $\Rightarrow$  gives the metadata  
 $\hookrightarrow$  container name  $\hookrightarrow$  data about data

docker network inspect sic-demonet

$\hookrightarrow$  It shows the which container use <sup>which</sup> n/w.  
 $\hookrightarrow$  n/w name


Host

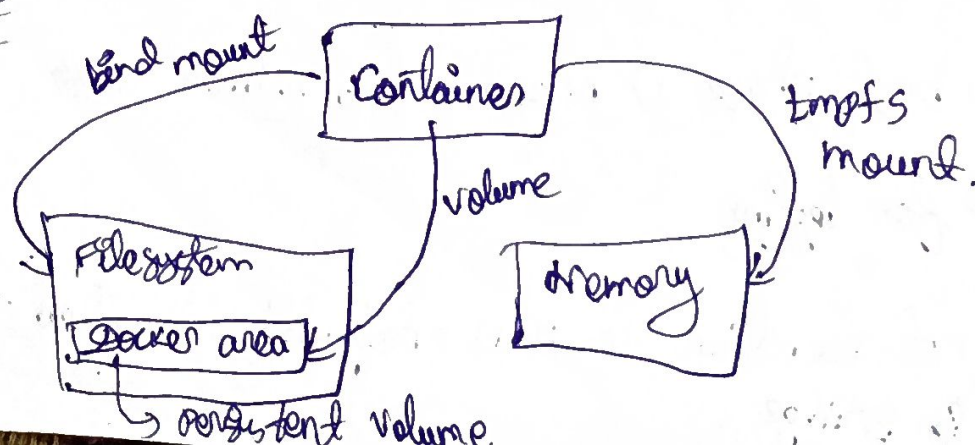

1. Docker area :- general volume created  
allocate the volume. map the container  
and volume :- If container deleted the  
volume store the details. it acts as backup.
2. bind mount :- it is used for file transfer.  
map the local file to created container.  
save the file from container to local file.
3. general - a volumes launch pandappa alth default - a  
bind mount - a launch again.

## Docker Compose:

Docker Compose makes it easier to configure and run applications made up of multiple containers. for example:  
Imagine being able to define three containers - one running a web app, another running postgres, and a third running redis - all in one YAML file and then running those three connected containers with a single command.

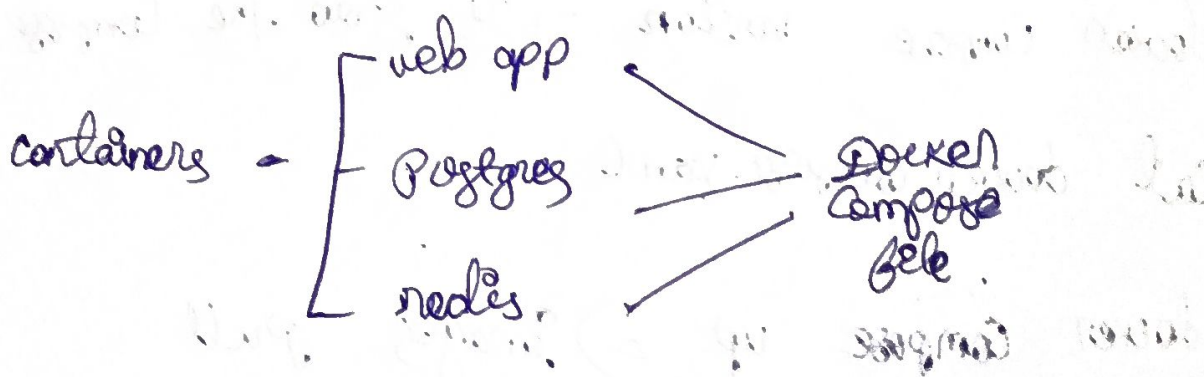

notepad

notepad dockerfile

docker build -t newimg

docker images

docker run -d --name new -p 8081:80 newimg

docker exec -it new /bin/bash

cd /htdocs

ls

IP config

Compose:  $\Rightarrow$  multiple containers into single file

notepad docker-compose

rename docker-compose.txt docker-compose.yaml

3 parts:  $\Rightarrow$  Compose file

frontend  $\Rightarrow$  apache

backend  $\Rightarrow$  PHP  $\Rightarrow$  It act as bridge b/w frontend and backend

Database  $\Rightarrow$  mysql

docker compose version  $\Rightarrow$  It show the Compose version.

cat docker-compose.yaml

docker compose up  $\Rightarrow$  images pull

docker compose down  $\Rightarrow$  containers & n/w are removed

docker ps

notepad index.html

ls

again :) docker compose up

then open browser type ~~the~~ localhost:8080

or ..

→ frontend  
port.

notepad docker-compose.yaml

then again :) docker compose up

docker compose ps ⇒ it show the composed. files (or) containers  
docker compose images ⇒ it show the through compose  
pulled images only.

compose valya jarva images kaatun.

docker compose up -d ⇒ background process.

docker compose networks

check the port is free or not

netstat -ano | findstr :8080