

Experiment -8

NMAP LIVE HOST DISCOVERY

Aim:

This experiment outline the Processes that takes before Port-Scanning to find which System are online.

- 1) ARP Scan: This Scan uses ARP requests to discover live hosts.
- 2) ICMP Scan: This Scan uses ICMP requests to identify live hosts.
- 3) TCP/UDP Ping Scan: This Scan Sends Packets to TCP Ports and UDP Ports to determine live hosts.

There will be two Scanners introduced.

1. nmap

2. masscan

Nmap (Network Mapper) - It is a well-known tool for mapping networks, locating live hosts and detecting running services.

Nmap's Scripting engine can be used to extend its capabilities, such as fingerprinting services.

The scan typically follow the steps required in the image, but several are optional and are conditional on the "command-line".

Send Packet



From:

To:

Packet Type:

Data:

Send Packet

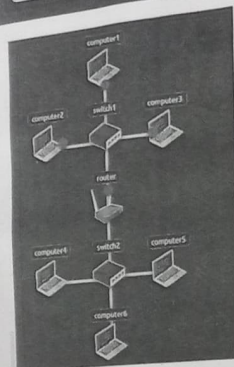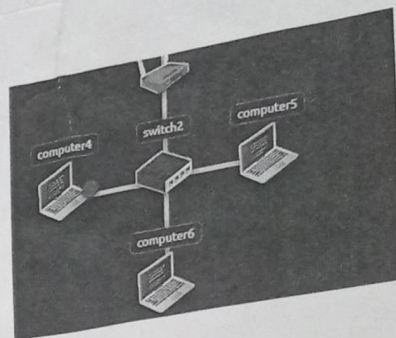

Send Packet


From:

To:

Packet Type:

Data:

Send Packet

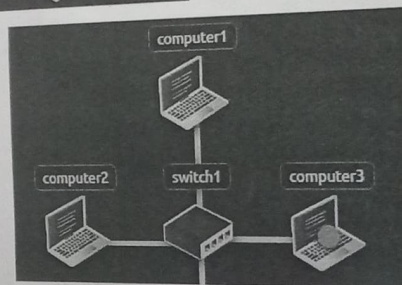

Result:

Thus the experiment was completed successfully.

27/10