EXP 3. STUDY OF CISCO PACKET TRACKER.

- **Aim:**

To understand environment of cisco packet tracker. to design a simple network

- **Introduction:**


A simulator. as the name suggest simulates network devices and its environment . Packet tracer is an exciting simulation. & modelling tool.

- It allows you to model complex systems without the need for dedicated equipment
- It is available for both the linux and windows desktop environment
- Protocols in packet tracer are coded to work and behave in the same way on real hardware

- **UI components:**

① Menu bar.

Standard top menu used to manage files; edit preferences and adjust setting

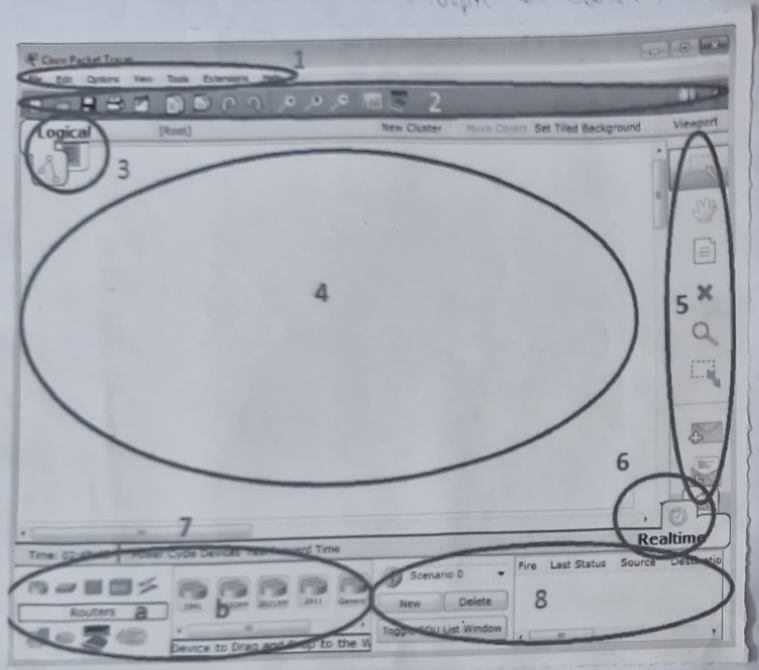

EXP 3. STUDY OF CISCO PACKET TRACKER.

- **Aim:**

To understand environment of cisco packet tracker. to design a simple network

- **Introduction:**


A simulator, as the name suggest simulates network devices and its environment. Packet tracer is an exciting simulation & modelling tool.

- It allows you to model complex systems without the need for dedicated equipment
- It is available for both the linux and windows desktop environment
- Protocols in packet tracer are coded to work and behave in the same way on real hardware

- **UI components:**

① Menu bar.

Standard top menu used to manage files; edit preferences and adjust setting

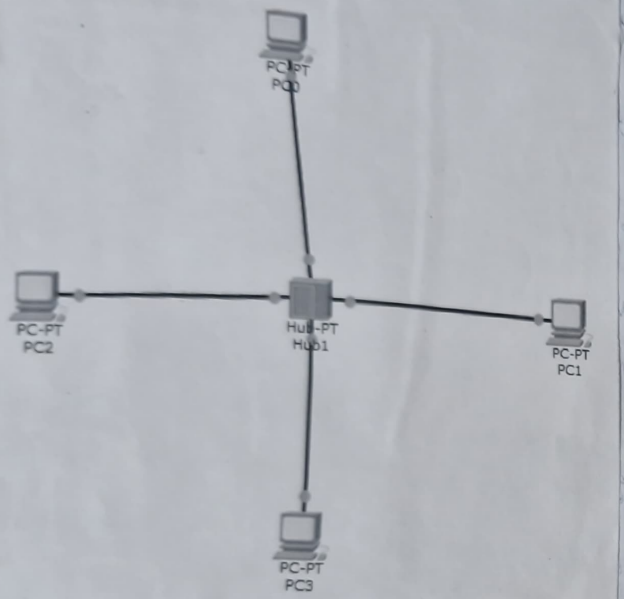

② Main Toolbar

Provides quick access icons for common actions like open, save, zoom & network info

③ Logical workspace tabs:

Toggles b/w the logical network topology view & geo-layout

④ Workspace:

The main area where network topologies are designed & simulated

⑤ Common tools bar:

Quick action utilities to manipulate devices. select, inspect, place mode etc.

⑥ User Created packet box:

Manager. Custom test packets. PDV & tracks like success rate states.

Topology config.

- Hub topology:
  4 generic PCs connected to 1 central hub.
- Switch topology
  4 generic PC's connected to 1 central switch

- Observations :

Hub operations. (Layer 1 - Physical)

Source PC → HUB == Broadcasts to All PCs == Destination PCs

↓ (Other PCs)

Switch operation. (Layer 2 - Data link)

Source PCs → SWITCH == (unicasts using MAC table)

== Destination PC

(Accepted)

10/9/26 9/10