


Demonstrate how to run a collection remotely with URL.

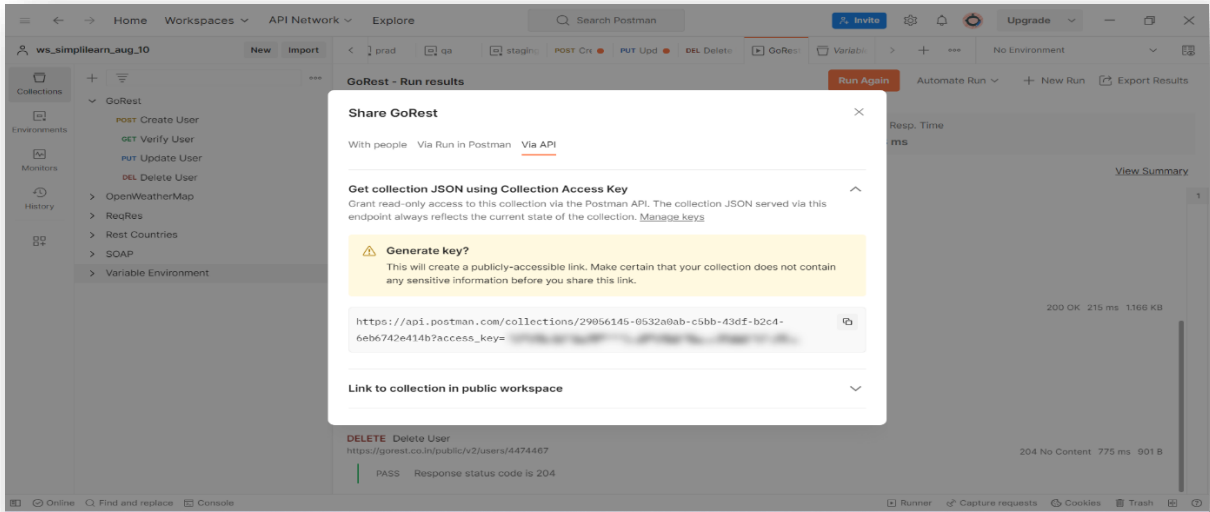

```
newman run https://api.postman.com/collections/29056145-0532a0ab-c5bb-43df-b2c4-6eb6742e414b?access_key=PMAT-01H7SE1W0RFZSNZ3VD3C7V30MW
```

```
newman
GoRest
- Create User
  POST https://gorest.co.in/public/v2/users [201 Created, 1.21kB, 390ms]
  ✓ Response status code is 201
  ✓ Response has the required fields
  ✓ Id is a positive integer
  ✓ Name is a non-empty string
  ✓ Email is in a valid email format
- Verify User
  GET https://gorest.co.in/public/v2/users/4432603 [200 OK, 1.16kB, 314ms]
  ✓ Response status code is 200
  ✓ Response has required fields
  ✓ The id should be a non-negative integer
  ✓ Email is in a valid email format
  ✓ Gender is either 'male' or 'female'
```

```
- Update User
  PUT https://gorest.co.in/public/v2/users/4432603 [200 OK, 1.17kB, 326ms]
  ✓ Response status code is 200
  ✓ Email is a non-empty string
  ✓ Name is a non-empty string
  ✓ Gender is a non-empty string
  ✓ Status is a non-empty string
- Delete User
  DELETE https://gorest.co.in/public/v2/users/4432603 [204 No Content, 897B, 324ms]
  ✓ Response status code is 204
```

	executed	failed
iterations	1	0
requests	4	0
test-scripts	4	0
prerequisite-scripts	0	0
assertions	16	0
total run duration: 1463ms		
total data received: 3038 (approx)		