

LAB MID Q

Suppose IUTCS HQ has gotten a new branch DS, we want to connect DS HQ to IUTCS
Network given is 172.16.0.0/23, do efficient IP address assignment (subnet mask)

DS HQ LAN : 100 hosts

IUTCS HQ Staff : 31 hosts


IUTCS HQ management : 20 hosts

Point to point link : between DS Router and IUTCS HQ router

Topology :

Configure VLAN 10=staff, 20=management, broadcast domain limited

HQ router only 1 interface configure

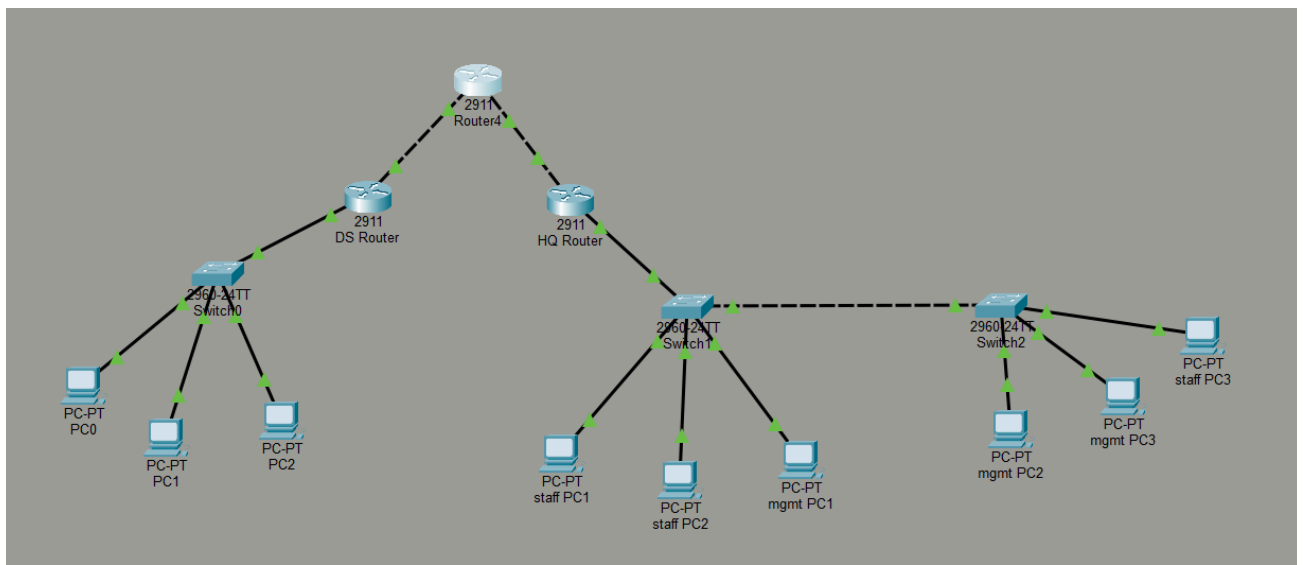

Auto IP Assignment : DHCP

IUTCS HQ - OSPF

DS HQ - RIP

Routing protocols implement

NAT and ACL : access deny and allow access to IUTCS and DS (forgot)