

LAPORAN PRATIKUM
PRAKTIKUM PEMROGRAMAN BERORIENTASI OBJEK


Dosen Pengampu:
ALLIN JUNIKHAH,M.T.




Disusun Oleh:
Rahmat Enomoto (230605110010)

PROGRAM STUDI
TEKNIK INFORMATIKA
FAKULTAS SAINS DAN TEKNOLOGI
UNIVERSITAS ISLAM NEGERI MAULANA MAILK IBRAHIM MALANG

2024

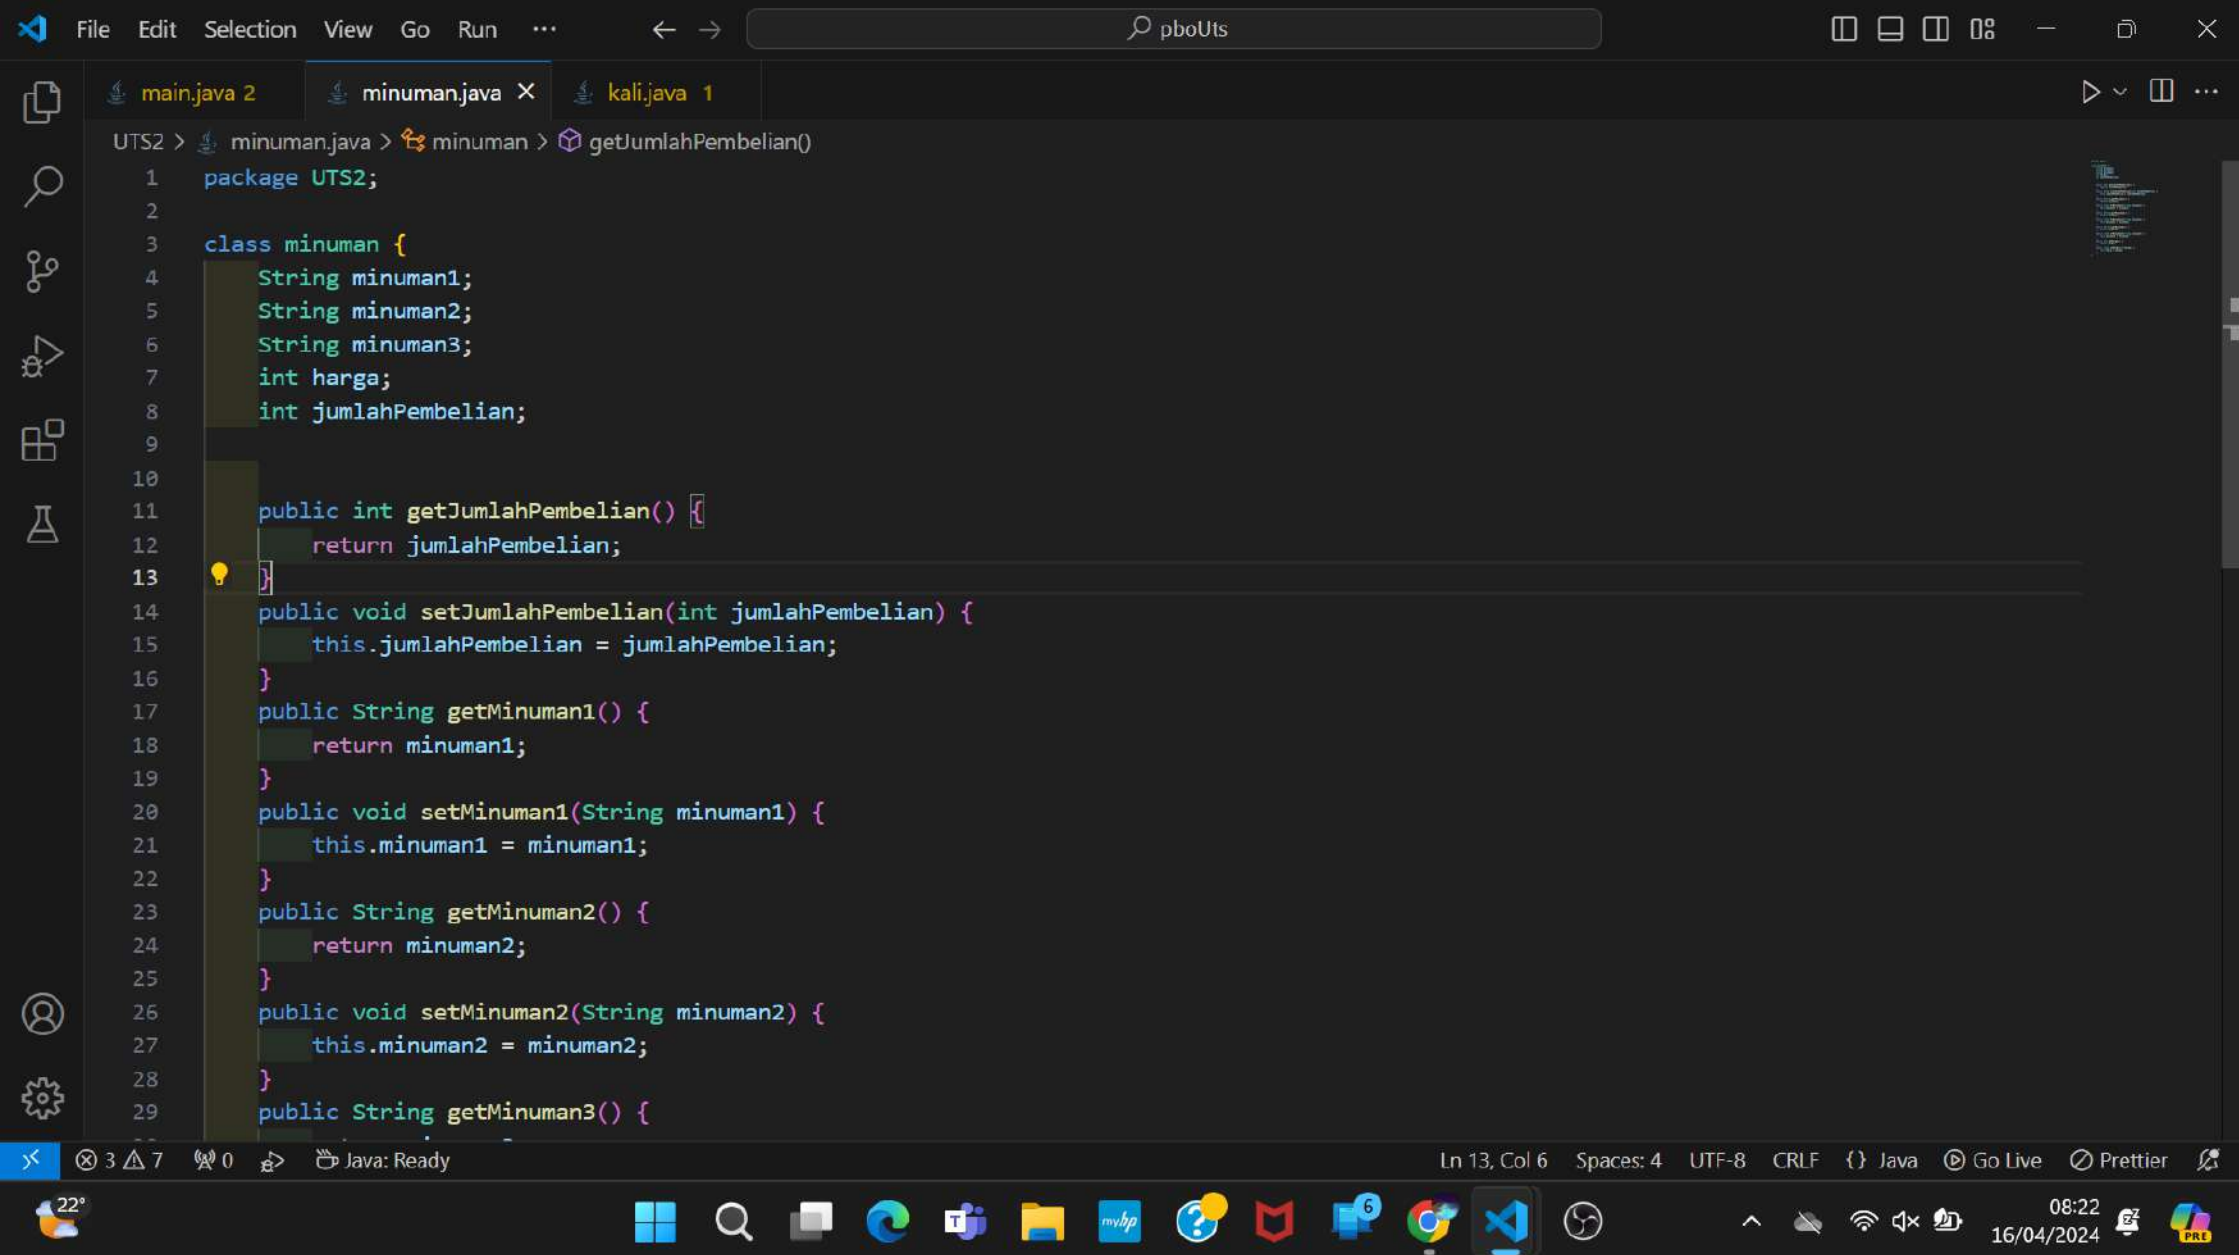

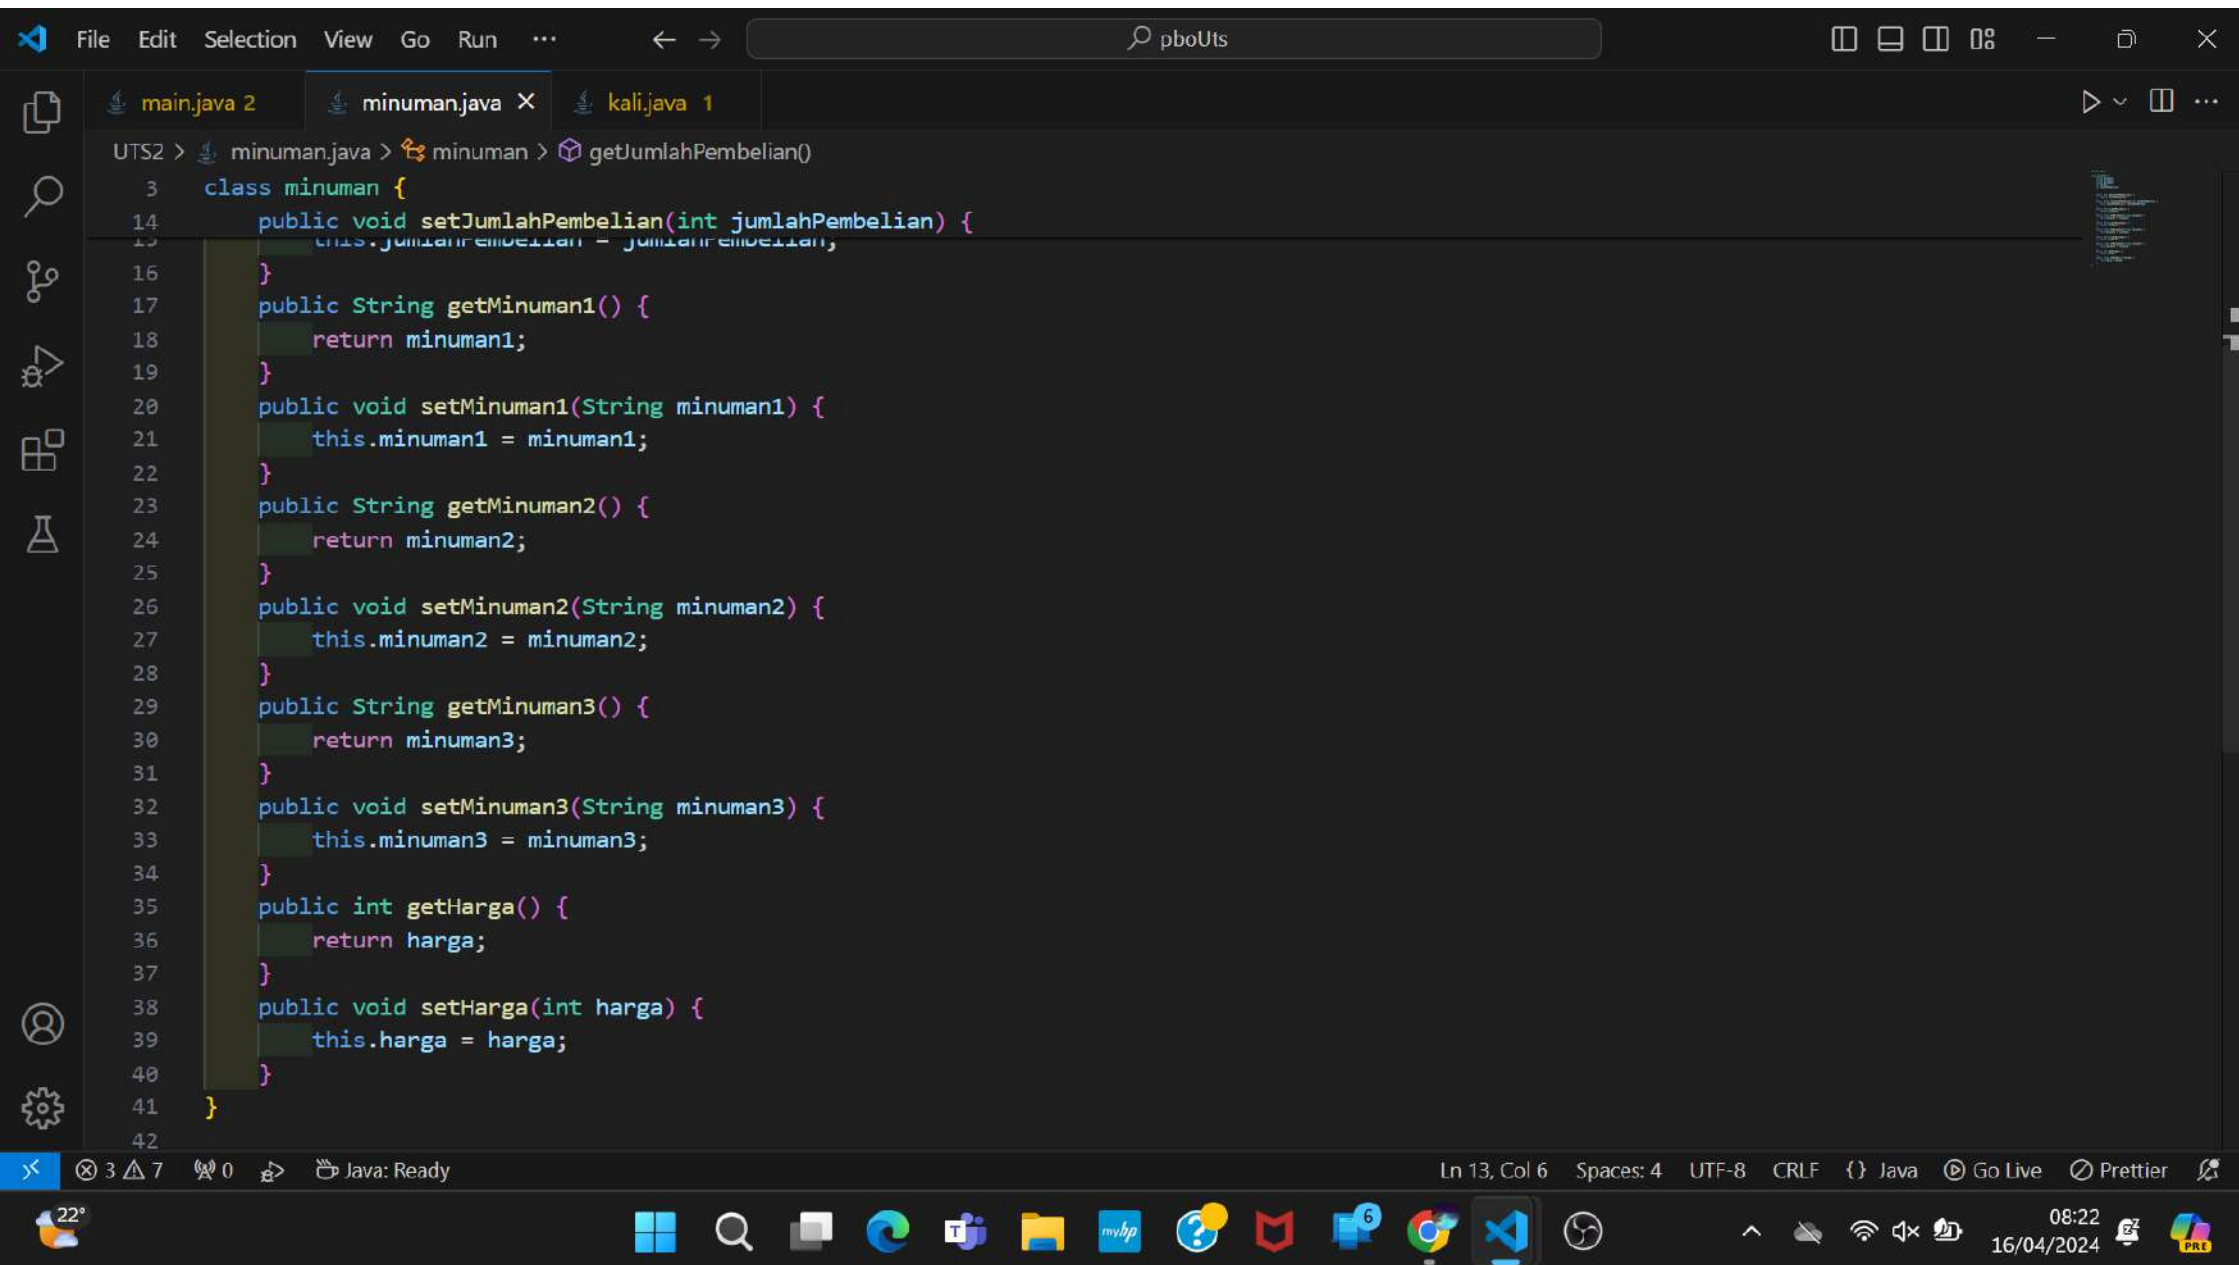

FileEditSelectionViewGoRun...<=>pboUts

main.java 2minuman.javakali.java 1 X

UTS2 > kali.java > ...

1package UTS2;

2public class kali {

3 public int kali(int a,int b){ This method has a constructor name

4 return a*b;

5 }

6}

7

<>370Java: Ready

Ln 7, Col 1Spaces: 4UTF-8CRLF{}JavaGo LivePrettier

22°08:2216/04/2024

File Edit Selection View Go Run ... pboUts

main.java 2 X minuman.java kali.java 1

UTS2 > main.java > main > main(String[])

```
1
2 package UTS2;
3 import java.util.Scanner;
4
5 public class main {
6     public static void main(String[] args) {
7         minuman m = new minuman();
8         kali hitung= new kali();
9         Scanner input = new Scanner(System.in);
10
11         m.minuman1="Cafe Latte";
12         m.setMinuman1(m.minuman1);
13         m.minuman2="machiato";
14         m.setMinuman2(m.minuman2);
15         m.minuman3="mochaccino";
16         m.setMinuman3(m.minuman3);
17         m.harga=57000;
18         m.setHarga(m.harga);
19
20         System.out.println(x:"==== input jenis minuman =====");
21         System.out.println(x:"jenis minuman");
22         System.out.println("1. "+m.getMinuman1());
23         System.out.println("2. "+m.getMinuman2());
24         System.out.println("3. "+m.getMinuman3());
25         System.out.print(s:"Input pilihan anda (1-3): ");
26         int pilihan =Integer.parseInt(input.nextLine());
27         if (pilihan == 1 ){
28             System.out.println("pilihan anda : "+m.getMinuman1());
29         } else if (pilihan == 2){
30             System.out.println("pilihan anda : "+m.getMinuman2());
31         } else if (pilihan == 3){
32             System.out.println("pilihan anda : "+m.getMinuman3());
33         }
34     }
35 }
```

Run | Debug

This method has a constructor name

Resource leak: 'input' is never closed

Ln 16, Col 35 Spaces: 4 UTF-8 CRLF {} Java Go Live Prettier

22° 08:22 16/04/2024

File Edit Selection View Go Run ... pboUts

main.java 2 X minuman.java kali.java 1

UTS2 > main.java > main > main(String[])

```
5 public class main {
6     public static void main(String[] args) { This method has a constructor name

26         int pilihan =Integer.parseInt(input.nextLine());
27         if (pilihan == 1 ){
28             System.out.println("pilihan anda : "+m.getMinuman1());
29         }else if(pilihan == 2){
30             System.out.println("pilihan anda : "+m.getMinuman2());
31         }else if(pilihan == 3){
32             System.out.println("pilihan anda : "+m.getMinuman3());
33         }else{
34             System.out.println(x:"pilihan anda tidak ada");
35         }
36         System.out.print(s:"Ice/Hot (ketik): ");
37         String jenis=input.nextLine();
38         System.out.println("harga (rp): "+m.getHarga());
39         System.out.print(s:"jumlah pembelian : ");
40         int inputJumlahPembelian= Integer.parseInt(input.nextLine());
41         m.setJumlahPembelian(inputJumlahPembelian);
42
43         System.out.println(x:"===== daftar pembelian =====");
44         System.out.println("jenis minuman: "+pilihan);
45         System.out.println("Ice/Hot :"+jenis);
46         System.out.println("harga(rp): "+m.getHarga());
47         System.out.println("jumlah pembelian: "+m.getJumlahPembelian());
48
49         System.out.println(x:"===== total pembayaran =====");
50         System.out.println("total (rp): "+hitung.kali(m.getJumlahPembelian(),m.getHarga()));
51     }
52 }
```

Ln 16, Col 35 Spaces: 4 UTF-8 CRLF {} Java Go Live Prettier

22° 08:22 16/04/2024

