

Experiment 5

Automation with Selenium: Extracting a Value from an HTML Table

Goal: Find the row whose last name is Doe and first name is Jason, then read the corresponding value in the Due column.

What you need

Python 3, Selenium, a Chrome or Chromium browser, and a compatible driver. The example page is <https://the-internet.herokuapp.com/tables>.

Procedure

1	Start a Chrome WebDriver session and open the demo page.
2	Collect all data rows from Table 1.
3	Read each row's cells and match the first two cells to Doe and Jason.
4	Store the fourth cell (Due), print it, and assert that it equals \$100.00.
5	Always close the browser in a finally block.

Implementation

```
import time

from selenium import webdriver

from selenium.webdriver.common.by import By

from selenium.webdriver.support.ui import WebDriverWait

driver = webdriver.Chrome()

driver.maximize_window()

try:

    driver.get("https://the-internet.herokuapp.com/tables")

    rows = WebDriverWait(driver, 10).until(

        lambda browser: browser.find_elements(By.XPATH, "//*[@id='table1']/tbody/tr")
```

```
)
```

```
target_amount = None
```

```
for row in rows:
```

```
    cells = row.find_elements(By.TAG_NAME, "td")
```

```
    last_name, first_name = cells[0].text, cells[1].text
```

```
    if (last_name, first_name) == ("Doe", "Jason"):
```

```
        target_amount = cells[3].text
```

```
        break
```

```
print(f"Jason Doe owes: {target_amount}")
```


```
assert target_amount == "$100.00"
```

```
finally:
```

```
    time.sleep(10)
```

```
    driver.quit()
```


Test evidence

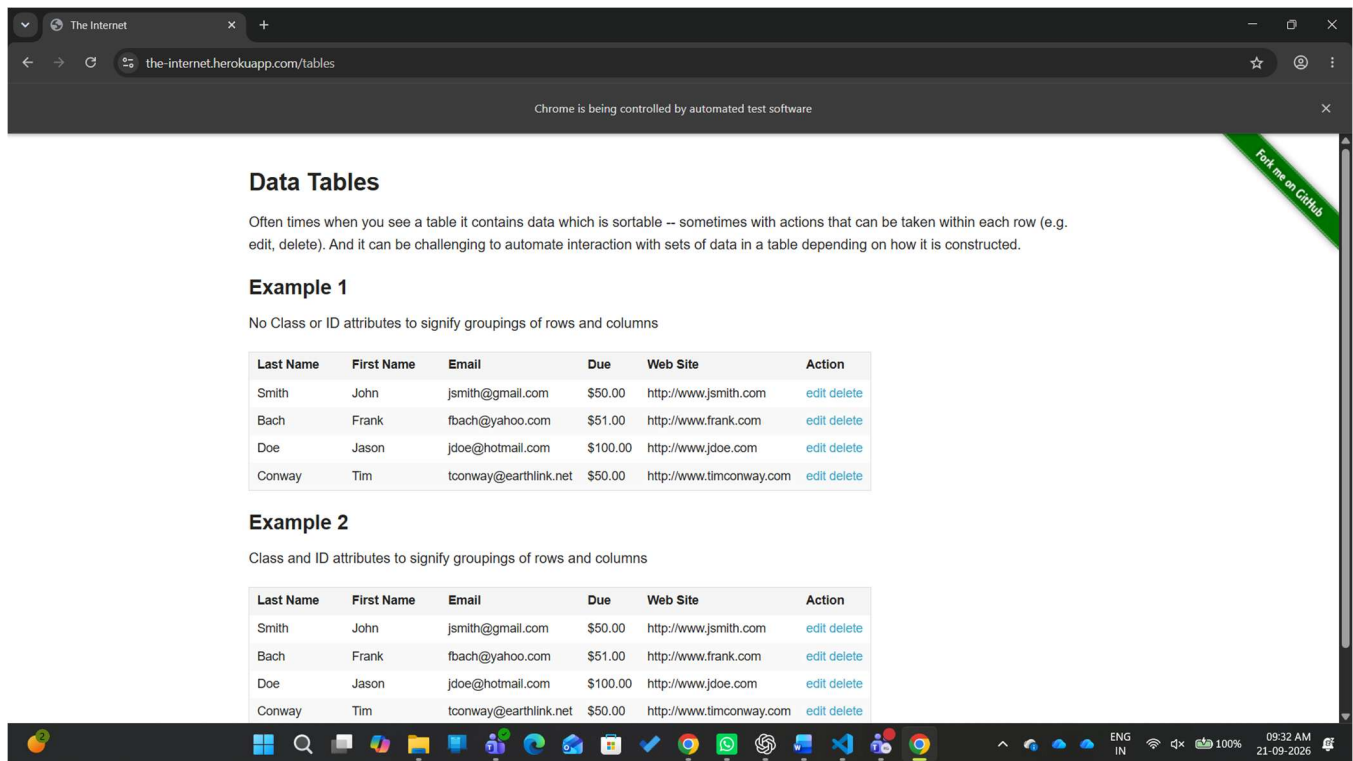

Screenshot 1 - Table 1 showing the target row

Last Name	First Name	Email	Due	Web Site
Smith	John	jsmith@gmail.com	\$50.00	jsmith.com
Bach	Frank	fbach@yahoo.com	\$51.00	frank.com
Doe	Jason	jdoe@hotmail.com	\$100.00	jdoe.com
Conway	Tim	tconway@earthlink.net	\$50.00	timconway.com

Observed page result: Table 1 contained Doe | Jason | jdoe@hotmail.com | \$100.00.

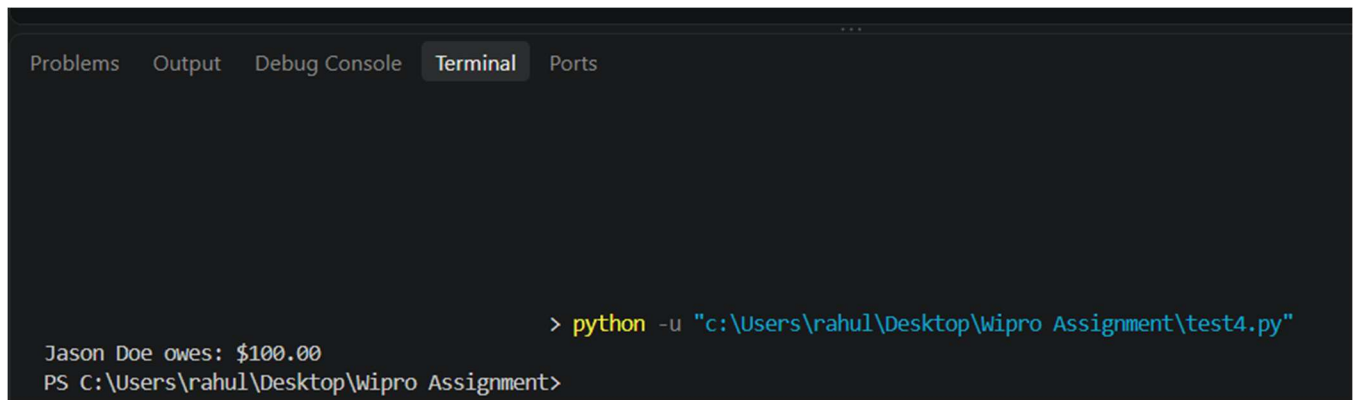

The screenshot shows a terminal window with a dark background. At the top, there are tabs for 'Problems', 'Output', 'Debug Console', 'Terminal' (which is active), and 'Ports'. The terminal content shows the command `> python -u "c:\Users\rahul\Desktop\wipro Assignment\test4.py"` being executed. Below the command, the output is displayed in two lines: `Jason Doe owes: $100.00` and `PS C:\Users\rahul\Desktop\wipro Assignment>`.

```
Problems  Output  Debug Console  Terminal  Ports

> python -u "c:\Users\rahul\Desktop\wipro Assignment\test4.py"
Jason Doe owes: $100.00
PS C:\Users\rahul\Desktop\wipro Assignment>
```

Screenshot 2 - Console result

Jason Doe owes: **\$100.00**

Assertion passed: target_amount == "\$100.00"

Result

PASS - The target cell was correctly isolated by matching sibling cells in the same row. The logic does not depend on the row being in a fixed position.