Chapter 3 ▪ Fundamental Programming Structures in Java

At this point, you should have successfully installed the JDK and executed the sample programs from **Chapter 2**. It's time to start programming. This chapter shows you how the basic programming concepts such as data types, branches, and loops are implemented in Java.

3.1. A Simple Java Program

Let's look more closely at one of the simplest Java programs you can have—one that merely prints a message to console:

```
public class FirstSample
{
   public static void main(String[] args)
   {
      System.out.println("We will not use 'Hello, World!'");
   }
}
```

It is worth spending all the time you need to become comfortable with the framework of this sample; the pieces will recur in all applications. First and foremost, *Java is case sensitive*. If you made any mistakes in capitalization (such as typing `Main` instead of `main`), the program will not run.

Now let's look at this source code line by line. The keyword `public` is called an *access modifier*; these modifiers control the level of access other parts of a program have to this code. For more about access modifiers, see **Chapter 4**. The keyword `class` reminds you that everything in a Java program lives inside a class. You will learn a lot more about classes in the next chapter. For now, think of a class as a container for the program logic that defines the behavior of an application. Classes are the building blocks with which all Java applications are built. *Everything* in a Java program must be inside a class.

Following the keyword `class` is the name of the class. The rules for class names in Java are quite generous. Names must begin with a letter, and after that, they can have any combination of letters and digits. The length is essentially unlimited. You cannot use a Java reserved word (such as `public` or `class`) for a class name. (See the appendix for a list of reserved words.)

The standard naming convention (used in the name `FirstSample`) is that class names are nouns that start with an uppercase letter. If a name consists of multiple words, use an initial uppercase letter in each of the words. This use of uppercase letters in the middle of a name is sometimes called "camel case" or, self-referentially, "CamelCase."

You need to make the file name for the source code the same as the name of the public class, with the extension `.java` appended. Thus, you must store this code in a file called `FirstSample.java`. (Again, case is important—don't use `firstsample.java`.)

You compile the file with the command

```
javac FirstSample.java
```

If you have named the file correctly and not made any typos in the source code, you end up with a file containing the bytecodes for this class. The Java compiler names the bytecode file `FirstSample.class` and stores it in the same directory as the source file. Finally, launch the program by issuing the following command:

```
java FirstSample
```

(Remember to leave off the `.class` extension.) When the program executes, it simply displays the string `We will not use 'Hello, World!'` on the console.

When you use

```
java ClassName
```

to run a compiled program, the Java virtual machine always starts execution with the code in the `main` method in the class you indicate. (The term "method" is Java-speak for a function.) Thus, you *must* have a `main` method in the source of your class for your code to execute. You can, of course, add your own methods to a class and call them from the `main` method. (You will see in the next chapter how to write your own methods.)



Note: According to the Java Language Specification, the `main` method must be declared `public`. (The Java Language Specification is the official document that describes the Java language. You can view or download it from https://docs.oracle.com/javase/specs.)

However, several versions of the Java launcher were willing to execute Java programs even when the `main` method was not `public`. A programmer filed a bug report. To see it, visit **https://bugs.openjdk.org/browse/JDK-4252539**. In 1999, that bug was marked as "closed, will not be fixed." A Sun engineer added an explanation that the Java Virtual Machine Specification does not mandate that `main` is `public` and that "fixing it will cause potential troubles." Fortunately, sanity prevailed. The Java launcher in Java 1.4 and beyond enforces that the `main` method is `public`.

Of course, it is frustrating to have quality assurance engineers, who are often overworked and not always experts in the fine points of Java, make questionable decisions about bug reports. But it is remarkable that the bug reports and their resolutions have been available for anyone to scrutinize, long before Java was open source.

Notice the braces `{ }` in the source code. In Java, as in C/C++, braces delineate the parts (usually called *blocks*) in your program. In Java, the code for any method must be started by an opening brace `{` and ended by a closing brace `}`.

Brace styles have inspired an inordinate amount of useless controversy. This book follows a style that lines up matching braces. As whitespace is irrelevant to the Java compiler, you can use whatever brace style you like.

For now, don't worry about the keywords `static void` —just think of them as part of what you need to get a Java program to compile. By the end of **Chapter 4**, you will understand this incantation completely. The point to remember for now is that every Java application must have a `main` method that is declared in the following way:

```
public class ClassName
{
  public static void main(String[] args)
  {
    program statements
  }
}
```



Preview Note: The byzantine complexity of `public static void main` is about to give way to something simpler. Java 21 has a preview feature, described in Java Enhancement Proposal (JEP) 445, that allows you to write the `main` method like this:

```
class FirstSample
{
  void main()
```

```
  {
    System.out.println("We will not use 'Hello, World!'");
  }
}
```

That is nicer. No `public`, no `static`, no `String[] args`.

For now, you need to compile and run the program with a command-line flag:

```
javac --enable-preview --source 21 FirstSample.java
java --enable-preview FirstSample
```

Even simpler, since there is a single source file, you can skip the `javac` step:

```
java --enable-preview --source 21 FirstSample.java
```

In this book, we embrace classes and object-oriented programming. But for very simple programs, JEP 445 allows you to omit the class, provided, of course, there is only one. The file `FirstSample.java` can simply contain:

```
void main()
{
  System.out.println("We will not use 'Hello, World!'");
}
```

Since these features are still in preview, I won't use them in this edition, but in the future, the first sample program will be a bit simpler.



C++ Note: As a C++ programmer, you know what a class is. Java classes are similar to C++ classes, but there are a few differences that can trap you. For example, in Java *all* functions are methods of some class. (The standard terminology refers to them as methods, not member functions.) Thus, in Java you must have a shell class for the `main` method. You may also be familiar with the idea of *static member functions* in C++. These are member functions defined inside a class that do not operate on objects. The `main` method in Java is always static. Finally, as in C/C++, the `void` keyword indicates that this method does not return a value. Unlike C/C++, the `main` method does not return an "exit code" to the operating system. If the `main` method exits normally, the Java pro-

gram has the exit code `0`, indicating successful completion. To terminate the program with a different exit code, call `System.exit(code)`.

Now that you have seen the basic structure of all Java programs, turn your attention to the contents of the `main` method:

```
{
  System.out.println("We will not use 'Hello, World!'");
}
```

Braces mark the beginning and end of the *body* of the method. This method has only one statement in it. As with most programming languages, you can think of Java statements as sentences of the language. In Java, every statement must end with a semicolon. In particular, carriage returns do not mark the end of a statement, so statements can span multiple lines if need be.

The body of the `main` method contains a statement that outputs a single line of text to the console.

Here, we are using the `System.out` object and calling its `println` method. Notice the periods used to invoke a method. Java uses the general syntax

```
object.method(arguments)
```

as its equivalent of a function call.

In this case, the `println` method receives a string argument. The method displays the string argument on the console. It then terminates the output line, so that each call to `println` displays its output on a new line. Notice that Java, like C/C++, uses double quotes to delimit strings. (You can find more information about strings later in this chapter.)

Methods in Java, like functions in any programming language, can use zero, one, or more *arguments*. Even if a method has no arguments, you must still use empty parentheses. For example, a variant of the `println` method with no arguments just prints a blank line. You invoke it with the call

```
System.out.println();
```



Note: `System.out` also has a `print` method that doesn't add a newline character to the output. For example, `System.out.print("Hello")` prints `Hello` without a newline. The next output appears immediately after the letter `o`.

3.2. Comments

Comments in Java, as in most programming languages, do not show up in the executable program. Thus, you can add as many comments as needed without fear of bloating the code. Java has three ways of marking comments. The most common form is a `//`. Use this for a comment that runs from the `//` to the end of the line.

```
System.out.println("We will not use 'Hello, World!'"); // is this too cute?
```

When longer comments are needed, you can mark each line with a `//`, or you can use the `/*` and `*/` comment delimiters that let you block off a longer comment.

Finally, a third kind of comment is used to generate documentation automatically. This comment uses a `/**` to start and a `*/` to end. You can see this type of comment in **Listing 3.1**. For more on this type of comment and on automatic documentation generation, see **Chapter 4**.

Listing 3.1 FirstSample/FirstSample.java

```
1  /**
2   * This is the first sample program in Core Java Chapter 3
3   * @version 1.01 1997-03-22
4   * @author Gary Cornell
5   */
6  public class FirstSample
7  {
8    public static void main(String[] args)
9    {
10     System.out.println("We will not use 'Hello, World!'");
11   }
12 }
```



Caution: `/* */` comments do not nest in Java. That is, you might not be able to deactivate code simply by surrounding it with `/*` and `*/` because the code you want to deactivate might itself contain a `*/` delimiter.

3.3. Data Types

Java is a *strongly typed language*. This means that every variable must have a declared type. There are eight *primitive types* in Java. Four of them are integer types; two are floating-point number types; one is the character type `char`, used for UTF-16 code units in the Unicode encoding scheme (see **Section 3.3.3**); and one is a `boolean` type for truth values.



Note: Java has an arbitrary-precision arithmetic package. However, "big numbers," as they are called, are Java *objects* and not a primitive Java type. You will see how to use them later in this chapter.

3.3.1. Integer Types

The integer types are for numbers without fractional parts. Negative values are allowed. Java provides the four integer types shown in **Table 3.1**.

Table 3.1: Java Integer Types

Type	Storage Requirement	Range (Inclusive)
`byte`	1 byte	-128 to 127
short	2 bytes	-32,768 to 32,767
`int`	4 bytes	-2,147,483,648 to 2,147,483,647 (just over 2 billion)
long	8 bytes	-9,223,372,036,854,775,808 to 9,223,372,036,854,775,807

In most situations, the `int` type is the most practical. If you want to represent the number of inhabitants of our planet, you'll need to resort to a `long`. The `byte` and `short` types are mainly intended for specialized applications, such as low-level file handling, or for large arrays when storage space is at a premium.

Under Java, the ranges of the integer types do not depend on the machine on which you will be running the Java code. This alleviates a major pain for the programmer who wants to move software from one platform to another, or even between operating systems on the same platform. In contrast, C and C++ programs use the most efficient integer type for each processor. As a result, a C program that runs well on a 32-bit processor may exhibit integer overflow on a 16-bit system. Since Java programs must run with the same results on all machines, the ranges for the various types are fixed.

Long integer numbers have a suffix `L` or `l` (for example, `4000000000L`). Hexadecimal numbers have a prefix `0x` or `0X` (for example, `0xCAFE`). Octal numbers have a prefix `0` (for example, `010` is 8)—naturally, this can be confusing, and few programmers use octal constants.

You can write numbers in binary, with a prefix `0b` or `0B`. For example, `0b1001` is 9. You can add underscores to number literals, such as `1_000_000` (or `0b1111_0100_0010_0100_0000`) to denote one million. The underscores are for human eyes only. The Java compiler simply removes them.



C++ Note: In C and C++, the sizes of types such as `int` and `long` depend on the target platform. On a 16-bit processor such as the 8086, integers are 2 bytes, but on a 32-bit processor like a Pentium or SPARC they are 4-byte quantities. Similarly, `long` values are 4-byte on 32-bit processors and 8-byte on 64-bit processors. These differences make it challenging to write cross-platform programs. In Java, the sizes of all numeric types are platform-independent.

Note that Java does not have any `unsigned` versions of the `int`, `long`, `short`, or `byte` types.



Note: If you work with integer values that can never be negative and you really need an additional bit, you can, with some care, interpret signed integer values as unsigned. For example, instead of having a `byte` value `b` represent the range from -128 to 127, you may want a range from 0 to 255. You can store it in a `byte`. Due to the nature of binary arithmetic, addition, subtraction, and multiplication will work provided they don't overflow. For other operations, call `Byte.toUnsignedInt(b)` to get an `int` value between 0 and 255, then process the integer value and cast back to `byte`. The `Integer` and `Long` classes have methods for unsigned division and remainder.

3.3.2. Floating-Point Types

The floating-point types denote numbers with fractional parts. The two floating-point types are shown in Table 3.2.

Table 3.2: Floating-Point Types

Type	Storage Requirement	Range
`float`	4 bytes	Approximately $\pm 3.40282347 \times 10^{38}$ (6–7 significant decimal digits)

Type	Storage Requirement	Range
double	8 bytes	Approximately ±1.79769313486231570 ×10^{308} (15 significant decimal digits)

The name `double` refers to the fact that these numbers have twice the precision of the `float` type. (Some people call these *double-precision* numbers.) The limited precision of `float` (6-7 significant digits) is simply not sufficient for many situations. Use `float` values only when you work with a library that requires them, or when you need to store a very large number of them.

Java 20 adds a couple of methods (`Float.floatToFloat16` and `Float.float16toFloat`) for storing "half-precision" 16-bit floating-point numbers in `short` values. These are used for implementing neural networks.

Numbers of type `float` have a suffix `F` or `f` (for example, `3.14F`). Floating-point numbers without an `F` suffix (such as `3.14`) are always considered to be of type `double` . You can optionally supply the `D` or `d` suffix (for example, `3.14D`).

An `E` or `e` denotes a decimal exponent. For example, `1.729E3` is the same as `1729` .



Note: You can specify floating-point literals in hexadecimal. For example, 0.125 = 2^{-3} can be written as `0x1.0p-3` . In hexadecimal notation, you use a `p` , not an `e` , to denote the exponent. (An `e` is a hexadecimal digit.) Note that the mantissa is written in hexadecimal and the exponent in decimal. The base of the exponent is 2, not 10.

All floating-point computations follow the IEEE 754 specification. In particular, there are three special floating-point values to denote overflows and errors:

- Positive infinity
- Negative infinity
- NaN (not a number)

For example, the result of dividing a positive floating-point number by 0 is positive infinity. Dividing 0.0 by 0 or the square root of a negative number yields NaN.



Note: The constants `Double.POSITIVE_INFINITY` , `Double.NEGATIVE_INFINITY` , and `Double.NaN` (as well as corresponding `Float` constants) represent these special values, but they are rarely used in practice. In particular, you cannot test

```
if (x == Double.NaN) // is never true
```

to check whether a particular result equals `Double.NaN`. All "not a number" values are considered distinct. However, you can use the `Double.isNaN` method:

```
if (Double.isNaN(x)) // check whether x is "not a number"
```



Caution: Floating-point numbers are *not* suitable for financial calculations in which roundoff errors cannot be tolerated. For example, the command `System.out.println(2.0 - 1.1)` prints `0.8999999999999999`, not `0.9` as you would expect. Such roundoff errors are caused by the fact that floating-point numbers are represented in the binary number system. There is no precise binary representation of the fraction 1/10, just as there is no accurate representation of the fraction 1/3 in the decimal system. If you need precise numerical computations without roundoff errors, use the `BigDecimal` class, which is introduced later in this chapter.

3.3.3. The `char` Type

The `char` type was originally intended to describe individual characters. However, this is no longer the case. Nowadays, some Unicode characters can be described with one `char` value, and other Unicode characters require two `char` values. Read the next section for the gory details.

Literal values of type `char` are enclosed in single quotes. For example, `'A'` is a character constant with value 65. It is different from `"A"`, a string containing a single character. Values of type `char` can be expressed as hexadecimal values that run from `\u0000` to `\uFFFF`.

Besides the `\u` escape sequences, there are several escape sequences for special characters, as shown in **Table 3.3**. You can use these escape sequences inside quoted character literals and strings, such as `'\u005B'` or `"Hello\n"`. The `\u` escape sequence (but none of the other escape sequences) can even be used *outside* quoted character constants and strings. For example,

```
public static void main(String\u005B\u005D args)
```

is perfectly legal—`\u005B` and `\u005D` are the encodings for `[` and `]`.

Table 3.3: Escape Sequences for Special Characters

Escape Sequence	Name	Unicode Value
`\b`	Backspace	`\u0008`
\t	Tab	\u0009
`\n`	Line feed	`\u000a`
\r	Carriage return	\u000d
`\f`	Form feed	`\u000c`
\"	Double quote	\u0022
`\'`	Single quote	`\u0027`
\\	Backslash	\u005c
`\s`	Space. Used in text blocks to retain trailing whitespace.	`\u0020`
\ newline	In text blocks only: Join this line with the next	—



Caution: Unicode escape sequences are processed before the code is parsed. For example, `"\u0022+\u0022"` is *not* a string consisting of a plus sign surrounded by quotation marks (U+0022). Instead, the `\u0022` are converted into `"` before parsing, yielding `""+""`, or an empty string.

Even more insidiously, you must beware of `\u` inside comments. The comment

```
// \u000A is a newline
```

yields a syntax error since `\u000A` is replaced with a newline when the program is read. Similarly, a comment

```
// look inside c:\users
```

yields a syntax error because the `\u` is not followed by four hex digits.



Note: You can have any number of `u` in a Unicode escape sequence: `\u00E9` and `\uuu00E9` both denote the character é. There is a reason for this oddity. Consider a programmer happily coding in Unicode who is forced, for some archaic reason, to check in code as ASCII only. A conversion tool can turn any character > U+007F into a Unicode escape and add a `u` to every existing Unicode escape. That makes the conversion reversible. For example, `\uD800 é` is turned into `\**uu**D800 \u00E9` and can be converted back to `\uD800 é`.

3.3.4. Unicode and the `char` Type

To fully understand the `char` type, you have to know about the Unicode encoding scheme. Before Unicode, there were many different character encoding standards: ASCII in the United States, ISO 8859-1 for Western European languages, KOI-8 for Russian, GB18030 and BIG-5 for Chinese, and so on. This caused two problems. First, a particular code value corresponds to different letters in the different encoding schemes. Second, the encodings for languages with large character sets have variable length: Some common characters are encoded as single bytes, others require two or more bytes.

Unicode was designed to solve both problems. When the unification effort started in the 1980s, a fixed 2-byte code was more than sufficient to encode all characters used in all languages in the world, with room to spare for future expansion—or so everyone thought at the time. In 1991, Unicode 1.0 was released, using slightly less than half of the available 65,536 code values. Java was designed from the ground up to use 16-bit Unicode characters, which was a major advance over other programming languages that used 8-bit characters.

Unfortunately, over time, the inevitable happened. Unicode grew beyond 65,536 characters, primarily due to the addition of a very large set of ideographs used for Chinese, Japanese, and Korean. Now, the 16-bit `char` type is insufficient to describe all Unicode characters.

We need a bit of terminology to explain how this problem is resolved in Java. A *code point* is an integer value associated with a character in an encoding scheme. In the Unicode standard, code points are written in hexadecimal and prefixed with U+, such as U+0041 for the code point of the Latin letter A. Unicode has code points that are grouped into 17 *code planes*, each holding 65536 characters. The first code plane, called the *basic multilingual plane*, consists of the "classic" Unicode characters with code points U+0000 to U+FFFF. Sixteen additional planes, with code points U+10000 to U+10FFFF, hold many more characters called *supplementary* characters.

How a Unicode code point (that is, an integer ranging from 0 to hexadecimal 10FFF) is represented in bits depends on the *character encoding*. You could encode each character as a sequence of 21 bits, but that is impractical for computer hardware. The UTF-32 encoding simply places each code point into 32 bits, where the top 11 bits are zero. That is rather wasteful. The most common encoding on the Internet is UTF-8, using between one and four bytes per character. See **Chapter 2 of Volume II** for details of that encoding.

Java strings use the UTF-16 encoding. It encodes all Unicode code points in a variable-length code of 16-bit units, called *code units*. The characters in the basic multilingual plane are encoded as a single code unit. All other characters are encoded as consecutive pairs of code units. Each of the code units in such an encoding pair falls into a range of 2048 unused values of the basic multilingual plane, called the *surrogates area* (`'\uD800'` to `'\uDBFF'` for the first code unit, `'\uDC00'` to `'\uDFFF'` for the second code unit). This is rather clever, because you can immediately tell whether a code unit encodes a single character or it is the first or second part of a supplementary character. For example, the beer mug emoji 🍺 has code point U+1F37A and is encoded by the two code units `'\uD83C'` and `'\uDF7A'`. (See **https://tools.ietf.org/html/rfc2781** for a description of the encoding algorithm.) Each code unit is stored as a `char` value. The details are not important. All you need to know is that a single Unicode character may require one or two `char` values.

You cannot ignore characters with code units above U+FFFF. Your customers may well write in a language where these characters are needed, or they may be fond of putting emojis such as 🍺 into their messages.

Nowadays, Unicode has become so complex that even code points no longer correspond to what a human viewer would perceive as a single character or symbol. This happens with languages whose characters are made from smaller building blocks, with emojis that can have modifiers for gender and skin tone, and with an ever-growing number of other compositions.

Consider the 🇮🇹 flag. You perceive a single symbol: the flag of Italy. However, this symbol is composed of two Unicode code points: U+1F1EE (regional indicator symbol letter I) and U+1F1F9 (regional indicator symbol letter T). About 250 flags can be formed with these regional indicators. The pirate flag 🏴‍☠️, on the other hand, is composed of U+1F3F4 (waving black flag), U+200D (zero width joiner), U+2620 (skull and crossbones), and U+FE0F (variation selector-16). In Java, you need four `char` values to represent the first flag, five for the second.

In summary, a visible character or symbol is encoded as a sequence of some number of `char` values, and there is almost never a need to look at the individual values. Always work with strings (see **Section 3.6**) and don't worry about their representation as `char` sequences.

3.3.5. The `boolean` Type

The `boolean` type has two values, `false` and `true`. It is used for evaluating logical conditions. You cannot convert between integers and `boolean` values.



C++ Note: In C++, numbers and even pointers can be used in place of `boolean` values. The value `0` is equivalent to the `bool` value `false`, and a nonzero value is equivalent to `true`. This is *not* the case in Java. Thus, Java programmers are shielded from accidents such as

```
if (x = 0) // oops... meant x == 0
```

In C++, this test compiles and runs, always evaluating to `false`. In Java, the test does not compile because the integer expression `x = 0` cannot be converted to a `boolean` value.

3.4. Variables and Constants

As in every programming language, variables are used to store values. Constants are variables whose values don't change. In the following sections, you will learn how to declare variables and constants.

3.4.1. Declaring Variables

In Java, every variable has a *type*. You declare a variable by placing the type first, followed by the name of the variable. Here are some examples:

```
double salary;
int vacationDays;
long earthPopulation;
boolean done;
```

Notice the semicolon at the end of each declaration. The semicolon is necessary because a declaration is a complete Java statement, which must end in a semicolon.

The identifier for a variable name (as well as for other names) is made up of letters, digits, currency symbols, and “punctuation connectors.” The first character cannot be a digit.

Symbols like `'+'` or `'©'` cannot be used inside variable names, nor can spaces. Letter case is significant: `main` and `Main` are distinct identifiers. The length of an identifier is essentially unlimited.

The terms "letter," "digit," and "currency symbol" are much broader in Java than in most languages. A letter is *any* Unicode character that denotes a letter in a language. For example, German users can use umlauts such as `ä` in variable names; Greek speakers could use a π. Similarly, digits are `0` – `9` and *any* Unicode characters that denote a digit. Currency symbols are `$`, `€`, `¥`, and so on. Punctuation connectors include the underscore character `_`, a "wavy low line" `‿`, and a few others. In practice, most programmers stick to `A` - `Z`, `a` - `z`, `0` - `9`, and the underscore `_`.



Tip: If you are really curious as to what Unicode characters can be used in identifiers, you can use the `isJavaIdentifierStart` and `isJavaIdentifierPart` methods in the `Character` class to check.



Tip: Even though `$` is a valid character in an identifier, you should not use it in your own code. It is intended for names that are generated by the Java compiler and other tools.

You also cannot use a Java keyword such as `class` as a variable name.

Underscores can be parts of identifiers. This is common for constant names, such as `Double.POSITIVE_INFINITY`. However, a single underscore `_` is a reserved word.



Preview Note: As of Java 21, a single underscore `_` denotes a variable that is syntactially required but never used. You will see examples in Chapters 6 and 7.

You can declare multiple variables on a single line:

```
int i, j; // both are integers
```

I don't recommend this style. If you declare each variable separately, your programs are easier to read.



Note: As you saw, names are case sensitive, for example, `hireday` and `hireDay` are two separate names. In general, you should not have two names that only differ in their letter case. However, sometimes it is difficult to come up with a good name for a variable. Many programmers then give the variable the same name as the type, for example

```
Box box; // "Box" is the type and "box" is the variable name
```

Other programmers prefer to use an "a" prefix for the variable:

```
Box aBox;
```

3.4.2. Initializing Variables

After you declare a variable, you must explicitly initialize it by means of an assignment statement—you can never use the value of an uninitialized variable. For example, the Java compiler flags the following sequence of statements as an error:

```
int vacationDays;
System.out.println(vacationDays); // ERROR--variable not initialized
```

You assign to a previously declared variable by using the variable name on the left, an equal sign (`=`), and then some Java expression with an appropriate value on the right.

```
int vacationDays;
vacationDays = 12;
```

You can both declare and initialize a variable on the same line. For example:

```
int vacationDays = 12;
```

Finally, in Java you can put declarations anywhere in your code. For example, the following is valid code in Java:

```
double salary = 65000.0;
System.out.println(salary);
int vacationDays = 12; // OK to declare a variable here
```

In Java, it is considered good style to declare variables as closely as possible to the point where they are first used.



Note: You do not need to declare the types of local variables if they can be inferred from the initial value. Simply use the keyword `var` instead of the type:

```
var vacationDays = 12; // vacationDays is an int
var greeting = "Hello"; // greeting is a String
```

This is not too important for number and string types, but, as you will see in the next chapter, this feature can make the declaration of objects less verbose.



C++ Note: C and C++ distinguish between the *declaration* and *definition* of a variable. For example,

```
int i = 10;
```

is a definition, whereas

```
extern int i;
```

is a declaration. In Java, no declarations are separate from definitions.

3.4.3. Constants

In Java, you use the keyword `final` to denote a constant. For example:

```
public class Constants
{
  public static void main(String[] args)
  {
    final double CM_PER_INCH = 2.54;
    double paperWidth = 8.5;
    double paperHeight = 11;
    System.out.println("Paper size in centimeters: "
      + paperWidth * CM_PER_INCH + " by " + paperHeight * CM_PER_INCH);
  }
}
```

The keyword `final` indicates that you can assign to the variable once, and then its value is set once and for all. It is customary to name constants in all uppercase.

It is probably more common in Java to create a constant so it's available to multiple methods inside a single class. These are usually called *class constants*. Set up a class constant with the keywords `static final`. Here is an example of using a class constant:

```
public class Constants2
{
   public static final double CM_PER_INCH = 2.54;
```

```
   public static void main(String[] args)
   {
      double paperWidth = 8.5;
      double paperHeight = 11;
      System.out.println("Paper size in centimeters: "
         + paperWidth * CM_PER_INCH + " by " + paperHeight * CM_PER_INCH);
   }
}
```

Note that the definition of the class constant appears *outside* the `main` method. Thus, the constant can also be used in other methods of the same class. Furthermore, if the constant is declared, as in this example, `public`, methods of other classes can also use it—in our example, as `Constants2.CM_PER_INCH`.



Caution: Some coding style guides state that uppercase letters should only be used for `static final` variables. If you need to follow such a style guide, and you have a local constant, decide what is more important to you—the fact that it is local (and lowercase), or that it is visibly a constant (`static` and uppercase).



C++ Note: `const` is a Java keyword, but it is not currently used for anything. You must use `final` for a constant.

3.4.4. Enumerated Types

Sometimes, a variable should only hold a restricted set of values. For example, you may sell clothes or pizza in four sizes: small, medium, large, and extra large. Of course, you could encode these sizes as integers `1`, `2`, `3`, `4` or characters `S`, `M`, `L`, and `X`. But that is an error-prone setup. It is too easy for a variable to hold a wrong value (such as `0` or `m`).

You can define your own *enumerated type* whenever such a situation arises. An enumerated type has a finite number of named values. For example,

```
enum Size { SMALL, MEDIUM, LARGE, EXTRA_LARGE };
```

Now you can declare variables of this type:

```
Size s = Size.MEDIUM;
```

A variable of type `Size` can hold only one of the values listed in the type declaration, or the special value `null` that indicates that the variable is not set to any value at all. (See **Chapter 4**

for more information about `null`.)

Enumerated types are discussed in greater detail in **Chapter 5**.

3.5. Operators

Operators are used to combine values. As you will see in the following sections, Java has a rich set of arithmetic and logical operators and mathematical functions.

3.5.1. Arithmetic Operators

The usual arithmetic operators `+`, `-`, `*`, and `/` are used in Java for addition, subtraction, multiplication, and division.

The `/` operator denotes integer division if both operands are integers, and floating-point division otherwise. Integer division by 0 raises an exception, whereas floating-point division by 0 yields an infinite or NaN result.

Integer remainder (sometimes called *modulus*) is denoted by `%`. For example, `15 / 2` is `7`, `15 % 2` is `1`, and `15.0 / 2` is `7.5`.



Caution: When one of the operands of `%` is negative, so is the result. For example, `n % 2` is 0 if `n` is even, 1 if `n` is odd and positive, and -1 if `n` is odd and negative. Why? When the first computers were built, someone had to make rules for how integer remainder should work for negative operands. Mathematicians had known the optimal (or "Euclidean") rule for a few hundred years: always leave the remainder ≥ 0. But, rather than open a math textbook, those pioneers came up with rules that seemed reasonable but are actually inconvenient.

Consider this problem. You compute the position of the hour hand of a clock. An adjustment is applied, and you want to normalize to a number between `0` and `11`. That is easy: `(position + adjustment) % 12`. But what if the adjustment is negative? Then you might get a negative number. So you have to introduce a branch, or use `((position + adjustment) % 12 + 12) % 12`. Either way, it is a hassle.

A better remedy is to use the `floorMod` method: `Math.floorMod(position + adjustment, 12)` always yields a value between `0` and `11`. Unfortunately, `floorMod` still gives negative remainders for negative divisors, but that situation doesn't often occur in practice.



Note: One of the stated goals of the Java programming language is portability. A computation should yield the same results no matter which virtual machine executes it. For arithmetic computations with floating-point numbers, it can be surprisingly difficult to

achieve this portability. The `double` type uses 64 bits to store a numeric value, but some processors use 80-bit floating-point registers. These registers yield added precision in intermediate steps of a computation.

But the result may be *different* from a computation that uses 64 bits throughout. For perfect portability, the initial specification of the Java virtual machine mandated that all intermediate computations must be truncated to 64 bit. The numeric community hated it. The computations were *slower* because the truncation operations took time on popular processors. For that reason, the Java programming language was updated to recognize the conflicting demands for optimum performance and perfect reproducibility. Virtual machine designers were permitted to use extended precision for intermediate computations. However, methods tagged with the `strictfp` keyword had to use strict floating-point operations that yield reproducible results.

Processors have become more flexible, and they can now carry out 64-bit arithmetic efficiently. As of Java 17, the virtual machine is again required to carry out strict 64-bit arithmetic, and the `strictfp` keyword is now obsolete.

3.5.2. Mathematical Functions and Constants

The `Math` class contains an assortment of mathematical functions that you may occasionally need, depending on the kind of programming that you do.

To take the square root of a number, use the `sqrt` method:

```
double x = 4;
double y = Math.sqrt(x);
System.out.println(y); // prints 2.0
```



Note: There is a subtle difference between the `println` method and the `sqrt` method. The `println` method operates on the `System.out` object. But the `sqrt` method in the `Math` class does not operate on any object. Such a method is called a *static* method. You can learn more about static methods in **Chapter 4**.

The Java programming language has no operator for raising a quantity to a power: You must use the `pow` method in the `Math` class. The statement

```
double y = Math.pow(x, a);
```

sets `y` to be `x` raised to the power `a` (x^a). The `pow` method's arguments are both of type `double`, and it returns a `double` as well.

The `Math` class supplies the usual trigonometric functions:

```
Math.sin
Math.cos
Math.tan
Math.atan
Math.atan2
```

and the exponential function with its inverse, the natural logarithm, as well as the decimal logarithm:

```
Math.exp
Math.log
Math.log10
```

Java 21 adds a method `Math.clamp` that forces a number to fit within given bounds. For example:

```
Math.clamp(-1, 0, 10) // too small, yields lower bound 0
Math.clamp(11, 0, 10) // too large, yields upper bound 10
Math.clamp(3, 0, 10) // within bounds, yields value 3
```

Finally, three constants denote the closest possible approximations to the mathematical constants π, $\tau = 2\pi$, and e:

```
Math.PI
Math.TAU
Math.E
```



Tip: You can avoid the `Math` prefix for the mathematical methods and constants by adding the following line to the top of your source file:

```
import static java.lang.Math.*;
```

For example:

```
System.out.println("The square root of π is " + sqrt(PI));
```

Static imports are covered in **Chapter 4**.

Note: The methods in the `Math` class use the routines in the computer's floating-point unit for fastest performance. If completely predictable results are more important than performance, use the `StrictMath` class instead. It implements the algorithms from the "Freely Distributable Math Library" (**https://www.netlib.org/fdlibm**), guaranteeing identical results on all platforms.

Note: The `Math` class provides several methods to make integer arithmetic safer. The mathematical operators quietly return wrong results when a computation overflows. For example, one billion times three (`1000000000 * 3`) evaluates to `-1294967296` because the largest `int` value is just over two billion. If you call `Math.multiplyExact(1000000000, 3)` instead, an exception is generated. You can catch that exception or let the program terminate rather than quietly continue with a wrong result. There are also methods `addExact` , `subtractExact` , `incrementExact` , `decrementExact` , `negateExact` , and `absExact` , all with arguments of type `int` and `long` .

3.5.3. Conversions between Numeric Types

It is often necessary to convert from one numeric type to another. **Figure 3.1** shows the legal conversions.

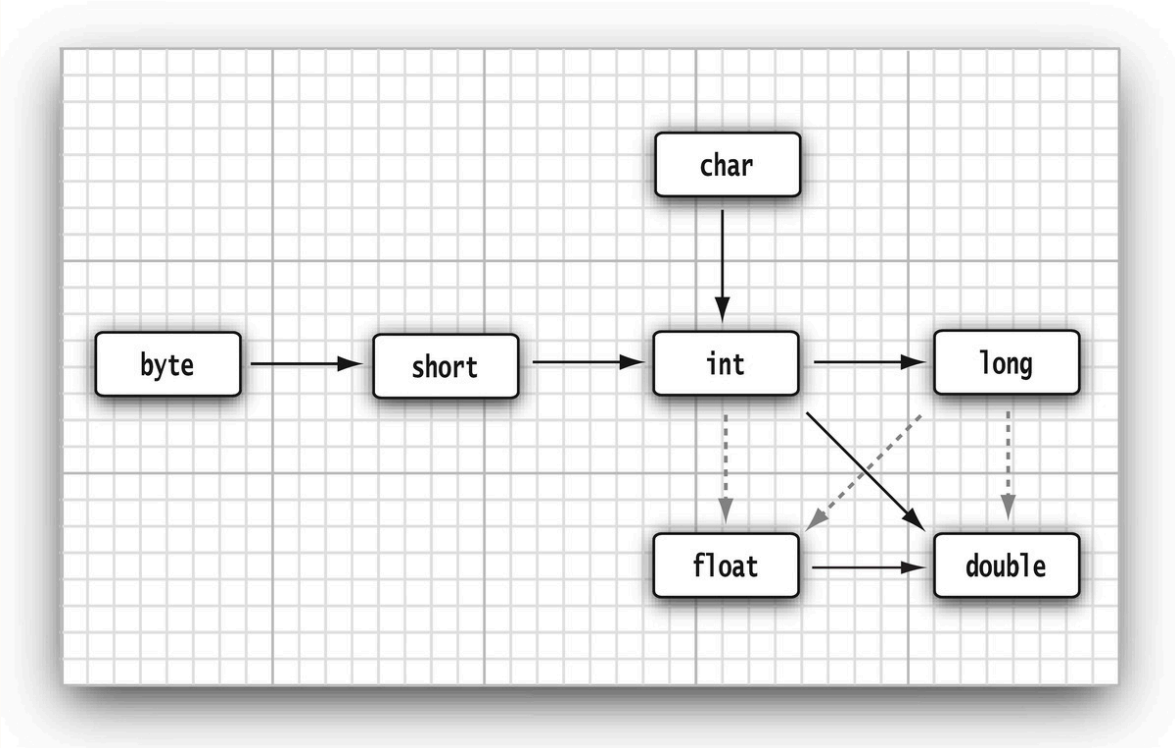


Figure 3.1: Legal conversions between numeric types

The six solid arrows in **Figure 3.1** denote conversions without information loss. The three dotted arrows denote conversions that may lose precision. For example, a large integer such as `123456789` has more digits than the `float` type can represent. When the integer is converted to a `float`, the resulting value has the correct magnitude but loses some precision.

```
int n = 123456789;
float f = n; // f is 1.23456792E8
```

When two values are combined with a binary operator (such as `n + f` where `n` is an integer and `f` is a floating-point value), both operands are converted to a common type before the operation is carried out.

- If either of the operands is of type `double`, the other one will be converted to a `double`.
- Otherwise, if either of the operands is of type `float`, the other one will be converted to a `float`.
- Otherwise, if either of the operands is of type `long`, the other one will be converted to a `long`.
- Otherwise, both operands will be converted to an `int`.

3.5.4. Casts

In the preceding section, you saw that `int` values are automatically converted to `double` values when necessary. On the other hand, there are obviously times when you want to consider a `double` as an integer. Numeric conversions are possible in Java, but of course information may be lost. Conversions in which loss of information is possible are done by means of *casts*. The syntax for casting is to give the target type in parentheses, followed by the variable name. For example:

```
double x = 9.997;
int nx = (int) x;
```

Now, the variable `nx` has the value `9` because casting a floating-point value to an integer discards the fractional part.

If you want to *round* a floating-point number to the *nearest* integer (which in most cases is a more useful operation), use the `Math.round` method:

```
double x = 9.997;
int nx = (int) Math.round(x);
```

Now the variable `nx` has the value `10`. You still need to use the cast `(int)` when you call `round`. The reason is that the return value of the `round` method is a `long`, and a `long` can only be assigned to an `int` with an explicit cast because there is the possibility of information loss.



Caution: If you try to cast a number of one type to another that is out of range for the target type, the result will be a truncated number that has a different value. For example, `(byte) 300` is actually `44`.



C++ Note: You cannot cast between `boolean` values and any numeric type. This convention prevents common errors. In the rare case when you want to convert a `boolean` value to a number, you can use a conditional expression such as `b ? 1 : 0`.

3.5.5. Assignment

There is a convenient shortcut for using binary operators in an assignment. For example, the *compound assignment operator*

```
x += 4;
```

is equivalent to

```
x = x + 4;
```

(In general, place the operator to the left of the `=` sign, such as `*=` or `%=`.)



Caution: If a compound assignment operator yields a value whose type is different from that of the left-hand side, then it is coerced to fit. For example, if `x` is an `int`, then the statement

```
x += 3.5;
```

is valid. It sets `x` to `(int)(x + 3.5)`, that is, `x + 3`, with no warning!

As of Java 20, you get a warning if you compile with the `-Xlint` command line option.

Note that in Java, an assignment is an *expression*. That is, it has a value—namely, the value that is being assigned. You can use that value—for example, to assign it to another variable. Consider these statements:

```
int x = 1;
int y = x += 4;
```

The value of `x += 4` is `5`, since that's the value that is being assigned to `x`. Next, that value is assigned to `y`.

Many programmers find such nested assignments confusing and prefer to write them more clearly, like this:

```
int x = 1;
x += 4;
int y = x;
```

3.5.6. Increment and Decrement Operators

Programmers, of course, know that one of the most common operations with a numeric variable is to add or subtract 1. Java, following in the footsteps of C and C++, has both increment and decrement operators: `n++` adds 1 to the current value of the variable `n`, and `n--` subtracts 1 from it. For example, the code

```
int n = 12;
n++;
```

changes `n` to `13`. Since these operators change the value of a variable, they cannot be applied to numbers themselves. For example, `4++` is not a legal statement.

There are two forms of these operators; you've just seen the postfix form of the operator that is placed after the operand. There is also a prefix form, `++n`. Both change the value of the variable by 1. The difference between the two appears only when they are used inside expressions. The prefix form does the addition first; the postfix form evaluates to the old value of the variable.

```
int m = 7;
int n = 7;
int a = 2 * ++m; // now a is 16, m is 8
int b = 2 * n++; // now b is 14, n is 8
```

Many programmers find this behavior confusing. In Java, using `++` inside expressions is uncommon.

3.5.7. Relational and `boolean` Operators

Java has the full complement of relational operators. To test for equality, use a double equal sign, `==`. For example, the value of

```
3 == 7
```

is `false`.

Use a `!=` for inequality. For example, the value of

```
3 != 7
```

is `true`.

Finally, you have the usual `<` (less than), `>` (greater than), `<=` (less than or equal), and `>=` (greater than or equal) operators.

Java, following C++, uses `&&` for the logical "and" operator and `||` for the logical "or" operator. As you can easily remember from the `!=` operator, the exclamation point `!` is the logical negation operator. The `&&` and `||` operators are evaluated in "short circuit" fashion: The second operand is not evaluated if the first operand already determines the value. If you combine two expressions with the `&&` operator,

```
expression1 && expression2
```

and the truth value of the first expression has been determined to be `false`, then it is impossible for the result to be `true`. Thus, the value for the second expression is *not* calculated. This behavior can be exploited to avoid errors. For example, in the expression

```
x != 0 && 1 / x > x + y // no division by 0
```

the second operand is never evaluated if `x` equals zero. Thus, `1 / x` is not computed if `x` is zero, and no divide-by-zero error can occur.

Similarly, the value of `expression1 || expression2` is automatically `true` if the first expression is `true`, without evaluating the second expression.

3.5.8. The Conditional Operator

Java provides the *conditional* `?:` operator that selects a value, depending on a Boolean expression. The expression

```
condition ? expression1 : expression2
```

evaluates to the first expression if the condition is `true`, and to the second expression otherwise. For example,

```
x < y ? x : y
```

gives the smaller of `x` and `y`.

3.5.9. Switch Expressions

If you need to choose among more than two values, then you can use a `switch` expression, which was introduced in Java 14. It looks like this:

```
String seasonName = switch (seasonCode)
  {
    case 0 -> "Spring";
    case 1 -> "Summer";
    case 2 -> "Fall";
    case 3 -> "Winter";
    default -> "???";
  };
```

The expression following the `switch` keyword is called the *selector expression*, and its value is the *selector*. For now, we only consider selectors and `case` labels that are integral types (`int`, `char`, `byte`, or `short`), strings, or constants of an enumerated type. In **Chapter 5**, you will see how to use `switch` expressions with other types for *pattern matching*.



Note: The `switch` expression, like every expression, has a value. Note the `->` arrow preceding the value in each branch.



Note: As of Java 14, there are four (!) forms of `switch`. This section focuses on the most useful one. See **Section 3.8.5** for a thorough discussion of all forms of `switch` expressions and statements.

A `case` label must be a compile-time constant whose type matches the selector type. You can provide multiple labels for each `case`, separated by commas:

```
int numLetters = switch (seasonName)
  {
    case "Spring", "Summer", "Winter" -> 6;
    case "Fall" -> 4;
    default -> -1;
  };
```

When you use the `switch` expression with enumerated constants, you need not supply the name of the enumeration in each label—it is deduced from the `switch` value. For example:

```
enum Size { SMALL, MEDIUM, LARGE, EXTRA_LARGE };
. . .
Size itemSize = . . .;
String label = switch (itemSize)
  {
    case SMALL -> "S"; // no need to use Size.SMALL
    case MEDIUM -> "M";
    case LARGE -> "L";
    case EXTRA_LARGE -> "XL";
  };
```

In the example, it was legal to omit the `default` since there was a case for each possible value.



Caution: When the selector is an `enum`, and you don't have cases for all constants, you need a `default`. A `switch` expression with an integer or `String` selector must always have a `default`.



Caution: If the selector is `null`, a `NullPointerException` is thrown. If you want to avoid this possibility, add a `case null`, like this:

```
String label = switch (itemSize)
  {
    . . .
    case null -> "???";
  };
```

This is a feature of Java 21. Note that `default` does *not* match `null`!

3.5.10. Bitwise Operators

For any of the integer types, you have operators that can work directly with the bits that make up the integers. This means that you can use masking techniques to get at individual bits in a number. The bitwise operators are

```
& ("and")   | ("or")   ^ ("xor")   ~ ("not")
```

These operators work on bit patterns. For example, if `n` is an integer variable, then

```
int fourthBitFromRight = (n & 0b1000) / 0b1000;
```

gives you a `1` if the fourth bit from the right in the binary representation of `n` is `1`, and `0` otherwise. Using `&` with the appropriate power of 2 lets you mask out all but a single bit.



Note: When applied to `boolean` values, the `&` and `|` operators yield a `boolean` value. These operators are similar to the `&&` and `||` operators, except that the `&` and `|` operators are not evaluated in "short circuit" fashion—that is, both operands are evaluated before the result is computed.

There are also `>>` and `<<` operators which shift a bit pattern right or left. These operators are convenient when you need to build up bit patterns to do bit masking:

```
int fourthBitFromRight = (n & (1 << 3)) >> 3;
```

Finally, a `>>>` operator fills the top bits with zero, unlike `>>` which extends the sign bit into the top bits. There is no `<<<` operator.



Caution: The right-hand operand of the shift operators is reduced modulo 32 (unless the left-hand operand is a `long`, in which case the right-hand operand is reduced modulo 64). For example, the value of `1 << 35` is the same as `1 << 3` or `8`.



C++ Note: In C/C++, there is no guarantee as to whether `>>` performs an arithmetic shift (extending the sign bit) or a logical shift (filling in with zeroes). Implementors are free to choose whichever is more efficient. That means the C/C++ `>>` operator may yield implementation-dependent results for negative numbers. Java removes that uncertainty.



Note: The `Integer` class has a number of static methods for bit-level operations. For example, `Integer.bitCount(n)` yields the number of bits that are 1 in the binary representation of `n`, and `Integer.reverse(n)` yields the number obtained by reversing the

bits of `n`. Not many programmers need bit-level operations, but if you do, have a look at the `Integer` class to see whether there is a method for the task that you need to accomplish.

3.5.11. Parentheses and Operator Hierarchy

Table 3.4 shows the precedence of operators. If no parentheses are used, operations are performed in the hierarchical order indicated. Operators on the same level are processed from left to right, except for those that are right-associative, as indicated in the table. For example, `&&` has a higher precedence than `||`, so the expression

```
a && b || c
```

means

```
(a && b) || c
```

Since `+=` associates right to left, the expression

```
a += b += c
```

means

```
a += (b += c)
```

That is, the value of `b += c` (which is the value of `b` after the addition) is added to `a`.

Table 3.4: Operator Precedence

Operators	Associativity
`[] . ()` (method call)	Left to right
`! ~ ++ -- + (unary) - (unary) () (cast) new`	Right to left
`* / %`	Left to right
`+ -`	Left to right

Operators	Associativity
`<< >> >>>`	Left to right
< <= > >= instanceof	Left to right
`== !=`	Left to right
&	Left to right
^	Left to right
|	Left to right
`&&`	Left to right
||	Left to right
?:	Right to left
= += -= *= /= %= &= |= ^= <<= >>= >>>=	Right to left



C++ Note: Unlike C or C++, Java does not have a comma operator. However, you can use a *comma-separated list of expressions* in the first and third slot of a `for` statement (see **Section 3.8.4**).

3.6. Strings

Conceptually, Java strings are sequences of Unicode characters. As you have seen in **Section 3.3.4**, the concept of what exactly a character is has become complicated. And the encoding of the characters into `char` values has also become complicated.

However, most of the time, you don't care. You get strings from string literals or from methods, and you operate on them with methods of the `String` class. The following sections cover the details.



Note: You have already seen string *literals* such as `"Hello, World!"`, which are instances of the `String` class.

To include "complicated" characters in string literals, be sure that you use the UTF-8 encoding for source files (which is the default for most IDEs). Then you can just paste them from web pages, and produce string literals such as `"Ciao 🇮🇹"`.

In the past, programmers were more concerned that their collaborators might use a different file encoding, and instead provided escape sequences for the UTF-16 encoding: `"Ciao \uD83C\uDDEE\uD83C\uDDF9"`.

3.6.1. Concatenation

Java, like most programming languages, allows you to use `+` to join (concatenate) two strings.

```
String expletive = "Expletive";
String PG13 = "deleted";
String message = expletive + PG13;
```

The preceding code sets the variable `message` to the string `"Expletivedeleted"`. (Note the lack of a space between the words: The `+` operator joins two strings in the order received, *exactly* as they are given.)

When you concatenate a string with a value that is not a string, the latter is converted to a string. For example,

```
int age = 13;
String rating = "PG" + age;
```

sets `rating` to the string `"PG13"`.

This feature is commonly used in output statements. For example,

```
System.out.println("The answer is " + answer);
```

is perfectly acceptable and prints what you would expect (and with correct spacing because of the space after the word `is`).



Caution: Beware of string concatenations with expressions that have a `+` operator, such as:

```
int age = 42;
```

```
String output = "Next year, you'll be " + age + 1 + "."; // ERROR
```

Because the `+` operators are evaluated from left to right, the result is `"Next year, you'll be 421."`. The remedy is to use parentheses:

```
String output = "Next year, you'll be " + (age + 1) + "."; // OK
```

If you need to put multiple strings together, separated by a delimiter, use the static `join` method:

```
String all = String.join(" / ", "S", "M", "L", "XL");
  // all is the string "S / M / L / XL"
```

The `repeat` method produces a string that repeats a given string a number of times:

```
String repeated = "Java".repeat(3); // repeated is "JavaJavaJava"
```

3.6.2. Splitting Strings

The `split` method splits a string into parts along a given boundary. For example,

```
"Hello, World!".split(" ")
```

yields an array with two elements: the strings `"Hello,"` and `"World!"`. (Arrays are introduced in **Section 3.10**.)

The argument of the `split` method is a *regular expression*, describing where the splits should occur. See **Chapter 2 of Volume II** for a detailed discussion of regular expressions. **Table 3.5** has some useful patterns.

Table 3.5: Splitting Patterns

Pattern	Description
`"\\s+"`	Whitespace
`"\\s*,\\s*"`	Comma with optional whitespace
`"\\."`	Period

`\\PL+`	Any non-letters
`"\\R"`	Line breaks
`"\\b"`	Word boundaries
`"\\b{g}"`	Grapheme cluster boundaries (since Java 9)

Splitting along *grapheme cluster* boundaries breaks a string into what humans perceive as the constituent characters:

```
"Ciao 🇮🇹".split("\\b{g}") // An array with the six elements "C", "i", "a", "o", " ", "🇮🇹"
```

3.6.3. Indexes and Substrings

Java strings are sequences of `char` values. As you saw in **Section 3.3.4**, the `char` data type is used for representing Unicode code points in the UTF-16 encoding. Some characters can be represented with a single `char` value, but many characters and symbols require more than one `char` value.



Note: The virtual machine is not required to store strings as sequences of `char` values. For efficiency, strings that hold only single-byte code units store `byte` sequences, and all others `char` sequences. This is an implementation detail that has changed in the past and may again change in the future.

The `length` method yields the number of `char` values required for a given string. For example:

```
String greeting = "Ciao 🇮🇹";
int n = greeting.length(); // is 9
```

The call `s.charAt(n)` returns the `char` value at position `n`, where `n` is between `0` and `s.length() - 1`. (Like C and C++, Java counts positions in a string starting with `0`.) For example:

```
char first = greeting.charAt(0); // first is 67 or 'C'
char last = greeting.charAt(8); // last is 56825
```

However, these calls are not very useful. The last `char` value is just a part of the flag symbol, and you won't generally care what these values are.

Still, you sometimes need to know where a substring is located in a string. Use the `indexOf` method:

```
String sub = " ";
int start = greeting.indexOf(sub); // 4
```

As it happens, the position or *index* of the space is 4, but the exact value doesn't matter. It depends on the characters preceding the substring, and the number of `char` values needed to encode each of them. Always treat an index as an opaque number, not the count of perceived characters preceding it.

You can compute where the next character starts:

```
int nextStart = start + sub.length(); // 5
```

As it happens, the string `" "` has length 1, but do not hard-code the length of a string. Always use the `length` method instead.

You can extract a substring from a larger string with the `substring` method of the `String` class. For example,

```
String greeting = "Hello, World!";
int n = greeting.indexOf(",")
String s = greeting.substring(0, n);
```

creates a string consisting of the characters `"Hello"`.

The second argument of `substring` is the first position that you *do not* want to copy. In our case, we copy everything from the beginning up to, but not including, the comma.

Note that the string `s.substring(a, b)` always has length `b` – `a`. For example, the substring `"Hello"` has length 5 – 0 = 5.

3.6.4. Strings Are Immutable

The `String` class gives no methods that let you *change* a character in an existing string. If you want to turn `greeting` into `"Help!"`, you cannot directly change the last positions of `greeting`

into `'p'` and `'!'`. If you are a C programmer, this can make you feel pretty helpless. How are we going to modify the string? In Java, it is quite easy: Concatenate the substring that you want to keep with the characters that you want to replace.

```
String greeting = "Hello";
int n = greeting.indexOf("lo");
greeting = greeting.substring(0, n) + "p!";
```

This declaration changes the current value of the `greeting` variable to `"Help!"`.

Since you cannot change the individual characters in a Java string, the documentation refers to the objects of the `String` class as *immutable*. Just as the number `3` is always 3, the string `"Hello"` will always contain the code-unit sequence for the characters `H`, `e`, `l`, `l`, `o`. You cannot change these values. Yet you can, as you just saw, change the contents of the string *variable* `greeting` and make it refer to a different string, just as you can make a numeric variable currently holding the value `3` hold the value `4`.

Isn't that a lot less efficient? It would seem simpler to change the characters than to build up a whole new string from scratch. Well, yes and no. Indeed, it is some amount of work to generate a new string that holds the concatenation of `"Hel"` and `"p!"`. But immutable strings have one great advantage: The compiler can arrange that strings are *shared*.

To understand how this works, think of the various strings as sitting in a common pool. String variables then point to locations in the pool. If you copy a string variable, both the original and the copy share the same characters.

Overall, the designers of Java decided that the efficiency of sharing outweighs the inefficiency of string creation. Look at your own programs; most of the time, you probably don't change strings—you just compare them. (There is one common exception—assembling strings from individual characters or from shorter strings that come from the keyboard or a file. For these situations, Java provides a separate class—see **Section 3.6.9**.)



C++ Note: C programmers are generally bewildered when they see Java strings for the first time because they think of strings as arrays of characters:

```
char greeting[] = "Hello";
```

That is a wrong analogy: A Java string is roughly analogous to a `char*` pointer,

```
char* greeting = "Hello";
```

When you replace `greeting` with another string, the Java code does roughly the following:

```
char* temp = malloc(6);
strncpy(temp, greeting, 3);
strncpy(temp + 3, "p!", 3);
greeting = temp;
```

Sure, now `greeting` points to the string `"Help!"`. And even the most hardened C programmer must admit that the Java syntax is more pleasant than a sequence of `strncpy` calls. But what if we make another assignment to `greeting`?

```
greeting = "Howdy";
```

Don't we have a memory leak? After all, the original string was allocated on the heap. Fortunately, Java does automatic garbage collection. If a block of memory is no longer needed, it will eventually be recycled.

If you are a C++ programmer and use the `string` class defined by ANSI C++, you will be much more comfortable with the Java `String` type. C++ `string` objects also perform automatic allocation and deallocation of memory. The memory management is performed explicitly by constructors, assignment operators, and destructors. However, C++ strings are mutable—you can modify individual characters in a string.

3.6.5. Testing Strings for Equality

To test whether two strings are equal, use the `equals` method. The expression

```
s.equals(t)
```

returns `true` if the strings `s` and `t` are equal, `false` otherwise. Note that `s` and `t` can be string variables or string literals. For example, the expression

```
"Hello".equals(greeting)
```

is perfectly legal. To test whether two strings are identical except for the upper/lowercase letter distinction, use the `equalsIgnoreCase` method.

```
"Hello".equalsIgnoreCase("hello")
```

Do *not* use the `==` operator to test whether two strings are equal! It only determines whether or not the strings are stored in the same location. Sure, if strings are in the same location, they must be equal. But it is entirely possible to store multiple copies of identical strings in different places.

```
String greeting = "Hello"; // initialize greeting to a string
greeting == "Hello" // true
greeting.substring(0, greeting.indexOf("l")) == "He" // false
greeting.substring(0, greeting.indexOf("l")).equals("He") // true
```

If the virtual machine always arranges for equal strings to be shared, then you could use the `==` operator for testing equality. But only string *literals* are shared, not strings that are computed at runtime. Therefore, *never* use `==` to compare strings. Always use `equals` instead.



C++ Note: If you are used to the C++ `string` class, you have to be particularly careful about equality testing. The C++ `string` class overloads the `==` operator to test for equality of the string contents. In Java, strings appear at first glance to be similar to numbers. They have literal values and the `+` operator, but they are actually objects. As you will see in the next chapter, the `==` operator always checks whether two objects are identical.

C programmers know never to use `==` to compare `char*` strings but use `strcmp` instead. The Java method `compareTo` is the exact analog of `strcmp`. You can use

```
if (greeting.compareTo("Hello") == 0) . . .
```

but it seems clearer to use `equals` instead.

3.6.6. Empty and Null Strings

The empty string `""` is a string of length 0. You can test whether a string is empty by calling

```
if (str.length() == 0)
```

or

```
if (str.equals(""))
```

or , for optimum efficiency

```
if (str.isEmpty())
```

An empty string is a Java object which holds the string length (namely, `0`) and an empty contents. However, a `String` variable can also hold a special value, called `null`, that indicates that no object is currently associated with the variable. To test whether a string is `null`, use

```
if (str == null)
```

Sometimes, you need to test that a string is neither `null` nor empty. Then use

```
if (str != null && str.length() != 0)
```

You need to test that `str` is not `null` first. As you will see in **Chapter 4**, it is an error to invoke a method on a `null` value.

3.6.7. The `String` API

The `String` class in Java contains close to 100 methods. The following API note summarizes the most useful ones.

These API notes, found throughout the book, will help you understand the Java Application Programming Interface (API). Each API note starts with the name of a class, such as `java.lang.String`. (The significance of the so-called *package* name `java.lang` is explained in **Chapter 4**.) The class name is followed by the names, explanations, and parameter descriptions of one or more methods. A *parameter variable* of a method is the variable that receives a method argument. For example, as you will see in the first API note below, the `charAt` method has a parameter called `index` of type `int`. If you call the method, you supply an argument of that type, such as `str.charAt(0)`.

The API notes do not list all methods of a particular class but present the most commonly used ones in a concise form. For a full listing, consult the online documentation (see **Section 3.6.8**).

The number following the class name is the JDK version number in which it was introduced. If a method has been added later, it has a separate version number.

`java.lang.String` **1.0**

- `char charAt(int index)`
  returns the code unit at the specified location. You probably don't want to call this method unless you are interested in low-level code units.
- `int length()`
  returns the number of code units of the string.
- `boolean equals(Object other)`
  returns `true` if the string equals `other`.
- `boolean equalsIgnoreCase(String other)`
  returns `true` if the string equals `other`, except for upper/lowercase distinction.
- `int compareTo(String other)`
  returns a negative value if the string comes before `other` in dictionary order, a positive value if the string comes after `other` in dictionary order, or `0` if the strings are equal.
- `boolean isEmpty()` **6**
  `boolean isBlank()` **11**
  return `true` if the string is empty or consists of whitespace.
- `boolean startsWith(String prefix)`
- `boolean endsWith(String suffix)`
  return `true` if the string starts with `prefix` or ends with `suffix`.
- `int indexOf(String str)`
- `int indexOf(String str, int fromIndex)`
- `int indexOf(String str, int fromIndex, int toIndex)` **21**
  return the start of the first substring equal to the string `str`, starting at index `0` or at `fromIndex`, and ending at the end of the string or at `toIndex`. Return `-1` if `str` does not occur in this string or the specified substring.
- `int lastIndexOf(String str)`
- `int lastIndexOf(String str, int fromIndex)`
  return the start of the last substring equal to the string `str`, starting at the end of the string or at `fromIndex`, or `-1` if `str` does not occur.
- `String replace(CharSequence oldString, CharSequence newString)`
  returns a new string that is obtained by replacing all substrings matching `oldString` in the string with the string `newString`. You can supply `String` or `StringBuilder` arguments for the `CharSequence` parameters.

- `String substring(int beginIndex)`
- `String substring(int beginIndex, int endIndex)`
  return a new string consisting of all code units from `beginIndex` until the end of the string or until `endIndex` – 1.
- `String toLowerCase()`
- `String toUpperCase()`
  return a new string containing all characters in the original string, with uppercase characters converted to lowercase, or lowercase characters converted to uppercase.
- `String strip()` **11**
  `String stripLeading()` **11**
  `String stripTrailing()` **11**
  return a new string by eliminating leading and trailing, or just leading or trailing whitespace in the original string. Use these methods instead of the archaic `trim` method that eliminates characters ≤ U+0020.
- `String join(CharSequence delimiter, CharSequence... elements)` **8**
  returns a new string joining all elements with the given delimiter.
- `String repeat(int count)` **11**
  returns a string that repeats this string `count` times.
- `String[] split(String regex)` **1.4**
  finds all matches of the regular expression and splits the string by removing them. Returns an array with the fragments, but not a trailing empty string.



Note: In the API notes, there are a few parameters of type `CharSequence`. This is an *interface* type to which all strings belong. You will learn about interface types in **Chapter 6**. For now, you just need to know that you can pass arguments of type `String` whenever you see a `CharSequence` parameter.

3.6.8. Reading the Online API Documentation

As you just saw, the `String` class has lots of methods. Furthermore, there are thousands of classes in the standard libraries, with many more methods. It is plainly impossible to remember all useful classes and methods. Therefore, it is essential that you become familiar with the online API documentation that lets you look up all classes and methods in the standard library. You can download the API documentation from Oracle and save it locally, or you can point your browser to **https://docs.oracle.com/en/java/javase/21/docs/api**.

The API documentation has a search box (see **Figure 3.2**). Older versions have frames with lists of packages and classes. You can still get those lists by clicking on the Frames menu item. For example, to get more information on the methods of the `String` class, type "String" into the search box and select the type `java.lang.String`, or locate the link in the frame with class names and click it. You get the class description, as shown in **Figure 3.3**.

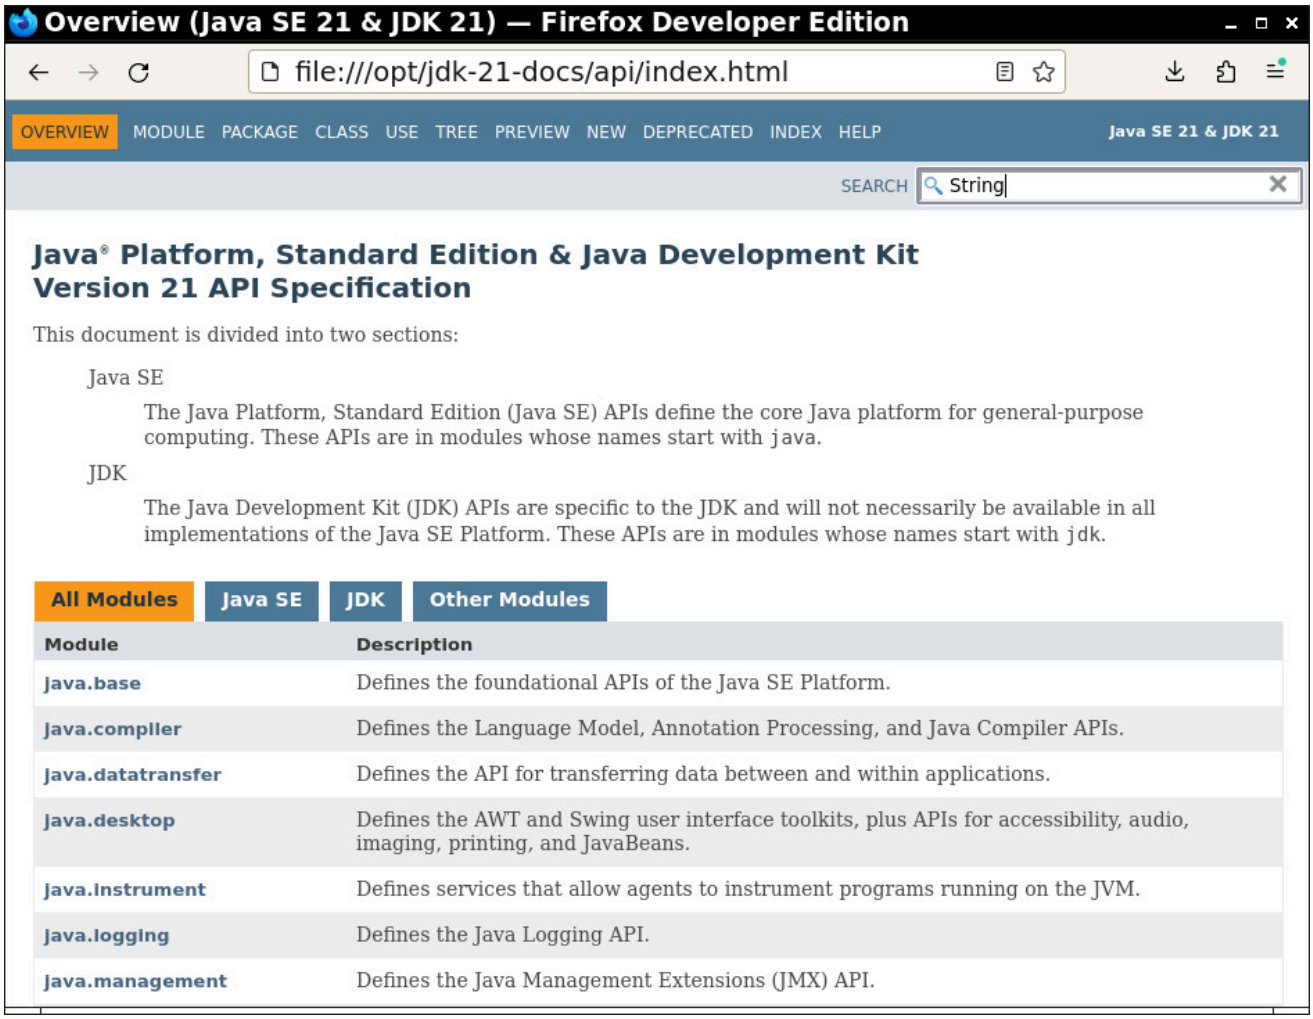


Figure 3.2: The Java API documentation

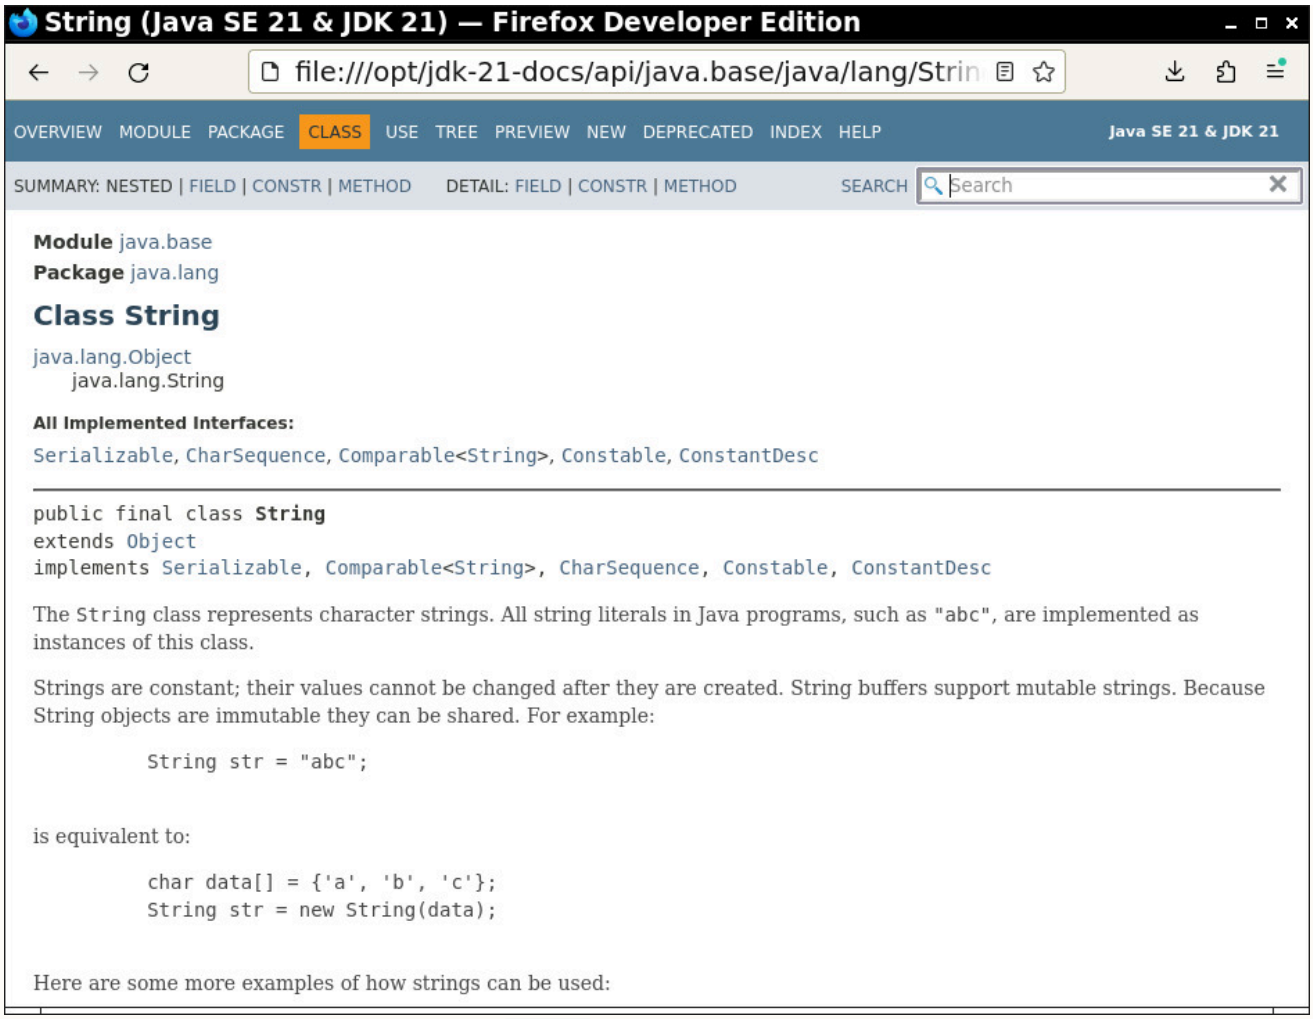


Figure 3.3: Class description for the `String` class

When you scroll down, you reach a summary of all methods, sorted in alphabetical order (see Figure 3.4). Click on any method name for a detailed description of that method (see Figure 3.5). For example, if you click on the compareToIgnoreCase link, you'll get the description of the `compareToIgnoreCase` method.

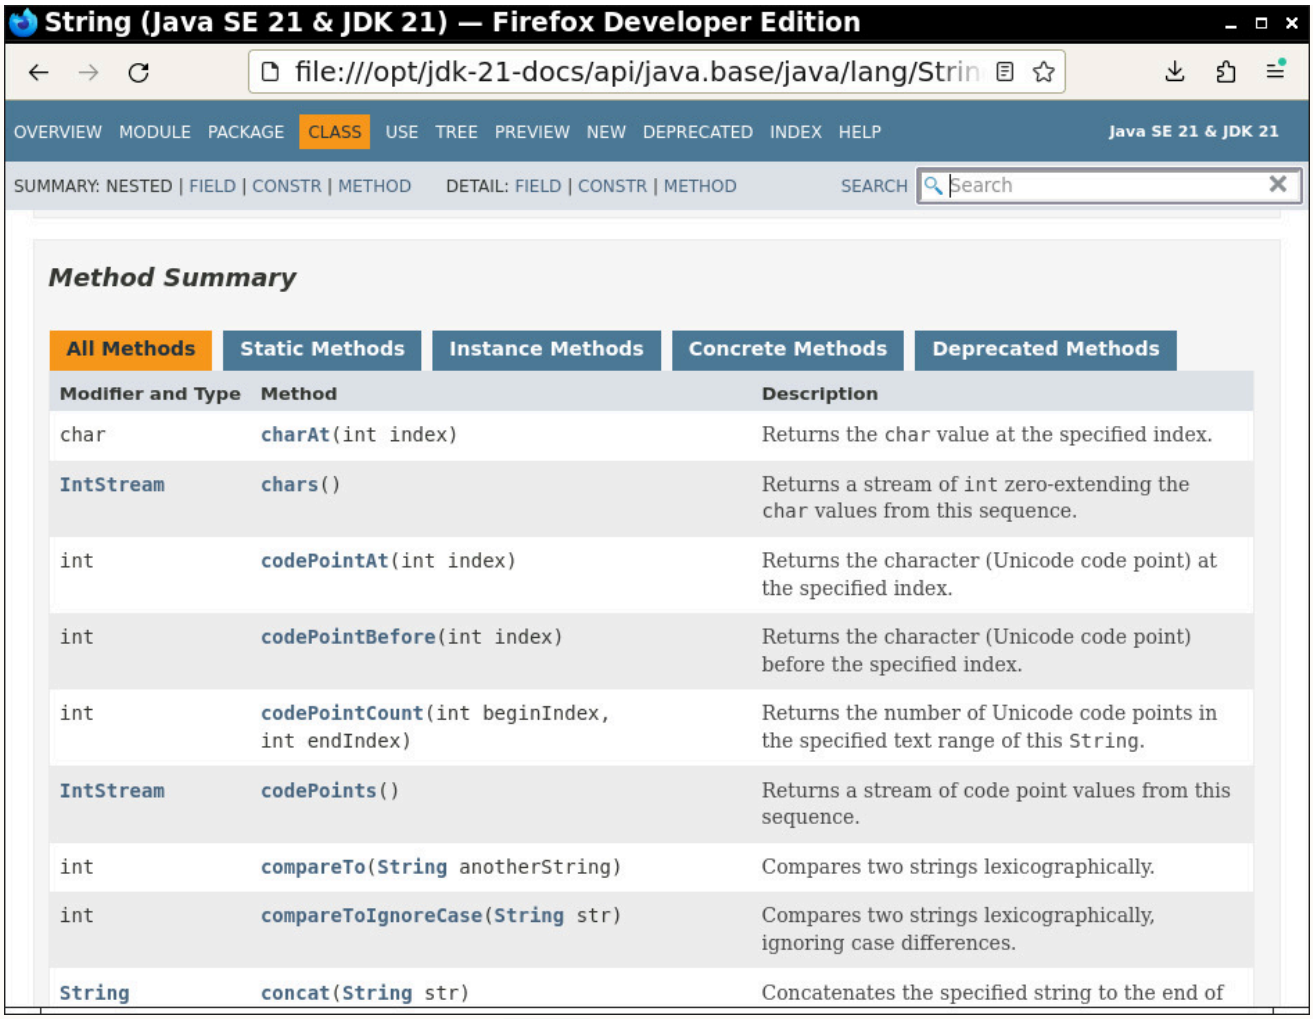


Figure 3.4: Method summary of the `String` class

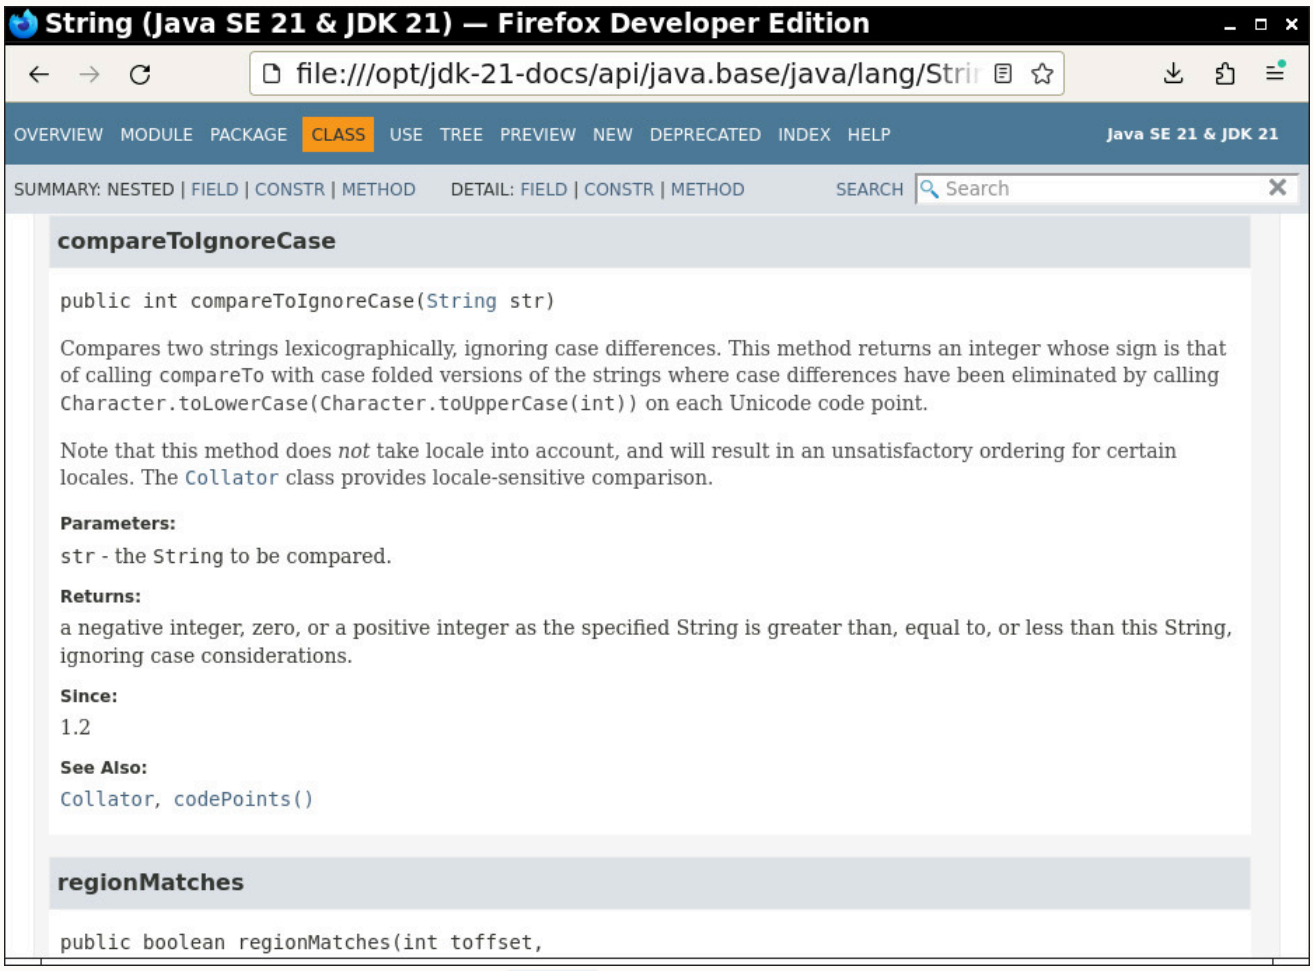


Figure 3.5: Detailed description of a `String` method



Tip: If you have not already done so, download the JDK documentation, as described in Chapter 2. Bookmark the `index.html` page of the documentation in your browser right now!

You can also add a new search engine to your browser with the query string

```
https://docs.oracle.com/en/java/javase/21/docs/api/search.html?q=%s
```

3.6.9. Building Strings

Occasionally, you need to build up strings from shorter strings, such as keystrokes or words from a file. It would be inefficient to use string concatenation for this purpose. Every time you concatenate strings, a new `String` object is constructed. This is time consuming and wastes memory. Using the `StringBuilder` class avoids this problem.

Follow these steps if you need to build a string from many small pieces. First, construct an empty string builder:

```
StringBuilder builder = new StringBuilder();
```

You can also provide initial content:

```
StringBuilder builder = new StringBuilder("INVOICE\n");
```

Each time you need to add another part, call the `append` method.

```
builder.append(str); // appends a string
builder.appendCodePoint(cp); // appends a single code point
```

The latter method is occasionally useful when you need to compute a code point. Here is an example. Flag emojis are made up of two code points, each in the range between 127462 (regional indicator symbol letter A) to 127487 (regional indicator symbol letter Z). Now suppose you have a country string such as `"IT"`. Then you can compute the code points as follows:

```
final int REGIONAL_INDICATOR_SYMBOL_LETTER_A = 127462;
String country = . . .;
builder.append(country.charAt(0) - 'A' + REGIONAL_INDICATOR_SYMBOL_LETTER_A);
builder.append(country.charAt(1) - 'A' + REGIONAL_INDICATOR_SYMBOL_LETTER_A);
```

When you are done building the string, call the `toString` method. You will get a `String` object with the character sequence contained in the builder.

```
String completedString = builder.toString();
```

Cleverly, the `StringBuilder` methods return the builder object, so that you can chain multiple method calls:

```
String completedString = new StringBuilder()
  .append(str)
  .appendCodePoint(cp)
  .toString();
```

The `String` class doesn't have a method to reverse the Unicode characters of a string, but `StringBuilder` does. To reverse a string, use this code snippet:

```
String reversed = new StringBuilder(original).reverse().toString();
```



Caution: Reversing works correctly for characters that are encoded with two `char` values, but it does not take grapheme clusters into account.



Note: The legacy `StringBuffer` class is less efficient than `StringBuilder`, but it allows multiple threads to add or remove characters. If all string editing happens in a single thread (which is usually the case), you should use `StringBuilder`. The APIs of both classes are identical.

The following API notes contain the most important methods for the `StringBuilder` class.

`java.lang.StringBuilder` **5.0**

- `StringBuilder()`
- `StringBuilder(CharSequence seq)`
  constructs an empty string builder, or one with the given initial content.
- `int length()`
  returns the number of code units of the builder or buffer.
- `StringBuilder append(String str)`
  appends a string and returns the string builder.
- `StringBuilder appendCodePoint(int cp)`
  appends a code point, converting it into one or two code units, and returns `this`.

- `StringBuilder insert(int offset, String str)`
  inserts a string at position `offset` and returns the string builder.
- `StringBuilder delete(int startIndex, int endIndex)`
  deletes the code units with offsets `startIndex` to `endIndex` – 1 and returns the string builder.
- `StringBuilder repeat(CharSequence cs, int count)` **21**
  Appends `count` copies of `cs` and returns the string builder.
- `StringBuilder reverse()`
  Reverses the code points in this string builder and returns the builder.
- `String toString()`
  returns a string with the same data as the builder or buffer contents.

3.6.10. Text Blocks

The text block feature, added in Java 15, makes it easy to provide string literals that span multiple lines. A text block starts with `"""`, followed by a line feed. The block ends with another `"""`:

```
String greeting = """
Hello
World
""";
```

A text block is easier to read and write than the equivalent string literal:

```
"Hello\nWorld\n"
```

This string contains two `\n`: one after `Hello` and one after `World`. The newline after the opening `"""` is not included in the string literal.

If you don't want a newline after the last line, put the closing `"""` immediately after the last character:

```
String prompt = """
Hello, my name is Hal.
Please enter your name:""";
```

Text blocks are particularly suited for including code in some other language, such as SQL or HTML. You can just paste it between the triple quotes:

```
String html = """
<div class="Warning">
  Beware of those who say "Hello" to the world
</div>
""";
```

Note that you don't have to escape the quotation marks. There are just two situations where you need to escape them:

- If the text block *ends* in a quotation mark
- If the text block contains a sequence of three or more quotation marks

Unfortunately, you still need to escape all backslashes.

All escape sequences from regular strings work the same way in text blocks.

There is one escape sequence that only works in text blocks. A `\` directly before the end of a line joins this line and the next. For example,

```
"""
Hello, my name is Hal. \
Please enter your name:""";
```

is the same as

```
"Hello, my name is Hal. Please enter your name:"
```

Line endings are normalized by removing trailing whitespace and changing any Windows line endings (`\r\n`) to simple newlines (`\n`). If you need to preserve trailing spaces, turn the last one into a `\s` escape. In fact, that's what you probably want for prompt strings. The following string ends in a space:

```
"""
Hello, my name is Hal. \
Please enter your name:\s""";
```

The story is more complex for leading whitespace. Consider a typical variable declaration that is indented from the left margin. You can indent the text block as well:

```
String html = """
  <div class="Warning">
    Beware of those who say "Hello" to the world
  </div>
  """;
```

The indentation that is common to all lines in the text block is subtracted. The actual string is

```
"<div class=\"Warning\">\n   Beware of those who say \"Hello\" to the world\n</div>\n"
```

Note that there are no indentations in the first and third line.

You can always avoid this indentation stripping by having no whitespace in the last line, before the closing `"""`. But many programmers seem to find that it looks neater when text blocks are indented. Your IDE may cheerfully offer to indent all text blocks, using tabs or spaces.

Java wisely does not prescribe the width of a tab. The whitespace prefix has to match *exactly* for all lines in the text block.

Entirely blank lines are not considered when stripping common indentation. However, the whitespace before the closing `"""` is significant. Be sure to indent to the end of the whitespace that you want to have stripped.



Caution: Be careful about mixed tabs and spaces in indentations. An overlooked space can easily yield a wrongly indented string.



Tip: If a text block contains code that isn't Java, you may actually prefer to place it at the left margin. It stands out from the Java code, and you have more room for long lines.

3.7. Input and Output

To make our example programs more interesting, we want to accept input and properly format the program output. Of course, modern programs use a GUI for collecting user input. However, programming such an interface requires more tools and techniques than we have at our disposal at this time. Our first order of business is to become more familiar with the Java programming language, so we use the humble console for input and output.

3.7.1. Reading Input

You saw that it is easy to print output to the "standard output stream" (that is, the console window) just by calling `System.out.println`. Reading from the "standard input stream" `System.in` isn't quite as simple. To read console input, you first construct a `Scanner` that is attached to `System.in`:

```
Scanner in = new Scanner(System.in);
```

(Constructors and the `new` operator are discussed in detail in **Chapter 4**.)

Now you can use the various methods of the `Scanner` class to read input. For example, the `nextLine` method reads a line of input.

```
System.out.print("What is your name? ");
String name = in.nextLine();
```

Here, we use the `nextLine` method because the input might contain spaces. To read a single word (delimited by whitespace), call

```
String firstName = in.next();
```

To read an integer, use the `nextInt` method.

```
System.out.print("How old are you? ");
int age = in.nextInt();
```

Similarly, the `nextDouble` method reads the next floating-point number.

The program in **Listing 3.2** asks for the user's name and age and then prints a message like

```
Hello, Cay. Next year, you'll be 65.
```

Finally, note the line

```
import java.util.*;
```

at the beginning of the program. The `Scanner` class is defined in the `java.util` package. Whenever you use a class that is not defined in the basic `java.lang` package, you need to use

an `import` directive. Packages and `import` directives are covered in more detail in **Chapter 4**.



Caution: You may run into trouble if you run this program from a terminal (by calling `java InputTest`), and you use Windows, and your name contains characters other than the 26 Roman upper- and lowercase characters (such as Bérengère or Ὀδυσσεύς). By default, Windows terminals use an archaic character encoding for `System.out`, but not for the `Scanner`. The result is garbled output. To fix this, switch the terminal to the UTF-8 encoding, by issuing the following terminal command prior to running the program:

```
chcp 65001
```

Then, if you use Java 18 or above, all will be well. With older versions of Java, run the program as:

```
java -Dfile.encoding=utf-8 InputTest
```

If you use a development environment, you should not have to worry about this issue.

Listing 3.2 InputTest/InputTest.java

```
1  import java.util.*;
2
3  /**
4   * This program demonstrates console input.
5   * @version 1.11 2023-08-26
6   * @author Cay Horstmann
7   */
8  public class InputTest
9  {
10   public static void main(String[] args)
11   {
12      Scanner in = new Scanner(System.in);
13
14      // get first input
15      System.out.print("What is your name? ");
16      String name = in.nextLine();
17
18      // get second input
19      System.out.print("How old are you? ");
20      int age = in.nextInt();
21
22      // display output on console
```

```
23      System.out.println("Hello, " + name + ". Next year, you'll be " + (age + 1) + ".");
24    }
25  }
```



Note: The `Scanner` class is not suitable for reading a password from a console since the input is plainly visible to anyone. Use the `readPassword` method of the `Console` class to read a password while hiding the user input:

```
Console cons = System.console();
String username = cons.readLine("User name: ");
char[] passwd = cons.readPassword("Password: ");
. . .
Arrays.fill(passwd, '*');
```

For security reasons, the password is returned in an array of characters rather than a string. After you are done processing the password, you should immediately overwrite the array elements with a filler value.

Input processing with a `Console` object is not as convenient as with a `Scanner`. You must read the input a line at a time. There are no methods for reading individual words or numbers.

`java.util.Scanner` **5.0**

- `Scanner(InputStream in)`
  constructs a `Scanner` object from the given input stream.
- `String nextLine()`
  reads the next line of input.
- `String next()`
  reads the next word of input (delimited by whitespace).
- `int nextInt()`
- `double nextDouble()`
  read and convert the next character sequence that represents an integer or floating-point number.
- `boolean hasNext()`
  tests whether there is another word in the input.
- `boolean hasNextInt()`
- `boolean hasNextDouble()`
  test whether the next character sequence represents an integer or floating-point number.

java.lang.System 1.0

- static Console console() 6
  returns a Console object for interacting with the user through a console window if such interaction is possible, null otherwise. A Console object is available for any program that is launched in a console window. Otherwise, the availability is system-dependent.

java.io.Console 6

- char[] readPassword(String prompt, Object... args)
- String readLine(String prompt, Object... args)
  display the prompt and read the user input until the end of the input line. The optional args parameters are used to supply formatting arguments, as described in the next section.

3.7.2. Formatting Output

You can print a number x to the console with the statement System.out.print(x). That command will print x with the maximum number of nonzero digits for that type. For example,

```
double x = 10000.0 / 3.0;
System.out.print(x);
```

prints

```
3333.3333333333335
```

That is a problem if you want to display, for example, dollars and cents.

The remedy is the printf method, which follows the venerable conventions from the C library. For example, the call

```
System.out.printf("%8.2f", x);
```

prints x with a *field width* of 8 characters and a *precision* of 2 characters. That is, the printout contains a leading space and the seven characters

```
3333.33
```

You can supply multiple arguments to `printf`. For example:

```
System.out.printf("Hello, %s. Next year, you'll be %d.", name, age + 1);
```

Each of the *format specifiers* that start with a `%` character is replaced with the corresponding argument. The *conversion character* that ends a format specifier indicates the type of the value to be formatted: `f` is a floating-point number, `s` a string, and `d` a decimal integer. **Table 3.6** shows all conversion characters.

The uppercase variants produce uppercase letters. For example, `"%8.2E"` formats 3333.33 as `3.33E+03`, with an uppercase `E`.

Table 3.6: Conversions for `printf`

Conversion Character	Type	Example
`d`	Decimal integer	`159`
`x` or `X`	Hexadecimal integer. For more control over hexadecimal formatting, use the `HexFormat` class.	`9f`
`o`	Octal integer	`237`
`f` or `F`	Fixed-point floating-point	`15.9`
`e` or `E`	Exponential floating-point	`1.59e+01`
`g` or `G`	General floating-point (the shorter of `e` and `f`)	—
`a` or `A`	Hexadecimal floating-point	`0x1.fccdp3`
`s` or `S`	String	`Hello`
`c` or `C`	Character	`H`
`b` or `B`	boolean	`true`

Conversion Character	Type	Example
`h` or `H`	Hash code	`42628b2`
`tx` or `Tx`	Legacy date and time formatting. Use the `java.time` classes instead—see **Chapter 6 of Volume II**.	—
`%`	The percent symbol	`%`
`n`	The platform-dependent line separator	—



Note: You can use the `s` conversion to format arbitrary objects. If an arbitrary object implements the `Formattable` interface, the object's `formatTo` method is invoked. Otherwise, the `toString` method is invoked to turn the object into a string. The `toString` method is discussed in **Chapter 5** and interfaces in **Chapter 6**.

In addition, you can specify *flags* that control the appearance of the formatted output. **Table 3.7** shows all flags. For example, the comma flag adds group separators. That is,

```
System.out.printf("%,.2f", 10000.0 / 3.0);
```

prints

```
3,333.33
```

You can use multiple flags, for example `"%,(.2f"` to use group separators and enclose negative numbers in parentheses.

Table 3.7: Flags for `printf`

Flag	Purpose	Example
`+`	Prints sign for positive and negative numbers.	`+3333.33`
space	Adds a space before positive numbers.	`| 3333.33|`
`0`	Adds leading zeroes.	`003333.33`

Flag	Purpose	Example
-	Left-justifies field.	|3333.33 |
(	Encloses negative numbers in parentheses.	(3333.33)
,	Adds group separators.	3,333.33
# (for f format)	Always includes a decimal point.	3,333.
# (for x or o format)	Adds 0x or 0 prefix.	0xcafe
$	Specifies the index of the argument to be formatted. For example, %1$d %1$x prints the first argument in decimal and hexadecimal.	159 9F
<	Formats the same value as the previous specification. For example, %d %<x prints the same number in decimal and hexadecimal.	159 9F

You can use the static String.format method to create a formatted string without printing it:

```
String message = String.format("Hello, %s. Next year, you'll be %d.", name, age + 1);
```



Note: As of Java 15, you can use the formatted method instead, saving you five characters:

```
String message = "Hello, %s. Next year, you'll be %d.".formatted(name, age + 1);
```

You have now seen all features of the printf method. Figure 3.6 shows a syntax diagram for format specifiers.

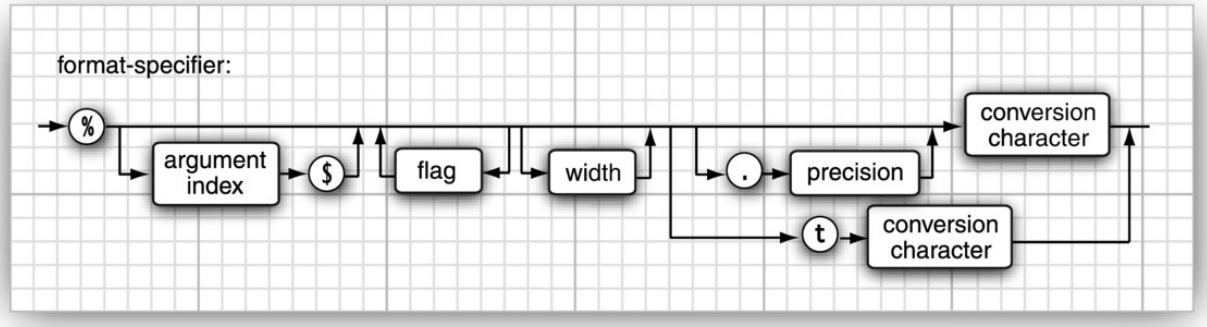


Figure 3.6: Format specifier syntax



Note: Formatting is *locale-specific*. For example, in Germany, the group separator is a period, not a comma. On a computer with a German locale, the call

```
double x = 10000.0 / 3.0;
System.out.printf("%8.2f", x);
```

yields the output

```
 3333,33
```

This locale-specific behavior is normally what you want when you communicate with users. However, if you produce a file that is later consumed by a computer program, you may need to choose a fixed locale for the output. Specify the locale as the first argument to `printf`:

```
System.out.printf(Locale.US, "%8.2f", x);
```

3.7.3. File Input and Output

To read from a file, construct a `Scanner` object like this:

```
Scanner in = new Scanner(Path.of("myfile.txt"));
```

If the file name contains backslashes, remember to escape each of them with an additional backslash: `"c:\\mydirectory\\myfile.txt"`.

Now you can read from the file, using any of the `Scanner` methods that you already encountered.



Note: Files store bytes, not Unicode characters. As you have seen in Section 3.3.4, there is more than one way of representing Unicode characters as bytes. By far the most commonly used character encoding is called UTF-8. In this book, all text files are assumed to use UTF-8. As of Java 18, this is the default encoding for all operations that read and write text. In older versions, the "default charset" of the computer running the Java program was used. That is not a good idea—the program might act differently depending on where it is run. If you use an older version of Java, always specify the character encoding:

```
Scanner in = new Scanner(Path.of("myfile.txt"), StandardCharsets.UTF_8);
```



Caution: You can construct a `Scanner` with a string argument, but the scanner interprets the string as data, not a file name. For example, if you call

```
Scanner in = new Scanner("myfile.txt"); // ERROR?
```

then the scanner will see ten characters of data: `'m'`, `'y'`, `'f'`, and so on. That is probably not what was intended in this case.

To write to a file, construct a `PrintWriter` object. In the constructor, supply the file name as a string:

```
PrintWriter out = new PrintWriter("myfile.txt");
```

If the file does not exist, it is created. You can use the `print`, `println`, and `printf` commands as you did when printing to `System.out`.



Note: When you specify a relative file name, such as `"myfile.txt"`, `"mydirectory/myfile.txt"`, or `"../myfile.txt"`, the file is located relative to the directory in which the Java virtual machine was started. If you launched your program from a command shell, by executing

```
java MyProg
```

then the starting directory is the current directory of the command shell. However, if you use an integrated development environment, it controls the starting directory. You can find the directory location with this call:

```
String dir = System.getProperty("user.dir");
```

If you run into grief with locating files, consider using absolute path names such as `"c:\\mydirectory\\myfile.txt"` or `"/home/me/mydirectory/myfile.txt"`.



Note: Prior to Java 18, you had to set the character encoding explicitly to UTF-8:

```
PrintWriter out = new PrintWriter("myfile.txt", StandardCharsets.UTF_8);
```

As you saw, you can access files just as easily as you can use `System.in` and `System.out`. There is just one catch: If you construct a `Scanner` with a file that does not exist or a `PrintWriter` with a file name that cannot be created, an exception occurs. The Java compiler considers these exceptions to be more serious than a "divide by zero" exception, for example. In **Chapter 7**, you will learn various ways of handling exceptions. For now, you should simply tell the compiler that you are aware of the possibility of an "input/output" exception. You do this by tagging the `main` method with a `throws` clause, like this:

```
public static void main(String[] args) throws IOException
{
  Scanner in = new Scanner(Path.of("myfile.txt"));
  . . .
}
```

You have now seen how to read and write files that contain textual data. For more advanced topics, such as dealing with different character encodings, processing binary data, reading directories, and writing zip files, turn to **Chapter 2 of Volume II**.



Note: If you dislike the exception declaration, read from `System.in` and write to `System.out`, as in the preceding sections. Then launch your program from a command shell, using the redirection syntax of your shell:

```
java MyProg < myfile.txt > output.txt
```

java.util.Scanner 5.0

- Scanner(Path p) 7
- Scanner(Path p, Charset charset) 10
  constructs a Scanner that reads data from the given path, using the default or given character encoding.
- Scanner(String data)
  constructs a Scanner that reads data from the given string.

java.io.PrintWriter 1.1

- PrintWriter(String fileName)
- PrintWriter(String fileName, Charset charset) 10
  constructs a PrintWriter that writes data to the file with the given file name, using the default or given character encoding.

java.nio.file.Path 7

- static Path of(String pathname) 11
  constructs a Path from the given path name.

3.8. Control Flow

Java, like any programming language, supports both conditional statements and loops to determine control flow. I will start with the conditional statements, then move on to loops, to end with a thorough discussion of the four forms of switch.



C++ Note: The Java control flow constructs are identical to those in C and C++, with a few exceptions. There is no goto, but there is a "labeled" version of break that you can use to break out of a nested loop (where, in C, you perhaps would have used a goto). Finally, there is a variant of the for loop that is similar to the range-based for loop in C++ and the foreach loop in C#.

3.8.1. Block Scope

Before learning about control structures, you need to know more about *blocks*.

A block, or compound statement, consists of a number of Java statements, surrounded by a pair of braces. Blocks define the scope of your variables. A block can be *nested* inside another block. Here is a block that is nested inside the block of the main method:

```
public static void main(String[] args)
{
  int n;
  . . .
  {
    int k;
    . . .
  } // k is only defined up to here
}
```

You may not declare identically named local variables in two nested blocks. For example, the following is an error and will not compile:

```
public static void main(String[] args)
{
  int n;
  . . .
  {
    int k;
    int n; // ERROR--can't redeclare n in inner block
    . . .
  }
}
```



C++ Note: In C++, it is possible to redefine a variable inside a nested block. The inner definition then shadows the outer one. This can be a source of programming errors; hence, Java does not allow it.

3.8.2. Conditional Statements

The conditional statement in Java has the form

```
if (condition) statement
```

The condition must be surrounded by parentheses.

In Java, as in most programming languages, you will often want to execute multiple statements when a single condition is `true`. In this case, use a *block statement* that takes the form

```
{
  statement1
  statement2
  . . .
}
```

For example:

```
if (yourSales >= target)
{
  performance = "Satisfactory";
  bonus = 100;
}
```

In this code all the statements surrounded by the braces will be executed when `yourSales` is greater than or equal to `target` (see **Figure 3.7**).

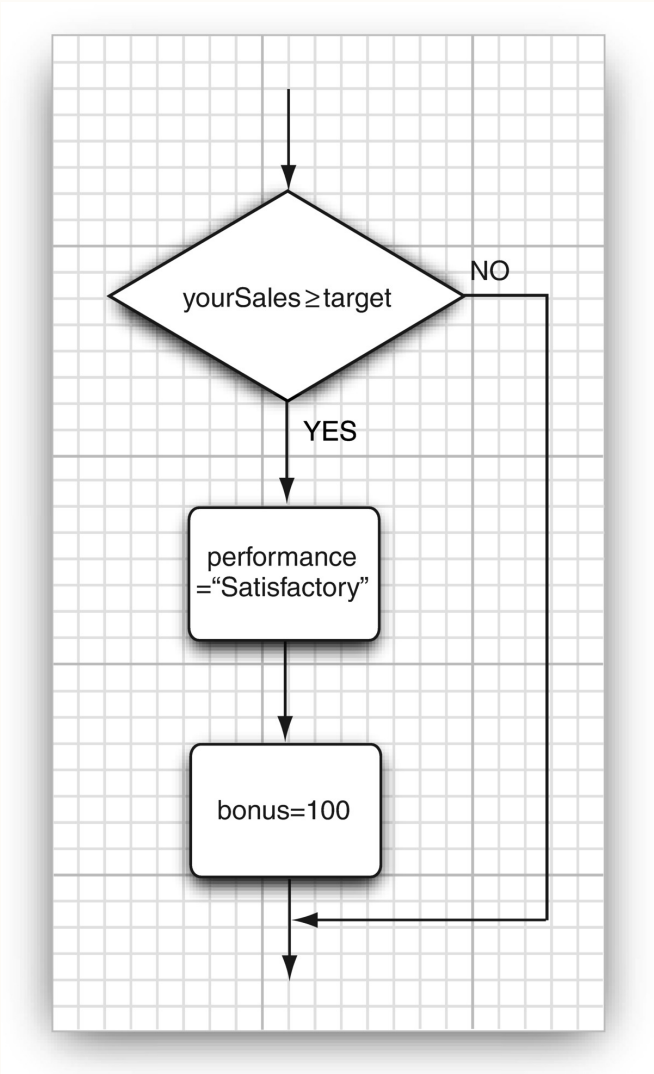


Figure 3.7: Flowchart for the `if` statement



Note: A block (sometimes called a *compound statement*) enables you to have more than one (simple) statement in any Java programming structure that otherwise allows for a single (simple) statement.

The more general conditional in Java looks like this (see **Figure 3.8**):

```
if (condition) statement1 else statement2
```

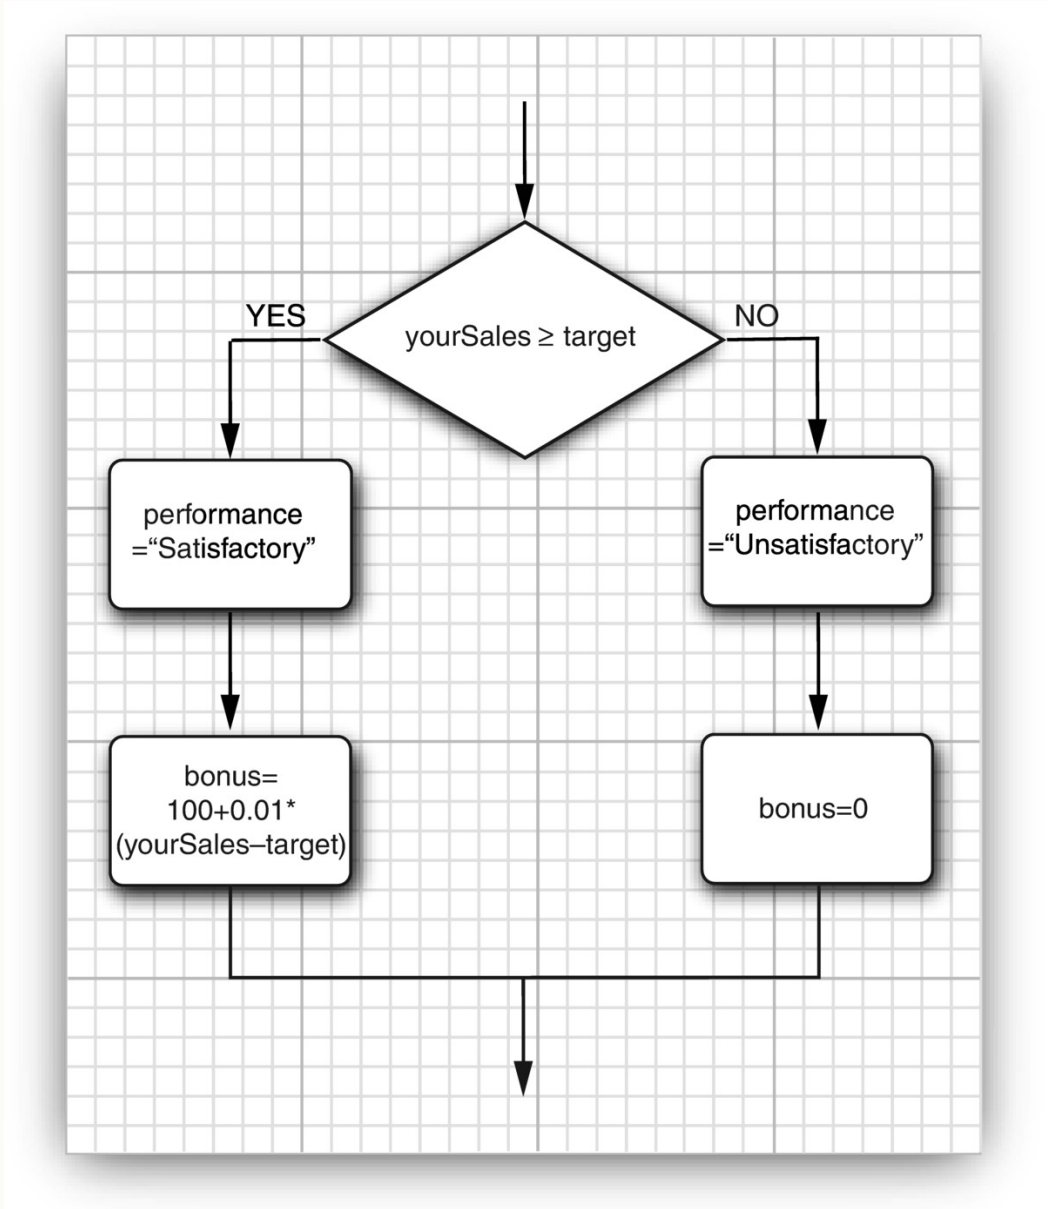


Figure 3.8: Flowchart for the `if` / `else` statement

For example:

```
if (yourSales >= target)
{
  performance = "Satisfactory";
  bonus = 100 + 0.01 * (yourSales - target);
}
```

```
else
{
   performance = "Unsatisfactory";
   bonus = 0;
}
```

The `else` part is always optional. An `else` groups with the closest `if`. Thus, in the statement

```
if (x <= 0) if (x == 0) sign = 0; else sign = -1;
```

the `else` belongs to the second `if`. Of course, it is a good idea to use braces to clarify this code:

```
if (x <= 0) { if (x == 0) sign = 0; else sign = -1; }
```

Repeated `if . . . else if . . .` alternatives are common (see **Figure 3.9**). For example:

```
if (yourSales >= 2 * target)
{
   performance = "Excellent";
   bonus = 1000;
}
else if (yourSales >= 1.5 * target)
{
   performance = "Fine";
   bonus = 500;
}
else if (yourSales >= target)
{
   performance = "Satisfactory";
   bonus = 100;
}
else
{
   System.out.println("You're fired");
}
```

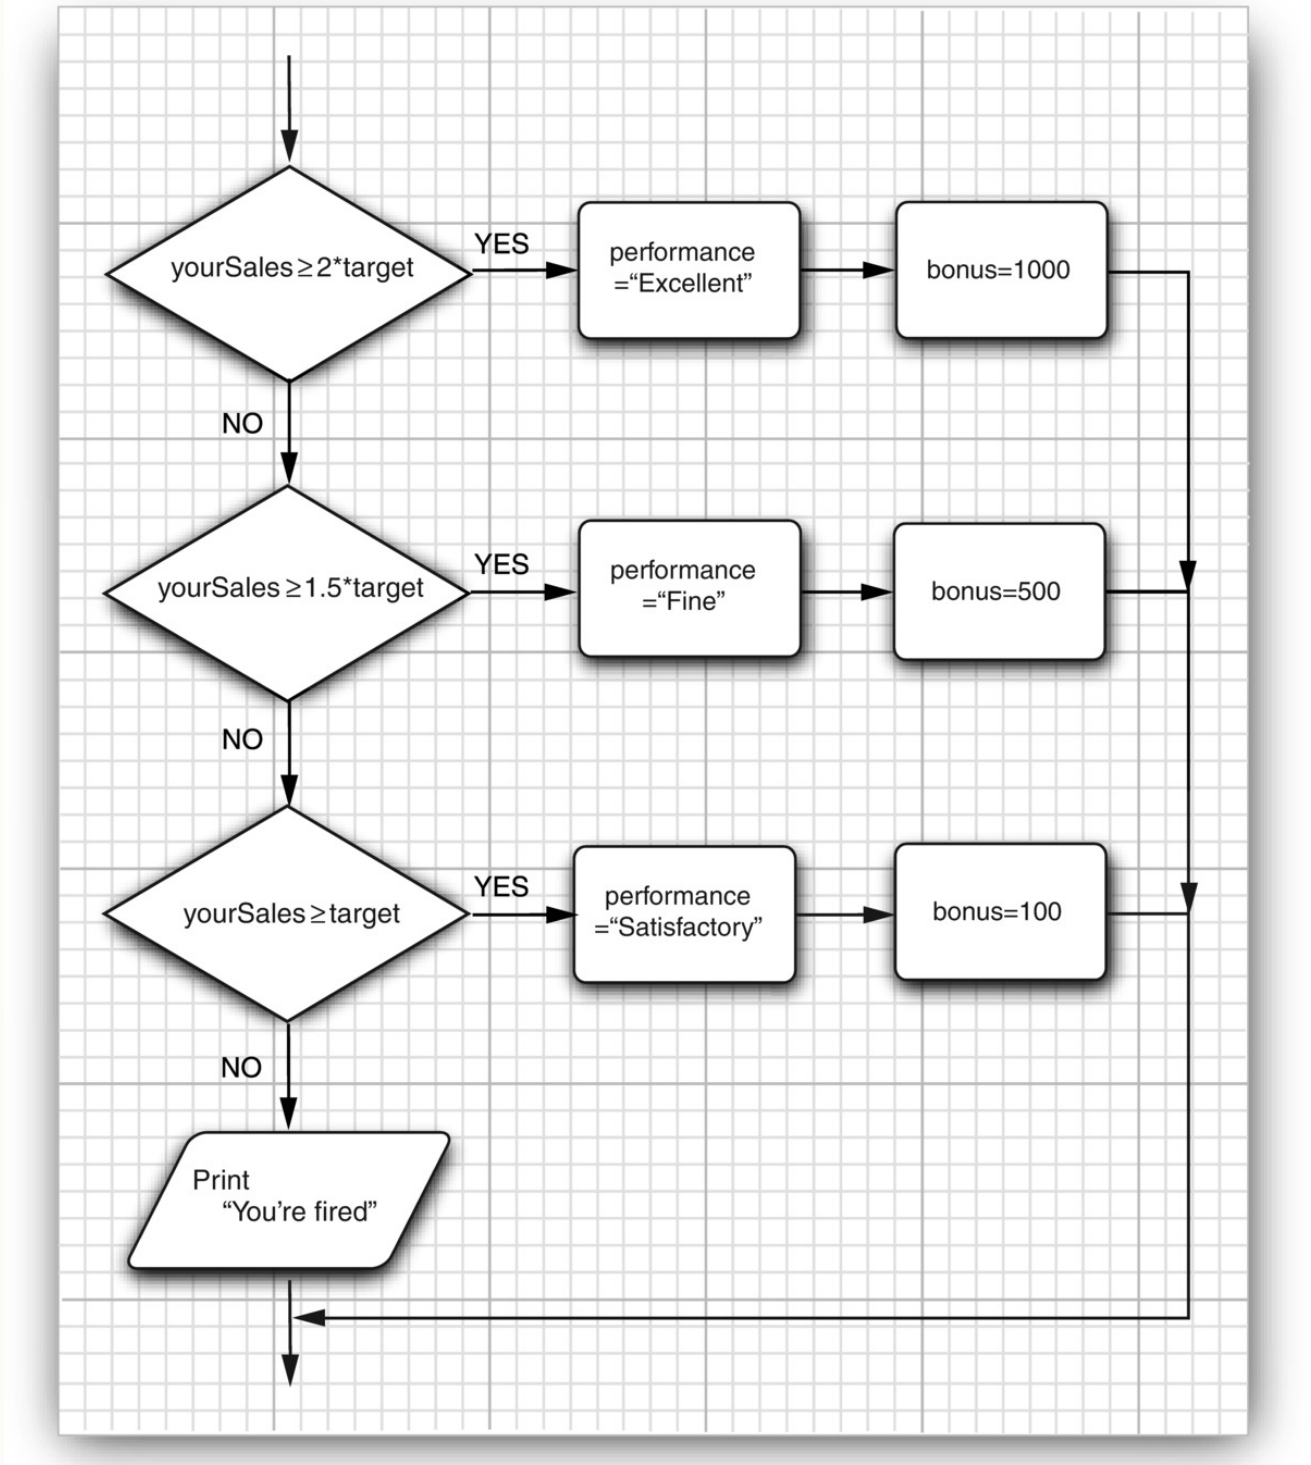


Figure 3.9: Flowchart for the `if` / `else if` (multiple branches)

3.8.3. Loops

The `while` loop executes a statement (which may be a block statement) while a condition is `true`. The general form is

```
while (condition) statement
```

The `while` loop will never execute if the condition is `false` at the outset (see **Figure 3.10**).

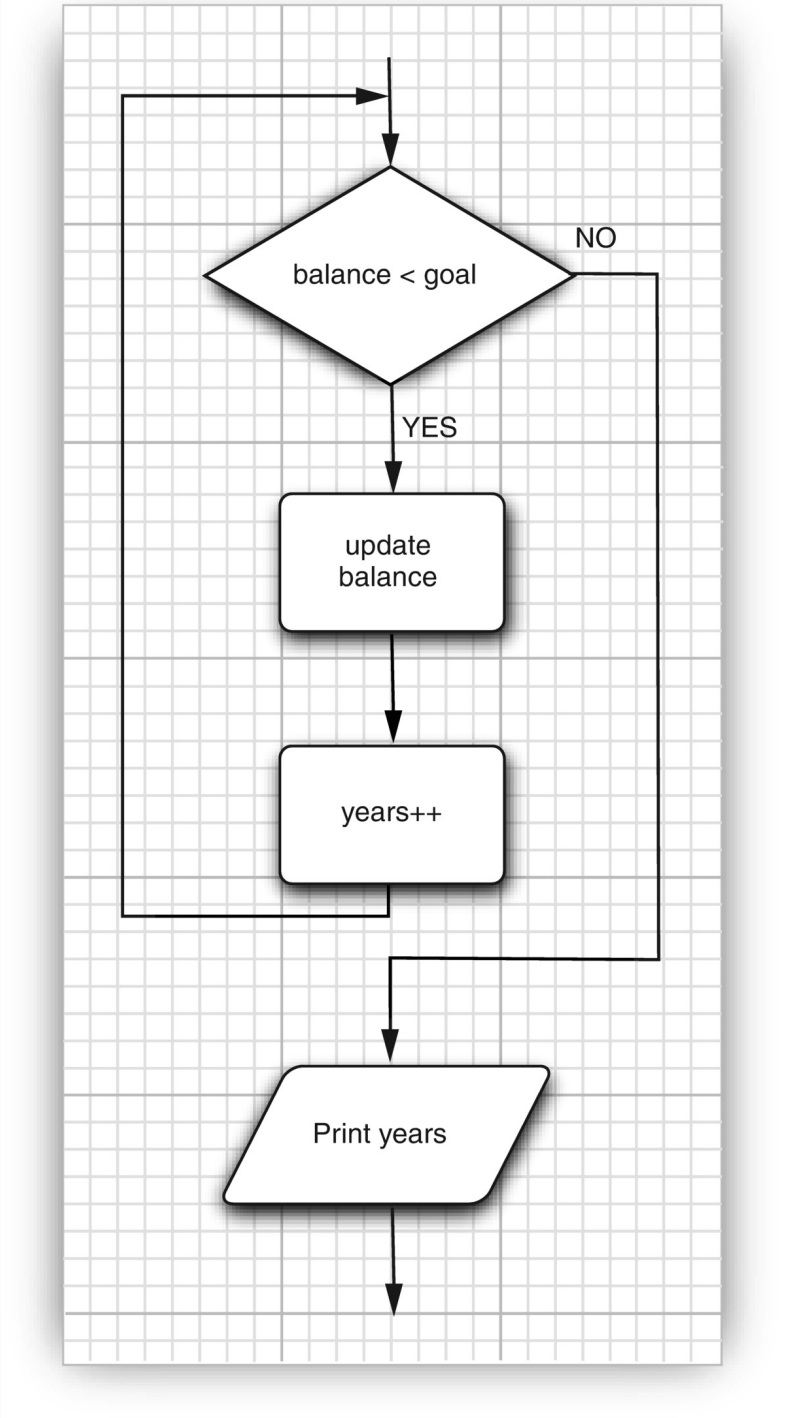


Figure 3.10: Flowchart for the `while` statement

The program in **Listing 3.3** determines how long it will take to save a specific amount of money for your well-earned retirement, assuming you deposit the same amount of money per year and the money earns a specified interest rate.

In the example, we are incrementing a counter and updating the amount currently accumulated in the body of the loop until the total exceeds the targeted amount.

```
while (balance < goal)
{
  balance += payment;
  double interest = balance * interestRate / 100;
  balance += interest;
```

```
  years++;
}
System.out.println(years + " years.");
```

(Don't rely on this program to plan for your retirement. It lacks a few niceties such as inflation and your life expectancy.)

A `while` loop tests at the top. Therefore, the code in the block might never be executed. If you want to make sure a block is executed at least once, you need to move the test to the bottom, using the `do` / `while` loop. Its syntax looks like this:

```
do statement while (condition);
```

This loop executes the statement (which is typically a block) and only then tests the condition. If it's `true`, it repeats the statement and retests the condition, and so on. The code in **Listing 3.4** computes the new balance in your retirement account and then asks if you are ready to retire:

```
do
{
  balance += payment;
  double interest = balance * interestRate / 100;
  balance += interest;
  years++;
  // print current balance
  . . .
  // ask if ready to retire and get input
  . . .
}
while (input.equals("N"));
```

As long as the user answers `"N"`, the loop is repeated (see **Figure 3.11**). This program is a good example of a loop that needs to be entered at least once, because the user needs to see the balance before deciding whether it is sufficient for retirement.

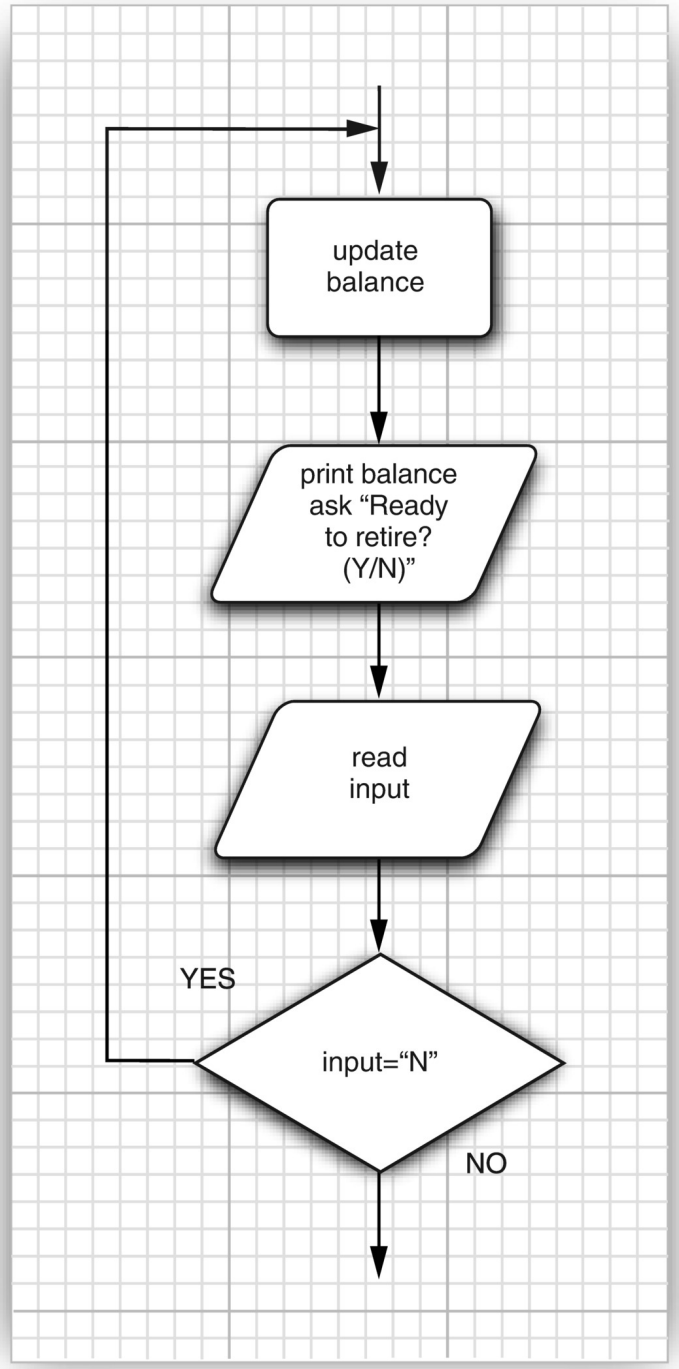


Figure 3.11: Flowchart for the `do` / `while` statement

Listing 3.3 Retirement/Retirement.java

```
1  import java.util.*;
2
3  /**
4   * This program demonstrates a <code>while</code> loop.
5   * @version 1.20 2004-02-10
6   * @author Cay Horstmann
7   */
8  public class Retirement
9  {
10   public static void main(String[] args)
```

```
  {
    // read inputs
    Scanner in = new Scanner(System.in);

    System.out.print("How much money do you need to retire? ");
    double goal = in.nextDouble();

    System.out.print("How much money will you contribute every year? ");
    double payment = in.nextDouble();

    System.out.print("Interest rate in %: ");
    double interestRate = in.nextDouble();

    double balance = 0;
    int years = 0;

    // update account balance while goal isn't reached
    while (balance < goal)
    {
      // add this year's payment and interest
      balance += payment;
      double interest = balance * interestRate / 100;
      balance += interest;
      years++;
    }

    System.out.println("You can retire in " + years + " years.");
  }
}
```

Listing 3.4 Retirement2/Retirement2.java

```
import java.util.*;

/**
 * This program demonstrates a <code>do/while</code> loop.
 * @version 1.20 2004-02-10
 * @author Cay Horstmann
 */
public class Retirement2
{
  public static void main(String[] args)
  {
    Scanner in = new Scanner(System.in);

    System.out.print("How much money will you contribute every year? ");
```

```
15      double payment = in.nextDouble();
16
17      System.out.print("Interest rate in %: ");
18      double interestRate = in.nextDouble();
19
20      double balance = 0;
21      int year = 0;
22
23      String input;
24
25      // update account balance while user isn't ready to retire
26      do
27      {
28        // add this year's payment and interest
29        balance += payment;
30        double interest = balance * interestRate / 100;
31        balance += interest;
32
33        year++;
34
35        // print current balance
36        System.out.printf("After year %d, your balance is %,.2f%n", year, balance);
37
38        // ask if ready to retire and get input
39        System.out.print("Ready to retire? (Y/N) ");
40        input = in.next();
41      }
42      while (input.equals("N"));
43    }
44  }
```

3.8.4. Determinate Loops

The `for` loop is a general construct to support iteration controlled by a counter or similar variable that is updated after every iteration. As **Figure 3.12** shows, the following loop prints the numbers from 1 to 10 on the screen:

```
for (int i = 1; i <= 10; i++)
  System.out.println(i);
```

The first slot of the `for` statement usually holds the counter initialization. The second slot gives the condition that will be tested before each new pass through the loop, and the third slot specifies how to update the counter.

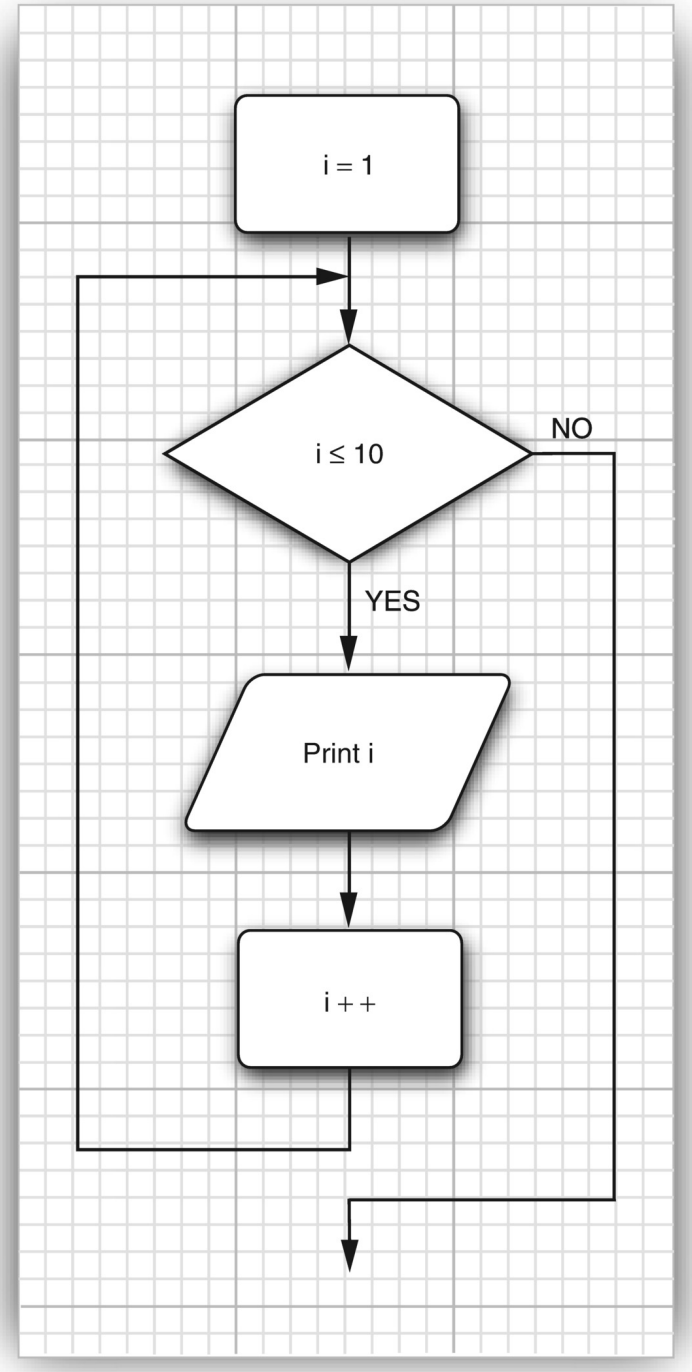


Figure 3.12: Flowchart for the `for` statement

Although Java, like C++, allows almost any expression in the various slots of a `for` loop, it is an unwritten rule of good taste that the three slots should only initialize, test, and update the same counter variable. One can write very obscure loops by disregarding this rule.

Even within the bounds of good taste, much is possible. For example, you can have loops that count down:

```
for (int i = 10; i > 0; i--)
   System.out.println("Counting down . . . " + i);
System.out.println("Blastoff!");
```



Caution: Be careful with testing for equality of floating-point numbers in loops. A `for` loop like this one

```
for (double x = 0; x != 10; x += 0.1) . . .
```

might never end. Because of roundoff errors, the final value might not be reached exactly. In this example, `x` jumps from `9.99999999999998` to `10.09999999999998` because there is no exact binary representation for `0.1`.

When you declare a variable in the first slot of the `for` statement, the scope of that variable extends until the end of the body of the `for` loop.

```
for (int i = 1; i <= 10; i++)
{
   . . .
}
// i no longer defined here
```

In particular, if you define a variable inside a `for` statement, you cannot use its value outside the loop. Therefore, if you wish to use the final value of a loop counter outside the `for` loop, be sure to declare it outside the loop header.

```
int i;
for (i = 1; i <= 10; i++)
{
   . . .
}
// i is still defined here
```

On the other hand, you can define variables with the same name in separate `for` loops:

```
for (int i = 1; i <= 10; i++)
{
   . . .
}
. . .
for (int i = 11; i <= 20; i++) // OK to define another variable named i
{
   . . .
}
```

A `for` loop is merely a convenient shortcut for a `while` loop. For example,

```
for (i = 10; i > 0; i--)
  System.out.println("Counting down . . . " + i);
```

can be rewritten as follows:

```
i = 10;
while (i > 0)
{
  System.out.println("Counting down . . . " + i);
  i--;
}
```

The first slot of a `for` loop can declare multiple variables, provided they are of the same type. And the third slot can contain multiple comma-separated expressions:

```
for (int i = 1, j = 10; i <= 10; i++, j--) { ... }
```

While technically legal, this stretches the intuitive meaning of the `for` loop, and you should consider a `while` loop instead.

Listing 3.5 shows a typical example of a `for` loop.

The program computes the odds of winning a lottery. For example, if you must pick six numbers from the numbers 1 to 50 to win, then there are (50 × 49 × 48 × 47 × 46 × 45)/(1 × 2 × 3 × 4 × 5 × 6) possible outcomes, so your chance is 1 in 15,890,700. Good luck!

In general, if you pick k numbers out of n, there are

$$\frac{n \times (n-1) \times (n-2) \times \cdots \times (n-k+1)}{1 \times 2 \times 3 \times 4 \times \cdots \times k}$$

possible outcomes. The following `for` loop computes this value:

```
int lotteryOdds = 1;
for (int i = 1; i <= k; i++)
  lotteryOdds = lotteryOdds * (n - i + 1) / i;
```



Note: **Section 3.10.3** describes the "generalized `for` loop" (also called "for each" loop)

that makes it convenient to visit all elements of an array or collection.

Listing 3.5 LotteryOdds/LotteryOdds.java

```
1  import java.util.*;
2
3  /**
4   * This program demonstrates a <code>for</code> loop.
5   * @version 1.20 2004-02-10
6   * @author Cay Horstmann
7   */
8  public class LotteryOdds
9  {
10   public static void main(String[] args)
11   {
12     Scanner in = new Scanner(System.in);
13
14     System.out.print("How many numbers do you need to draw? ");
15     int k = in.nextInt();
16
17     System.out.print("What is the highest number you can draw? ");
18     int n = in.nextInt();
19
20     /*
21      * compute binomial coefficient n*(n-1)*(n-2)*...*(n-k+1)/(1*2*3*...*k)
22      */
23
24     int lotteryOdds = 1;
25     for (int i = 1; i <= k; i++)
26       lotteryOdds = lotteryOdds * (n - i + 1) / i;
27
28     System.out.println("Your odds are 1 in " + lotteryOdds + ". Good luck!");
29   }
30 }
```

3.8.5. Multiple Selections with `switch`

The `if` / `else` construct can be cumbersome when you have to deal with multiple alternatives for the same expression. The `switch` statement makes this easier, particularly with the form that has been introduced in Java 14.

For example, if you set up a menu system with four alternatives like that in **Figure 3.13**, you could use code that looks like this:

```
Scanner in = new Scanner(System.in);
System.out.print("Select an option (1, 2, 3, 4) ");
int choice = in.nextInt();
switch (choice)
{
  case 1 ->
    . . .
  case 2 ->
    . . .
  case 3 ->
    . . .
  case 4 ->
    . . .
  default ->
    System.out.println("Bad input");
}
```

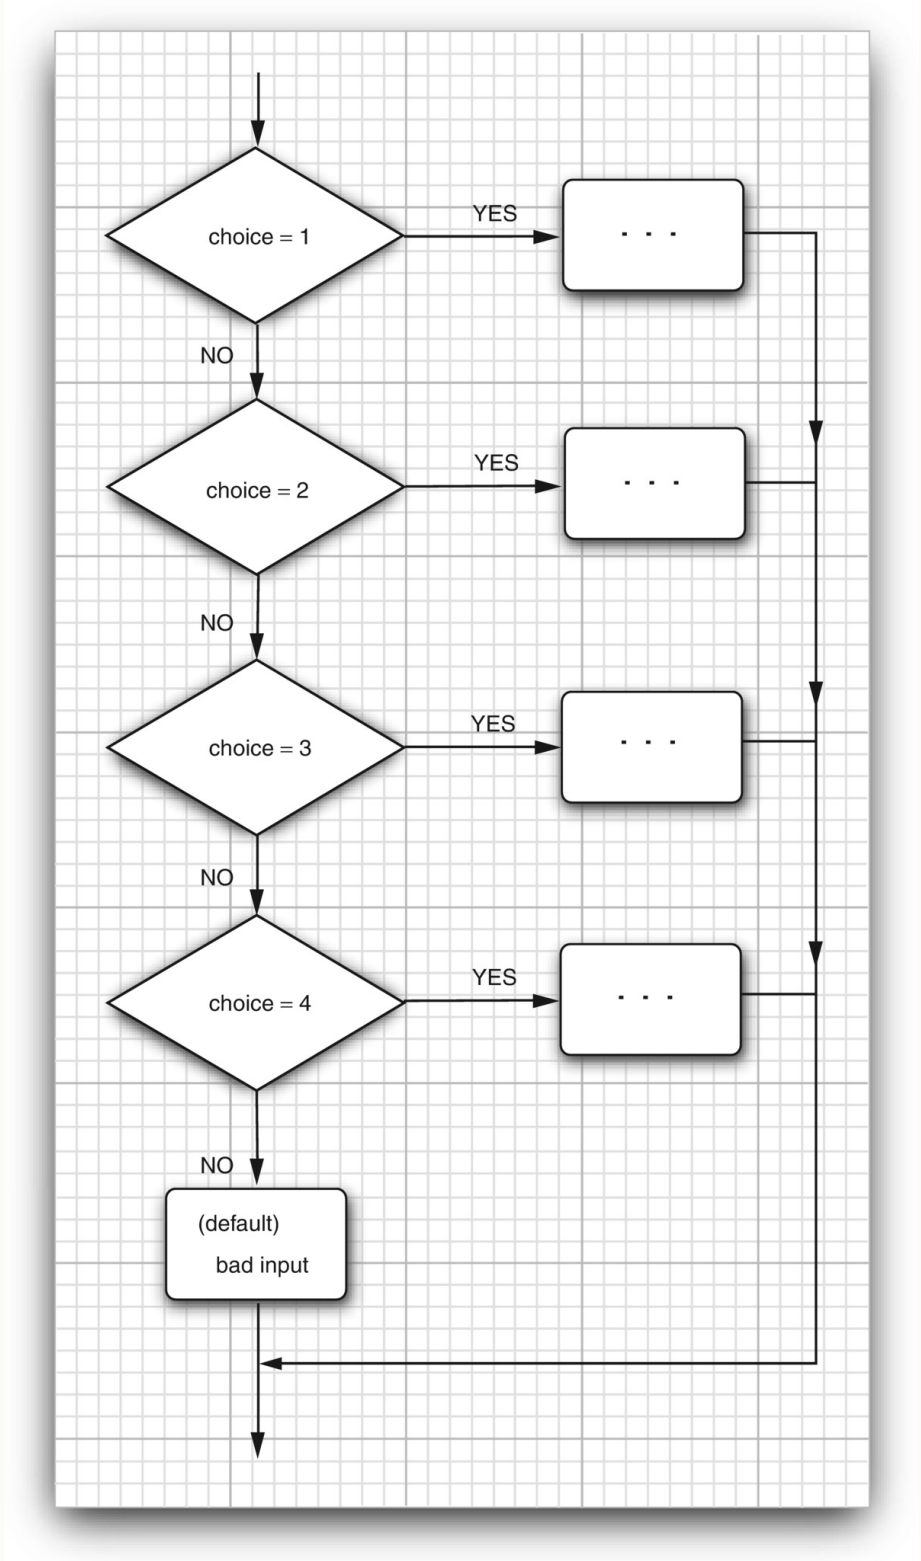


Figure 3.13: Flowchart for the `switch` statement

Note the similarity to the `switch` expressions that you saw in **Section 3.5.9**. Unlike a `switch` expression, a `switch` statement has no value. Each case carries out an action.

The "classic" form of the `switch` statement, which dates all the way back to the C language, has been supported since Java 1.0. It has the form:

```
int choice = . . .;
switch (choice)
{
```

```
    case 1:
      . . .
      break;
    case 2:
      . . .
      break;
    case 3:
      . . .
      break;
    case 4:
      . . .
      break;
    default:
      System.out.println("Bad input");
  }
```

Execution starts at the `case` label that matches the value on which the selection is performed and continues until the next `break` or the end of the switch. If none of the case labels match, then the `default` clause is executed, if it is present.



Caution: It is possible for multiple alternatives to be triggered. If you forget to add a `break` at the end of an alternative, execution falls through to the next alternative! This behavior is plainly dangerous and a common cause for errors.

To detect such problems, compile your code with the `-Xlint:fallthrough` option, like this:

```
javac -Xlint:fallthrough Test.java
```

Then the compiler will issue a warning whenever an alternative does not end with a `break` statement.

If you actually want to use the fallthrough behavior, tag the surrounding method with the annotation `@SuppressWarnings("fallthrough")`. Then no warnings will be generated for that method. (An annotation is a mechanism for supplying information to the compiler or a tool that processes Java source or class files. Volume II has an in-depth coverage of annotations.)

For symmetry, Java 14 also introduced a `switch` expression with fallthrough, for a total of four forms of `switch`. **Table 3.8** shows them all.

Table 3.8: The four forms of `switch`

	Expression	Statement

No Fallthrough	`int numLetters = switch (seasonName)`
	`{`
	`  case "Spring" ->`
	`  {`
	`  System.out.println(`
	`  "spring time!");`
	`  yield 6;`
	`  }`
	`  case "Summer", "Winter" -> 6;`
	`  case "Fall" -> 4;`
	`  default -> -1;`
	`};`
		`switch (seasonName)`
		`{`
		`  case "Spring" ->`
		`  {`
		`  System.out.println(`
		`  "spring time!");`
		`  numLetters = 6;`
		`  }`
		`  case "Summer", "Winter" ->`
		`  numLetters = 6;`
		`  case "Fall" ->`
		`  numLetters = 4;`
		`  default ->`
		`  numLetters = -1;`
		`}`

Fallthrough	`int numLetters = switch (seasonName)`
	`{`
	`  case "Spring":`
	`  System.out.println(`
	`  "spring time!");`
	`  case "Summer", "Winter":`
	`  yield 6;`
	`  case "Fall":`
	`  yield 4;`
	`  default:`
	`  yield -1;`
	`};`
		`switch (seasonName)`
		`{`
		`  case "Spring":`
		`  System.out.println(`
		`  "spring time!");`
		`  case "Summer", "Winter":`
		`  numLetters = 6;`
		`  break;`
		`  case "Fall":`
		`  numLetters = 4;`
		`  break;`
		`  default:`
		`  numLetters = -1;`
		`}`

In the fallthrough variants, each case ends with a colon. If the cases end with arrows `->`, then there is no fallthrough. You can't mix colons and arrows in a single `switch` statement.

Each branch of a `switch` *expression* must yield a value. Most commonly, each value follows an `->` arrow:

```
case "Summer", "Winter" -> 6;
```

If that is not possible, use a `yield` statement. Like `break`, it terminates execution. Unlike `break`, it also yields a value—the value of the expression.

To use statements in a branch of a `switch` expression without fallthrough, you must use braces and `yield`:

```
case "Spring" ->
  {
    System.out.println("spring time!");
    yield 6;
  }
```



Note: It is legal to throw an exception in a branch of a `switch` expression. For example:

```
default -> throw new IllegalArgumentException("Not a valid season");
```

Exceptions are covered in detail in **Chapter 7**.



Caution: The point of a `switch` expression is to produce a value (or to fail with an exception). You are not allowed to "jump out":

```
default -> { return -1; } // ERROR
```

Specifically, you cannot use `return`, `break`, or `continue` statements in a switch expression. (See **Section 3.8.6** for the latter two.)

With so many variations of `switch`, which one should you choose?

1. Avoid the fallthrough forms. It is very uncommon to need fallthrough.
2. Prefer `switch` expressions over statements.

If each branch computes the value for a variable assignment or method call, yield the value with an expression, and then use it. For example,

```
numLetters = switch (seasonName)
  {
    case "Spring", "Summer", "Winter" -> 6
```

```
    case "Fall" -> 4
    default -> -1
  };
```

is better than

```
switch (seasonName)
{
  case "Spring", "Summer", "Winter" ->
    numLetters = 6;
  case "Fall" ->
    numLetters = 4;
  default ->
    numLetters = -1;
}
```

3.8.6. Statements That Break Control Flow

Although the designers of Java kept `goto` as a reserved word, they decided not to include it in the language. In general, `goto` statements are considered poor style. Some programmers feel the anti-`goto` forces have gone too far (see, for example, the famous article of Donald Knuth called "Structured Programming with goto statements"). They argue that unrestricted use of `goto` is error-prone but that an occasional jump *out of a loop* is beneficial. The Java designers agreed and even added a new statement, the labeled break, to support this programming style.

Let us first look at the unlabeled `break` statement. The same `break` statement that you use to exit a `switch` statement can also be used to break out of a loop. For example:

```
while (years <= 100)
{
  balance += payment;
  double interest = balance * interestRate / 100;
  balance += interest;
  if (balance >= goal) break;
  years++;
}
```

Now the loop is exited if either `years > 100` occurs at the top of the loop or `balance >= goal` occurs in the middle of the loop. Of course, you could have computed the same value for `years` without a `break`, like this:

```
while (years <= 100 && balance < goal)
{
  balance += payment;
  double interest = balance * interestRate / 100;
  balance += interest;

  if (balance < goal)
    years++;
}
```

But note that the test `balance < goal` is repeated twice in this version. To avoid this repeated test, some programmers prefer the `break` statement.

The *labeled break* statement lets you break out of multiple nested loops. Occasionally something weird happens inside a deeply nested loop. In that case, you may want to break completely out of all the nested loops. It is inconvenient to program that simply by adding extra conditions to the various loop tests.

Here's an example that shows the labeled `break` statement at work. Notice that the label must precede the outermost loop out of which you want to break. It also must be followed by a colon.

```
Scanner in = new Scanner(System.in);
int n;
read_data:
while (. . .) // this loop statement is tagged with the label
{
  . . .
  for (. . .) // this inner loop is not labeled
  {
    System.out.print("Enter a number >= 0: ");
    n = in.nextInt();
    if (n < 0) // should never happen—can't go on
      break read_data;
      // break out of read_data loop
    . . .
  }
}
// this statement is executed immediately after the labeled break



if (n < 0) // check for bad situation
{
```

```
  // deal with bad situation
}
else
{
  // carry out normal processing
}
```

If there is a bad input, the labeled break moves past the end of the labeled block. As with any use of the `break` statement, you then need to test whether the loop exited normally or as a result of a break.



Note: Curiously, you can apply a label to any statement, even an `if` statement or a block statement, like this:

```
label:
{
  . . .
  if (condition) break label; // exits block
  . . .
}
// jumps here when the break statement executes
```

Thus, if you are lusting after a `goto` and you can place a block that ends just before the place to which you want to jump, you can use a `break` statement! Naturally, I don't recommend this approach. Note, however, that you can only jump *out of* a block, never *into* a block.

Finally, there is a `continue` statement that, like the `break` statement, breaks the regular flow of control. The `continue` statement transfers control to the header of the innermost enclosing loop. Here is an example:

```
Scanner in = new Scanner(System.in);
while (sum < goal)
{
  System.out.print("Enter a number: ");
  n = in.nextInt();
  if (n < 0) continue;
  sum += n; // not executed if n < 0
}
```

If `n < 0`, then the `continue` statement jumps immediately to the loop header, skipping the remainder of the current iteration.

If the `continue` statement is used in a `for` loop, it jumps to the "update" part of the `for` loop. For example:

```
for (count = 1; count <= 100; count++)
{
   System.out.print("Enter a number, -1 to quit: ");
   n = in.nextInt();
   if (n < 0) continue;
   sum += n; // not executed if n < 0
}
```

If `n < 0`, then the `continue` statement jumps to the `count++` statement.

There is also a labeled form of the `continue` statement that jumps to the header of the loop with the matching label.



Tip: Many programmers find the `break` and `continue` statements confusing. These statements are entirely optional—you can always express the same logic without them. None of the programs in this book use `break` or `continue`.

3.9. Big Numbers

If the precision of the basic integer and floating-point types is not sufficient, you can turn to a couple of handy classes in the `java.math` package: `BigInteger` and `BigDecimal`. These are classes for manipulating numbers with an arbitrarily long sequence of digits. The `BigInteger` class implements arbitrary-precision integer arithmetic, and `BigDecimal` does the same for floating-point numbers.

Use the static `valueOf` method to turn an ordinary number into a big number:

```
BigInteger a = BigInteger.valueOf(100);
```

For longer numbers, use a constructor with a string argument:

```
BigInteger reallyBig
   = new BigInteger("22223224462942044552973989346190996720666693909649976499097960");
```

There are also constants `BigInteger.ZERO`, `BigInteger.ONE`, `BigInteger.TWO`, and `BigInteger.TEN`.



Caution: With the `BigDecimal` class, you should always use the constructor with a string argument. There is a constructor `BigDecimal(double)` that is inherently prone to roundoff: `new BigDecimal(0.1)` has digits

```
0.1000000000000000055511151231257827021181583404541015625
```

Unfortunately, you cannot use the familiar mathematical operators such as `+` and `*` to combine big numbers. Instead, you must use methods such as `add` and `multiply` in the big number classes.

```
BigInteger c = a.add(b); // c = a + b
BigInteger d = c.multiply(b.add(BigInteger.valueOf(2))); // d = c * (b + 2)
```



C++ Note: Unlike C++, Java has no programmable operator overloading. There was no way for the programmers of the `BigInteger` class to redefine the `+` and `*` operators to give the `add` and `multiply` operations of the `BigInteger` classes. The language designers did overload the `+` operator to denote concatenation of strings. They chose not to overload other operators, and they did not give Java programmers the opportunity to overload operators in their own classes.



Note: In Java 19, the `BigInteger` class provides a `parallelMultiply` method that yields the same result as `multiply` but can potentially compute the result faster by using multiple processor cores. Use this method if you have to do a lot of multiplications and you know that your application does not need the CPU resources for other computations.

Listing 3.6 shows a modification of the lottery odds program of Listing 3.5, updated to work with big numbers. For example, if you are invited to participate in a lottery in which you need to pick 60 numbers out of a possible 490 numbers, you can use this program to tell you your odds of winning. They are 1 in `716395843461995557415116222540092933411717612789263493493351013459481104668848`. Good luck!

The program in Listing 3.5 computed the statement

```
lotteryOdds = lotteryOdds * (n - i + 1) / i;
```

When big integers are used for `lotteryOdds` and `n`, the equivalent statement becomes

```
lotteryOdds = lotteryOdds
   .multiply(n.subtract(BigInteger.valueOf(i - 1)))
   .divide(BigInteger.valueOf(i));
```

Listing 3.6 BigIntegerTest/BigIntegerTest.java

```
1  import java.math.*;
2  import java.util.*;
3
4  /**
5   * This program uses big numbers to compute the odds of winning the grand prize in a lottery.
6   * @version 1.21 2021-09-03
7   * @author Cay Horstmann
8   */
9  public class BigIntegerTest
10 {
11    public static void main(String[] args)
12    {
13       Scanner in = new Scanner(System.in);
14
15       System.out.print("How many numbers do you need to draw? ");
16       int k = in.nextInt();
17
18       System.out.print("What is the highest number you can draw? ");
19       BigInteger n = in.nextBigInteger();
20
21       /*
22        * compute binomial coefficient n*(n-1)*(n-2)*...*(n-k+1)/(1*2*3*...*k)
23        */
24
25       BigInteger lotteryOdds = BigInteger.ONE;
26
27       for (int i = 1; i <= k; i++)
28          lotteryOdds = lotteryOdds
29             .multiply(n.subtract(BigInteger.valueOf(i - 1)))
30             .divide(BigInteger.valueOf(i));
31
32       System.out.printf("Your odds are 1 in %s. Good luck!%n", lotteryOdds);
33    }
34 }
```

java.math.BigInteger 1.1

- BigInteger add(BigInteger other)
- BigInteger subtract(BigInteger other)
- BigInteger multiply(BigInteger other)
- BigInteger divide(BigInteger other)
- BigInteger mod(BigInteger other)
- BigInteger pow(int exponent)
  return the sum, difference, product, quotient, remainder, and power of this big integer and other.
- BigInteger sqrt() 9
  yields the square root of this BigInteger.
- int compareTo(BigInteger other)
  returns 0 if this big integer equals other, a negative result if this big integer is less than other, and a positive result otherwise.
- static BigInteger valueOf(long x)
  returns a big integer whose value equals x.

java.math.BigDecimal 1.1

- BigDecimal(String digits)
  constructs a big decimal with the given digits.
- BigDecimal add(BigDecimal other)
- BigDecimal subtract(BigDecimal other)
- BigDecimal multiply(BigDecimal other)
- BigDecimal divide(BigDecimal other) 5.0
- BigDecimal divide(BigDecimal other, RoundingMode mode) 5.0
  return the sum, difference, product, or quotient of this big decimal and other. The first divide method throws an exception if the quotient does not have a finite decimal expansion. To obtain a rounded result, use the second method. The mode RoundingMode.HALF_UP is the rounding mode that you learned in school: round down the digits 0 to 4, round up the digits 5 to 9. It is appropriate for routine calculations. See the API documentation for other rounding modes.
- int compareTo(BigDecimal other)
  returns 0 if this big decimal equals other, a negative result if this big decimal is less than other, and a positive result otherwise.

3.10. Arrays

Arrays hold sequences of values of the same type. In the following sections, you will see how to work with arrays in Java.

3.10.1. Declaring Arrays

Declare an array variable by specifying the array type—which is the element type followed by `[]`—and the array variable name. For example, here is the declaration of an array `a` of integers:

```
int[] a;
```

However, this statement only declares the variable `a`. It does not yet initialize `a` with an actual array. Use the `new` operator to create the array.

```
int[] a = new int[100]; // or var a = new int[100];
```

This statement declares and initializes an array of 100 integers.

The array length need not be a constant: `new int[n]` creates an array of length `n`.

Once you create an array, you cannot change its length (although you can, of course, change an individual array element). If you frequently need to expand the length of arrays while your program is running, you should use *array lists*, which are covered in **Chapter 5**.

The type of an array variable does not include the length. For example, the variable `a` in the preceding example has type `int[]` and can be set to an `int` array of any length.



Note: You can define an array variable either as

```
int[] a;
```

or as

```
int a[];
```

Most Java programmers prefer the former style because it neatly separates the type `int[]` (integer array) from the variable name.

Java has a shortcut for creating an array object and supplying initial values:

```
int[] smallPrimes = { 2, 3, 5, 7, 11, 13 };
```

Notice that you do not use `new` with this syntax, and you don't specify the length.

A comma after the last value is allowed, which can be convenient for an array to which you keep adding values over time:

```
String[] authors =
  {
    "James Gosling",
    "Bill Joy",
    "Guy Steele",
    // add more names here and put a comma after each name
  };
```

You can declare an *anonymous array*:

```
new int[] { 17, 19, 23, 29, 31, 37 }
```

This expression allocates a new array and fills it with the values inside the braces. It counts the number of initial values and sets the array length accordingly. You can use this syntax to reinitialize an array without creating a new variable. For example,

```
smallPrimes = new int[] { 17, 19, 23, 29, 31, 37 };
```

is shorthand for

```
int[] anonymous = { 17, 19, 23, 29, 31, 37 };
smallPrimes = anonymous;
```



Note: It is legal to have arrays of length 0. Such an array can be useful if you write a method that computes an array result and the result happens to be empty. Construct an array of length 0 as

```
new elementType[0]
```

or

```
new elementType[] {}
```

Note that an array of length 0 is not the same as `null`.

3.10.2. Accessing Array Elements

You access each individual element of an array through an integer *index*, using the bracket operator. For example, if `a` is an array of integers, then `a[i]` is the element with index `i` in the array.

The array elements are *numbered starting from 0*. The last valid index is one less than the length. In the example below, the index values range from 0 to 99. Once the array is created, you can fill the elements in an array, for example, by using a loop:

```
int[] a = new int[100];
for (int i = 0; i < 100; i++)
  a[i] = i; // fills the array with numbers 0 to 99
```

When you create an array of numbers, all elements are initialized with zero. Arrays of `boolean` are initialized with `false`. Arrays of objects are initialized with the special value `null`, which indicates that they do not (yet) hold any objects. This can be surprising for beginners. For example,

```
String[] names = new String[10];
```

creates an array of ten strings, all of which are `null`. If you want the array to hold empty strings, you must supply them:

```
for (int i = 0; i < 10; i++) names[i] = "";
```



Caution: If you construct an array with 100 elements and then try to access the element `a[100]` (or any other index outside the range from 0 to 99), an "array index out of bounds" exception will occur.

To find the number of elements of an array, use `array.length`. For example:

```
for (int i = 0; i < a.length; i++)
  System.out.println(a[i]);
```

3.10.3. The "for each" Loop

Java has a powerful looping construct that allows you to loop through each element in an array (or any other collection of elements) without having to fuss with index values.

The *enhanced* `for` loop

```
for (variable : collection) statement
```

sets the given variable to each element of the collection and then executes the statement (which, of course, may be a block). The `collection` expression must be an array or an object of a class that implements the `Iterable` interface, such as `ArrayList`. Array lists are covered in **Chapter 5** and the `Iterable` interface in **Chapter 9**.

For example,

```
for (int element : a)
  System.out.println(element);
```

prints each element of the array `a` on a separate line.

You should read this loop as "for each `element` in `a`." The designers of the Java language considered using keywords, such as `foreach` and `in`. But this loop was a late addition to the Java language, and in the end nobody wanted to break the old code that already contained methods or variables with these names (such as `System.in`).

Of course, you could achieve the same effect with a traditional `for` loop:

```
for (int i = 0; i < a.length; i++)
  System.out.println(a[i]);
```

However, the "for each" loop is more concise and less error-prone, as you don't have to worry about those pesky start and end index values.



Note: The loop variable of the "for each" loop traverses the *elements* of the array, not the index values.

The "for each" loop is a pleasant improvement over the traditional loop if you need to process all elements in a collection. However, there are still plenty of opportunities to use the tradi-

tional `for` loop. For example, you might not want to traverse the entire collection, or you may need the index value inside the loop.



Tip: There is an even easier way to print all values of an array, using the `toString` method of the `Arrays` class. The call `Arrays.toString(a)` returns a string containing the array elements, enclosed in brackets and separated by commas, such as `"[2, 3, 5, 7, 11, 13]"`. To print the array, simply call

```
System.out.println(Arrays.toString(a));
```

3.10.4. Array Copying

You can copy one array variable into another, but then *both variables refer to the same array*:

```
int[] luckyNumbers = smallPrimes;
luckyNumbers[5] = 12; // now smallPrimes[5] is also 12
```

Figure 3.14 shows the result.

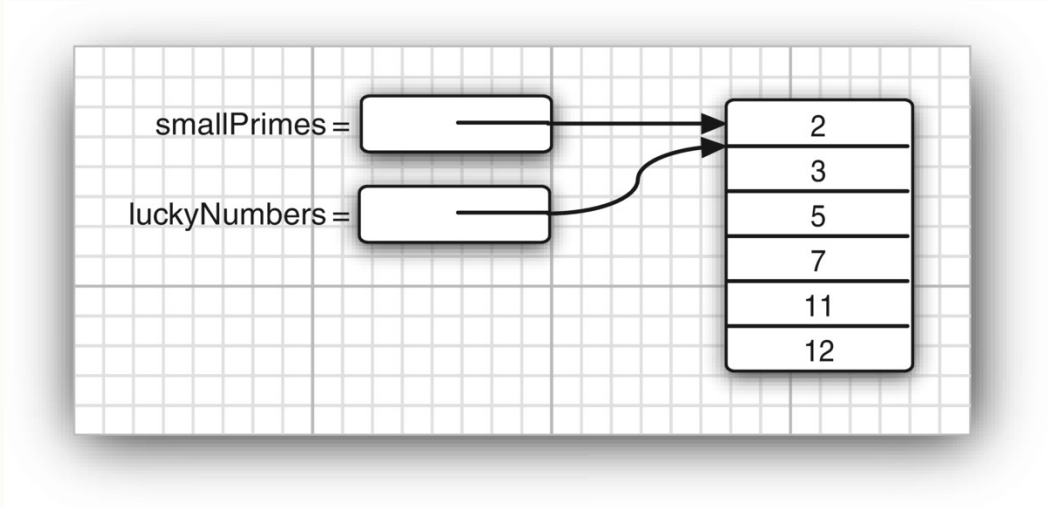


Figure 3.14: Copying an array variable

If you actually want to copy all values of one array into a new array, use the `copyOf` method in the `Arrays` class:

```
int[] copiedLuckyNumbers = Arrays.copyOf(luckyNumbers, luckyNumbers.length);
```

The second argument is the length of the new array. A common use of this method is to increase the length of an array:

```
luckyNumbers = Arrays.copyOf(luckyNumbers, 2 * luckyNumbers.length);
```

The additional elements are filled with `0` if the array contains numbers, `false` if the array contains `boolean` values. Conversely, if the length is less than the length of the original array, only the initial values are copied.



C++ Note: A Java array is quite different from a C++ array on the stack. It is, however, essentially the same as a pointer to an array allocated on the *heap*. That is,

```
int[] a = new int[100]; // Java
```

is not the same as

```
int a[100]; // C++
```

but rather

```
int* a = new int[100]; // C++
```

In Java, the `[]` operator is predefined to perform *bounds checking*. Furthermore, there is no pointer arithmetic—you can't increment `a` to point to the next element in the array.

3.10.5. Command-Line Arguments

You have already seen one example of a Java array repeated quite a few times. Every Java program has a `main` method with a `String[] args` parameter variable. This parameter indicates that the `main` method receives an array of strings—namely, the arguments specified on the command line.

For example, consider this program:

```
public class Message
{
  public static void main(String[] args)
  {
    if (args.length == 0 || args[0].equals("-h"))
      System.out.print("Hello,");
    else if (args[0].equals("-g"))
      System.out.print("Goodbye,");
```

```
    // print the other command-line arguments
    for (int i = 1; i < args.length; i++)
      System.out.print(" " + args[i]);
    System.out.println("!");
  }
}
```

If the program is called as

```
java Message -g cruel world
```

then the `args` array has the following contents:

```
args[0]: "-g"
args[1]: "cruel"
args[2]: "world"
```

The program prints the message

```
Goodbye, cruel world!
```



C++ Note: Unlike in C++, the name of the program is not stored in the array of command-line arguments. For example, when you start up a program as

```
java Message -h world
```

from the command line, then `args[0]` will be `"-h"` and not `"Message"` or `"java"`.

3.10.6. Array Sorting

To sort an array of numbers, you can use one of the `sort` methods in the `Arrays` class:

```
int[] a = new int[10000];
. . .
Arrays.sort(a)
```

This method uses a tuned version of the QuickSort algorithm that is claimed to be very efficient on most data sets. The `Arrays` class provides several other convenience methods for ar-

rays that are included in the API notes at the end of this section.

The program in **Listing 3.7** puts arrays to work. This program draws a random combination of numbers for a lottery game. For example, if you play a "choose 6 numbers from 49" lottery, the program might print this:

```
Bet the following combination. It'll make you rich!
4
7
8
19
30
44
```

To select such a random set of numbers, first fill an array `numbers` with the values `1`, `2`, . . ., `n`:

```
int[] numbers = new int[n];
for (int i = 0; i < numbers.length; i++)
  numbers[i] = i + 1;
```

A second array holds the numbers to be drawn:

```
int[] result = new int[k];
```

Now draw `k` numbers. The `Math.random` method returns a random floating-point number that is between `0` (inclusive) and `1` (exclusive). Multiplying the result with `n` yields a random number between `0` and `n` - 1.

```
int r = (int) (Math.random() * n);
```

Set the `i`th result to be the number at that index. Initially, that is just `r` + 1, but as you'll see presently, the contents of the `numbers` array are changed after each draw.

```
result[i] = numbers[r];
```

Now, you must be sure never to draw that number again—all lottery numbers must be distinct. Therefore, overwrite `numbers[r]` with the *last* number in the array and reduce `n` by 1.

```
numbers[r] = numbers[n - 1];
n--;
```

The point is that in each draw we pick an *index*, not the actual value. The index points into an array that contains the values that have not yet been drawn.

After drawing `k` lottery numbers, sort the `result` array for a more pleasing output:

```
Arrays.sort(result);
for (int r : result)
  System.out.println(r);
```

Listing 3.7 LotteryDrawing/LotteryDrawing.java

```
1  import java.util.*;
2
3  /**
4   * This program demonstrates array manipulation.
5   * @version 1.20 2004-02-10
6   * @author Cay Horstmann
7   */
8  public class LotteryDrawing
9  {
10   public static void main(String[] args)
11   {
12     Scanner in = new Scanner(System.in);
13
14     System.out.print("How many numbers do you need to draw? ");
15     int k = in.nextInt();
16
17     System.out.print("What is the highest number you can draw? ");
18     int n = in.nextInt();
19
20     // fill an array with numbers 1 2 3 . . . n
21     int[] numbers = new int[n];
22     for (int i = 0; i < numbers.length; i++)
23       numbers[i] = i + 1;
24
25     // draw k numbers and put them into a second array
26     int[] result = new int[k];
27     for (int i = 0; i < result.length; i++)
28     {
29       // make a random index between 0 and n - 1
30       int r = (int) (Math.random() * n);
```

```
31
32          // pick the element at the random location
33          result[i] = numbers[r];
34
35          // move the last element into the random location
36          numbers[r] = numbers[n - 1];
37          n--;
38       }
39
40       // print the sorted array
41       Arrays.sort(result);
42       System.out.println("Bet the following combination. It'll make you rich!");
43       for (int r : result)
44          System.out.println(r);
45    }
46 }
```

java.util.Arrays 1.2

- static String toString(T[] a) 5.0
  returns a string with the elements of a, enclosed in brackets and delimited by commas. In this and the following methods, the component type T of the array can be int, long, short, char, byte, boolean, float, or double.
- static T[] copyOf(T[] a, int end) 6
- static T[] copyOfRange(T[] a, int start, int end) 6
  return an array of the same type as a, of length either end or end - start, filled with the values of a. If end is larger than a.length, the result is padded with 0 or false values.
- static void sort(T[] a)
  sorts the array, using a tuned QuickSort algorithm.
- static void fill(T[] a, T v)
  sets all elements of the array to v.
- static boolean equals(T[] a, T[] b)
  returns true if the arrays have the same length and if the elements at corresponding indexes match.

3.10.7. Multidimensional Arrays

Multidimensional arrays use more than one index to access array elements. They are used for tables and other more complex arrangements. You can safely skip this section until you have a need for this storage mechanism.

Suppose you want to make a table of numbers that shows how much an investment of $10,000 will grow under different interest rate scenarios in which interest is paid annually and reinvested.

```
     5%       6%       7%       8%       9%      10%
10000.00 10000.00 10000.00 10000.00 10000.00 10000.00
10500.00 10600.00 10700.00 10800.00 10900.00 11000.00
11025.00 11236.00 11449.00 11664.00 11881.00 12100.00
11576.25 11910.16 12250.43 12597.12 12950.29 13310.00
12155.06 12624.77 13107.96 13604.89 14115.82 14641.00
12762.82 13382.26 14025.52 14693.28 15386.24 16105.10
13400.96 14185.19 15007.30 15868.74 16771.00 17715.61
14071.00 15036.30 16057.81 17138.24 18280.39 19487.17
14774.55 15938.48 17181.86 18509.30 19925.63 21435.89
15513.28 16894.79 18384.59 19990.05 21718.93 23579.48
```

You can store this information in a two-dimensional array named `balances`.

Declaring a two-dimensional array in Java is simple enough. For example:

```
double[][] balances;
```

You cannot use the array until you initialize it. In this case, you can do the initialization as follows:

```
balances = new double[NYEARS][NRATES];
```

In other cases, if you know the array elements, you can use a shorthand notation for initializing a multidimensional array without a call to `new`. For example:

```
int[][] magicSquare =
  {
    {16, 3, 2, 13},
    {5, 10, 11, 8},
    {9, 6, 7, 12},
    {4, 15, 14, 1}
  };
```

Once the array is initialized, you can access individual elements by supplying two pairs of brackets—for example, `balances[i][j]`.

The example program stores a one-dimensional array `interest` of interest rates and a two-dimensional array `balances` of account balances, one for each year and interest rate. Initialize the first row of the array with the initial balance:

```
for (int j = 0; j < balances[0].length; j++)
  balances[0][j] = 10000;
```

Then compute the other rows, as follows:

```
for (int i = 1; i < balances.length; i++)
{
  for (int j = 0; j < balances[i].length; j++)
  {
    double oldBalance = balances[i - 1][j];
    double interest = . . .;
    balances[i][j] = oldBalance + interest;
  }
}
```

Listing 3.8 shows the full program.



Note: A "for each" loop does not automatically loop through all elements in a two-dimensional array. Instead, it loops through the rows, which are themselves one-dimensional arrays. To visit all elements of a two-dimensional array `a`, nest two loops, like this:

```
for (double[] row : a)
  for (double value : row)
    do something with value
```



Tip: To print out a quick-and-dirty list of the elements of a two-dimensional array, call

```
System.out.println(Arrays.deepToString(a));
```

The output is formatted like this:

```
[[16, 3, 2, 13], [5, 10, 11, 8], [9, 6, 7, 12], [4, 15, 14, 1]]
```

Listing 3.8 CompoundInterest/CompoundInterest.java

```
/**
 * This program shows how to store tabular data in a 2D array.
 * @version 1.41 2023-11-28
 * @author Cay Horstmann
 */
public class CompoundInterest
{
   public static void main(String[] args)
   {
      final double STARTRATE = 5;
      final int NRATES = 6;
      final int NYEARS = 10;

      // set interest rates to 5 . . . 10%
      double[] interestRate = new double[NRATES];
      for (int j = 0; j < interestRate.length; j++)
         interestRate[j] = (STARTRATE + j) / 100.0;

      double[][] balances = new double[NYEARS][NRATES];

      // set initial balances to 10000
      for (int j = 0; j < balances[0].length; j++)
         balances[0][j] = 10000;

      // compute interest for future years
      for (int i = 1; i < balances.length; i++)
      {
         for (int j = 0; j < balances[i].length; j++)
         {
            // get last year's balances from previous row
            double oldBalance = balances[i - 1][j];

            // compute interest
            double interest = oldBalance * interestRate[j];

            // compute this year's balances
            balances[i][j] = oldBalance + interest;
         }
      }

      // print one row of interest rates
      for (int j = 0; j < interestRate.length; j++)
         System.out.printf("%9.0f%%", 100 * interestRate[j]);

      System.out.println();
```

```
46
47      // print balance table
48      for (double[] row : balances)
49      {
50        // print table row
51        for (double b : row)
52          System.out.printf("%10.2f", b);
53
54        System.out.println();
55      }
56    }
57  }
```

3.10.8. Ragged Arrays

So far, what you have seen is not too different from other programming languages. But there is actually something subtle going on behind the scenes that you can sometimes turn to your advantage: Java has *no* multidimensional arrays at all, only one-dimensional arrays. Multidimensional arrays are faked as "arrays of arrays."

For example, the `balances` array in the preceding example is actually an array that contains ten elements, each of which is an array of six floating-point numbers (**Figure 3.15**).

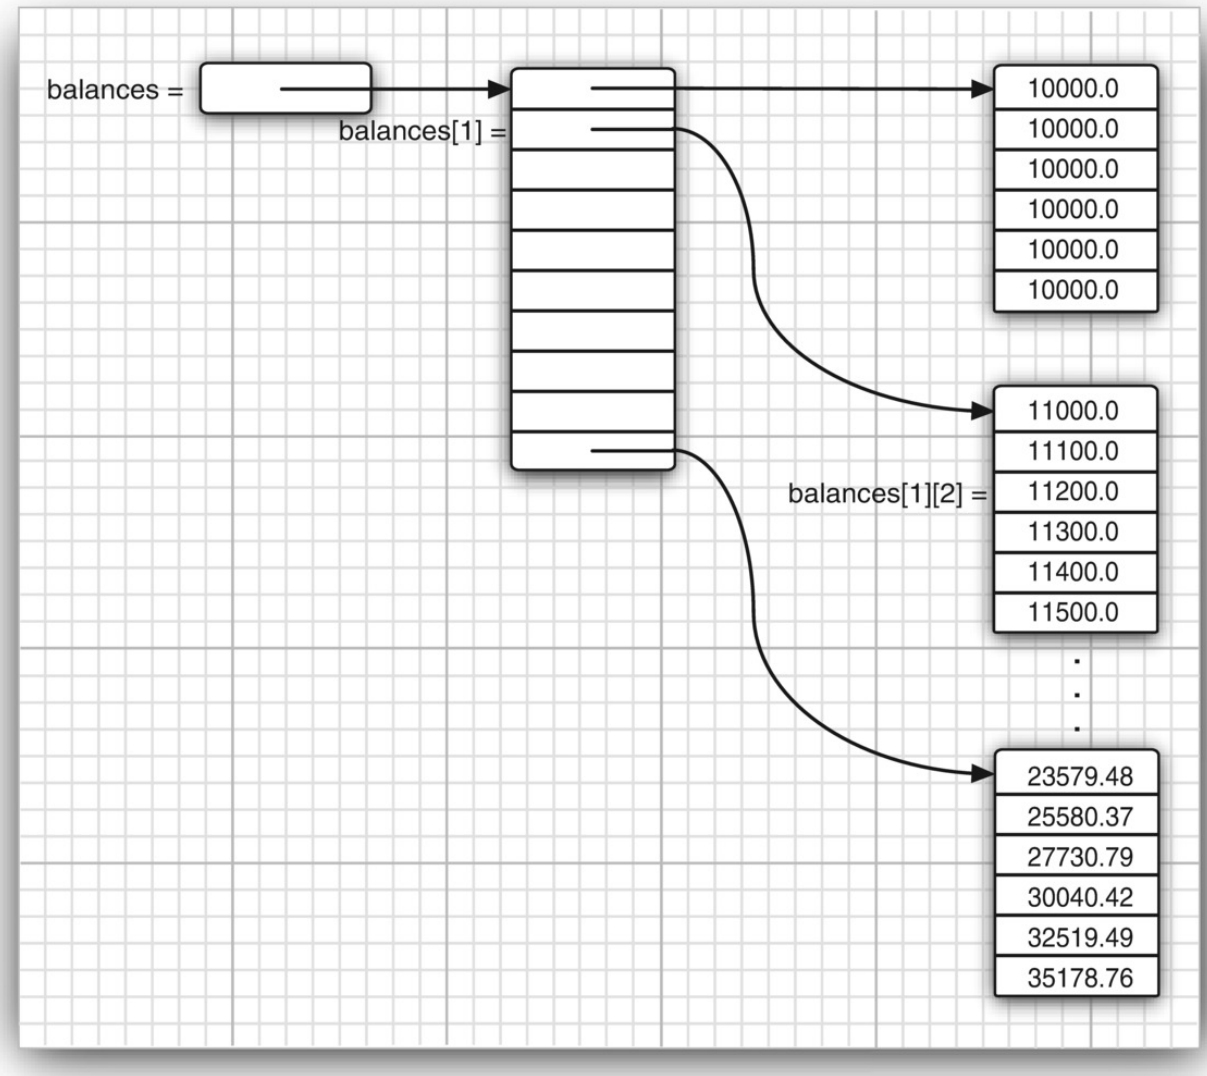


Figure 3.15: A two-dimensional array

The expression `balances[i]` refers to the `i` th subarray—that is, the `i` th row of the table. It is itself an array, and `balances[i][j]` refers to the `j` th element of that array.

Since rows of arrays are individually accessible, you can actually swap them!

```
double[] temp = balances[i];
balances[i] = balances[i + 1];
balances[i + 1] = temp;
```

Note that the number of rows and columns is not a part of the type of an array variable. The variable `balances` has type `double[][]` : an array of `double` arrays.

Therefore, you can make "ragged" arrays—that is, arrays in which different rows have different lengths. Here is the standard example. Let us make an array in which the element at row `i` and column `j` equals the number of possible outcomes of a "choose `j` numbers from `i` numbers" lottery.

```
1
1 1
1 2 1
1 3 3 1
1 4 6 4 1
1 5 10 10 5 1
1 6 15 20 15 6 1
```

As `j` can never be larger than `i`, the matrix is triangular. The `i` th row has `i` + 1 elements. (It is OK to choose 0 elements; there is one way to make such a choice.) To build this ragged array, first allocate the array holding the rows:

```
final int NMAX = 10;
int[][] odds = new int[NMAX + 1][];
```

Next, allocate the rows:

```
for (int n = 0; n <= NMAX; n++)
  odds[n] = new int[n + 1];
```

Now that the array is allocated, you can access the elements in the normal way, provided you do not overstep the bounds:

```
for (int n = 0; n < odds.length; n++)
  for (int k = 0; k < odds[n].length; k++)
  {
    // compute lotteryOdds
    . . .
    odds[n][k] = lotteryOdds;
  }
```

Listing 3.9 gives the complete program.



Note: Just as with one-dimensional arrays, it is legal to construct multi-dimensional arrays where a dimension is zero. For example,

```
new int[3][0]
```

has three rows, each of which happen to have length zero. In contrast,

```
new int[0][3]
```

has no rows. The row length is immaterial, since no rows are actually allocated. In other words, `new int[0][3]`, `new int[0][4]`, and `new int[0][]` are all the same.



C++ Note: In C++, the Java declaration

```
double[][] balances = new double[10][6]; // Java
```

is not the same as

```
double balances[10][6]; // C++
```

or even

```
double (*balances)[6] = new double[10][6]; // C++
```

Instead, an array of ten pointers is allocated:

```
double** balances = new double*[10]; // C++
```

Then, each element in the pointer array is filled with an array of six numbers:

```
for (i = 0; i < 10; i++)
  balances[i] = new double[6];
```

Mercifully, this loop is automatic when you ask for a `new double[10][6]`. When you want ragged arrays, you allocate the row arrays separately.

Listing 3.9 LotteryArray/LotteryArray.java

```
1  /**
2   * This program demonstrates a triangular array.
3   * @version 1.20 2004-02-10
4   * @author Cay Horstmann
5   */
6  public class LotteryArray
```

```
{
  public static void main(String[] args)
  {
    final int NMAX = 10;

    // allocate triangular array
    int[][] odds = new int[NMAX + 1][];
    for (int n = 0; n <= NMAX; n++)
      odds[n] = new int[n + 1];

    // fill triangular array
    for (int n = 0; n < odds.length; n++)
      for (int k = 0; k < odds[n].length; k++)
      {
        /*
         * compute binomial coefficient n*(n-1)*(n-2)*...*(n-k+1)/(1*2*3*...*k)
         */
        int lotteryOdds = 1;
        for (int i = 1; i <= k; i++)
          lotteryOdds = lotteryOdds * (n - i + 1) / i;

        odds[n][k] = lotteryOdds;
      }

    // print triangular array
    for (int[] row : odds)
    {
      for (int odd : row)
        System.out.printf("%4d", odd);
      System.out.println();
    }
  }
}
```

You have now seen the fundamental programming structures of the Java language. The next chapter covers object-oriented programming in Java.

Previous chapter

< 2. The Java Programming Environment

Next chapter

4. Objects and Classes >