[*Appendix A*]

Chapter Prerequisites

Learning Git is a hands-on learning experience designed to be read from Chapter 1 through Chapter 12 in a linear way. Throughout the book, you will work on the Rainbow project to learn how Git works.

However, there may be some situations in which you want or need to start from a specific chapter. For example:

- You have gone through the exercises in the entire book once and you want to review from a specific chapter onward.
- Something went wrong in the Rainbow project in a previous chapter that you were not able to troubleshoot, and you want to continue from a new chapter afresh.

In this case, you can use the instructions in the relevant section of this appendix to re-create an approximation of what the Rainbow project should look like at the start of the chapter you want to begin from. This will provide the minimum setup you need to be able to continue working on the Rainbow project from your chapter of choice. For more information and in-depth explanations about the steps in each Follow Along, refer to the relevant chapter's contents.

[NOTE]

For Chapters 9 to 11, you will not re-create all the commits that were made in the previous chapters. You will only re-create a commit similar to the last commit that was made before the chapter you want to start from. This means that your Rainbow project repositories will have fewer commits than the Rainbow project repositories illustrated in the Visualize It diagrams in the chapter contents. Keep this in mind while working through those chapters.

All of the instructions assume you have carried out the actions in Chapter 1 on the computer you are using for the Rainbow project exercises at least once before. This consists of installing Git, choosing a text editor, and setting the user.name and user.email variables. If this is not the case, you'll need to start with the Follow Along in "Prerequisite Setup for All Chapters" on page 260.

The instructions use the same names for the repositories that were used in the rest of the book: rainbow, friend-rainbow, and rainbow-remote. If you still have those repositories on your local computer and your hosting service, then you will have to use slightly different names; for example, rainbow1, friend-rainbow1, and rainbow-remote1. I recommend you stick with similar names, because these names are referred to throughout each chapter's contents.

Prerequisite Setup for All Chapters

If you don't have Git installed or a text editor ready to be used, complete the steps in Follow Along A-1. Otherwise, you may skip it.

[FOLLOW ALONG A-1]

1. Go to the Learning Git repository (*https://github.com/gitlearningjourney/learning-git*) and follow the steps to download Git for your operating system.

2. Choose your preferred text editor. If you don't already have a text editor on your computer, then download one. For more information, see "Preparing a Text Editor" on page 19.

Next, you must set the user.name and user.email configuration variables to the appropriate values. If you have not done this yet, go to Follow Along A-2. For more information about Git configuration variables, see "Setting Git Configurations" on page 17. Make sure to provide your name and email address in place of the placeholders in the Follow Along.

[FOLLOW ALONG A-2]

1. $ **git config --global user.name** "<name>"
2. $ **git config --global user.email** "<email>"

Chapter 2 Prerequisite Setup

In Follow Along A-3, you will prepare the basic setup to start working from Chapter 2.

[FOLLOW ALONG A-3]

1. Use your command line application to open a command line window.
2. $ **cd desktop**
3. desktop $ **mkdir rainbow**
4. desktop $ **cd rainbow**
5. Open the rainbow project directory in a text editor window.

Chapter 3 Prerequisite Setup


In Follow Along A-4, you will prepare the basic setup for the rainbow repository to start working from Chapter 3.

[FOLLOW ALONG A-4]

1. Use your command line application to open a command line window.
2. $ **cd desktop**
3. desktop $ **mkdir rainbow**
4. desktop $ **cd rainbow**
5. rainbow $ **git init -b main**
   Initialized empty Git repository in
   /Users/annaskoulikari/desktop/rainbow/.git/
6. Open the rainbow project directory in a text editor window and create a file called rainbowcolors.txt inside this directory.
7. In the rainbowcolors.txt file in your text editor, add “Red is the first color of the rainbow.” on line 1 and save the file.

At the end of this process the rainbow repository you have created will contain the rainbowcolors.txt file in the working directory, as shown in Visualize it A-1.

[VISUALIZE IT A-1]

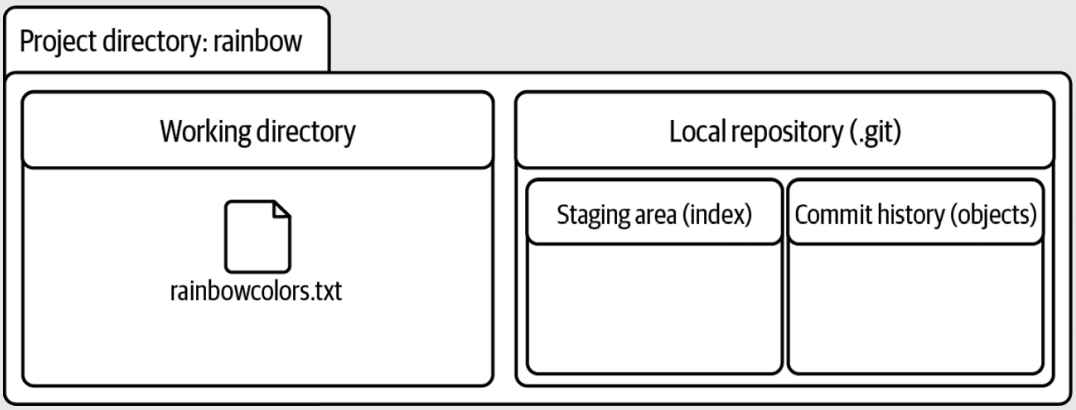

The re-created rainbow repository to start working from Chapter 3, without having gone through Chapter 2

Chapter 4 Prerequisite Setup


In Follow Along A-5, you will prepare the basic setup for the rainbow repository to start working from Chapter 4.

[FOLLOW ALONG A-5]

1. Use your command line application to open a command line window.
2. $ **cd desktop**
3. desktop $ **mkdir rainbow**
4. desktop $ **cd rainbow**
5. rainbow $ **git init -b main**
   Initialized empty Git repository in
   /Users/annaskoulikari/desktop/rainbow/.git/
6. Open the rainbow project directory in a text editor window and create a file called rainbowcolors.txt inside this directory.
7. In the rainbowcolors.txt file in your text editor, add “Red is the first color of the rainbow.” on line 1 and save the file.
8. rainbow $ **git add rainbowcolors.txt**
9. rainbow $ **git commit -m "red"**
   [main (root-commit) c26d0bc] red
   1 file changed, 1 insertion(+)
   create mode 100644 rainbowcolors.txt

At the end of this process the rainbow repository you have created will contain the red commit, as shown in Visualize it A-2.

[VISUALIZE IT A-2]

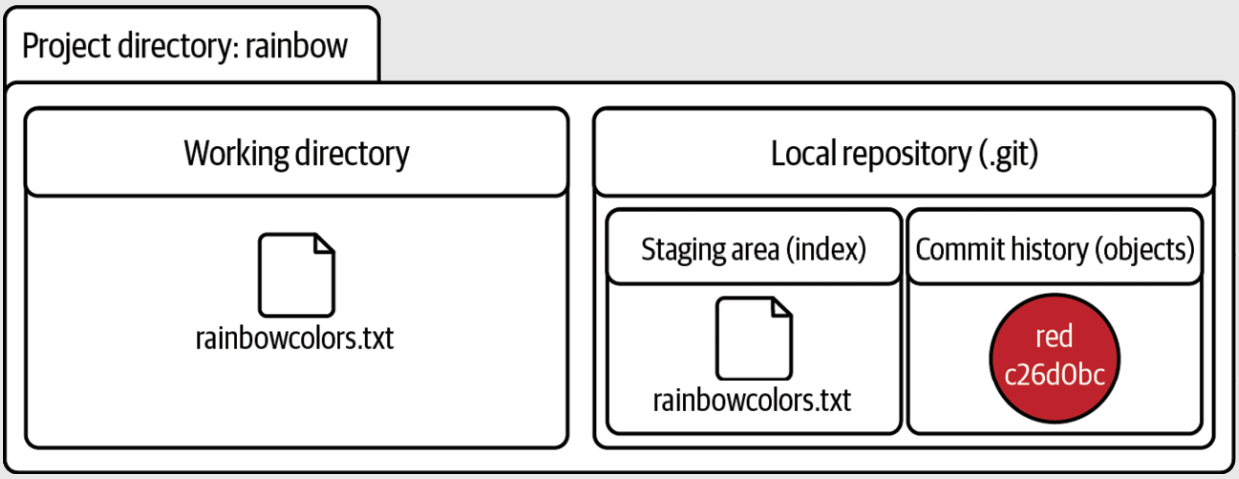

The re-created rainbow repository to start working from Chapter 4, without having gone through Chapter 3

Chapter 5 Prerequisite Setup

In Follow Along A-6, you will prepare the basic setup for the rainbow repository to start working from Chapter 5.

[FOLLOW ALONG A-6]

1. Use your command line application to open a command line window.

2. $ **cd desktop**

3. desktop $ **mkdir rainbow**

4. desktop $ **cd rainbow**

5. rainbow $ **git init -b main**
   Initialized empty Git repository in
   /Users/annaskoulikari/desktop/rainbow/.git/

6. Open the rainbow project directory in a text editor window and create a file called rainbowcolors.txt inside this directory.

7. In the rainbowcolors.txt file in your text editor, add “Red is the first color of the rainbow.” on line 1 and save the file.

8. rainbow $ **git add rainbowcolors.txt**

9. rainbow $ **git commit -m "red"**
   [main (root-commit) c26d0bc] red
   1 file changed, 1 insertion(+)
   create mode 100644 rainbowcolors.txt

10. In the rainbowcolors.txt file in your text editor, add “Orange is the second color of the rainbow.” on line 2 and save the file.

11. rainbow $ **git add rainbowcolors.txt**

12. rainbow $ **git commit -m “orange”**
    [main 7acb333] orange
    1 file changed, 2 insertions(+), 1 deletion(-)

13. rainbow $ **git branch feature**

[FOLLOW ALONG A-6]

14. rainbow $ **git switch feature**
    Switched to branch 'feature'


15. In rainbowcolors.txt file in your text editor, add "Yellow is the third color of the rainbow." on line 3 and save the file.

16. rainbow $ **git add rainbowcolors.txt**

17. rainbow $ **git commit -m "yellow"**
    [feature fc8139c] yellow
    1 file changed, 2 insertions(+), 1 deletion(-)

At the end of this process the rainbow repository you have created will contain the red, orange, and yellow commits, as shown in Visualize it A-3.

[VISUALIZE IT A-3]

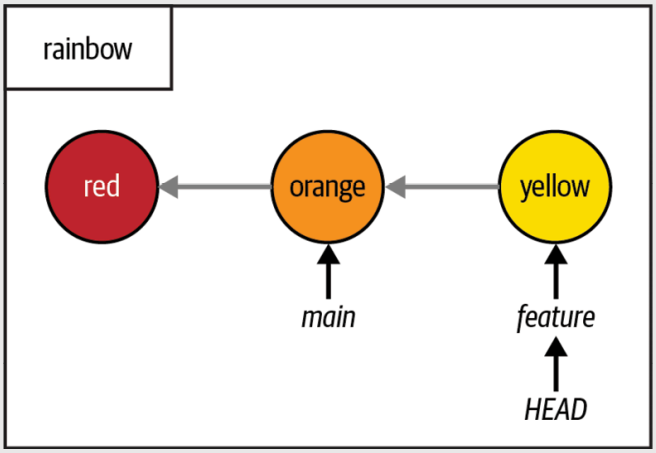

The re-created rainbow repository to start working from Chapter 5, without having gone through Chapter 4

Chapter 6 and 7 Prerequisite Setup

In Follow Along A-7, you will prepare the basic setup for the rainbow repository to start working from Chapters 6 or 7.

[FOLLOW ALONG A-7]

1. Use your command line application to open a command line window.

2. $ **cd desktop**

3. desktop $ **mkdir rainbow**

4. desktop $ **cd rainbow**

5. rainbow $ **git init -b main**
   Initialized empty Git repository in
   /Users/annaskoulikari/desktop/rainbow/.git/

6. Open the rainbow project directory in a text editor window and create a file called rainbowcolors.txt inside this directory.

7. In the rainbowcolors.txt file in your text editor, add “Red is the first color of the rainbow.” on line 1 and save the file.

8. rainbow $ **git add rainbowcolors.txt**

9. rainbow $ **git commit -m "red"**
   [main (root-commit) c26d0bc] red
   1 file changed, 1 insertion(+)
   create mode 100644 rainbowcolors.txt

10. In the rainbowcolors.txt file in your text editor, add “Orange is the second color of the rainbow.” on line 2 and save the file.

11. rainbow $ **git add rainbowcolors.txt**

12. rainbow $ **git commit -m "orange"**
    [main 7acb333] orange
    1 file changed, 2 insertions(+), 1 deletion(-)

13. rainbow $ **git branch feature**

[FOLLOW ALONG A-7]

14. rainbow $ **git switch feature**
    Switched to branch 'feature'

15. In the rainbowcolors.txt file in your text editor, add "Yellow is the third color of the rainbow." on line 3 and save the file.

16. rainbow $ **git add rainbowcolors.txt**

17. rainbow $ **git commit -m "yellow"**
    [feature fc8139c] yellow
    1 file changed, 2 insertions(+), 1 deletion(-)

18. rainbow $ **git switch main**
    Switched to branch 'main'


19. rainbow $ **git merge feature**
    Updating 7acb333..fc8139c
    Fast-forward
    rainbowcolors.txt | 3 ++-
    1 file changed, 2 insertions(+), 1 deletion(-)

[NOTE]

If you are using this section to start at Chapter 7 and you don't yet have a hosting service account and/or authentication details set up for HTTPS or SSH access, then you must go to Chapter 6 and carry out the exercises in that chapter before continuing. Following the instructions in this section will not be sufficient to complete the exercises in Chapter 7.

At the end of this process the rainbow repository you have created will contain the red, orange, and yellow commits, as shown in Visualize it A-4.

[VISUALIZE IT A-4]

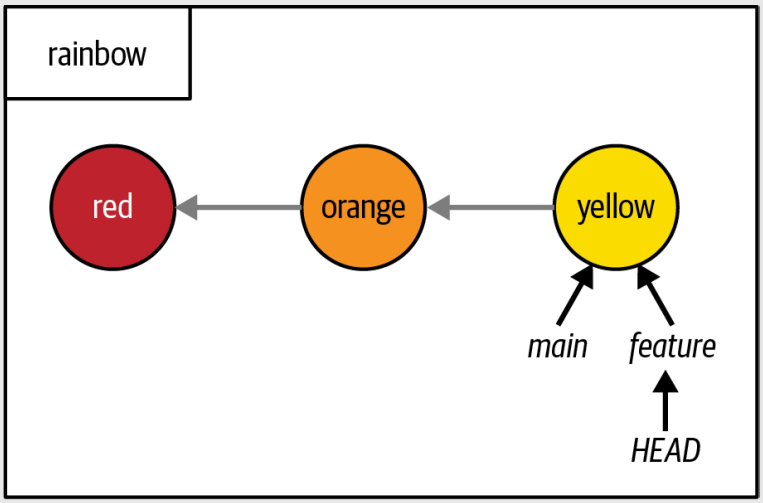

The re-created rainbow repository to start working from Chapters 6 or 7, without having gone through Chapter 5

Chapter 8 Prerequisite Setup

In Follow Along A-8, you will prepare the basic setup for the Rainbow project to start working from Chapter 8. In step 24, be sure to enter the entire command on a single line.

[FOLLOW ALONG A-8]

1. Use your command line application to open a command line window.

2. $ **cd desktop**

3. desktop $ **mkdir rainbow**

4. desktop $ **cd rainbow**

5. rainbow $ **git init -b main**
   Initialized empty Git repository in
   /Users/annaskoulikari/desktop/rainbow/.git/

6. Open the rainbow project directory in a text editor window and create a file called rainbowcolors.txt inside this directory.

7. In the rainbowcolors.txt file in your text editor, add “Red is the first color of the rainbow.” on line 1 and save the file.

8. rainbow $ **git add rainbowcolors.txt**

9. rainbow $ **git commit -m "red"**
   [main (root-commit) c26d0bc] red
   1 file changed, 1 insertion(+)
   create mode 100644 rainbowcolors.txt

10. In the rainbowcolors.txt file in your text editor, add “Orange is the second color of the rainbow.” on line 2 and save the file.

11. rainbow $ **git add rainbowcolors.txt**

12. rainbow $ **git commit -m "orange"**
    [main 7acb333] orange
    1 file changed, 2 insertions(+), 1 deletion(-)

13. rainbow $ **git branch feature**

[FOLLOW ALONG A-8]

14. rainbow $ **git switch feature**
    Switched to branch 'feature'

15. In the rainbowcolors.txt file in your text editor, add "Yellow is the third color of the rainbow." on line 3 and save the file.

16. rainbow $ **git add rainbowcolors.txt**

17. rainbow $ **git commit -m "yellow"**
    [feature fc8139c] yellow
    1 file changed, 2 insertions(+), 1 deletion(-)

18. rainbow $ **git switch main**
    Switched to branch 'main'

19. rainbow $ **git merge feature**
    Updating 7acb333..fc8139c
    Fast-forward
    rainbowcolors.txt | 3 ++-
    1 file changed, 2 insertions(+), 1 deletion(-)

20. If you don't yet have a hosting service account and/or authentication details set up for HTTPS or SSH access, then you must go to Chapter 6 to complete this part of the process now. Return to this Follow Along once that is done.

21. Log in to your hosting service account.

22. Create a remote repository. For more information on how to do this, go to the Learning Git repository (*https://github.com/gitlearningjourney/learning-git*) or go directly to your hosting service's documentation.
    When creating the repository for this exercise:

    - For the repository name, use rainbow-remote.
    - You may choose to make the repository public or private. I recommend making it private.

[FOLLOW ALONG A-8]

- Do not include any files. For example, do not include a README file or a .gitignore file.
- If you are asked to provide a default branch name, you may leave the field blank or set it to main.

23 Once you've finished the steps to create the remote repository, locate the remote repository URL. If you're unsure of where to find this, consult your hosting service's documentation.
There will be two versions of the URL, one for HTTPS access and one for SSH access. In the examples in this book, the two remote repository URLs are:

- HTTPS: https://github.com/gitlearningjourney/rainbow-remote.git
- SSH: git@github.com:gitlearningjourney/rainbow-remote.git

Copy the URL for the protocol you have chosen to use. In the following steps, wherever you see my URL you must use your URL instead.

24 rainbow $ **git remote add origin https://github.com/gitlearnin gjourney/rainbow-remote.git**

25 rainbow $ **git push origin main**
Enumerating objects: 9, done.
Counting objects: 100% (9/9), done.
Delta compression using up to 4 threads
Compressing objects: 100% (5/5), done.
Writing objects: 100% (9/9), 747 bytes | 373.00 KiB/s, done.
Total 9 (delta 1), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (1/1), done.
To github.com:gitlearningjourney/rainbow-remote.git
* [new branch] main -> main

26 rainbow $ **git switch feature**
Switched to branch 'feature'


27 rainbow $ **git push origin feature**
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0

[FOLLOW ALONG A-8]

```
remote:
remote: Create a pull request for 'feature' on GitHub by visiting:
remote: https://github.com/gitlearningjourney/rainbow-
remote/pull/new/feature
remote:
To github.com:gitlearningjourney/rainbow-remote.git
* [new branch] feature -> feature
```

At the end of this process the Rainbow project you have created will contain the red, orange, and yellow commits in all the repositories, as shown in Visualize it A-5.

[VISUALIZE IT A-5]

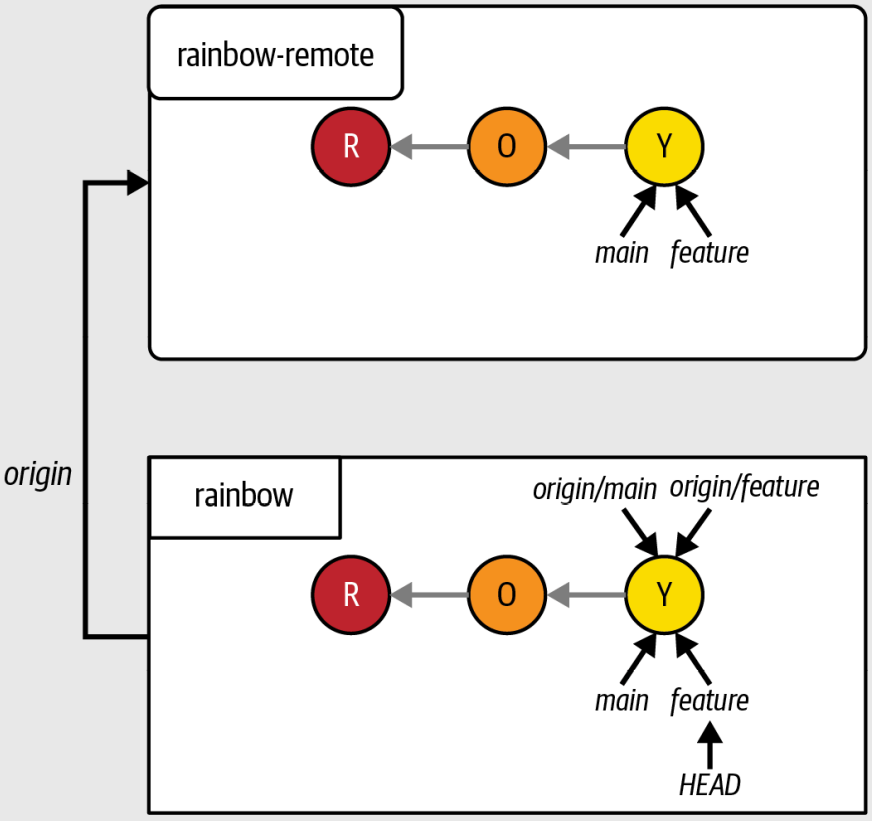

The re-created Rainbow project to start working from Chapter 8, without having gone through Chapter 7

Chapter 9 Prerequisite Setup

In Follow Along A-9, you will prepare the basic setup for the Rainbow project to start working from Chapter 9. In steps 14 and 17, be sure to enter the entire command on a single line.

[FOLLOW ALONG A-9]

1. Use your command line application to open a command line window.

2. $ **cd desktop**

3. desktop $ **mkdir rainbow**

4. desktop $ **cd rainbow**

5. rainbow $ **git init -b main**
   Initialized empty Git repository in
   /Users/annaskoulikari/desktop/rainbow/.git/

6. Open the rainbow project directory in a text editor window and create a file called rainbowcolors.txt inside this directory.

7. Add the following text to the rainbowcolors.txt file in your text editor, and save the file:
   Red is the first color of the rainbow.
   Orange is the second color of the rainbow.
   Yellow is the third color of the rainbow.
   Green is the fourth color of the rainbow.

8. rainbow $ **git add rainbowcolors.txt**

9. rainbow $ **git commit -m "green"**
   [main (root-commit) 4e59074] "green"
   1 file changed, 4 insertions(+)
   create mode 100644 rainbowcolors.txt

10. If you don't yet have a hosting service account and/or authentication details set up for HTTPS or SSH access, then you must go to Chapter 6 to complete this part of the process now. Return to this Follow Along once that is done.

11. Log in to your hosting service account.

[FOLLOW ALONG A-9]

12 Create a remote repository. For more information on how to do this, go to the Learning Git repository (*https://github.com/gitlearningjourney/learning-git*) or go directly to your hosting service's documentation.
When creating the repository for this exercise:

- For the repository name, use rainbow-remote.
- You may choose to make the repository public or private. I recommend making it private.
- Do not include any files. For example, do not include a README file or a .gitignore file.
- If you are asked to provide a default branch name, you may leave the field blank or set it to main.

13 Once you've finished the steps to create the remote repository, locate the remote repository URL. If you're unsure of where to find this, consult your hosting service's documentation.
There will be two versions of the URL, one for HTTPS access and one for SSH access. In the examples in this book, the two remote repository URLs are:

- HTTPS: https://github.com/gitlearningjourney/rainbow-remote.git
- SSH: git@github.com:gitlearningjourney/rainbow-remote.git

Copy the URL for the protocol you have chosen to use. In the following steps, wherever you see my URL you must use your URL instead.

14 rainbow $ **git remote add origin https://github.com/gitlearningjourney/rainbow-remote.git**

15 rainbow $ **git push origin main**
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 4 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 311 bytes | 311.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To github.com:gitlearningjourney/rainbow-remote.git

[FOLLOW ALONG A-9]

```
 * [new branch] main -> main
```

16. Open a new command line window to navigate to the desktop directory to simulate that you are your friend now.

17. desktop $ **git clone https://github.com/gitlearningjourney/rainbow-remote.git friend-rainbow**


```
Cloning into 'friend-rainbow'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 3 (delta 0), reused 3 (delta 0), pack-reused 0
Receiving objects: 100% (3/3), done.
```

18. desktop $ **cd friend-rainbow**

19. Open the friend-rainbow project directory in a new text editor window.

At the end of this process the minimum setup for the Rainbow project you have created will contain just one commit, the green commit, in all the repositories, as shown in Visualize it A-6.

[VISUALIZE IT A-6]

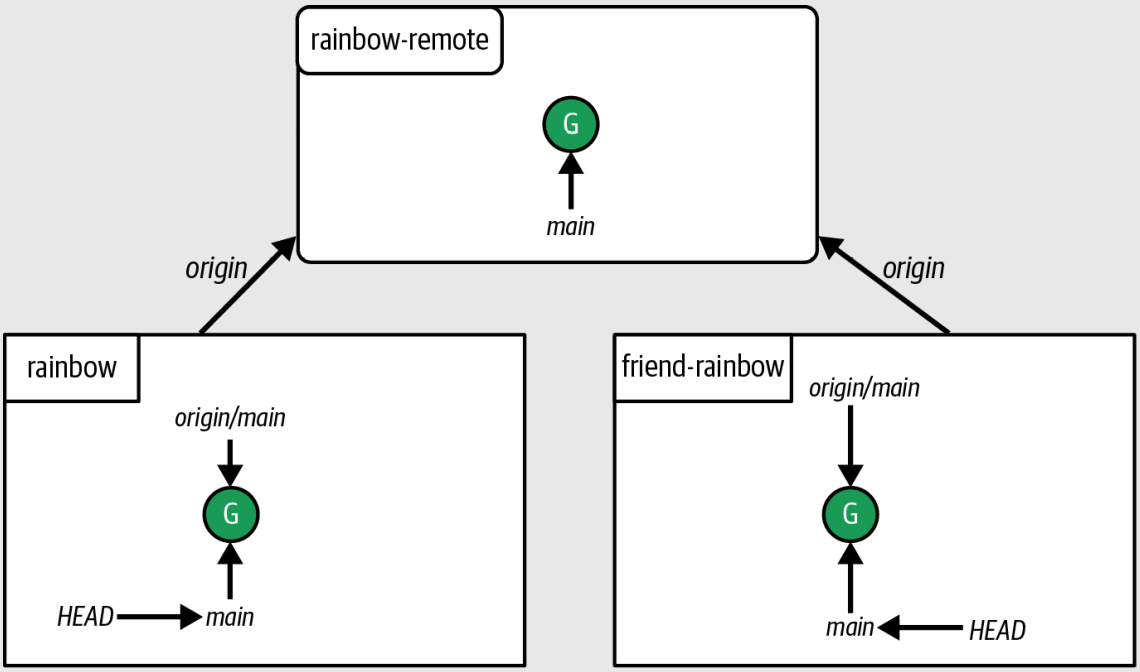

The re-created Rainbow project to start working from Chapter 9, without having gone through Chapter 8

Chapter 10 Prerequisite Setup

In Follow Along A-10, you will prepare the basic setup for the Rainbow project to start working from Chapter 10. In steps 15 and 19, be sure to enter the entire command on a single line.

[FOLLOW ALONG A-10]

1. Use your command line application to open a command line window.

2. $ **cd desktop**

3. desktop $ **mkdir rainbow**

4. desktop $ **cd rainbow**

5. rainbow $ **git init -b main**
   Initialized empty Git repository in
   /Users/annaskoulikari/desktop/rainbow/.git/

6. Open the rainbow project directory in a text editor window and create a file called rainbowcolors.txt and a file called othercolors.txt inside this directory.

7. Add the following text to the rainbowcolors.txt file in your text editor and save the file:
   Red is the first color of the rainbow.
   Orange is the second color of the rainbow.
   Yellow is the third color of the rainbow.
   Green is the fourth color of the rainbow.
   Blue is the fifth color of the rainbow.

8. Add the following text to the othercolors.txt file in your text editor and save the file:
   Brown is not a color in the rainbow.

9. rainbow $ **git add rainbowcolors.txt othercolors.txt**

10. rainbow $ **git commit -m "fake merge commit 1"**
    2 files changed, 6 insertions(+)
    create mode 100644 othercolors.txt
    create mode 100644 rainbowcolors.txt

11.

[FOLLOW ALONG A-10]

If you don't yet have a hosting service account and/or authentication details set up for HTTPS or SSH access, then you must go to Chapter 6 to complete this part of the process now. Return to this Follow Along once that is done.

12 Log in to your hosting service account.

13 Create a remote repository. For more information on how to do this, go to the Learning Git repository (*https://github.com/gitlearningjourney/learning-git*) or go directly to your hosting service's documentation.
When creating the repository for this exercise:

- For the repository name, use rainbow-remote.
- You may choose to make the repository public or private. I recommend making it private.
- Do not include any files. For example, do not include a README file or a .gitignore file.
- If you are asked to provide a default branch name, you may leave the field blank or set it to main.

14 Once you've finished the steps to create the remote repository, locate the remote repository URL. If you're unsure of where to find this, consult your hosting service's documentation.
There will be two versions of the URL, one for HTTPS access and one for SSH access. In the examples in this book, the two remote repository URLs are:

- HTTPS: https://github.com/gitlearningjourney/rainbow-remote.git
- SSH: git@github.com:gitlearningjourney/rainbow-remote.git

Copy the URL for the protocol you have chosen to use. In the following steps, wherever you see my URL you must use your URL instead.

15 rainbow $ **git remote add origin https://github.com/gitlearningjourney/rainbow-remote.git**

16 rainbow $ **git push origin main**

[FOLLOW ALONG A-10]

```
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 4 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (4/4), 394 bytes | 394.00 KiB/s, done.
Total 4 (delta 0), reused 0 (delta 0), pack-reused 0
To github.com:gitlearningjourney/rainbow-remote.git
* [new branch] main -> main
```

17 rainbow $ **git branch -u origin/main**
branch 'main' set up to track 'origin/main'.

18 Open a new command line window to navigate to the desktop directory to simulate that you are your friend now.

19 desktop $ **git clone https://github.com/gitlearningjourney/rainbow-remote.git friend-rainbow**
Cloning into 'friend-rainbow'...
remote: Enumerating objects: 4, done.
remote: Counting objects: 100% (4/4), done.
remote: Compressing objects: 100% (3/3), done.
remote: Total 4 (delta 0), reused 4 (delta 0), pack-reused 0
Receiving objects: 100% (4/4), done.

20 desktop $ **cd friend-rainbow**


21 Open the friend-rainbow project directory in a new text editor window.

At the end of this process the minimum setup for the Rainbow project you have created will contain just one commit, the fake merge commit 1 (M1), in all the repositories, as shown in Visualize it A-7.

[NOTE]

The last commit created in Chapter 9 was merge commit 1 (M1), which has two parents. Your commit will be the first and only one in the repositories, so it won't have any parent commits. Therefore, it is a fake merge commit.

[VISUALIZE IT A-7]

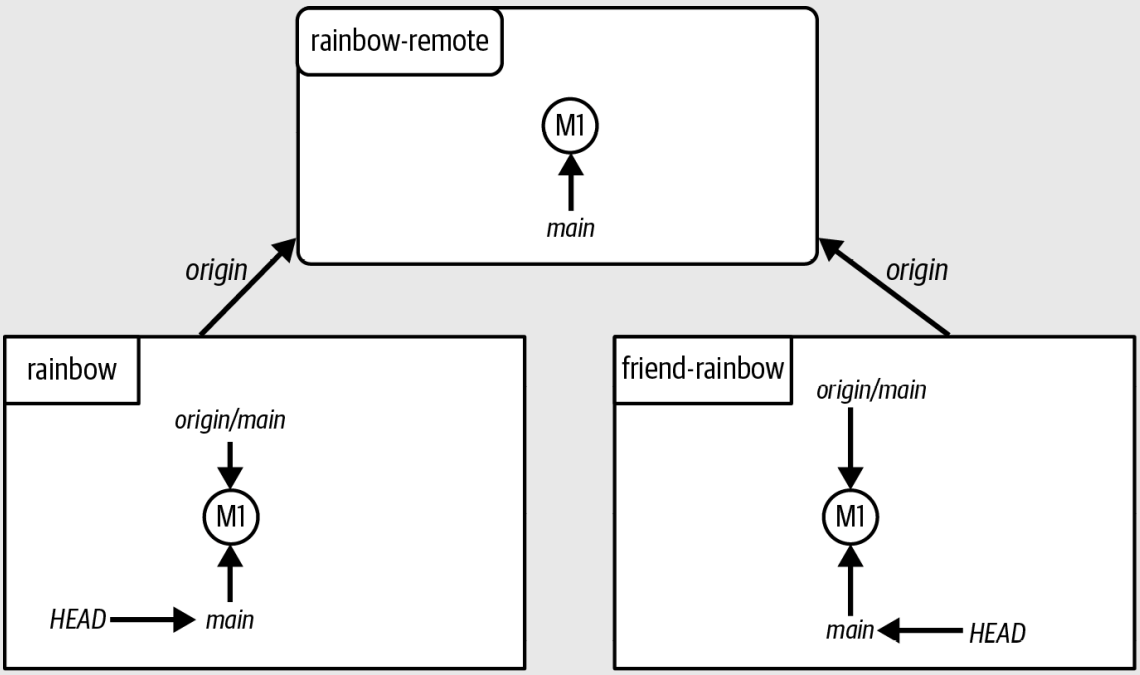

The re-created Rainbow project to start working from Chapter 10, without having gone through Chapter 9

Chapter 11 Prerequisite Setup

In Follow Along A-11, you will prepare the basic setup for the Rainbow project to start working from Chapter 11. In steps 15 and 19, be sure to enter the entire command on a single line.

[FOLLOW ALONG A-11]

1. Use your command line application to open a command line window.

2. $ **cd desktop**

3. desktop $ **mkdir rainbow**

4. desktop $ **cd rainbow**

5. rainbow $ **git init -b main**
   Initialized empty Git repository in
   /Users/annaskoulikari/desktop/rainbow/.git/

6. Open the rainbow project directory in a text editor window and create a file called rainbowcolors.txt and a file called othercolors.txt inside this directory.

7. Add the following text to the rainbowcolors.txt file in your text editor and save the file:
   Red is the first color of the rainbow.
   Orange is the second color of the rainbow.
   Yellow is the third color of the rainbow.
   Green is the fourth color of the rainbow.
   Blue is the fifth color of the rainbow.
   Indigo is the sixth color of the rainbow.
   Violet is the seventh color of the rainbow.

8. Add the following text to the othercolors.txt file in your text editor and save the file:
   Brown is not a color in the rainbow.

9. rainbow $ **git add rainbowcolors.txt othercolors.txt**

10. rainbow $ **git commit -m "fake merge commit 2"**
    [main (root-commit) 32fa0b7] fake merge commit 2
    2 files changed, 8 insertions(+)
    create mode 100644 othercolors.txt

[FOLLOW ALONG A-11]

create mode 100644 rainbowcolors.txt

11 If you don't yet have a hosting service account and/or authentication details set up for HTTPS or SSH access, then you must go to Chapter 6 to complete this part of the process now. Return to this Follow Along once that is done.

12 Log in to your hosting service account.

13 Create a remote repository. For more information on how to do this, go to the Learning Git repository (*https://github.com/gitlearningjourney/learning-git*) or go directly to your hosting service's documentation.
When creating the repository for this exercise:

- For the repository name, use rainbow-remote.
- You may choose to make the repository public or private. I recommend making it private.
- Do not include any files. For example, do not include a README file or a .gitignore file.
- If you are asked to provide a default branch name, you may leave the field blank or set it to main.

14 Once you've finished the steps to create the remote repository, locate the remote repository URL. If you're unsure of where to find this, consult your hosting service's documentation.
There will be two versions of the URL, one for HTTPS access and one for SSH access. In the examples in this book, the two remote repository URLs are:

- HTTPS: https://github.com/gitlearningjourney/rainbow-remote.git
- SSH: git@github.com:gitlearningjourney/rainbow-remote.git

Copy the URL for the protocol you have chosen to use. In the following steps, wherever you see my URL you must use your URL instead.

15 rainbow $ **git remote add origin https://github.com/gitlearningjourney/rainbow-remote.git**

[FOLLOW ALONG A-11]

16. rainbow $ **git push origin main**
    Enumerating objects: 4, done.
    Counting objects: 100% (4/4), done.
    Delta compression using up to 4 threads
    Compressing objects: 100% (3/3), done.
    Writing objects: 100% (4/4), 413 bytes | 413.00 KiB/s, done.
    Total 4 (delta 0), reused 0 (delta 0), pack-reused 0
    To github.com:gitlearningjourney/rainbow-remote.git
    * [new branch] main -> main

17. rainbow $ **git branch -u origin/main**
    branch 'main' set up to track 'origin/main'.

18. Open a new command line window to navigate to the desktop directory to simulate that you are your friend now.

19. desktop $ **git clone https://github.com/gitlearningjourney/rainbow-remote.git friend-rainbow**
    Cloning into 'friend-rainbow'...
    remote: Enumerating objects: 4, done.
    remote: Counting objects: 100% (4/4), done.
    remote: Compressing objects: 100% (3/3), done.
    remote: Total 4 (delta 0), reused 4 (delta 0), pack-reused 0
    Receiving objects: 100% (4/4), done.

20. desktop $ **cd friend-rainbow**


21. Open the friend-rainbow project directory in a new text editor window.

At the end of this process the minimum setup for the Rainbow project you have created will contain just one commit, the fake merge commit 2 (M2), in all the repositories, as shown in Visualize it A-8.

[NOTE]

The last commit created in Chapter 10 was merge commit 2 (M2), which has two parents. Your commit will be the first and only one in the repositories, so it won't have any parent commits. Therefore, it is a fake merge commit.

[VISUALIZE IT A-8]

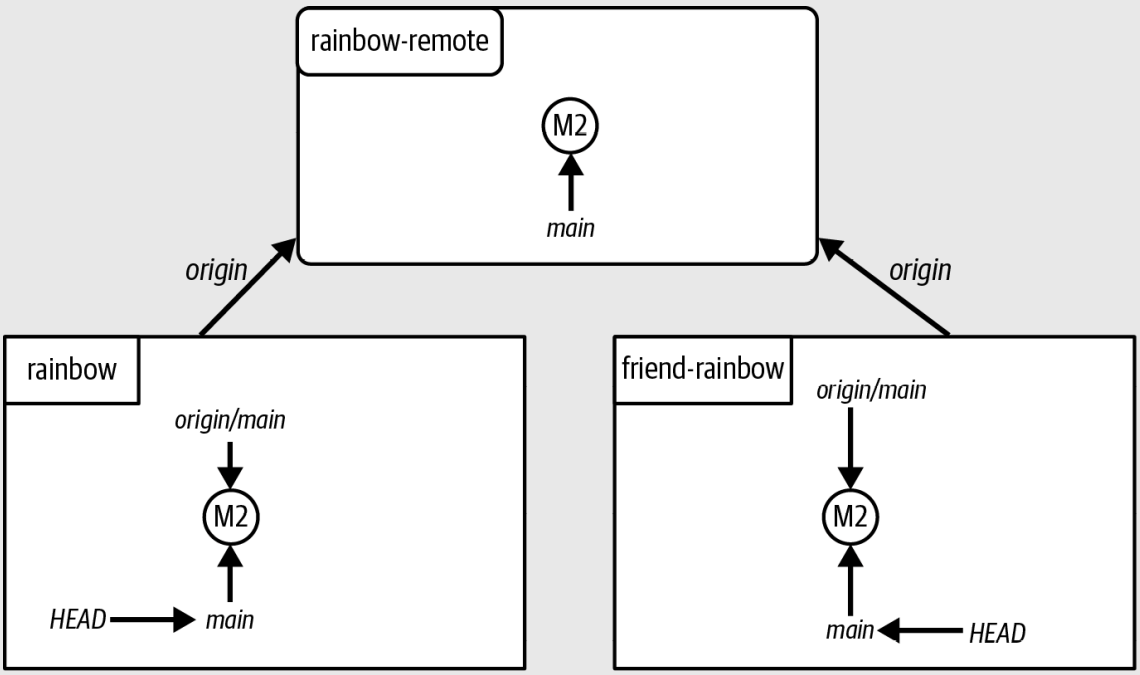

The re-created Rainbow project to start working from Chapter 11, without having gone through Chapter 10

Chapter 12 Prerequisite Setup

In Follow Along A-12, you will prepare the basic setup for the Rainbow project to start working from Chapter 12. In steps 15 and 19, be sure to enter the entire command on a single line.

[FOLLOW ALONG A-12]

1. Use your command line application to open a command line window.

2. $ **cd desktop**

3. desktop $ **mkdir rainbow**

4. desktop $ **cd rainbow**

5. rainbow $ **git init -b main**
   Initialized empty Git repository in
   /Users/annaskoulikari/desktop/rainbow/.git/

6. Open the rainbow project directory in a text editor window and create a file called rainbowcolors.txt and a file called othercolors.txt inside this directory.

7. Add the following text to the rainbowcolors.txt file in your text editor and save the file:
   Red is the first color of the rainbow.
   Orange is the second color of the rainbow.
   Yellow is the third color of the rainbow.
   Green is the fourth color of the rainbow.
   Blue is the fifth color of the rainbow.
   Indigo is the sixth color of the rainbow.
   Violet is the seventh color of the rainbow.
   These are the colors of the rainbow.

8. Add the following text to the othercolors.txt file in your text editor and save the file:
   Brown is not a color in the rainbow.
   Gray is not a color in the rainbow.
   Black is not a color in the rainbow.

9. rainbow $ **git add rainbowcolors.txt othercolors.txt**

10. rainbow $ **git commit -m "rainbow"**

[FOLLOW ALONG A-12]

```
[main (root-commit) 56b92dc] "rainbow"
2 files changed, 11 insertions(+)
create mode 100644 othercolors.txt
create mode 100644 rainbowcolors.txt
```

11 If you don't yet have a hosting service account and/or authentication details set up for HTTPS or SSH access, then you must go to Chapter 6 to complete this part of the process now. Return to this Follow Along once that is done.

12 Log in to your hosting service account.

13 Create a remote repository. For more information on how to do this, go to the Learning Git repository (*https://github.com/gitlearningjourney/learning-git*) or go directly to your hosting service's documentation.
When creating the repository for this exercise:

- For the repository name, use rainbow-remote.
- You may choose to make the repository public or private. I recommend making it private.
- Do not include any files. For example, do not include a README file or a .gitignore file.
- If you are asked to provide a default branch name, you may leave the field blank or set it to main.

14 Once you've finished the steps to create the remote repository, locate the remote repository URL. If you're unsure of where to find this, consult your hosting service's documentation.
There will be two versions of the URL, one for HTTPS access and one for SSH access. In the examples in this book, the two remote repository URLs are:

- HTTPS: https://github.com/gitlearningjourney/rainbow-remote.git
- SSH: git@github.com:gitlearningjourney/rainbow-remote.git

Copy the URL for the protocol you have chosen to use. In the following steps, wherever you see my URL you must use your URL instead.

[FOLLOW ALONG A-12]

15 rainbow $ **git remote add origin https://github.com/gitlearningjourney/rainbow-remote.git**

16 rainbow $ **git push origin main**
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 4 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (4/4), 445 bytes | 445.00 KiB/s, done.
Total 4 (delta 0), reused 0 (delta 0), pack-reused 0
To github.com:gitlearningjourney/rainbow-remote.git
* [new branch] main -> main

17 rainbow $ **git branch -u origin/main**
branch 'main' set up to track 'origin/main'.

18 Open a new command line window to navigate to the desktop directory to simulate that you are your friend now.

19 desktop $ **git clone https://github.com/gitlearningjourney/rainbow-remote.git friend-rainbow**
Cloning into 'friend-rainbow'...
remote: Enumerating objects: 4, done.
remote: Counting objects: 100% (4/4), done.
remote: Compressing objects: 100% (4/4), done.
remote: Total 4 (delta 0), reused 4 (delta 0), pack-reused 0
Receiving objects: 100% (4/4), done.

20 desktop $ **cd friend-rainbow**

21 Open the friend-rainbow project directory in a new text editor window.


At the end of this process the minimum setup for the Rainbow project you have created will contain just one commit, the rainbow commit, in all the repositories, as shown in Visualize it A-9.

[NOTE]

The rainbow commit at the start of Chapter 12 is the rebased rainbow commit, which is why it is labeled Ra' in the Visualize It diagrams in that chapter.

Your rainbow commit at the end of this process is a regular commit. Keep this in mind as you work through the chapter. See Appendix C for a summary of the visual language of the book, if you would like a refresher.

[VISUALIZE IT A-9]

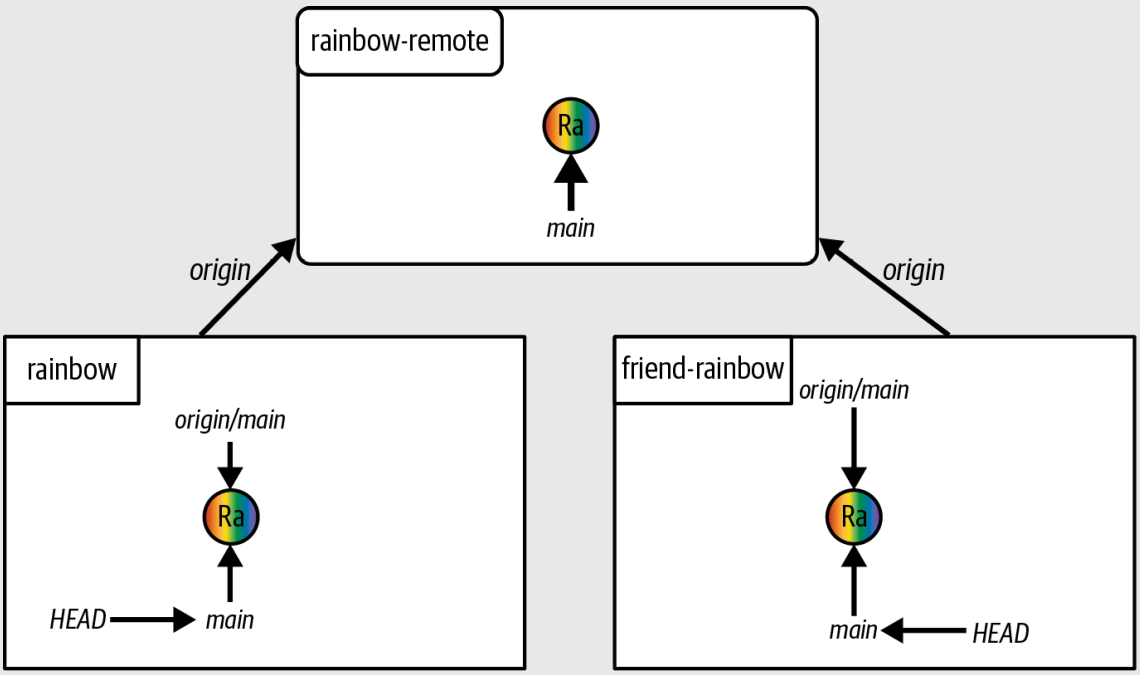

The re-created Rainbow project, to start working from Chapter 12 without having gone through Chapter 11

Previous chapter

< [Epilogue]

Next chapter

Appendix B: Command Quick Reference >