

# Data or Feature Preprocessing


---

## Importance of data preprocessing

Real-world databases (from which features are supposed to be extracted) are highly susceptible to noisy, missing, and inconsistent data due to their typically huge size (often several gigabytes or more) and their likely origin from multiple, heterogeneous sources. Low-quality data will lead to low-quality classification /clustering /mining results. Thus data must be preprocessed in order to help improve the quality of the data and consequently of the desired results.

# Chapter 3: Data Preprocessing

---

- Data Preprocessing: An Overview 
  - Data Quality
  - Major Tasks in Data Preprocessing
- Data Cleaning
- Data Integration
- Data Reduction
- Data Transformation and Data Discretization
- Summary

# Data Quality: Why Preprocess the Data?

---

- Measures for data quality: A multidimensional view
  - Accuracy: correct or wrong, accurate or not
  - Completeness: not recorded, unavailable, ...
  - Consistency: some modified but some not, dangling, ...
  - Timeliness: timely update?
  - Believability: how trustable the data are correct?
  - Interpretability: how easily the data can be understood?

# Major Tasks in Data Preprocessing

---

- **Data cleaning**

- Fill in missing values, smooth noisy data, identify or remove outliers, and resolve inconsistencies

- **Data integration**

- Integration of multiple databases, data cubes, or files

- **Data reduction**


- Dimensionality reduction
- Numerosity reduction
- Data compression

- **Data transformation and data discretization**

- Normalization
- Concept hierarchy generation


# Data Mining: A KDD Process

- Data mining: the core of knowledge discovery process.

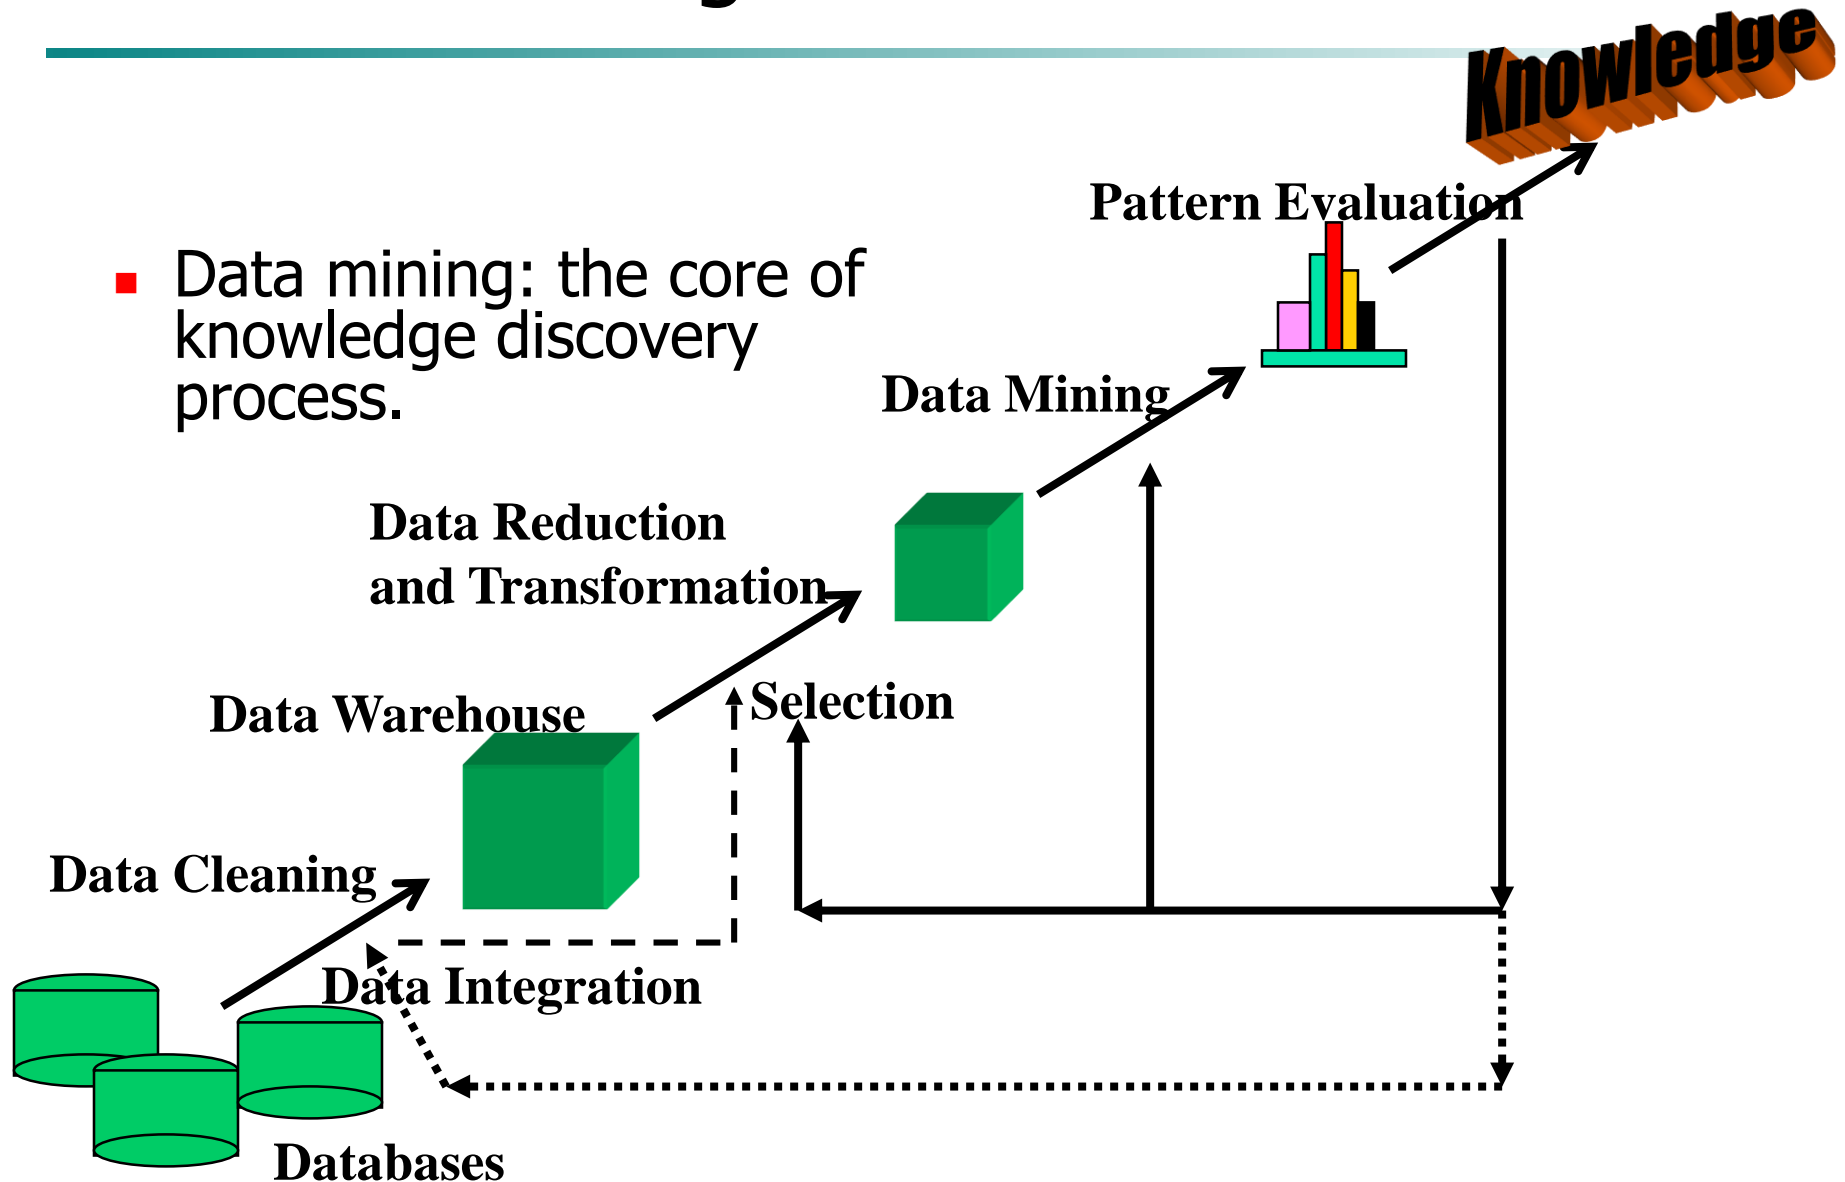

# Chapter 3: Data Preprocessing

---

- Data Preprocessing: An Overview
  - Data Quality
  - Major Tasks in Data Preprocessing
- Data Cleaning 
- Data Integration
- Data Reduction
- Data Transformation and Data Discretization
- Summary

# Data Cleaning

- Data in the Real World Is Dirty: Lots of potentially incorrect data, e.g., instrument faulty, human or computer error, transmission error
  - incomplete: lacking attribute values, lacking certain attributes of interest, or containing only aggregate data
    - e.g., *Occupation*=" " (missing data)
  - noisy: containing noise, errors, or outliers
    - e.g., *Salary*="−10" (an error)
  - inconsistent: containing discrepancies in codes or names, e.g.,
    - *Age*="42", *Birthday*="03/07/2010"
    - Was rating "1, 2, 3", now rating "A, B, C"
    - discrepancy between duplicate records
  - Intentional (e.g., *disguised missing* data)
    - Jan. 1 as everyone's birthday?

# Incomplete (Missing) Data

---

- Data is not always available
  - E.g., many tuples have no recorded value for several attributes, such as customer income in sales data
- Missing data may be due to
  - equipment malfunction
  - inconsistent with other recorded data and thus deleted
  - data not entered due to misunderstanding
  - certain data may not be considered important at the time of entry
  - not register history or changes of the data
- Missing data may need to be inferred



# How to Handle Missing Data?

---

- Ignore the tuple: usually done when class label is missing (when doing classification)—not effective when the % of missing values per attribute varies considerably
- Fill in the missing value manually: tedious + infeasible?
- Fill in it automatically with
  - a global constant : e.g., “unknown”, a new class?!
  - the attribute mean
  - the attribute mean for all samples belonging to the same class: smarter
  - the most probable value: inference-based such as Bayesian formula or decision tree

# Noisy Data

---

- **Noise**: random error or variance in a measured variable
- **Incorrect attribute values** may be due to
  - faulty data collection instruments
  - data entry problems
  - data transmission problems
  - technology limitation
  - inconsistency in naming convention
- **Other data problems** which require data cleaning
  - duplicate records
  - incomplete data
  - inconsistent data


# How to Handle Noisy Data?

---

- Binning
  - first sort data and partition into (equal-frequency) bins
  - then one can smooth by bin means, smooth by bin median, smooth by bin boundaries, etc.
- Regression
  - smooth by fitting the data into regression functions
- Clustering
  - detect and remove outliers
- Combined computer and human inspection
  - detect suspicious values and check by human (e.g., deal with possible outliers)

# Chapter 3: Data Preprocessing

---

- Data Preprocessing: An Overview
  - Data Quality
  - Major Tasks in Data Preprocessing
- Data Cleaning
- Data Integration
- Data Reduction 
- Data Transformation and Data Discretization
- Summary


# Data Reduction/Feature Selection

---

- **Data reduction:** Obtain a reduced representation of the data set that is much smaller in volume but yet produces the same (or almost the same) analytical results
- Why data reduction? — A real-life application may need to handle terabytes of data. Complex data analysis may take a very long time to run on the complete data set.
- Data reduction (i.e. Feature Selection and Feature Extraction) strategies
  - **Dimensionality reduction**, e.g., remove unimportant attributes
    - Wavelet transforms
    - Principal Components Analysis (PCA)
    - Feature subset selection, feature creation
  - **Numerosity reduction**
    - Regression and Log-Linear Models
    - Histograms, clustering, sampling
    - Data cube aggregation
  - **Data compression**

# Principal Component Analysis (PCA)

- Find a projection that captures the largest amount of variation in data
- The original data are projected onto a much smaller space, resulting in dimensionality reduction. We find the eigenvectors of the covariance matrix, and these eigenvectors define the new space

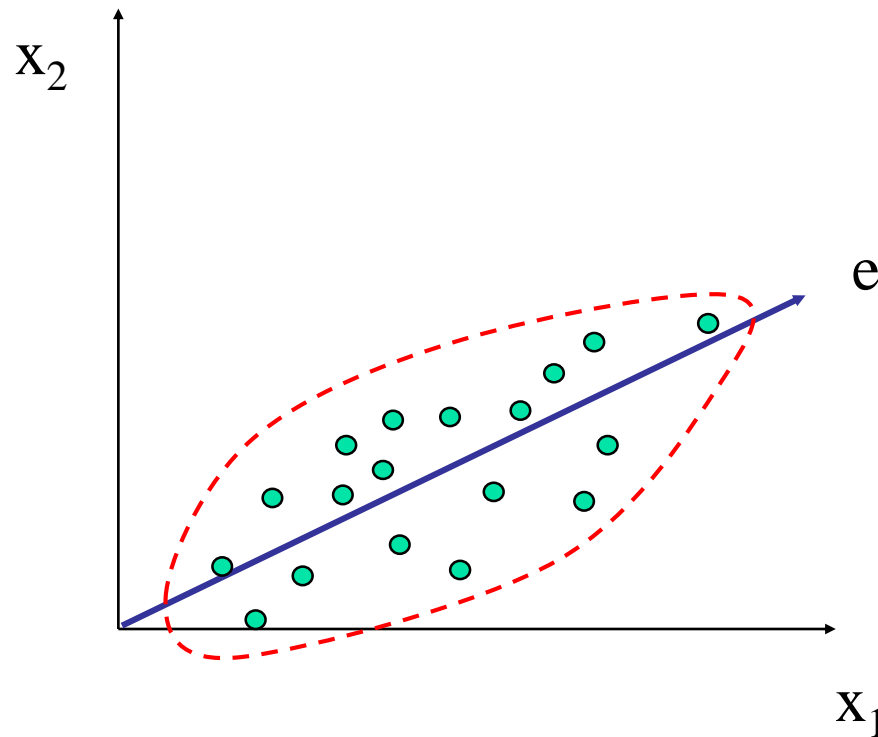

# Principal Component Analysis (Steps)

---

- Given  $N$  data vectors from  $n$ -dimensions, find  $k \leq n$  orthogonal vectors (*principal components*) that can be best used to represent data
  - Normalize input data: Each attribute falls within the same range
  - Compute  $k$  orthonormal (unit) vectors, i.e., *principal components*
  - Each input data (vector) is a linear combination of the  $k$  principal component vectors
  - The principal components are sorted in order of decreasing “significance” or strength
  - Since the components are sorted, the size of the data can be reduced by eliminating the *weak components*, i.e., those with low variance (i.e., using the strongest principal components, it is possible to reconstruct a good approximation of the original data)
- Works for numeric data only

# Attribute Subset Selection

---

- Another way to reduce dimensionality of data
- Redundant attributes
  - Duplicate much or all of the information contained in one or more other attributes
  - E.g., purchase price of a product and the amount of sales tax paid
- Irrelevant attributes
  - Contain no information that is useful for the problem at hand
  - E.g., students' ID is often irrelevant to the task of predicting students' GPA




# Heuristic Search in Attribute Selection

---

- There are  $2^d$  possible attribute combinations of  $d$  attributes
- Typical heuristic attribute selection methods:
  - Best single attribute under the attribute independence assumption: choose by significance tests
  - Best step-wise feature selection:
    - The best single-attribute is picked first
    - Then next best attribute condition to the first, ...
  - Step-wise attribute elimination:
    - Repeatedly eliminate the worst attribute
  - Best combined attribute selection and elimination
  - Optimal branch and bound:
    - Use attribute elimination and backtracking

# Histogram Analysis

- Divide data into buckets and store average (sum) for each bucket
- Partitioning rules:
  - Equal-width: equal bucket range
  - Equal-frequency (or equal-depth)

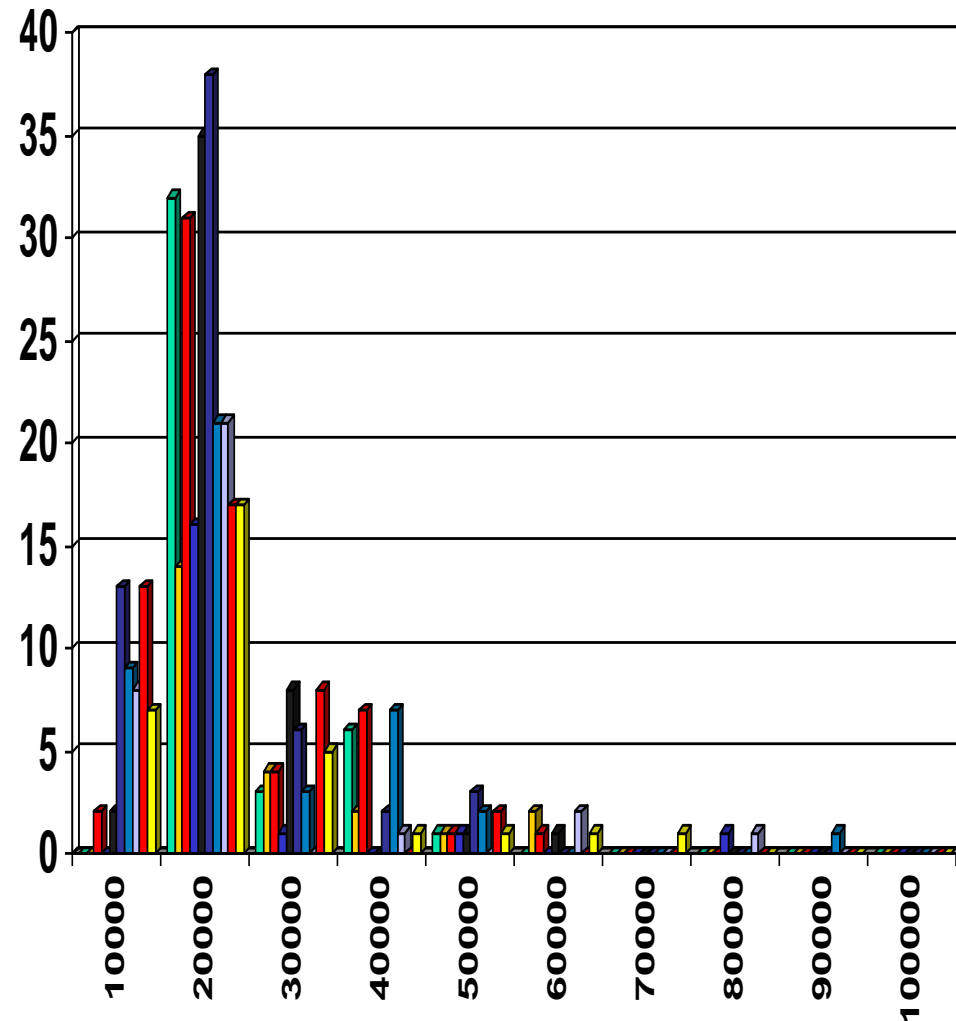

# Clustering

---

- Partition data set into clusters based on similarity, and store cluster representation (e.g., centroid and diameter) only
- Can be very effective if data is clustered but not if data is “smeared”
- Can have hierarchical clustering and be stored in multi-dimensional index tree structures
- There are many choices of clustering definitions and clustering algorithms
- Cluster analysis will be studied in depth in Chapter 10

# Chapter 3: Data Preprocessing

---

- Data Preprocessing: An Overview
  - Data Quality
  - Major Tasks in Data Preprocessing
- Data Cleaning
- Data Integration
- Data Reduction
- Data Transformation and Data Discretization
- Summary



# Data Transformation

---

- A function that maps the entire set of values of a given attribute to a new set of replacement values s.t. each old value can be identified with one of the new values
- Methods
  - Smoothing: Remove noise from data
  - Attribute/feature construction
    - New attributes constructed from the given ones
  - Aggregation: Summarization, data cube construction
  - Normalization: Scaled to fall within a smaller, specified range
    - min-max normalization
    - z-score normalization
    - normalization by decimal scaling
  - Discretization: Concept hierarchy climbing

# Normalization

- **Min-max normalization:** to  $[new\_min_A, new\_max_A]$

$$v' = \frac{v - min_A}{max_A - min_A} (new\_max_A - new\_min_A) + new\_min_A$$

- Ex. Let income range \$12,000 to \$98,000 normalized to [0.0, 1.0]. Then \$73,000 is mapped to  $\frac{73,600 - 12,000}{98,000 - 12,000} (1.0 - 0) + 0 = 0.716$

- **Z-score normalization** ( $\mu$ : mean,  $\sigma$ : standard deviation):

$$v' = \frac{v - \mu_A}{\sigma_A}$$

- Ex. Let  $\mu = 54,000$ ,  $\sigma = 16,000$ . Then  $\frac{73,600 - 54,000}{16,000} = 1.225$

- **Normalization by decimal scaling**

$$v' = \frac{v}{10^j} \quad \text{Where } j \text{ is the smallest integer such that } \text{Max}(|v'|) < 1$$

# Discretization

---

- Three types of attributes
  - Nominal—values from an unordered set, e.g., color, profession
  - Ordinal—values from an ordered set, e.g., military or academic rank
  - Numeric—real numbers, e.g., integer or real numbers
- Discretization: Divide the range of a continuous attribute into intervals
  - Interval labels can then be used to replace actual data values
  - Reduce data size by discretization
  - Supervised vs. unsupervised
  - Split (top-down) vs. merge (bottom-up)
  - Discretization can be performed recursively on an attribute
  - Prepare for further analysis, e.g., classification

# Data Discretization Methods

---

- Typical methods: All the methods can be applied recursively
  - Binning
    - Top-down split, unsupervised
  - Histogram analysis
    - Top-down split, unsupervised
  - Clustering analysis (unsupervised, top-down split or bottom-up merge)
  - Decision-tree analysis (supervised, top-down split)
  - Correlation (e.g.,  $\chi^2$ ) analysis (unsupervised, bottom-up merge)



# Simple Discretization: Binning

---




- **Equal-width** (distance) partitioning
  - Divides the range into  $N$  intervals of equal size: uniform grid
  - if  $A$  and  $B$  are the lowest and highest values of the attribute, the width of intervals will be:  $W = (B - A) / N$ .
  - The most straightforward, but outliers may dominate presentation
  - Skewed data is not handled well
- **Equal-depth** (frequency) partitioning
  - Divides the range into  $N$  intervals, each containing approximately same number of samples
  - Good data scaling
  - Managing categorical attributes can be tricky

# Binning Methods for Data Smoothing


---

- ❑ Sorted data for price (in dollars): 4, 8, 9, 15, 21, 21, 24, 25, 26, 28, 29, 34
- \* Partition into equal-frequency (**equi-depth**) bins:
  - Bin 1: 4, 8, 9, 15
  - Bin 2: 21, 21, 24, 25
  - Bin 3: 26, 28, 29, 34
- \* Smoothing by **bin means**:
  - Bin 1: 9, 9, 9, 9
  - Bin 2: 23, 23, 23, 23
  - Bin 3: 29, 29, 29, 29
- \* Smoothing by **bin boundaries**:
  - Bin 1: 4, 4, 4, 15
  - Bin 2: 21, 21, 25, 25
  - Bin 3: 26, 26, 26, 34

# Discretization Without Using Class Labels (Binning vs. Clustering)

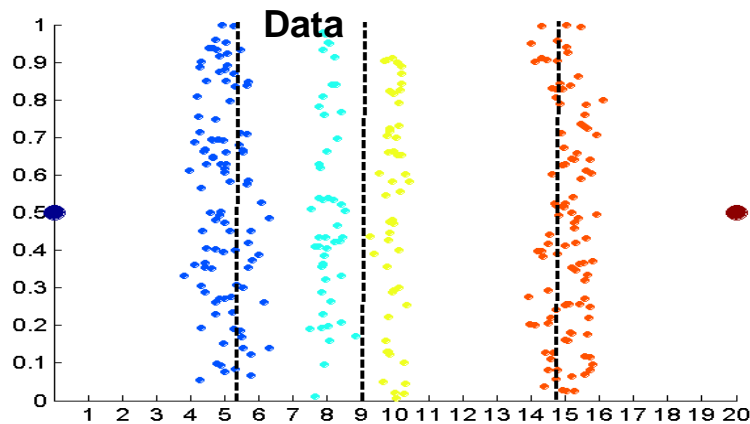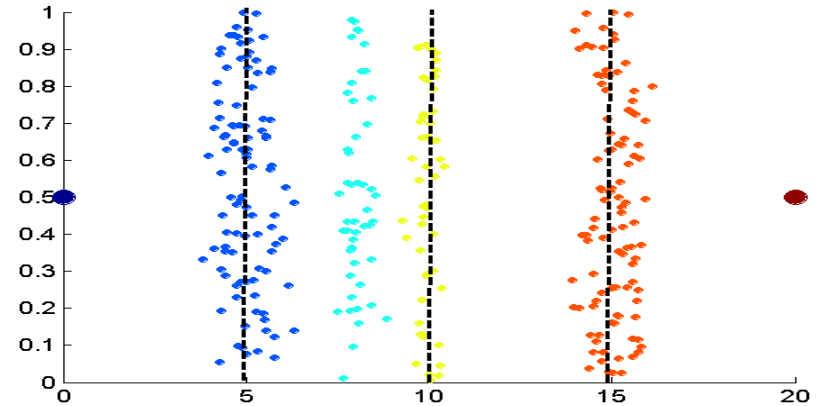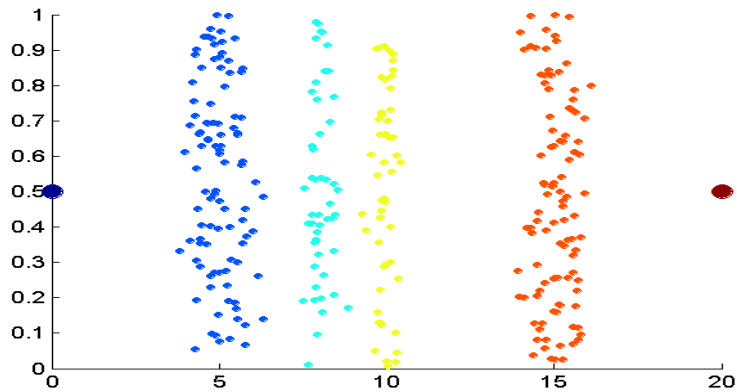


Equal frequency (binning)

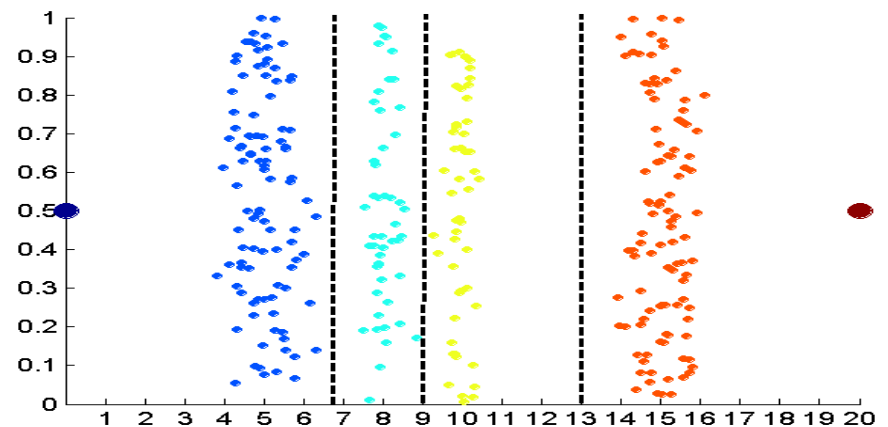

K-means clustering leads to better results

# Chapter 3: Data Preprocessing

---

- Data Preprocessing: An Overview
  - Data Quality
  - Major Tasks in Data Preprocessing
- Data Cleaning
- Data Integration
- Data Reduction
- Data Transformation and Data Discretization
- Summary 

# Summary

---

- **Data quality:** accuracy, completeness, consistency, timeliness, believability, interpretability
- **Data cleaning:** e.g. missing/noisy values, outliers
- **Data integration** from multiple sources:
  - Entity identification problem
  - Remove redundancies
  - Detect inconsistencies
- **Data reduction**
  - Dimensionality reduction
  - Numerosity reduction
  - Data compression
- **Data transformation and data discretization**
  - Normalization
  - Concept hierarchy generation