

MorphicDraw

Stephan J.C. Eggermont, Sensus

April 30, 2015

MorphicDraw is a drawing application demonstrating some of the power of Morphe. Morphe is a powerful graphics environment, used in Self, Squeak, Cuis and Pharo. In an iterative and incremental process we'll build up an application that supports drawing connected figures.

1 A Morphe Application

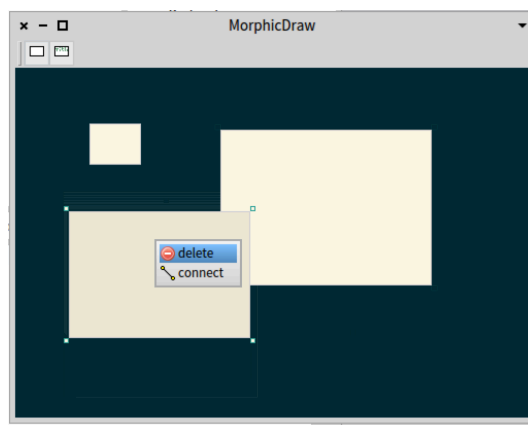


Figure 1: A first iteration of the main window of MorphicDraw

The first iteration (Figure 1) shows an application window with a toolbar and a drawing area. In the drawing area there are three graphical shapes, one of which is selected. A context menu for the selected shape shows options to delete it and to connect it.

1.1 An application with a window

Add a class that represents the application. It has instance variables for the different parts.

```
Object subclass: #MorphicDraw
  instanceVariableNames: 'window tools dock'
```

```
classVariableNames: ''  
category: 'MorphicDraw-Model'
```

Creating a window in Morphic is simple. Open a workspace and Dolt

```
StandardWindow new openInWorld
```

This creates a window and opens it on the screen. It already has default behaviour for closing and resizing, and a default title. All graphical elements in Morphic are subclasses of Morph, and the World is a container for all of them. Opening a Morph in the world positions it and makes it visible. An alternative to opening it directly is to add it to the (mouse) cursor. In Morphic this is called the hand. Dolt:

```
StandardWindow new openInHand
```

The window is then positioned by clicking.

The MorphicDraw application uses the first, but needs to change the window title and default size.

```
MorphicDraw>>createWindow  
window := StandardWindow new  
    setLabel: 'MorphicDraw';  
    extent: 400@400;  
    yourself.
```

StandardWindow is part of PolyMorph. PolyMorph extends Morphic with theme-ability. PolyMorph widgets often strictly adhere to the theme, ignoring the Morphic-level setters for colors and borders defined in their superclasses. PolyMorph makes the Window responsible for adding predefined user interface widgets to the application Window. For that it uses the TEasilyThemed trait. It adds a lot (163 in my current image) of convenience methods.

In Morphic, a toolbar in a window has buttons on it. This iteration of MorphicDraw uses two buttons to be able to create two different graphical shapes.

```
MorphicDraw>>createNewCardButton  
^ window  
    newButtonFor: self  
    getState: nil  
    action: #newCard  
    arguments: nil  
    getEnabled: nil  
    labelForm: MDIcons default cardIcon  
    help: 'New Card' translated
```

The help text is shown when hovering the mouse over the button. The button is always enabled, and sends the #newCard message without any arguments to self when it is pressed. It has no state-dependent behaviour or shape. The icon for the button is provided by MDIcons default cardIcon (see the Icons section, p. 5).

The button for the other shape is similar:

```

MorphicDraw>>createNewRectangleButton
    ^ window
      newButtonFor: self
      getState: nil
      action: #newRectangle
      arguments: nil
      getEnabled: nil
      labelForm: MDIcons default rectangleIcon
      help: 'New Rectangle' translated

```

The newCard and newRectangle are implemented by creating a new morph of the right kind and opening it in the hand. Both MDShape is a subclass of BorderedMorph and MDCard a subclass of MDShape.

```

MorphicDraw>>newCard
    ^MDCard new openInHand

```

```

MorphicDraw>>newRectangle
    ^MDShape new openInHand

```

A toolbar in Morhic consists of two parts, a ToolDockingBar and a Toolbar. The Toolbar is added to the dock. A DockingBarMorph sticks to one edge of the Morph that it is added to.

```

MorphicDraw>>createToolBar
    tools := window newToolbar:
        (Array with: self createNewRectangleButton with: self createNewCardButton).
    dock := window newToolDockingBar.
    dock addMorph: tools

```

This allows the creation and opening of the window

```

MorphicDraw>>open
    self createWindow.
    self createToolBar.
    window
        addMorph: dock
        fullFrame: ((0@0 corner: 1@0) asLayoutFrame bottomOffset: dock minExtent y);
        addMorph: MDPanel new
            fullFrame: ((0@0 corner: 1@1) asLayoutFrame topOffset: dock minExtent y).
    ^window openInWorld.

```

Some morphs automatically lay out their submorphs when they are added, others need to add an explicit layout strategy. The toolbar adds its toolbar buttons from left to right without a gap between them. The toolbar dock by default takes up the top edge of the morph it is added to. For a window that is the area with the drag bar, title and window icons. A LayoutFrame that should fit the whole contents area of the window is created using a rectangle from 0@0 to 1@1.

```

(0@0 corner: 1@1) asLayoutFrame.

```

The left half would be (0@0 corner: 0.5@1). Space can be left at a side by using the bottom/top/left/rightOffset. The dock knows its minimum height

```
dock minExtent y
```

so uses a layout frame based on the top line, extending it at its bottom by the dock height. The MDPanel is a PasteUpMorph subclass containing all the drawing shapes.

At the class side add a method to open the application

```
MorphicDraw>>open
  ^self new open
```

2 Shapes and PasteUpMorph

The basic graphics entity in Morhic is a Morph. In a workspace, Dolt

```
Morph new openInWorld
```

This opens a small blue rectangle on the screen. This can be dragged around on the screen. That is functionality that can be reused. World is a subclass of PasteUpMorph. The default PasteUpMorph is another small rectangle, this time light green.

```
PasteUpMorph new openInWorld
```

After dragging a Morph onto a PasteUpMorph, it behaves as a canvas containing the Morph. Let's use a subclass of PasteUpMorph as the application canvas panel.

```
PasteUpMorph subclass: #MDPanel
  instanceVariableNames: ''
  classVariableNames: ''
  category: 'MorphicDraw-Model'
```

The default color for a PasteUpMorph is less suitable for MorhicDraw. override it:

```
MDPanel>>defaultColor
  "answer the default color/fill style for the receiver"
  ^ MDColors base03
```

Its default size is also too small.

```
MDPanel>>defaultBounds
  "answer the default bounds for the receiver"
  ^ 0 @ 0 corner: 300 @ 200
```

The method that decides what kind of Morphs a PasteUpMorph wants to receive is wants-DroppedMorph: aMorph event: evt. In WorldMorph this always returns true, in PasteUpMorph only Morphs that are visible and dropEnabled. MorhicDraw only wants to have to deal with its own Morphs.

```
MDPanel>>wantsDroppedMorph: aMorph event: evt
  (aMorph isMorphicDraw) ifFalse: [ ^false ].
  ^super wantsDroppedMorph: aMorph event: evt
```

This works by adding a method to a special protocol in Morph. This is called creating an extension method. In Morph add the protocol '*MorphicDraw-Model'. In that protocol add a method

```
Morph>>isMorphicDraw
  ^false
```

This method belongs to the MorphicDraw package, not to that of Morph, Morphic-Core. A standard Morph has no border, this is added by BorderedMorph. Create a subclass of BorderedMorph to use as the basic shape.

```
BorderedMorph subclass: #MDShape
  instanceVariableNames: 'selected highlighted connectors handles'
  classVariableNames: ''
  category: 'MorphicDraw-Model'
```

and override isMorphicDraw

```
MDShape>>isMorphicDraw
  ^true
```

Now test that the MDPanel only accepts MDShapes. Dolt

```
MDPanel new openInWorld.
MDShape new openInWorld.
```

Verify that the shape can be dragged on the panel, and other morphs can not. To make sure that an MDShape can only be dropped on a MDPanel, add a method to MDShape

```
MDShape>>wantsToBeDroppedInto: aMorph
  ^aMorph class = MDPanel
```

3 Icons

The current icons in Pharo are bitmap icons. Athens makes it possible to replace them by SVG, vector based icons. PolyMorph adds the ThemeIcons class to make it easy to manage an applications' icons. In this class a number of utility functions are defined to load and save icons in png format.

Create the png icons in an external program (these were created with Gimp), store them in a directory. Create a subclass of ThemeIcons

```
ThemeIcons subclass: #MDIcons
  instanceVariableNames: ''
  classVariableNames: ''
  category: 'MorphicDraw-Model'
```

Add two methods containing the names for small- and normal sized icons

```
MDIcons>>normalSizeNames
  "Answer the names of the normal icons"
  ^#('rectangle' 'connector' 'card')

MDIcons>>smallSizeNames
  "Answer the names of the small icons. None"
  ^#()
```

Provide a default instance of this class. At the class side, add a class instance variable and a lazy accessor

```
MDIcons class
  instanceVariableNames: 'default'

MDIcons class>>default
  ^default ifNil: [ ^self new ]
```

Now add the icons using a utility method. In a workspace, Dolt with directory replaced by the fully qualified path name of the directory containing the icon png files:

```
MDIcons default createIconMethodsFromDirectory: directory
```

This adds two methods for each png file, one with a base64 encoded contents and one icon form accessor. Form provides asMorph, so the icons can be tested by Dolt

```
MDIcons default connectorIcon asMorph openInWorld
```

This opens an ImageMorph with the icon in the World (Fig. 2). By selecting it with shift-alt, its halos are shown. With the cross halo the icon can be deleted.



Figure 2: ImageMorph with icon and halos

By having the resource contents in a method, the normal version control can be used and there is no need for specific resource management. This works well when the resources are small and can be manipulated in the image, like png icons.

4 Colors

The responsibility for the colors used in MorphicDraw is given to the MDColors class.

```
Object subclass: #MDColors
  instanceVariableNames: ''
  classVariableNames: ''
  category: 'MorphicDraw-Model'
```

At the moment there is no need to dynamically change these colors, so add an indicator that the colors are all defined class-side.

```
MDColors>>seeClassSide
```

At the class side, the colors for a Solarize color scheme are added

```
MDColors class>>base0
  ^Color fromHexString: '839496'
```

```
MDColors class>>base00
  ^Color fromHexString: '657b83'
```

```
MDColors class>>base01
  ^Color fromHexString: '586e75'
```

```
''',
MDColors class>>red
  ^Color fromHexString: 'dc322f'
```

```
MDColors class>>violet
  ^Color fromHexString: '6c71c4'
```

```
MDColors class>>yellow
  ^Color fromHexString: 'b58900'
```

5 Selection and resizing

Adding shapes to the panel and moving them around on it now works. To manipulate shapes, Morphic by default uses halos. In this application an approach more similar to drawing programs like Freehand or Illustrator is preferred. When a shape is selected, show small manipulation squares (handles) at the corners (Fig. 3) to be able to resize them. In the initialize of the MDShape the color and border color are set.

```
MDShape>>initialize
  super initialize.
  self color: self defaultColor.
  self borderColor: self defaultBackgroundColor.
  selected := false.
```

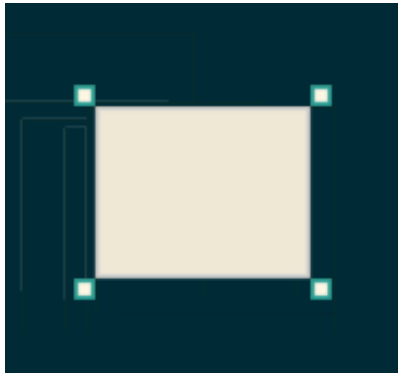


Figure 3: A selected shape

```
highlighted := false.
connectors := OrderedCollection new.
handles := OrderedCollection new.
self on: #mouseUp send: #changeSelected to: self.
self on: #mouseMove send: #doDrag:with: to: self
```

A new MDShape is not selected and not highlighted. It has no connectors to other shapes and no handles. The selection will be changed on #mouseUp and the handles might have to be moved on #mouseMove. On #mouseUp, the selection is changed and the shape updates itself.

```
MDShape>>changeSelected
    selected := selected not.
    self updateSelection.
```

The color is changed to the color representing the selection state. Highlighting color dominates this color.

```
MDShape>>updateSelection
    selected ifTrue: [
        self color: self selectedColor.
        self showHandles]
    ifFalse: [
        self removeHandles.
        self color: self unselectedColor].
    highlighted ifTrue: [
        self color: self highlightColor ]
```

In showHandles, the morphs for the handles are created the first time they are needed, then they are added to the shape and then (re)positioned on the respective corners of the shape.

```
MDShape>>showHandles
    handles ifEmpty: [ self addHandles ].
    handles do: [ :handle |
```



```

        self addMorph: handle ].
self positionCorners

```

Adding the handles consists of creating one with the appropriate corner name.

```

MDShape>>addHandles
    #(topLeft bottomRight bottomLeft topRight) do: [ :aCorner |
        handles add: (MDCornerHandle on: self at: aCorner) ].

```

Positioning the corners is delegated to the handles

```

MDShape>>positionCorners
    handles do: [ :corner | corner rePosition ]

```

5.1 Corner handles

A corner shape knows which corner of which subject it is for

```

BorderedMorph subclass: #MDCornerHandle
instanceVariableNames: 'subject corner'
classVariableNames: ''
category: 'MorphicDraw-Model'

```

The shape creates them

```

MDCornerHandle class>>on: aSubject at: aCorner
    "see instance side corners for possible values"
    ^self new
        subject: aSubject;
        corner: aCorner;
        yourself

```

Because a morph shape responds to the corner name messages with the position of the respective corner, #reposition gets the location of that corner from the subject

```

MDCornerHandle>>rePosition
    self positionMeAt: (subject perform: corner)

```

To position the corner handle, all that is needed is the opposite corner

```

MDCornerHandle>>oppositeCorners
    ^Dictionary newFromPairs:# (topLeft bottomRight:
    leftCenter rightCenter:
    bottomLeft topRight:
    bottomCenter topCenter:
    bottomRight topLeft:
    rightCenter leftCenter:
    topRight bottomLeft:
    topCenter bottomCenter:)

```

With that, the handle gets positioned exactly at the outside of the shape.

```
MDCornerHandle>>positionMeAt: aPosition
    self perform: (self oppositeCorners at: corner) with: aPosition
```

To make sure that the corner handle can be used to scale its shape, it needs to handle mouse events. Morphs only start receiving mouse events if they declare their interest in them.

```
MDCornerHandle>>handlesMouseDown: evt
    ^true
```

Once the mouse is moved, the subject needs to be resized to where the mouse is and it needs to update the positions of the other corners.

```
MDCornerHandle>>mouseMove: evt
    self reframedTo: evt position

MDCornerHandle>>reframedTo: aPoint
    subject bounds: (subject bounds withSideOrCorner: corner setToPoint: aPoint).
    subject moved.
    subject positionCorners
```

In #moved the connectors can be updated.

```
MDSShape>>moved
connectors do: [ :connector | connector moved ]
```

6 Context menu

The shape needs to react to mouse events. When the mouse button is pressed over the shape, it can be either part of a click or of the beginning of a drag. The hand supports making that distinction. If the mouse is not moved too far before the mouse button is released, it will send #click: to the shape

```
MDSShape>>mouseDown: evt
    evt ifNotNil: [
        evt hand waitForClicksOrDrag: self event: evt]
```

The context menu is shown when the right button has been clicked. No further propagation of the event is wanted.

```
MDSShape>>click: evt
    "Default behavior: Show a context menu if right mouse button was clicked."

    evt yellowButtonPressed ifTrue: [
        self openContextMenuForHand: evt hand.
        evt wasHandled: true.]
```

The context menu is a standard menu morph. It is filled with two actions in menu items with icons: delete and connect. Both sent a message to the shape . By sending it #popUpInWorld it is shown at the position of the hand.

```
openContextMenuForHand: aHand
| menu |
menu := MenuMorph new defaultTarget: self.
menu add: 'delete' selector: #delete;
      add: 'connect' selector: #connect.

menu items first icon: Smalltalk ui theme icons deleteIcon .
menu items second icon: MDIcons default connectorIcon .

menu popUpInWorld
```

7 Connecting

A PolygonMorph provides a good base for a connector. Just add the shapes it connects to.

```
PolygonMorph subclass: #MDConnector
instanceVariableNames: 'from to'
classVariableNames: ''
category: 'MorphicDraw-Model'
```

It need stop be configured as a line-based polygon, not a closed figure.

```
MDConnector>>initialize
super initialize.
closed := false.
```

As the shapes keep track of their connectors, they need to know when they are (dis)connected.

```
MDConnector>>from: anObject
from ifNotNil: [ from connectors delete: self ].
from := anObject.
from connectors add: self.
self moved.
```

They connect from center to center of the shapes they connect to and need to recalculate their shape when moved. Setting the vertices to an array with two points just creates a straight line.

```
MDConnector>>moved
(from isNil | to isNil )ifFalse: [
self vertices: (Array with: from center with: to center)]
```

```
MDConnector>>vertices: aCollection
vertices := aCollection.
self computeBounds
```

8 Loading the code

The code can be found on www.smalltalkhub.com, in the repository StephanEggermont/MorphicDraw. Open the Monticello Browser. Add a new repository of type smalltalkhub.com. The owner is StephanEggermont, the project is MorphicDraw. User and password are only needed when you want to commit changes to the repository. Open the repository and load the latest version of MorphicDraw.