
(a) attribute tree T
r
u1
u2
a
b
c
d
subtree(u1)
DFS -> [tin(u1), tout(u1)]

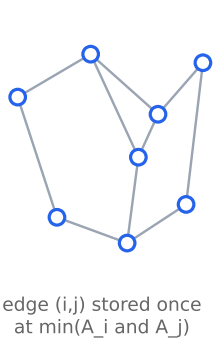
(b) shared level-l graph
edge (i,j) stored once
at min(A_i and A_j)

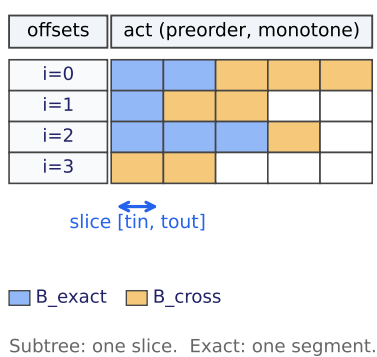
(c) interval-sliced CSR
offsets
act (preorder, monotone)
i=0
i=1
i=2
i=3
slice [tin, tout]
B_exact
B_cross
Subtree: one slice. Exact: one segment.
Boolean Phi: disjoint intervals.