# Wazuh Integration with n8n and Use Case Implementation

**Submitted By:**
Raja Muhammad Bilal Arshad

**Wazuh Integration with n8n and Use Case Implementation.....1**
Step 1: Add the Webhook Node..... 2
Step 2: Add the Processing Logic (IF Node)..... 3
Step 3: Add the Communication Channel.....4
Step 4: Connecting Wazuh to n8n..... 6
Step 5: Configure Wazuh.....7
Step 6:Filter the Noise (The "If" Node).....11
Step 6:Format the Alert (The Notification Node).....11

## Step 1: Add the Webhook Node

On your blank canvas, click the Add first step button (or the + icon).

Type Webhook in the search bar and select it.

A settings panel will slide out on the right. Configure it exactly like this:

1. **Authentication:** None
2. **HTTP Method:** POST (Wazuh sends data using POST).
3. **Path:** Type something recognizable like `wazuh-redteam-alert`.
4. **Respond:** Immediately.

At the top of this panel, you will see a toggle for Test URL and Production URL. Click Test URL and copy the link (it will look like

`http://localhost:5678/webhook-test/wazuh-redteam-alert`). Save this link in a notepad.
Close the node settings panel.

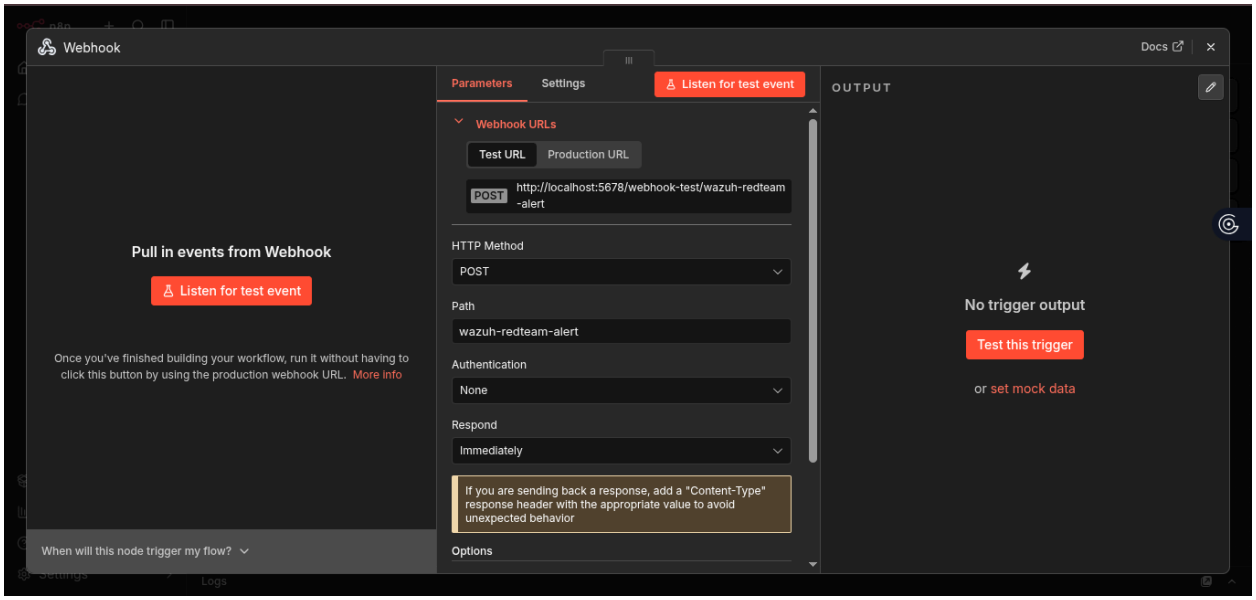


# Step 2: Add the Processing Logic (IF Node)

Hover your mouse to the right of your Webhook node, click the little + icon on the connector line.

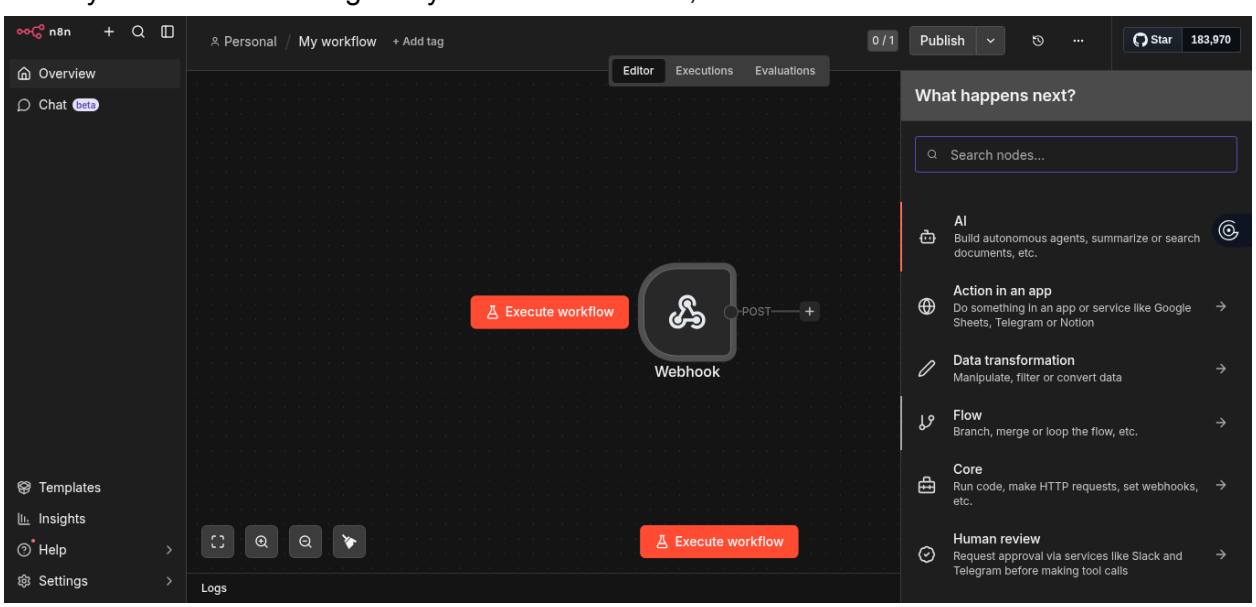


Search for the **If** node and add it.

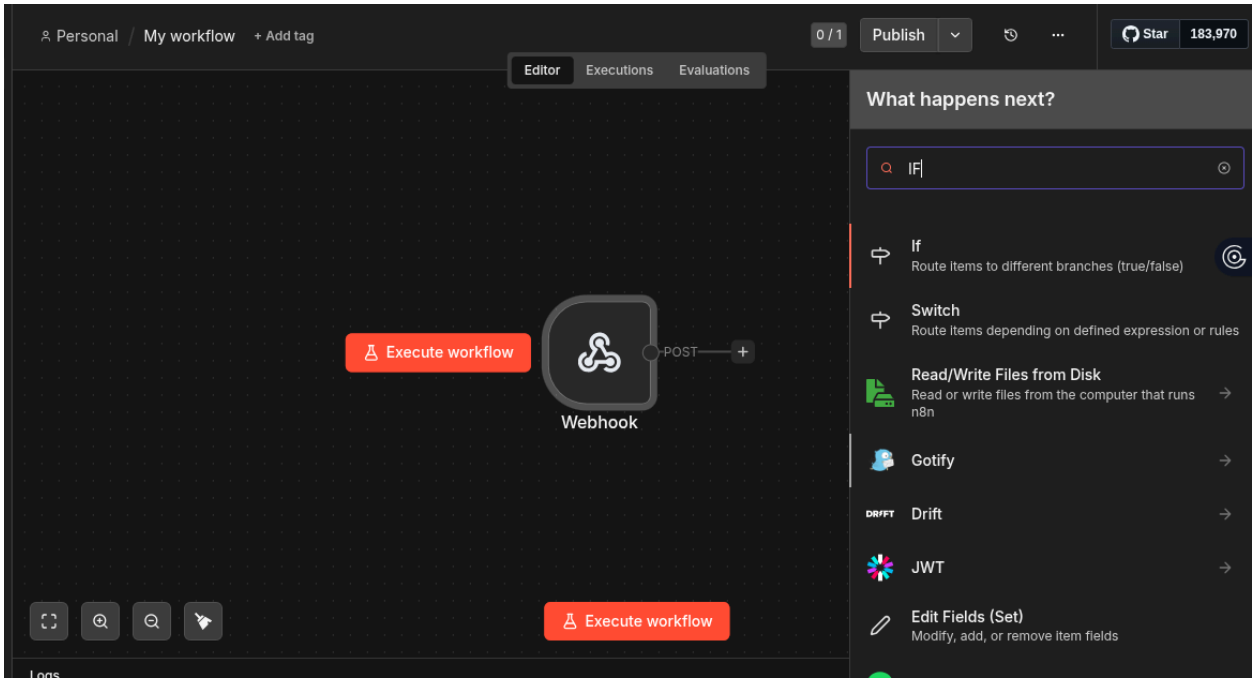


We will configure this node to look at the incoming Wazuh alert data and check the `rule.id` or `rule.description`.

## Step 3: Add the Communication Channel

1. Click the + icon on the true output branch of your IF node.

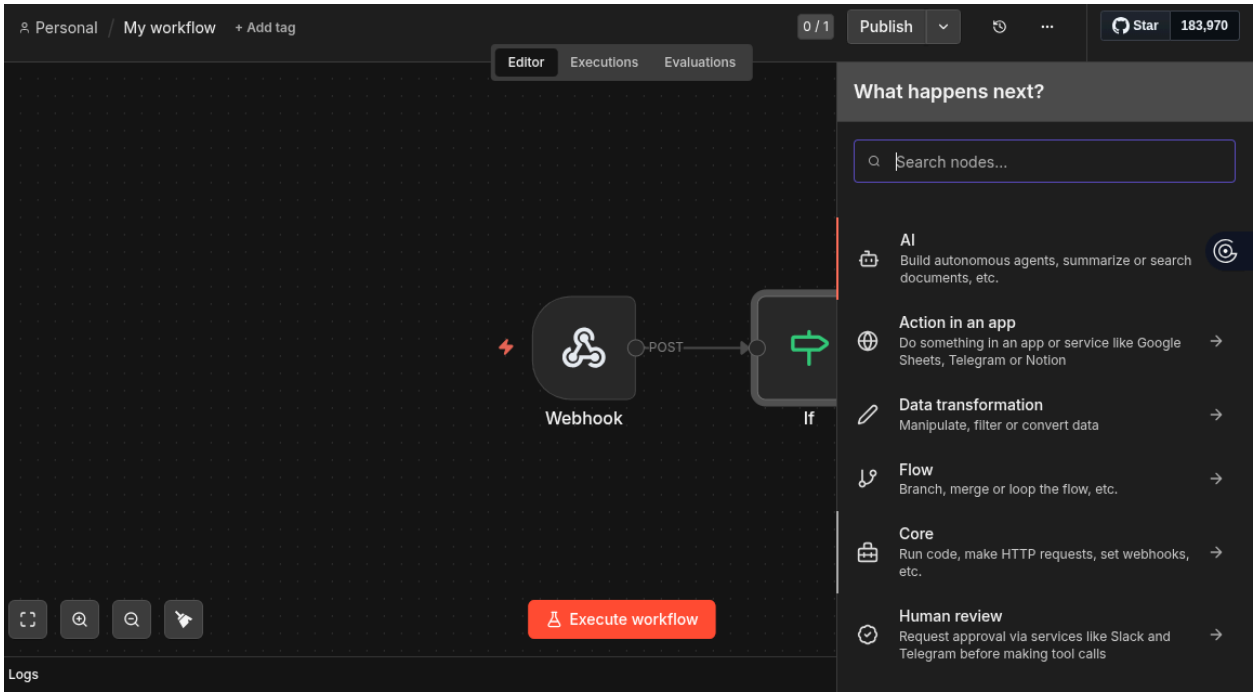


2. Depending on what you want to use, you can add a Discord, Slack, or Email node here.

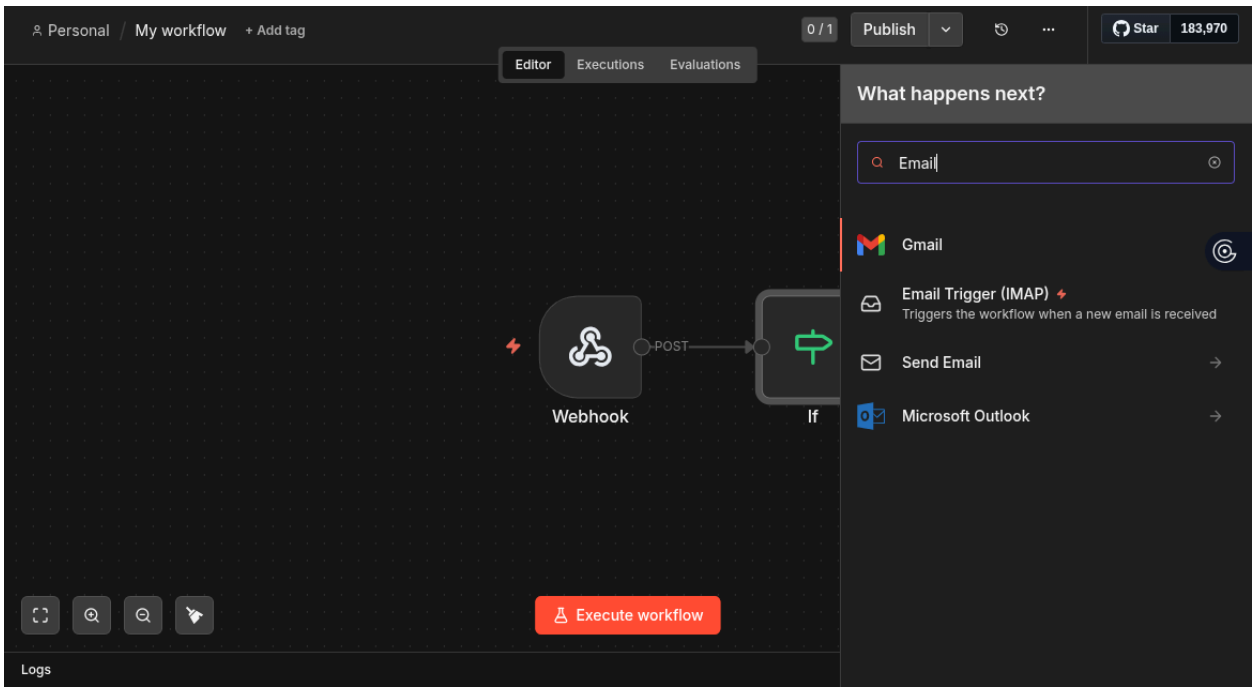


3. In this node, we will write a custom message pulling in data from Wazuh (e.g., ⚠️ `ALERT: Attack Detected! IP: {{json.data.srcip}}`).

# Step 4: Connecting Wazuh to n8n

### Put n8n in Listening Mode

1. Open your **Webhook node** in n8n.
2. Click the **Test URL** tab and copy that URL. *(Crucial Note: If your Wazuh Manager is installed on a different VM or server, change `localhost` in the URL to your Kali machine's actual IP address, e.g., `http://192.168.X.X:5678...`)*

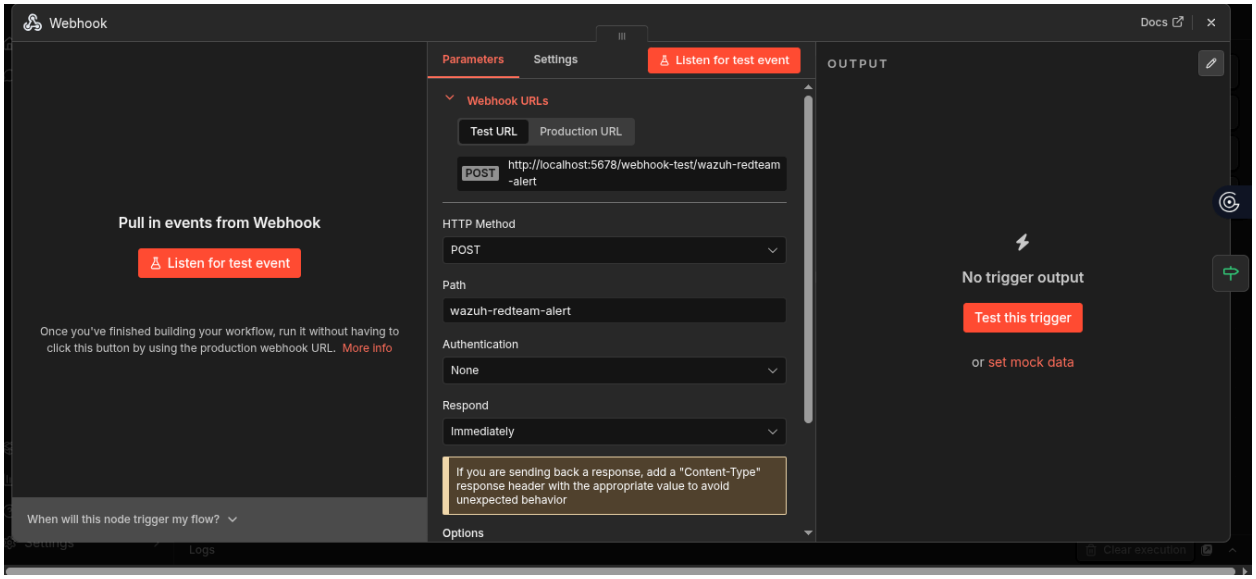


3. Click the **Listen for Test Event** (or "Execute Step") button. You will see a spinning wheel. n8n is now actively waiting for Wazuh to knock on the door

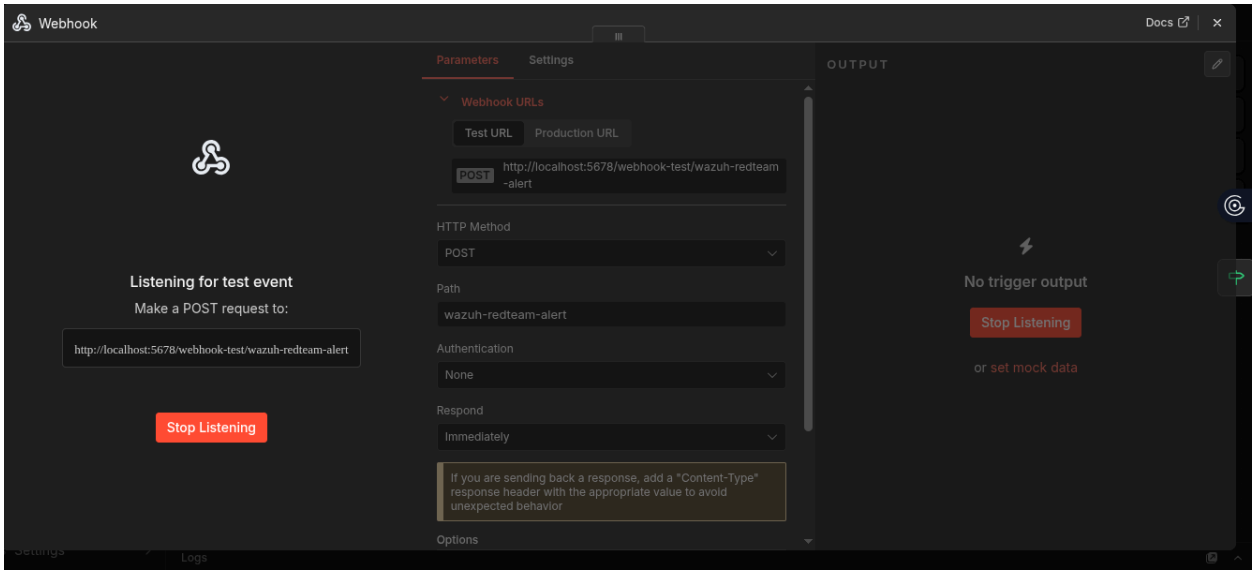


# Step 5: Configure Wazuh

Open the terminal on the machine where your **Wazuh Manager** is installed.
Edit the main configuration file:
sudo nano /var/ossec/etc/ossec.conf

Scroll down anywhere inside the main `<ossec_config>` section and paste this block:

```
<integration>
  <name>shuffle</name>
  <hook_url>http://localhost:5678/webhook-test/wazuh-redteam-alert</hook_url>
```

```
  <level>3</level>
  <alert_format>json</alert_format>
</integration>
```

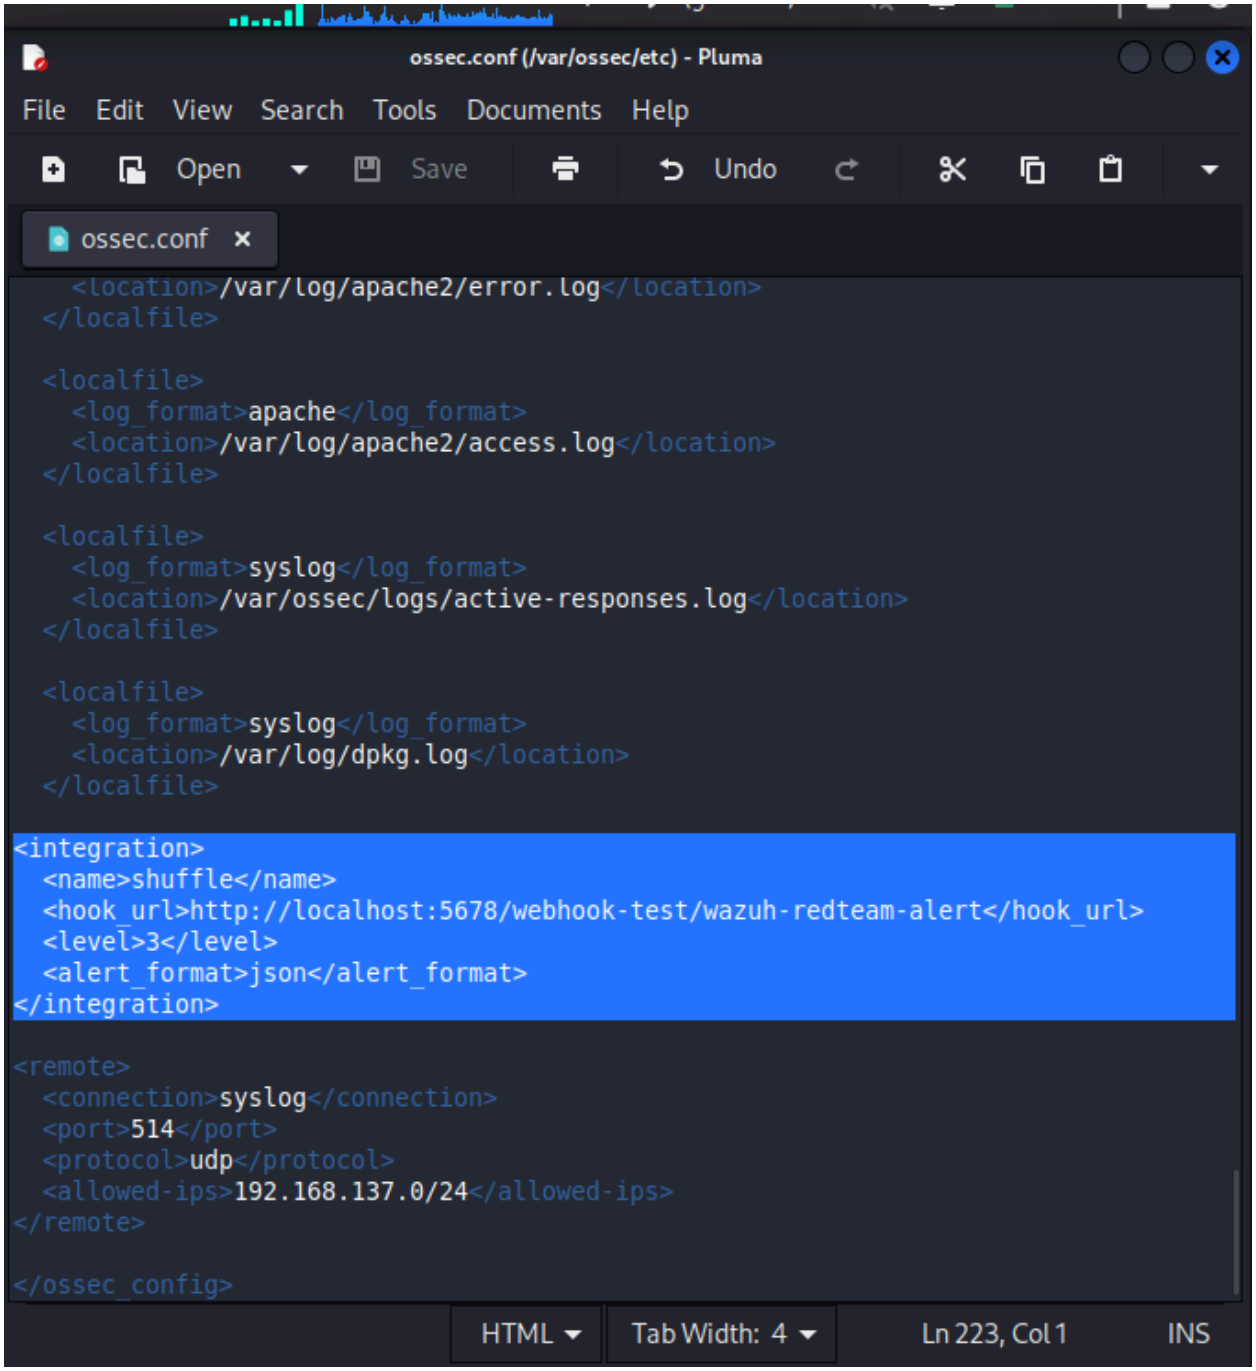


Restart the Wazuh manager so it reads the new config:

sudo docker exec -it single-node-wazuh.manager-1 /var/ossec/bin/wazuh-control restart

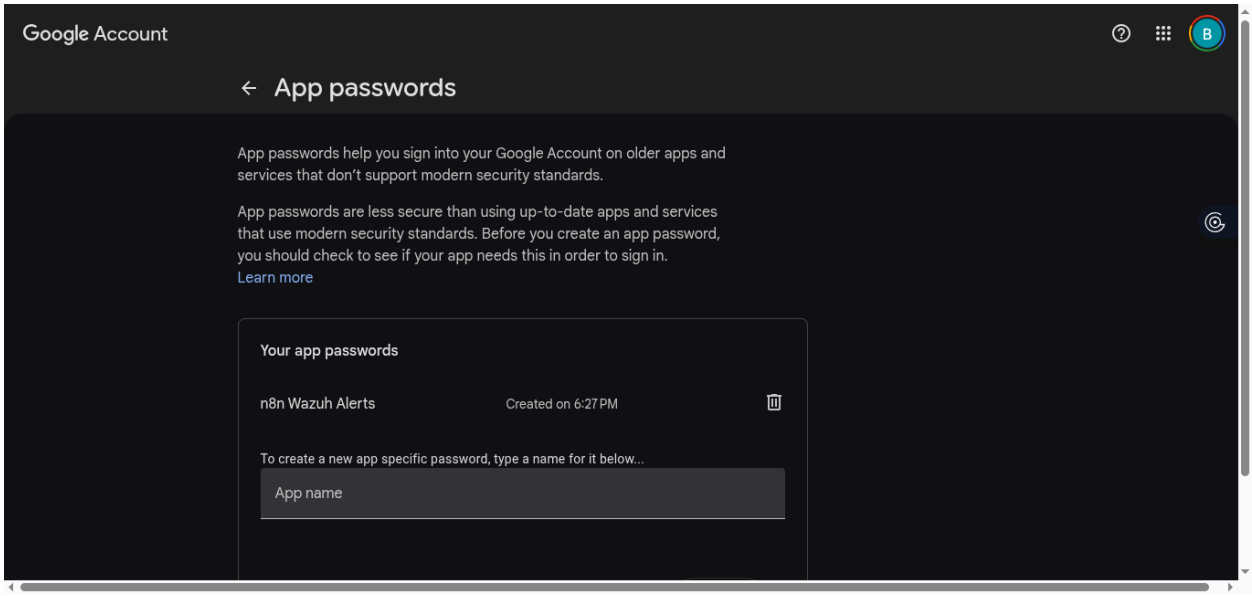
Google Account
App passwords
App passwords help you sign into your Google Account on older apps and services that don't support modern security standards.
App passwords are less secure than using up-to-date apps and services that use modern security standards. Before you create an app password, you should check to see if your app needs this in order to sign in.
Learn more
Your app passwords
n8n Wazuh Alerts
Created on 6:27 PM
To create a new app specific password, type a name for it below...
App name

bhai@bhai: ~
Session Actions Edit View Help
(base) ┌──(bhai㉿bhai)-[~]
└─$ su - fake_hacker_test
su: user fake_hacker_test does not exist or the user entry does not contain all the required fields

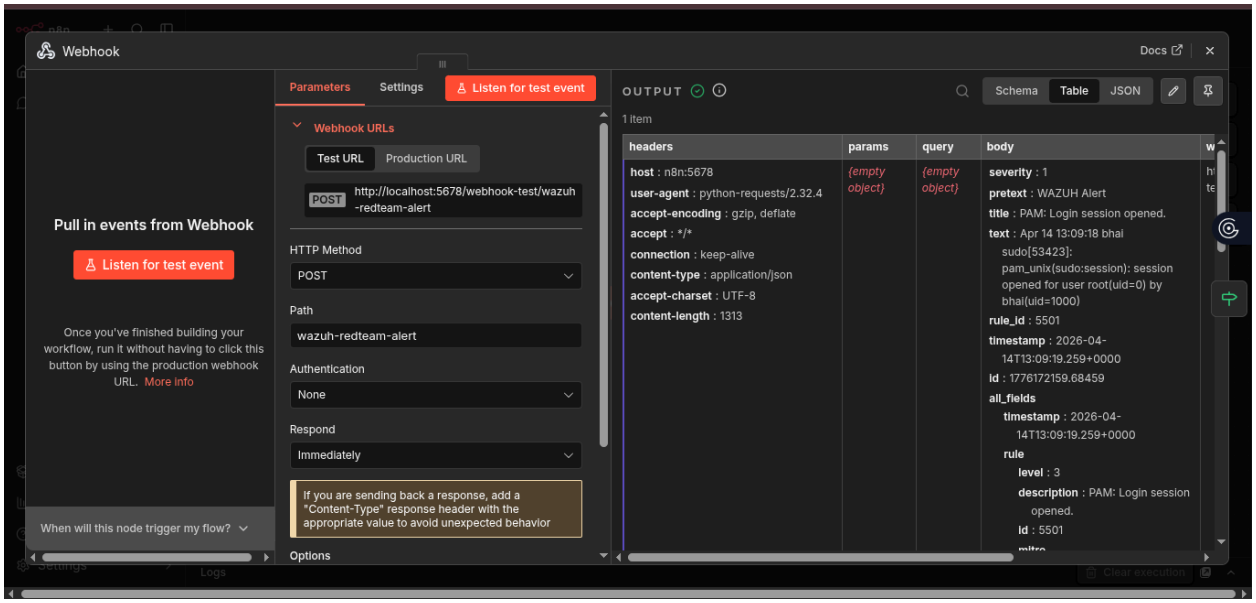
Webhook
Docs
Pull in events from Webhook
Listen for test event
Once you've finished building your workflow, run it without having to click this button by using the production webhook URL. More info
When will this node trigger my flow?
Parameters
Settings
Listen for test event
Webhook URLs
Test URL
Production URL
POST
http://localhost:5678/webhook-test/wazuh-redteam-alert
HTTP Method
POST
Path
wazuh-redteam-alert
Authentication
None
Respond
Immediately
If you are sending back a response, add a "Content-Type" response header with the appropriate value to avoid unexpected behavior
Options
OUTPUT
Schema
Table
JSON
1 item
headers
params
query
body
host : n8n:5678
user-agent : python-requests/2.32.4
accept-encoding : gzip, deflate
accept : */*
connection : keep-alive
content-type : application/json
accept-charset : UTF-8
content-length : 1313
{empty object}
{empty object}
severity : 1
pretext : WAZUH Alert
title : PAM: Login session opened.
text : Apr 14 13:09:18 bhai sudo[53423]: pam_unix(sudo:session): session opened for user root(uid=0) by bhai(uid=1000)
rule_id : 5501
timestamp : 2026-04-14T13:09:19.259+0000
id : 1776172159.68459
all_fields
timestamp : 2026-04-14T13:09:19.259+0000
rule
level : 3
description : PAM: Login session opened.
id : 5501

## Step 6:Filter the Noise (The "If" Node)

Set the condition to check the alert level:

1. **Value 1:** Drag and drop the `level` variable from your Webhook output, or type: `{{ $json.body.rule.level }}`
2. **Operation:** `Larger or Equal`
3. **Value 2:** `7` (Level 7 is where Wazuh starts logging actual suspicious activity and high-priority errors).

## Step 6:Format the Alert (The Notification Node)

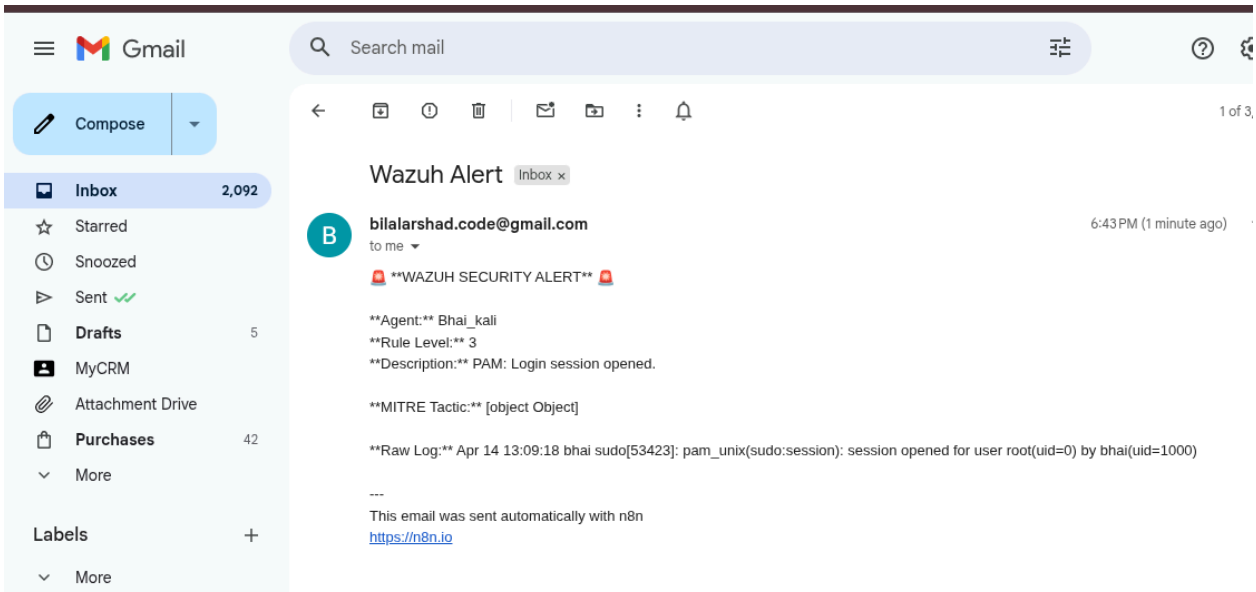


Here is exactly what to type into those fields on your screen to bypass the block:

1. **User:** Your full Gmail address (e.g., `bhai@gmail.com`).
2. **Password:** The 16-letter Google App Password. *(Important: Paste it with NO spaces! Do not use your regular email login password).*
3. **Host:** `smtp.gmail.com`
4. **Port:** `465`

5. **SSL/TLS:** Toggle thisto ON (or check the box).
6. **Client Host Name:** Leave this completely BLANK.

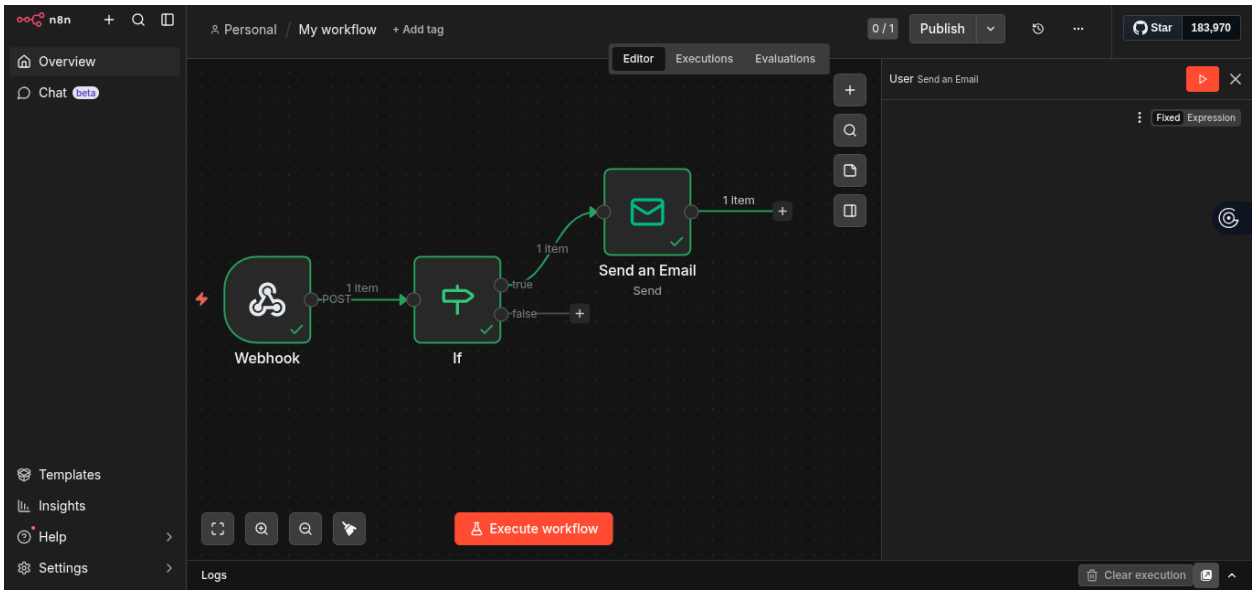


| Path | Action | Rule description | Rule Lev... | Rule Id |
|---|---|---|---|---|
| /etc/resolv.conf.U3IGN3 | deleted | File deleted. | 7 | 553 |
| /etc/resolv.conf | modified | Integrity checksum changed. | 7 | 550 |
| /etc/resolv.conf.U3IGN3 | added | File added to the system. | 5 | 554 |
| /etc/resolv.conf | modified | Integrity checksum changed. | 7 | 550 |
| /home/bhai/secret_project/n8n_test.txt | added | File added to the system. | 5 | 554 |

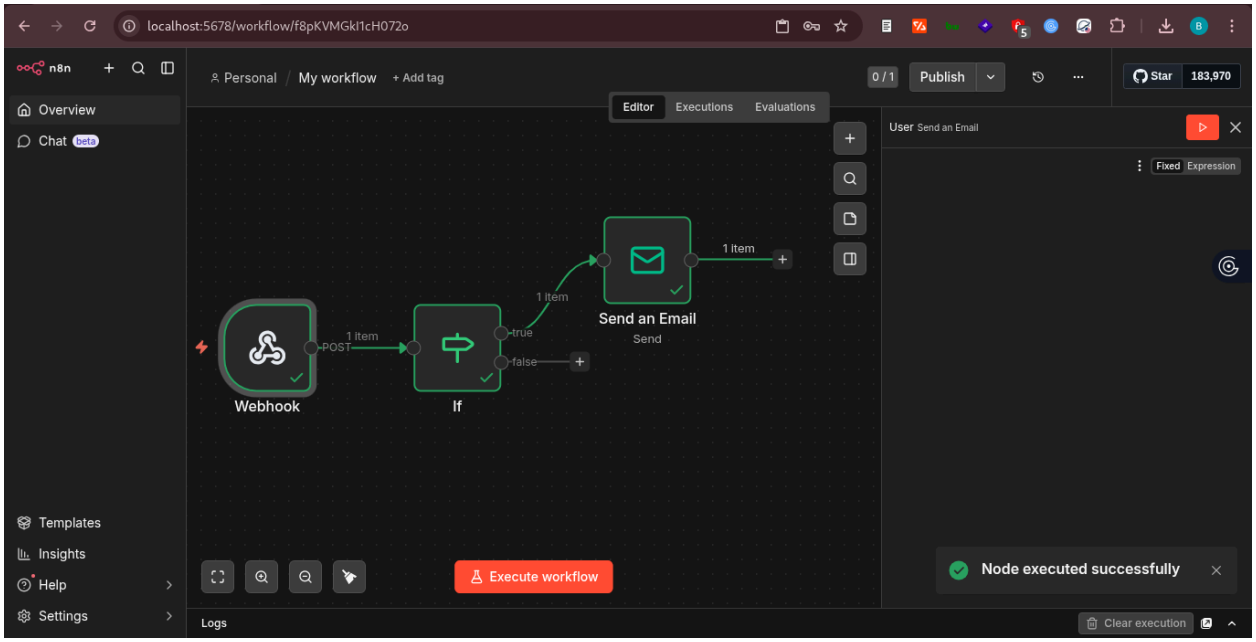
localhost:5678/workflow/f8pKVMGkI1cH072o
n8n
Overview
Chat beta
Templates
Insights
Help
Settings
Personal / My workflow
+ Add tag
0 / 1
Publish
Star 183,970
Editor
Executions
Evaluations
Webhook
POST
1 item
If
true
false
1 item
Send an Email
Send
1 item
Execute workflow
User Send an Email
Fixed
Expression
Node executed successfully
Logs
Clear execution