

Question No-14:

//PROGRAM TO CONVERT RUPEES INTO PAISE

```
#include<stdio.h>
```

```
int main()
```

```
{
```

```
    float rupees,paise;
```

```
    rupees=paise=0;
```

```
    printf("enter the amount in rupees : ");
```

```
    scanf("%f",&rupees);
```


```
    paise=100*rupees;
```

```
    printf("the money in paise is %.2f/-",paise);
```

```
    getch();
```

```
    return 0;
```

```
}
```

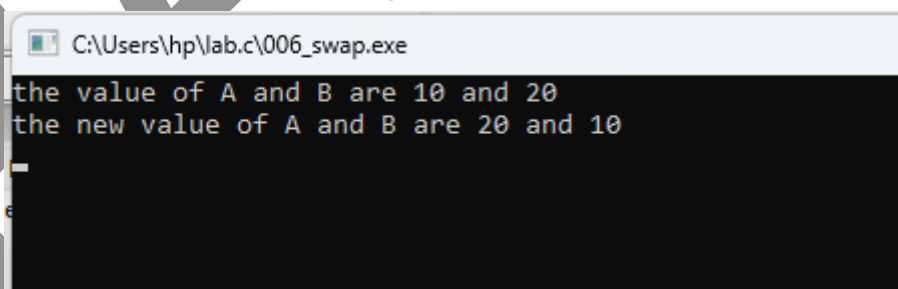

```
C:\Users\hp\lab.c\006_swap.exe
the value of A and B are 10 and 20
the new value of A and B are 20 and 10
```