

Question No-8:

//Program to check the costliest pen

```
#include<stdio.h>
```

```
int main()
```

```
{
```

```
    int Reynolds, Montex, Parker;
```

```
    Reynolds=Parker=Montex=0;
```

```
    printf("Enter the price of three pens :");
```

```
    scanf("%d%d%d",&Reynolds,&Montex,&Parker);
```

```
    if(Reynolds>Montex&&Reynolds>Parker)
```

```
        printf("Reynolds is most costliest");
```

```
    else
```

```
        if(Montex>Parker)
```


```
            printf("Montex is most costliest ");
```

```
    else
```

```
        printf("Parker is most costliest ");
```

```
    return 0;
```

```
}
```

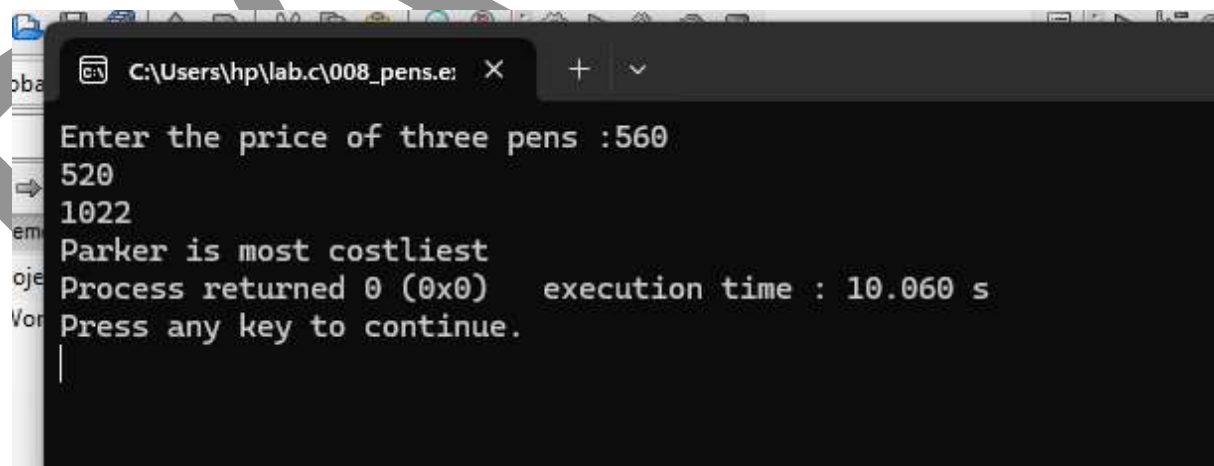

```
C:\Users\hp\lab.c\008_pens.e: Enter the price of three pens :560
520
1022
Parker is most costliest
Process returned 0 (0x0)   execution time : 10.060 s
Press any key to continue.
```