

### Question No-3:

//PROGRAM TO READ THE BILL AMOUNT PAID BY THE CUSTOMER

```
#include<stdio.h> int
```

```
main()
```

```
//LET US ASSUME BA IS BILL AMOUNT,APC IS AMOOUNT PAID  
BY CUSTOMER,BAL IS BALANCE AMOUNT
```

```
{
```

```
    int ba,apc,bal;
```

```
    ba=bal=apc=0;
```

```
    printf("ENTER THE BILL MADE BY THE CUSTOMER :");
```


```
    scanf("%d",&ba);
```

```
    printf("ENTER THE AMOUNT PID BY THE CUSTOMER :");
```

```
    scanf("%d",&apc);    bal=apc-ba;
```

```
    printf("THE BALANCE AMOUNT PAID BY THE CUSTOMER  
IS:%d",bal);    getch();    return 0;
```

```
}
```

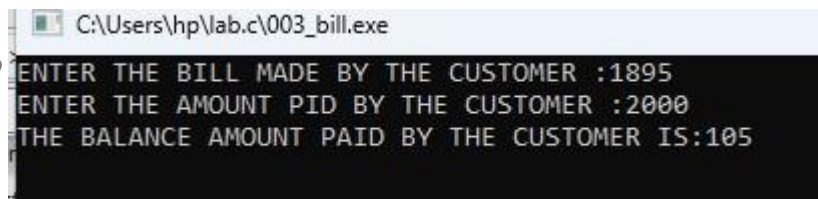

```
C:\Users\hp\lab.c\003_bill.exe
ENTER THE BILL MADE BY THE CUSTOMER :1895
ENTER THE AMOUNT PID BY THE CUSTOMER :2000
THE BALANCE AMOUNT PAID BY THE CUSTOMER IS:105
```