

spect

Srini

2023-08-03

R Generate signal and its fft

This generates a sinusoid 4 Hz, 1 second, sampled 200 Hz.

```
../bin/spect sin
```

Plot the signal freq analysis

```
library(ggplot2)
library(dplyr)
```

```
##
## Attaching package: 'dplyr'

## The following objects are masked from 'package:stats':
##
##   filter, lag

## The following objects are masked from 'package:base':
##
##   intersect, setdiff, setequal, union
```

```
signalfft<-read.csv("sin.csv",header=FALSE,sep=",")
names(signalfft)<-c("freq","rex","imx","mod","arg")
```


Dominant frequencies

The top 5 frequencies are

```
head(signalfft,5)
```

```
##   freq      rex      imx      mod      arg
## 1    1 1.9997100  2.13128  2.92253  0.817236
## 2    2 0.0333027  2.65588  2.65609  1.558260
## 3    3 0.0846389  4.50653  4.50732  1.552020
## 4    4 0.2114050 200.97700 200.97700  1.569740
## 5    5 12.5798000 -3.64110  13.09610 -0.281741
```

```
dominant<-signalfft %>% slice_head(n=10)
ggplot(dominant,aes(x=freq,y=mod))+geom_bar(stat="identity")
```

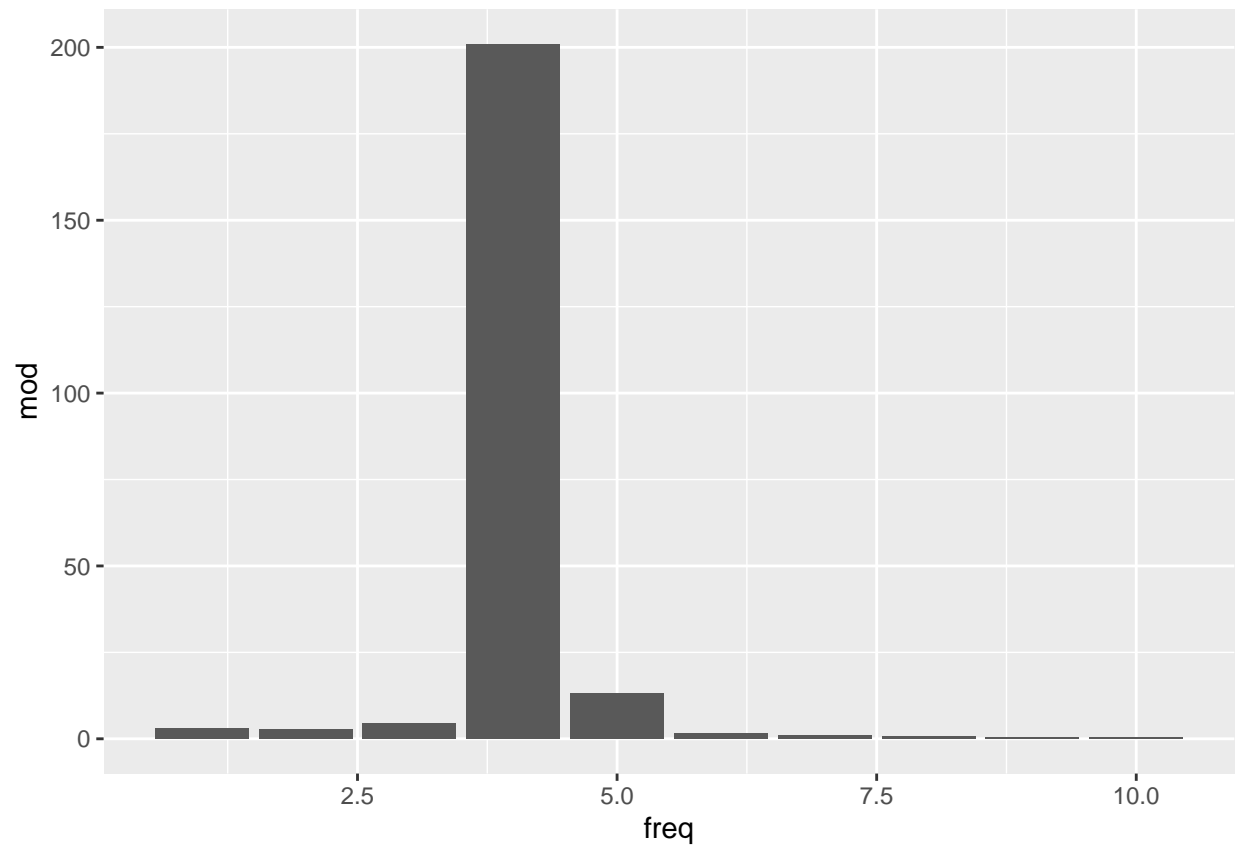

Reconstructed waveform

```
signal<-read.csv("sin_re.csv",header=FALSE,sep=",")
names(signal) <- c("x","y")
ggplot(signal,aes(x=x,y=y))+geom_point(colour="red", size=5,show.legend=TRUE)+theme(legend.position = "bottom")
```

