




API Usage


Browsing available endpoints

DataHive API endpoints are available under the **Resources** > **API documentation** tab. You can also access the API specifications [here](#).

The OpenAPI Swagger JSON file can be found at https://datahive.gov.sg/docs/scripting_api.json.

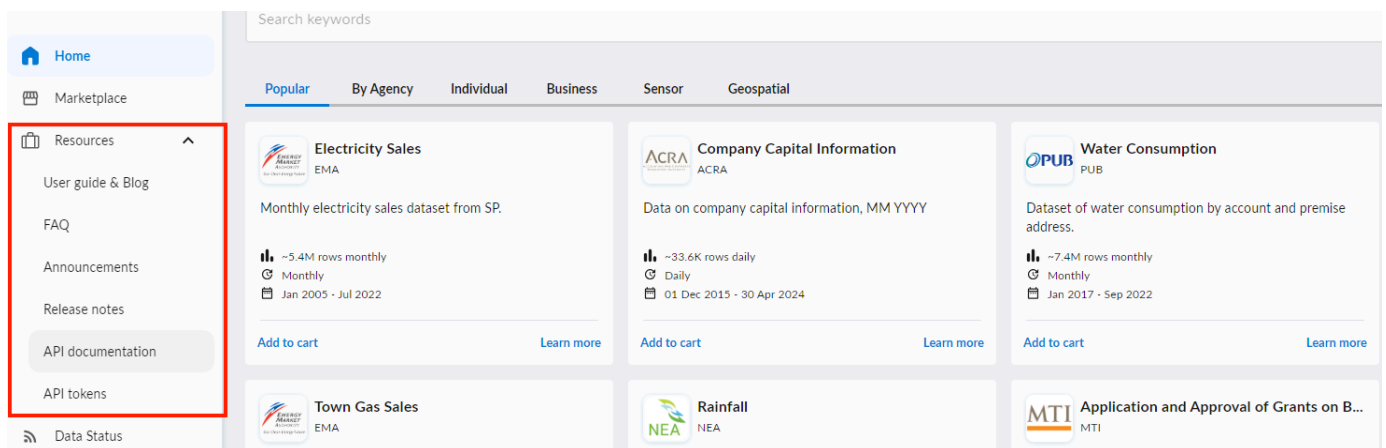

There are 2 types of APIs: those that require authorization, and those that do not. This is represented by a lock icon beside each endpoint.

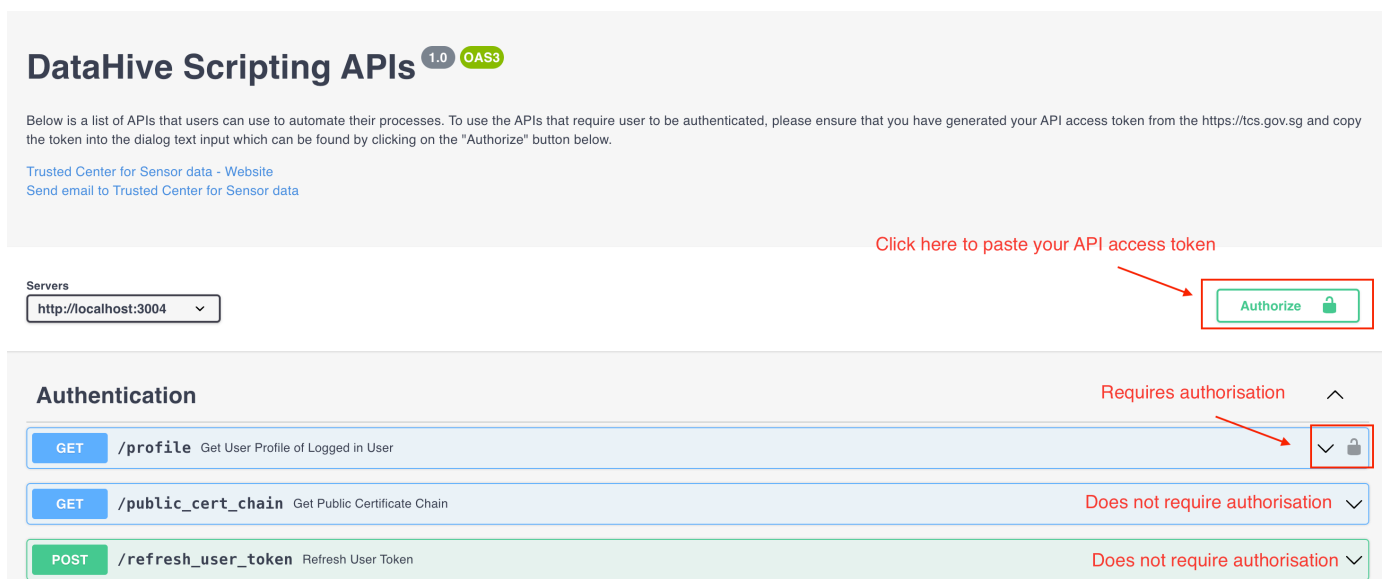

In some of our APIs, there will be ID parameters in which you have to input. For those APIs, you can retrieve those IDs by first calling the list API. For example for the following API:

GET

/subscription_requests/{request_id}/datasets/{dataset_id}/query_filters

Get Filters for Query

Roles	Access
Users with access to GET /subscription_requests/{request_id}	Y
.	N

Get a list of filters that can be used to query the dataset.

Parameters

Try it out

Name	Description
scope required string (query)	Inherit the scope of the data request API endpoint's scope. Available values : user, approval Default value : user user
flags string (query)	1 for mocks flags
request_id required string (path)	Obtain the request_id from GET Data Requests API. request_id
dataset_id required string (path)	Obtain the dataset_id from GET Datasets API. dataset_id

The request id and dataset id can be found by calling *GET /datasets* and *GET /subscription_requests*.

Retrieving the API tokens

Access this feature at

Resources

 >

API tokens

.

Home

Marketplace

Resources

User guide & Blog

FAQ

Announcements

Release notes

API documentation

API tokens

Data Status

Search keywords

PopularBy AgencyIndividualBusinessSensorGeospatial

Electricity Sales

EMA

Monthly electricity sales dataset from SP.

~5.4M rows monthly

Monthly

Jan 2005 - Jul 2022

Add to cartLearn more

Company Capital Information

ACRA

Data on company capital information, MM YYYY

~33.6K rows daily

Daily

01 Dec 2015 - 30 Apr 2024

Add to cartLearn more

Water Consumption

PUB

Dataset of water consumption by account and premise address.

~7.4M rows monthly

Monthly

Jan 2017 - Sep 2022

Add to cartLearn more

Town Gas Sales

EMA

Rainfall

NEA

Application and Approval of Grants on B...

MTI

A pop up will appear where you will automatically see the access and refresh tokens being generated.

API tokens

Access token

eyJ0e*****NPbg_9y_NU

Access token expiring in 1 hour.

Refresh token

0.000*****0000000000

Unsure how to use the tokens? Download a sample script [here](#).
Documentation on how to use the script can be found [here](#).

Generate

Using the API tokens

There are 2 tokens here in which you can use and below is an explanation on their usage.

Access token Refresh token

Access tokens enable clients to securely call protected web APIs, and are used by web APIs to perform authentication and authorization.

NOTE

Access token has a short lifespan of 1 hour. You may use the refresh token to generate a new access token after expiry.

Here is an example of how you can use the access token.

```
import requests

access_token = "*****"

# "cert_chain.pem" represents a file path to DataHive's public cert chain.
# Please refer to the "Public SSL certificate chain" section on how to obtain the cert chain
response = requests.get(
    "https://datahive.gov.sg/api/profile",
    headers={
        "Authorization": f"Bearer {access_token}"
    }
)
```

```
verify="cert_chain.pem"  
)
```

Public SSL certificate chain

A public SSL certificate chain is an ordered list of public certificates that is being used to validate the validity of the DataHive certificate.


This would ensure that the client (your machine) is able to verify that the DataHive API that is being called is legitimate.

To obtain the public SSL certificate chain, you can use the browser and visit https://datahive.gov.sg/api/public_cert_chain.

Sample API script

The provision of this sample script is meant as an aid for users to make authenticated calls to DataHive APIs.

You can download the sample script from the API tokens popup as shown below.

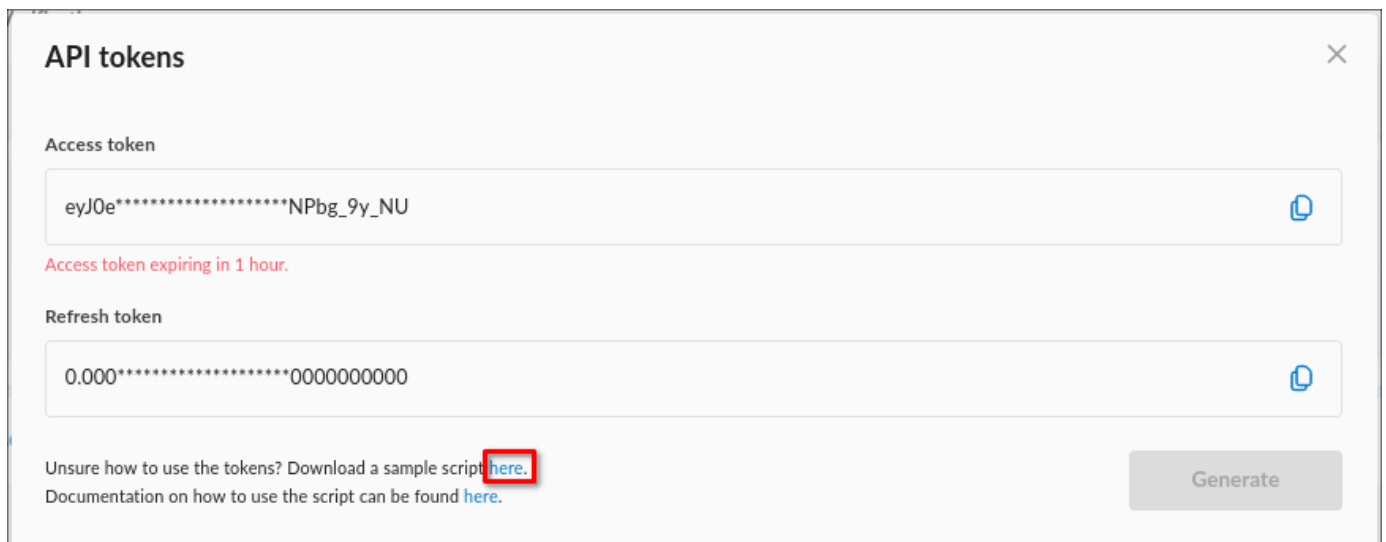

API tokens

Access token

eyJ0e*****NPbg_9y_NU

Access token expiring in 1 hour.

Refresh token

0.000*****0000000000

Unsure how to use the tokens? Download a sample script [here.](#)
Documentation on how to use the script can be found [here.](#)

Generate

DANGER

- Please read and understand the usage of the files as described in this section, especially on handling of `config.json` file.

- Usage of this script in either development or production systems is at the user's discretion.

By clicking on the highlighted link, you will download a zip file. Extract it and you will find 4 files in it.

File name	Description
api_script.py	This is the main script that you run to call the DataHive API.
cert_chain.pem	This file contains the public SSL certificate chain for DataHive as described in this section
config.json	This file contains the configurations and credentials required to run the script to make authenticated calls to DataHive APIs. If both of your access token and refresh token have expired/invalidated, you can copy the tokens from the API tokens dialog and update this file appropriately. ⚠ As this file contains your credentials, please adhere to the following rules when handling this file: • DO NOT share this file to anyone. • DO NOT commit this file to any source code management (SCM) tool such as <code>git</code>.
token_service.py	This is a helper script for <code>api_script.py</code> that is responsible for managing the tokens. For example, it will use the refresh token to retrieve a new set of tokens whenever it deems the access token as expired.

To run the script, ensure you have `python` installed and then run the following command:

```
python api_script.py
```