



PowerBI in M365

What is Microsoft PowerBI in M365?

Power BI in M365 service is a Microsoft cloud-based business analytics service that enables any Whole-of-Government (WoG) officers to visualise and analyze data with greater speed, efficiency, and collaboration. It connects WoG officers to a broad range of cloud-based and on-premise data through easy-to-use dashboards, interactive reports and compelling visualizations within the web browser without installing specialised software. For more information visit the [M365 PowerBI Community Portal](#).

How does PowerBI in M365 work with DataHive?

DataHive lets WoG users discover, request and access government-owned datasets. WoG officers with a approved data request can create dashboards, reports and visualizations using the PowerBI M365 [Snowflake data connector](#) to DataHive. Please check and consider specific M365 PowerBI Usage Specifications [here](#)

WARNING

Note: PowerBI M365 is supported for data up to Confidential (Cloud-Eligible) / Sensitive (Normal) only, and users are fully responsible for their own usage.

How can I configure PowerBI in M365 to connect to DataHive?


PRE-REQUISITES

To access your approved data request via PowerBI in M365, you'll need a valid WoG account with [MGLP Basket A subscription](#) with access to app.powerbi.com

WARNING

Long running PowerBI in M365 queries will timeout after 5 mins.

1. Click on **Create** **+** in the sidebar > **Get Data** > Search for **Snowflake Data Connector**
2. Reference video tutorial

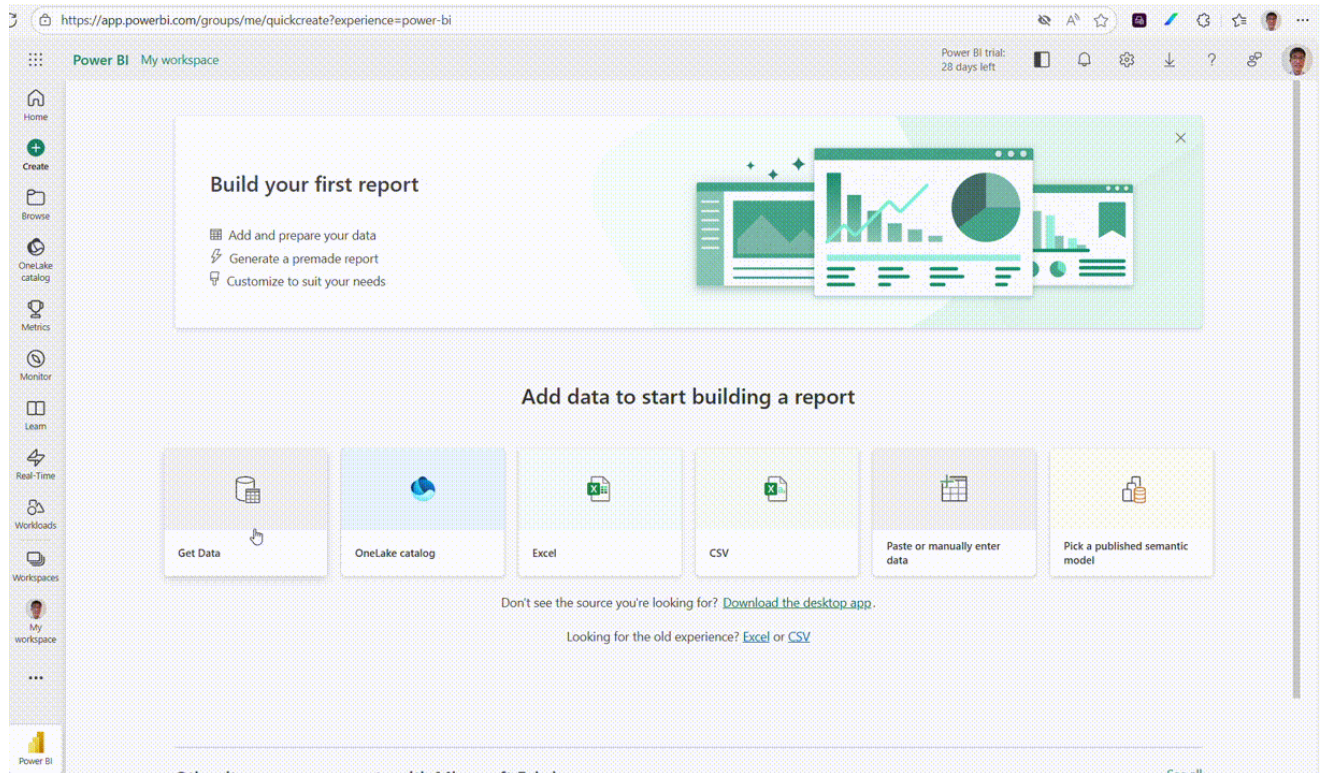

3. Use the following configuration settings with your Data Request ID

Connection Settings

Setting	Value/Selection	Description
Server	govtech- datahive.snowflakecomputing.com or govtech-datahive- stg.snowflakecomputing.com	The address of the Snowflake server for Production and Staging platform respectively. (Required)
Warehouse	BI_WAREHOUSE	The specific warehouse to connect to within Snowflake. (Required)

Advanced Options

Option	Value/Selection	Description
Specify a text value to use as Role name	<DR_ID_replace_dashes_with_underscore>	The specific Data Request ID without dashes (Required) for example if the DR is GOVTECH-2025-10-012 use GOVTECH_2025_10_012
Include relationship columns	(Use Default values)	Option to include columns that define relationships. (blank)
Connection timeout in seconds	(Use Default values)	Specifies how long to wait for the initial connection to be established. (Example: 60)
Command timeout in seconds	(Use Default values)	Specifies how long to wait for a command (query) to execute. (Example: 300)

Connection Credentials

Credential Setting	Value/Selection	Description
Connection	Create new connection	Action to establish a new connection profile.

Credential Setting	Value/Selection	Description
Connection name	govtech- datahive.snowflakecomputing.com;BI_WAREHOUSE	Auto-generated or custom name for the connection profile.
Data gateway	(none)	Indicates no data gateway is being used (for cloud or direct connections).
Authentication kind	Microsoft Account	The type of authentication mechanism being used. Do not use Snowflake
Privacy Level	Private	Defines the data privacy setting for the source.
On-premises connection	(Unchecked)	Box to indicate if the connection uses on-premises data gateways or VNet data.

 Please remember to **Sign in** to complete the connection process using your gov.sg
Entra ID.