
O Quick 14





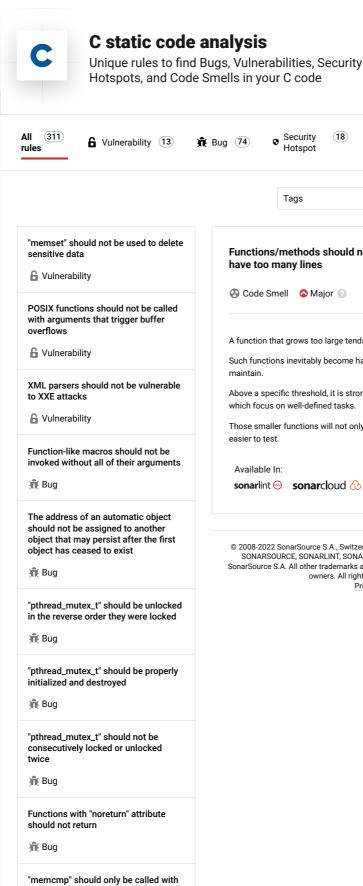

pointers to trivially copyable types with no padding

🖷 Bug

Functions/methods should not Analyze your code have too many lines brain-overload A function that grows too large tends to aggregate too many responsibilities. Such functions inevitably become harder to understand and therefore harder to Above a specific threshold, it is strongly advised to refactor into smaller functions which focus on well-defined tasks. Those smaller functions will not only be easier to understand, but also probably easier to test. Available In: sonarlint ⊖ | sonarcloud ☆ | sonarqube | Developer Edition

⊗ Code

Smell

206

Search by name.

Security

Hotspot

Tags

18

© 2008-2022 SonarSource S.A., Switzerland. All content is copyright protected. SONAR, SONARSOURCE, SONARLINT, SONARQUBE and SONARCLOUD are trademarks of SonarSource S.A. All other trademarks and copyrights are the property of their respective owners. All rights are expressly reserved. Privacy Policy

Stack allocated memory and nonowned memory should not be freed

R
Bug

Closed resources should not be
accessed
Bug

Dynamically allocated memory should
be released
Bug

Freed memory should not be used