
Code Smell 61



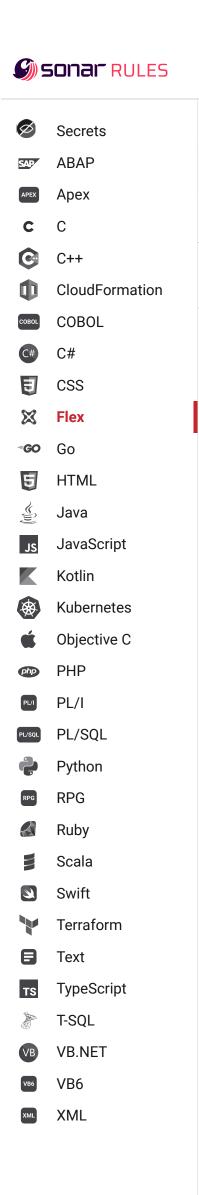

Flex static code analysis


Unique rules to find Bugs, Security Hotspots, and Code Smells in your FLEX code

9

All rules 76	📆 Bu
Security.allowDomain() should only be used in a tightly focused manner	C ₂
❸ Vulnerability	hi
The flash.system.Security.exactSettings property should never be set to false	8
☆ Vulnerability	Th Co
Dynamic classes should not be used	un
Code Smell	De
"LocalConnection" should be configured to narrowly specify the domains with which local connections	Th
to other Flex application are allowed Uulnerability	
"default" clauses should be first or last	
Code Smell	©
Event types should be defined in metadata tags	
Event names should not be hardcoded in event listeners	
Code Smell	
The special "star" type should not be used	
Code Smell	
Variables of the "Object" type should not be used	
Methods should not be empty	
Code Smell	
Constant names should comply with a naming convention	
Code Smell	
All branches in a conditional structure should not have exactly the same implementation	

📆 Bug

Classes that extend "Event" should

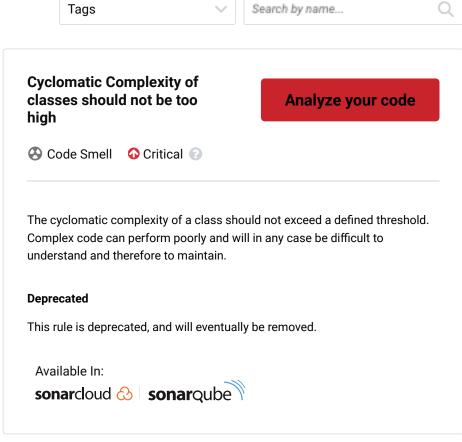

Security Hotspot 1

© 2008-2022 SonarSource S.A., Switzerland. All content is copyright protected. SONAR, SONARSOURCE, SONARLINT, SONARQUBE and SONARCLOUD are trademarks of SonarSource S.A. All other trademarks and copyrights are the property of their respective owners. All rights are expressly reserved.

Privacy Policy

override "Event.clone()" • Bug
Constructors should not dispatch events
Rug
"ManagedEvents" tags should have companion "Event" tags
∰ Bug
Objects should not be instantiated inside a loop
Two branches in a conditional structure should not have exactly the same implementation
Constructor bodies should be as lightweight as possible
Only "while", "do" and "for" statements should be labelled
Statements, operators and keywords specific to ActionScript 2 should not be used
"for" loop stop conditions should be invariant
Unused function parameters should be removed
Code Smell