




Products >

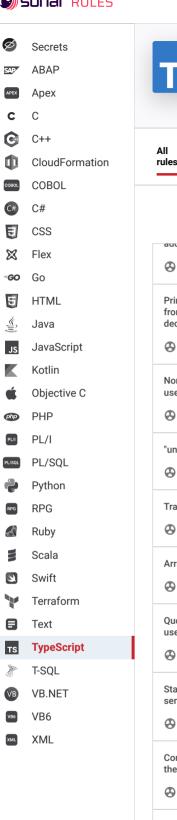

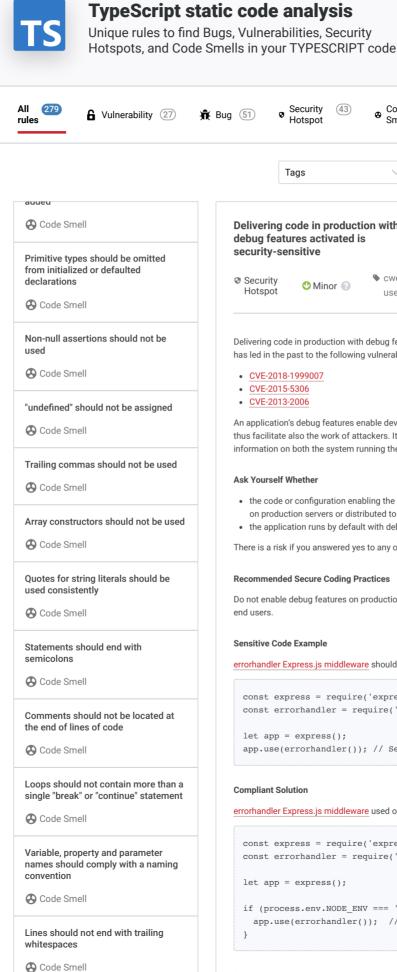

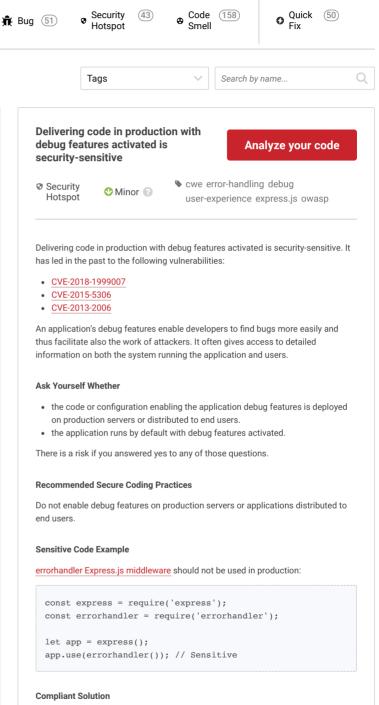

errorhandler Express.js middleware used only in development mode:

const errorhandler = require('errorhandler');

app.use(errorhandler()); // Compliant

if (process.env.NODE ENV === 'development') { // Compliant

const express = require('express');

let app = express();

See

TypeScript static code analysis: Delivering code in production with debug features activated is security-sensitive

Files should contain an empty newline at the end

Code Smell

An open curly brace should be located at the end of a line

Code Smell

Tabulation characters should not be used

Code Smell

Function and method names should comply with a naming convention

Code Smell

- OWASP Top 10 2021 Category A5 Security Misconfiguration
- OWASP Top 10 2017 Category A3 Sensitive Data Exposure
- MITRE, CWE-489 Active Debug Code
- MITRE, CWE-215 Information Exposure Through Debug Information

Available In:

sonarcloud 🔂 | sonarqube

© 2008-2022 SonarSource S.A., Switzerland. All content is copyright protected. SONAR, SONARSOURCE, SONARLINT, SONARQUBE and SONARCLOUD are trademarks of SonarSource S.A. All other trademarks and copyrights are the property of their respective owners. All rights are expressly reserved.

Privacy Policy