
Code Smell (144)

Search by name...



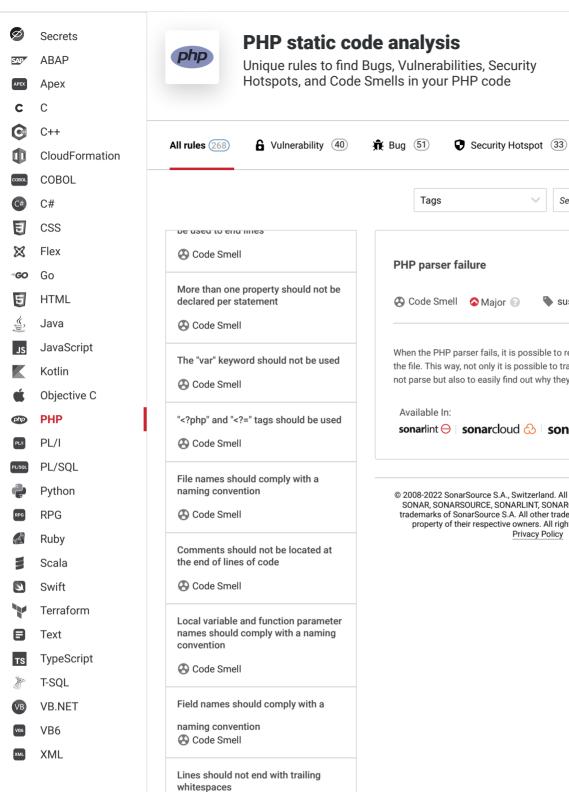

Code Smell

at the end Code Smell

correct order Code Smell

Files should contain an empty newline

Modifiers should be declared in the

An open curly brace should be located

at the beginning of a line

Analyze your code suspicious When the PHP parser fails, it is possible to record the failure as a violation on the file. This way, not only it is possible to track the number of files that do not parse but also to easily find out why they do not parse. sonarlint ⊕ | sonarcloud 🐼 | sonarqube

© 2008-2022 SonarSource S.A., Switzerland. All content is copyright protected. SONAR, SONARSOURCE, SONARLINT, SONARQUBE and SONARCLOUD are trademarks of SonarSource S.A. All other trademarks and copyrights are the property of their respective owners. All rights are expressly reserved.

An open curly brace should be located at the end of a line
Code Smell

Tabulation characters should not be used
Code Smell

Method and function names should comply with a naming convention
Code Smell

Creating cookies with broadly defined "domain" flags is security-sensitive

Security Hotspot