/*copy the reverse by string with pointer*/
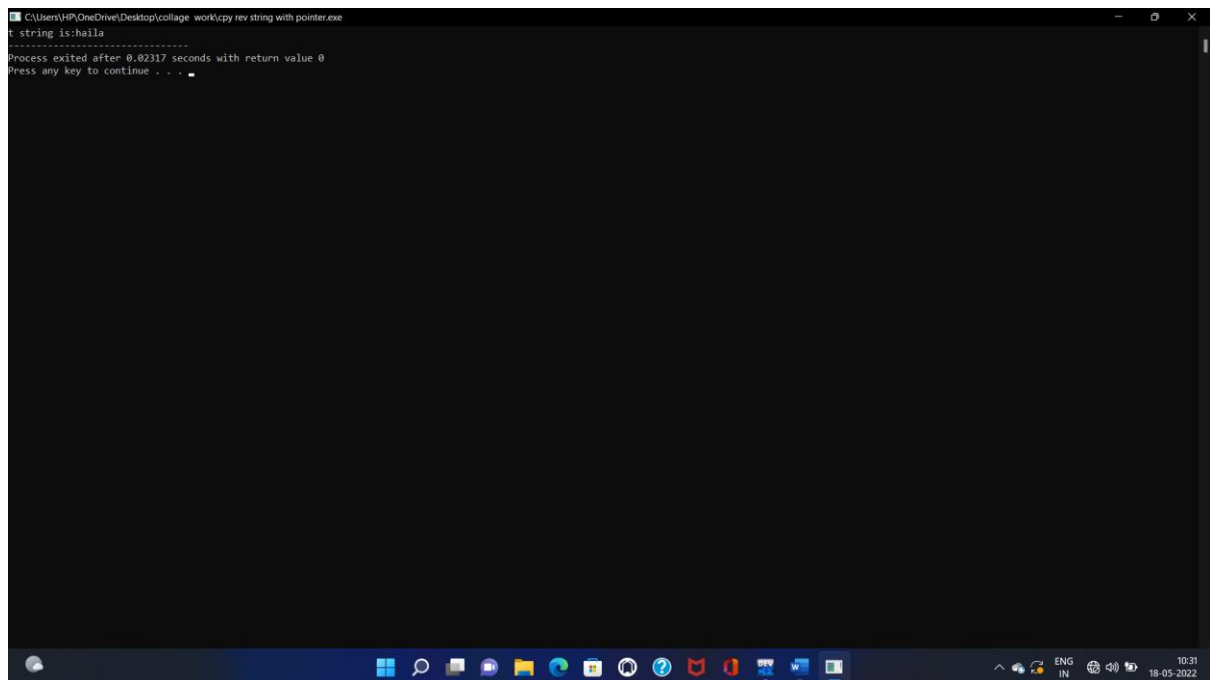
```c
#include<stdio.h>

int main()
{
        char x[]="aliah";

        char t[50];

        char *p=&x[4];

        char *q=t;

        while(*p!='\0')

        {

                *q=*p;

                p--;

                q++;

        }

        *q='\0';

        printf("t string is:%s",t);

        return 0;

}
```