HTML Events

Shoaib Ghachi

MCT | Technical Trainer | Mentor |SME

Overview

-What are HTML Events?

-Click Event

-Input Event

-TextChanged

HTML Events

HTML has the ability to let events trigger actions in a browser, like starting a JavaScript when a user clicks on an element.

Events triggered for the window object (applies to the <body> tag):

HTML events are signals fired by the browser when something significant happens, such as a user clicking a button, a page loading, or a video playing. These events are typically used with JavaScript to create dynamic and interactive web pages by executing specific code (event handlers) in response to these actions.

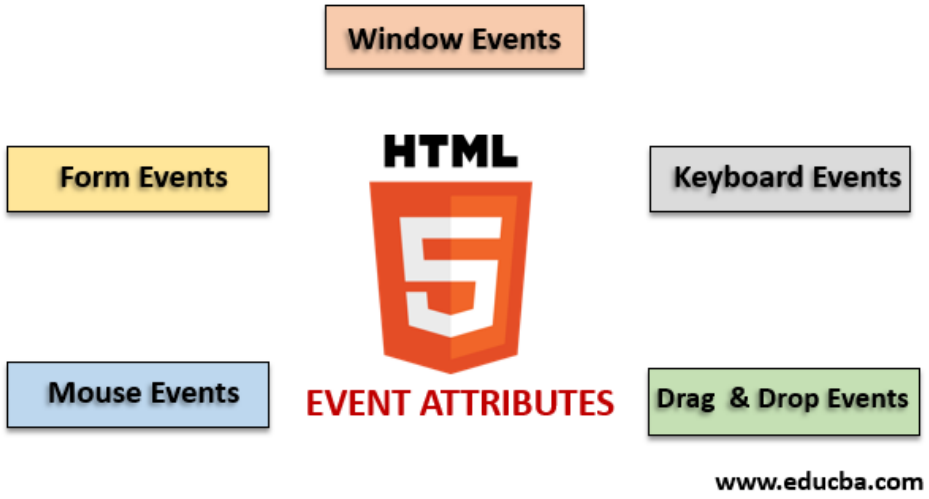

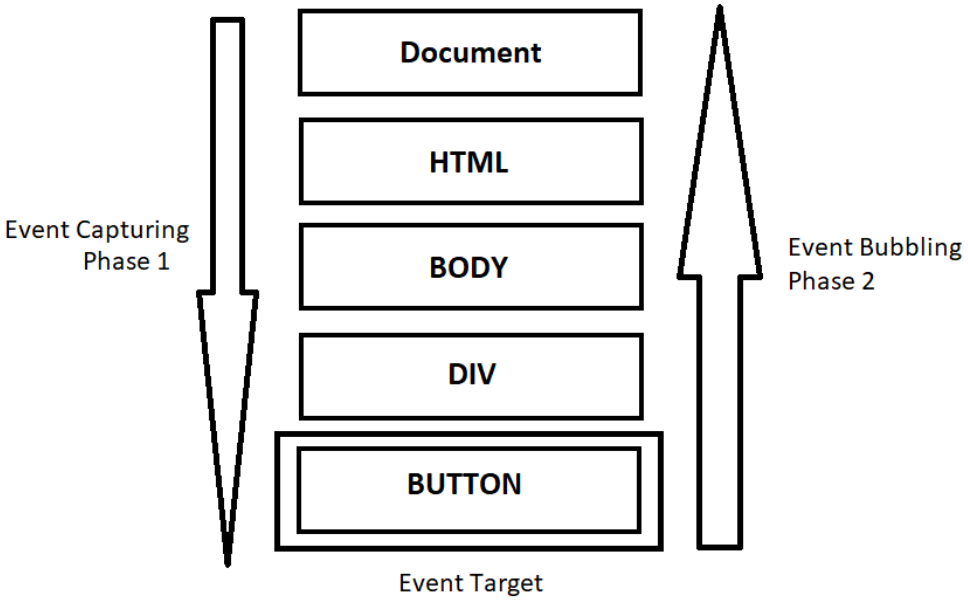

Common HTML Events

Here is a list of some common HTML events:

Event	Description
onchange	An HTML element has been changed
onclick	The user clicks an HTML element
onmouseover	The user moves the mouse over an HTML element
onmouseout	The user moves the mouse away from an HTML element
onkeydown	The user pushes a keyboard key
onload	The browser has finished loading the page

Example-1: Click Event

```
<button onclick="changeColor()">Click Me</button>

<script>
function changeColor() {
  document.body.style.backgroundColor = "lightblue";
}
</script>
```

Example-2: Input Event

```
<input type="text" onkeyup="showText(this.value)">
<p id="output"></p>

<script>
function showText(value) {
  document.getElementById("output").innerText = value;
}
</script>
```

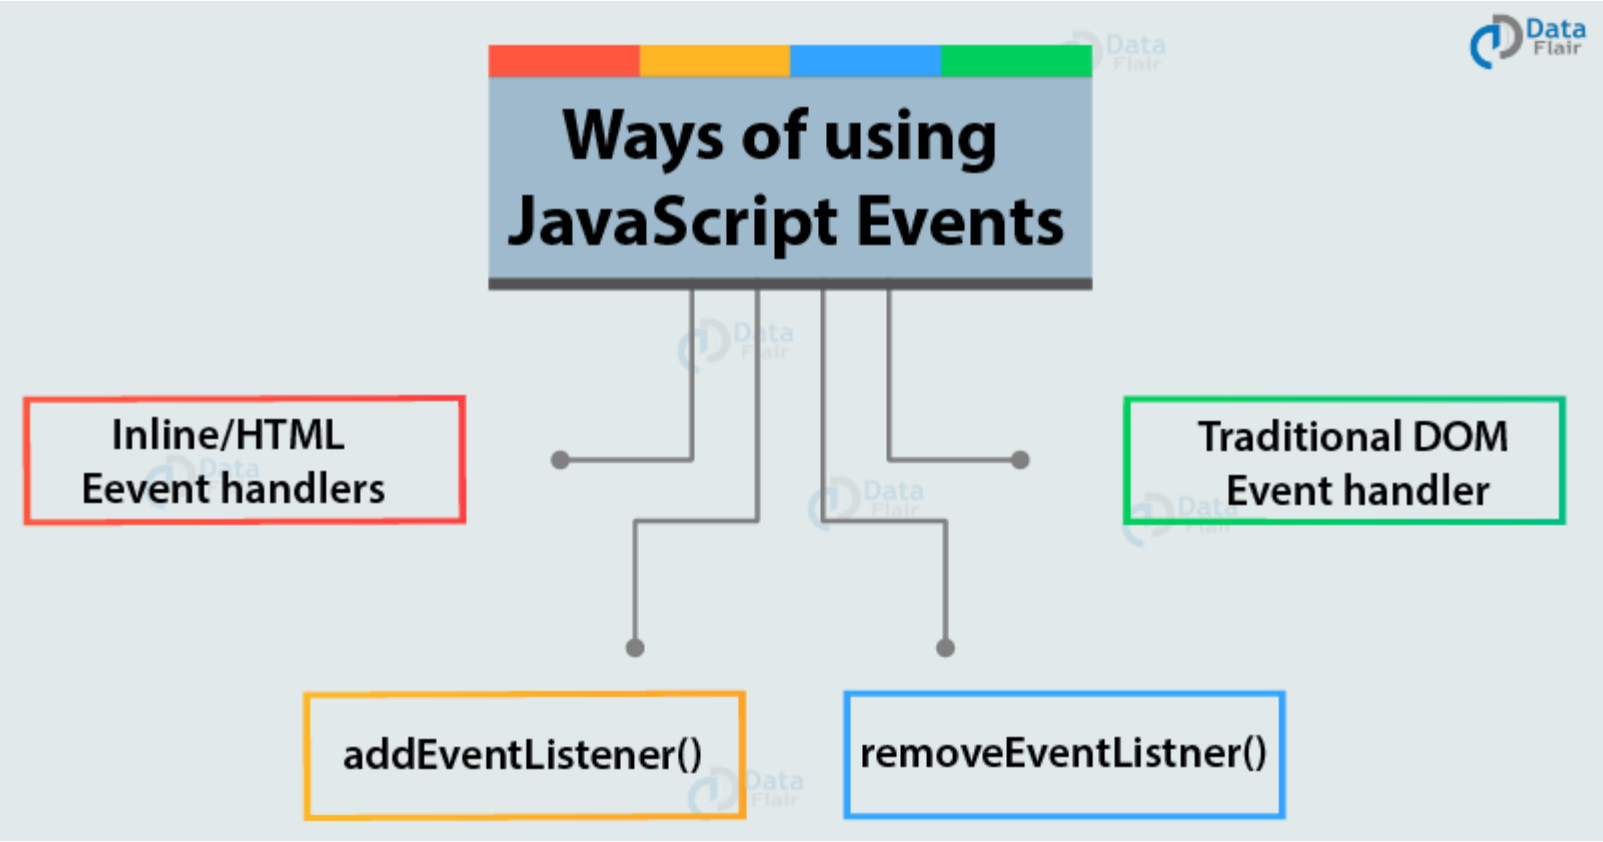
Ways of using JavaScript Events
Inline/HTML Eevent handlers
Traditional DOM Event handler
addEventListener()
removeEventListner()

Example-1: Click Event using addEventListener()

```
<!DOCTYPE html>
<html>
<head>
  <title>Click Event Example</title>
</head>
<body>
<button id="btn">Click Me</button>
<script>
  // Step 1: Select the button
  const button = document.getElementById("btn");

  // Step 2: Add event listener
  button.addEventListener("click", function() {
    document.body.style.backgroundColor = "lightblue";
  });
</script>
</body>
</html>
```

Example 2: Input Event using addEventListener()

```
<!DOCTYPE html>
<html>
<head>
  <title>Input Event Example</title>
</head>
<body>
<input type="text" id="nameInput" placeholder="Type something">
<p id="output"></p>
<script>
  // Step 1: Select elements
  const inputBox = document.getElementById("nameInput");
  const outputText = document.getElementById("output");
  // Step 2: Add input event listener
  inputBox.addEventListener("input", function() {
    outputText.innerText = inputBox.value;
  });
</script>
</body>
</html>
```