

Linux Commands (S2)

- **Pwd** - Show current directory

Syntax : `pwd`

```
Editor  Tab 1  +
ubuntu:~$ pwd
/root
ubuntu:~$
```

- **ls** - Show Lists files

Syntax : `ls`

```
Editor  Tab 1  +
ubuntu:~$ ls
filesystem
ubuntu:~$
```

- **touch** - Creates file

Syntax : `touch filename`

```
Editor  Tab 1  +
ubuntu:~$ touch rajesh
ubuntu:~$ ls
filesystem rajesh
ubuntu:~$
```

- **mkdir** - Creates a new directory


Syntax : `mkdir folder(or)directoryname`

```
Editor  Tab 1  +
ubuntu:~$ mkdir bhimavaram
ubuntu:~$ ls
bhimavaram filesystem rajesh
ubuntu:~$
```

Creating & Editing Files Using vim Editor

- **vim** - Create or open a file, it will open for editing.

Syntax : vim filename

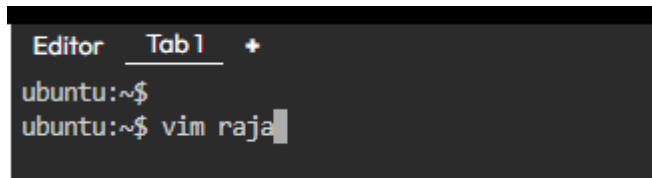


```
Editor  Tab 1 +
ubuntu:~$
ubuntu:~$ vim raja
```


- Press enter, vim opens in **command mode**



- Press i, You'll now enter **INSERT mode**, and you can start typing your content.

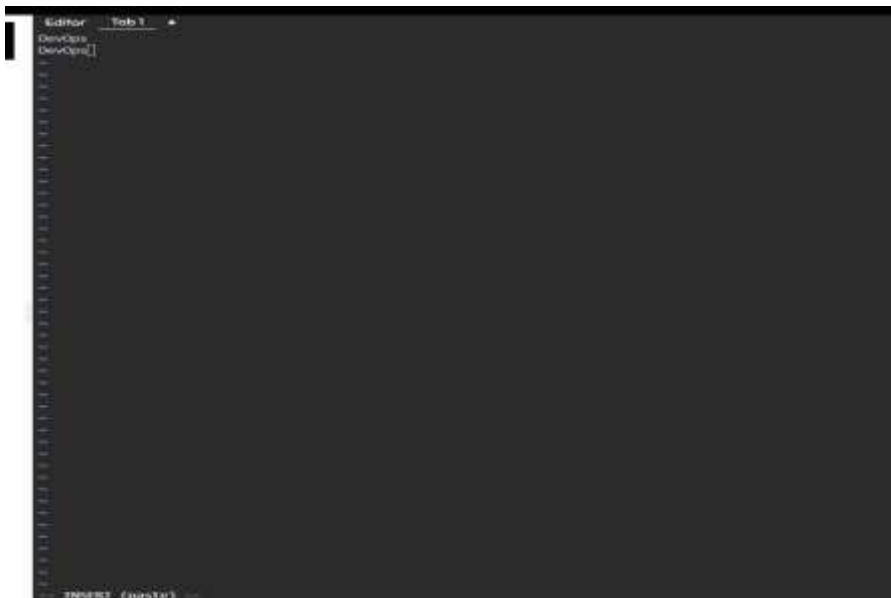


- Press **Esc** and enter **:wq!** → to exit INSERT mode and go back to command mode.

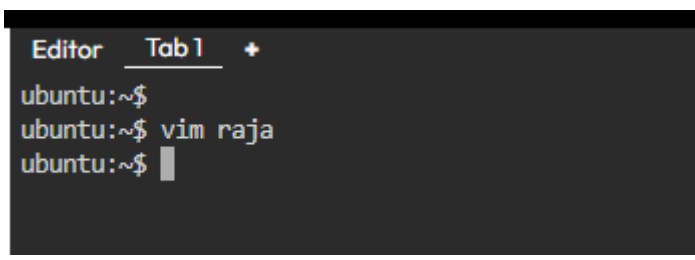

- **cat** - Verify the file content.

Syntax : cat filename

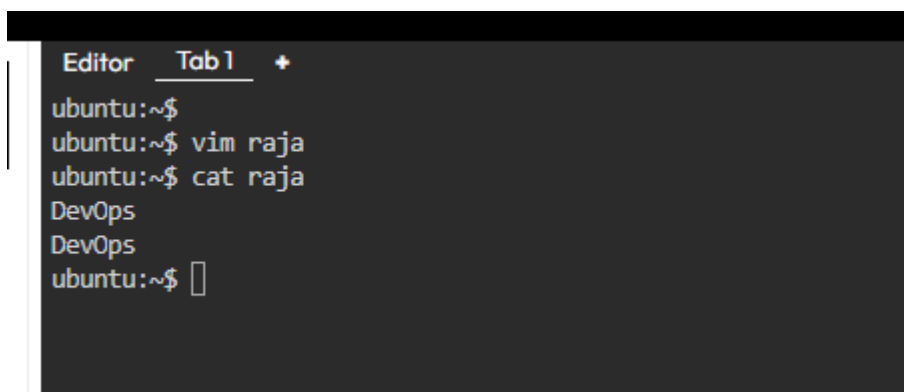

- **yy** - copy single line

Syntax : yy

- **2yy** - copy 2 lines

Syntax : 2yy

- **5yy** - copy 5 lines

Syntax : 5yy


- **p** - past the line

Syntax : p

(all above commands use in ESC mode)

- **set number** - displays **line numbers** on the left side of your Vim editor.

Syntax : :set number

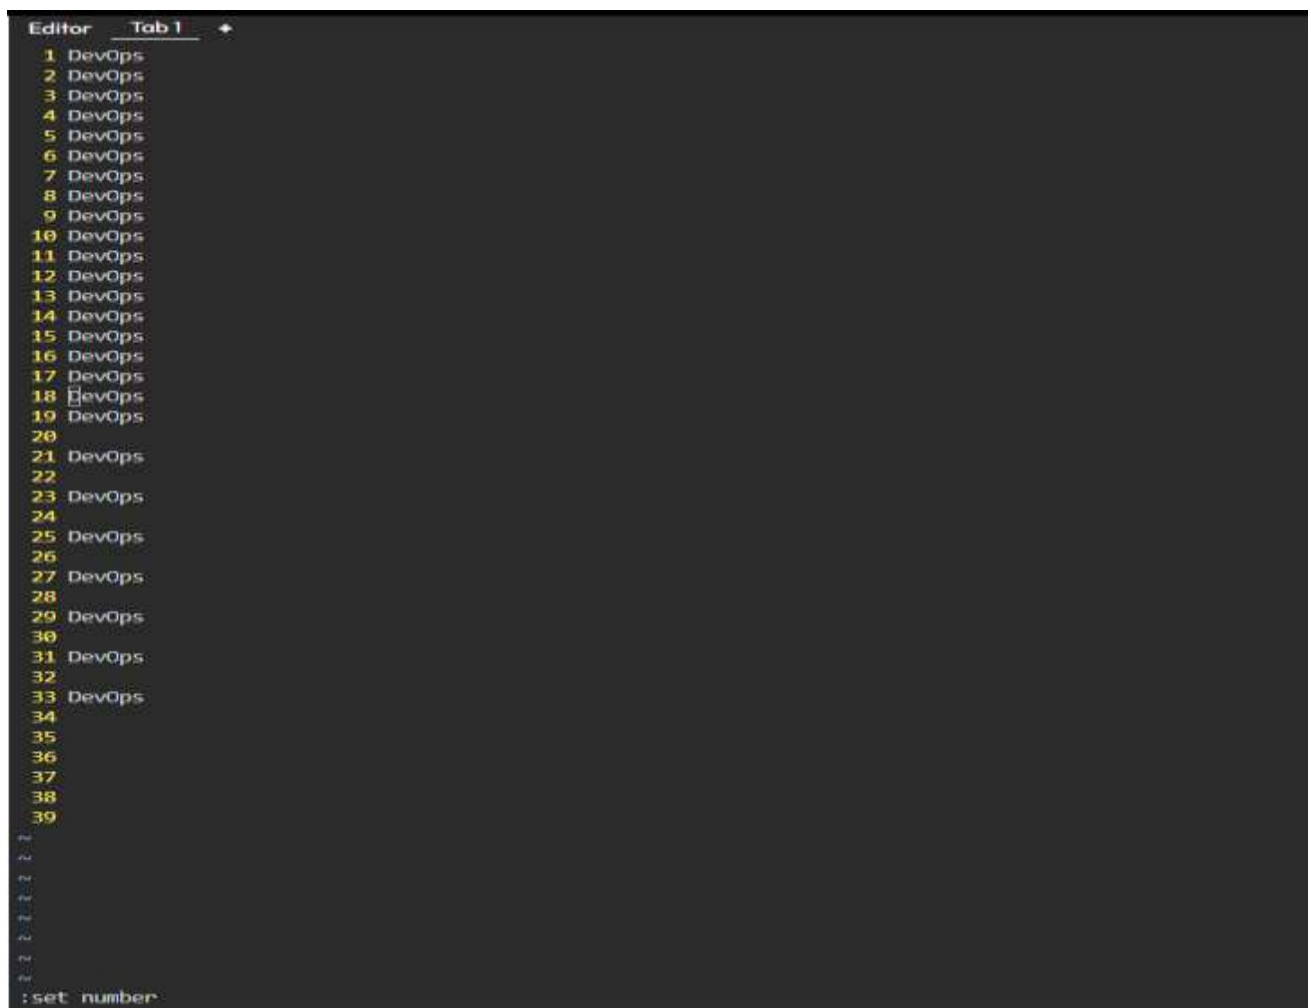

The screenshot shows a Vim editor window with a dark background. At the top, the title bar reads "Editor Tab 1". The editor content consists of 39 lines, each starting with a yellow line number followed by the text "DevOps". The line numbers are displayed in a yellow font on the left side of the editor. At the bottom of the window, the command prompt shows the command `:set number` being entered.

- **:5** - Vim will move your cursor to the **start of line 5**

Syntax : :5

- **:10** - Vim will move your cursor to the **start of line 10**

Syntax : :10

- **dd** - to delete single line

Syntax : dd

- **4dd** - to delete 4 lines at a time

Syntax : 4dd


- **10dd** - to delete 10 lines at a time

Syntax : 10dd

- **sed** - to replace a word

Syntax : :%s/old_word/new_word

For example devops change into aws

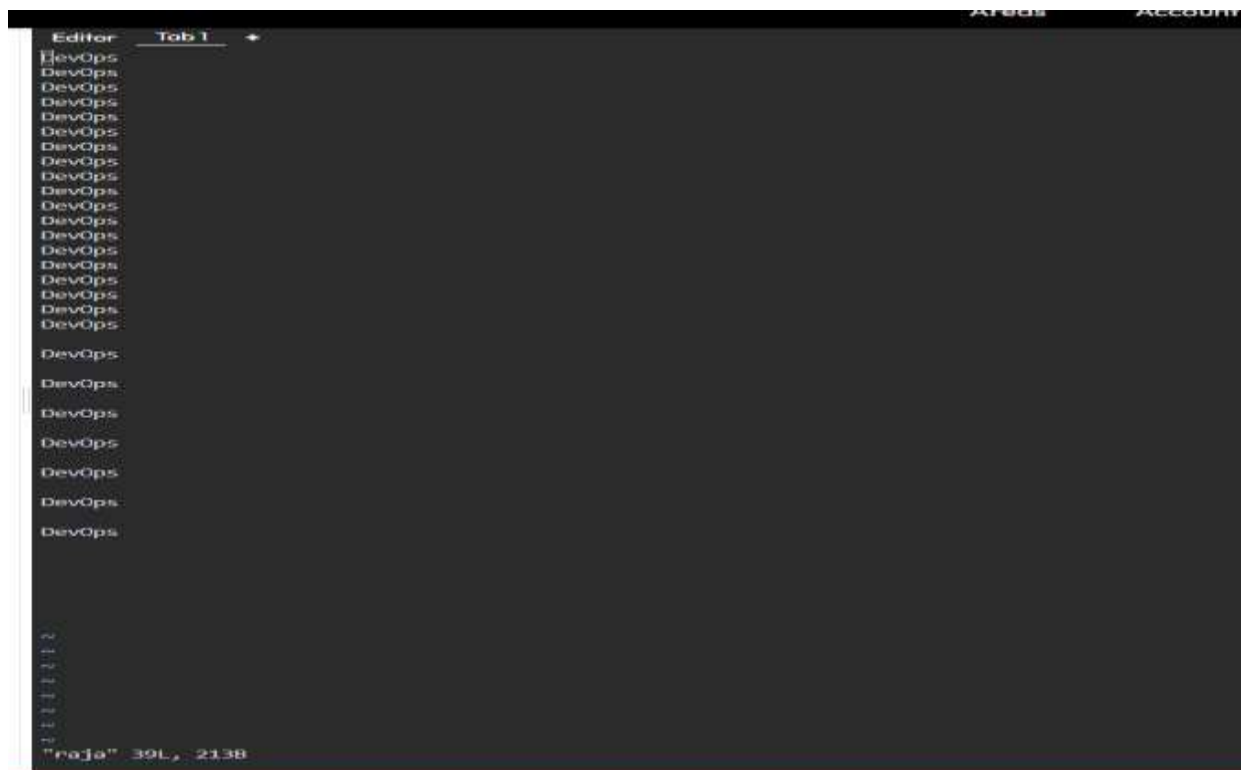

```
~  
~  
:%s/DevOps/aws
```

[illegible]

- **mkdir dirname** - create multiple directories

```
Syntax : mkdir [directory_name] [directory_name]
[directory_name]
```

```
Editor  Tab 1  +
ubuntu:~$ mkdir AWS GCP DevOps
ubuntu:~$ ls
AWS DevOps GCP filesystem raja
ubuntu:~$
```

- **mikdir filename{1..10}** - create series of directories

Syntax : mkdir raja{1..10}

```
Editor  Tab1  +
ubuntu:~$ mkdir raja{1..10}
ubuntu:~$ ls
AWS  DevOps  GCP  filesystem  raja  raja1  raja10  raja2  raja3  raja4  raja5  raja6  raja7  raja8  raja9
ubuntu:~$
```

- **rmdir filename** - remove directories.

Syntax : `rmdir raja5`

```
Editor  Tab1  +
ubuntu:~$ ls
AWS  DevOps  GCP  filesystem  raja  raja1  raja10  raja2  raja3  raja4  raja5  raja6  raja7  raja8  raja9
ubuntu:~$ rmdir raja5
ubuntu:~$ ls
AWS  DevOps  GCP  filesystem  raja  raja1  raja10  raja2  raja3  raja4  raja6  raja7  raja8  raja9
ubuntu:~$
```

- **rmdir filename filename** - remove multiple directories.

Syntax : `rmdir aws GCP`

```
Editor  Tab1  +
ubuntu:~$ ls
AWS  DevOps  GCP  filesystem  raja  raja1  raja10  raja2  raja3  raja4  raja6  raja7  raja8  raja9
ubuntu:~$ rmdir AWS GCP
ubuntu:~$ ls
DevOps  filesystem  raja  raja1  raja10  raja2  raja3  raja4  raja6  raja7  raja8  raja9
ubuntu:~$
```

- **rmdir filename*** - remove series of directories

Syntax : `rmdir raja*`

```
Editor  Tab1  +
ubuntu:~$ ls
DevOps  filesystem  raja  raja1  raja10  raja2  raja3  raja4  raja6  raja7  raja8  raja9
ubuntu:~$ rmdir raja*
rmdir: failed to remove 'raja': Not a directory
ubuntu:~$ ls
DevOps  filesystem  raja
ubuntu:~$
```

- **rm -rf *** - remove all files and directories

Syntax : `rm -rf *`

```
ubuntu:~$ ls
AWS  GCP  jan  kk  krish  mk  raghu  ram  ravi
ubuntu:~$ rm -rf *
ubuntu:~$ ls
ubuntu:~$
```

- **mv filename change filename** - to change file name

Syntax : mv raja RAJESH

```
Editor  Tab 1  +
ubuntu:~$ ls
raja
ubuntu:~$ mv raja RAJESH
ubuntu:~$ ls
RAJESH
ubuntu:~$
```

- **mkdir -p name1/name2/name3/** - Creates all the intermediate directories

Syntax : mkdir -p raja1/raja2/raja3/raja4/raja5

```
Editor  Tab 1  +
ubuntu:~$ mkdir -p raja1/raja2/raja3/raja4/raja5
ubuntu:~$ tree
.
|-- filesystem -> /
`-- raja1
    |-- raja2
        |-- raja3
            |-- raja4
                |-- raja5

7 directories, 0 files
ubuntu:~$
```