

## APACHE (httpd)

Package name : httpd

Port number : 80

Service name : httpd.service

Configuration file : /etc/httpd

### **Steps to be followed in name based:**

- **Install package httpd**
- **List the particular package httpd and search for the vhost.conf**
- **Make directory of your website**
- **Copy the lines which is in the vhost and paste it in conf file**
- **Create a new config file in /etc/httpd/conf.d**
- **In the configuration file we want to add the entries**
- **Save and close the file**
- **Create a new html file in /var/www/namebased.com/**
- **Restart the apache service**
- **Add entry to the local host file to point the domain name of the server's IP**

### **Testing the virtual host in web browser**

#### **Step1**

Install the package

#yum install httpd -y

```
[root@server ~]# yum install httpd -y
Last metadata expiration check: 2:46:43 ago on Sun 05 Jul 2026 05:04:33 PM IST
Package httpd-2.4.62-14.el9.x86_64 is already installed.
Dependencies resolved.
Nothing to do.
```

## Step2

To list the installed in httpd

```
#rpm -qa | grep httpd
```

```
Complete!  
[root@server ~]# rpm -qa|grep httpd  
httpd-tools-2.4.62-14.el9.x86_64  
httpd-filesystem-2.4.62-14.el9.noarch  
httpd-core-2.4.62-14.el9.x86_64  
centos-logos-httpd-90.9-1.el9.noarch  
httpd-2.4.62-14.el9.x86_64
```

## Step3

```
[root@server ~]# systemctl enable --now httpd  
[root@server ~]# systemctl status httpd  
● httpd.service - The Apache HTTP Server  
   Loaded: loaded (/usr/lib/systemd/system/httpd.service; enabled; preset: disabled)  
   Active: active (running) since Sun 2026-07-05 17:53:11 IST; 2h 0min ago  
     Docs: man:httpd.service(8)  
  Main PID: 984 (httpd)  
    Status: "Total requests: 0; Idle/Busy workers 100/0;Requests/sec: 0; Bytes se  
    Tasks: 177 (limit: 16264)  
    Memory: 18.5M (peak: 18.7M)
```

## Step-4

Listing the package and search for vhost.conf for copying

```
rpm -ql httpd-core-2.4.57-8.el9.x86_64 |grep vhost
```

```
[root@client ~]# rpm -ql httpd-core-2.4.62-14.el9.x86_64 |grep vhost  
/usr/lib64/httpd/modules/mod_vhost_alias.so  
/usr/share/doc/httpd-core/httpd-vhosts.conf
```

## Step-5

**vi /usr/share/doc/httpd-core/httpd-vhosts.conf**

```
root@client:~  
#  
<VirtualHost *:80>  
    ServerAdmin webmaster@dummy-host.example.com  
    DocumentRoot "/var/www/dummy-host.example.com"  
    ServerName dummy-host.example.com  
    ServerAlias www.dummy-host.example.com  
    ErrorLog "/var/log/httpd/dummy-host.example.com-error_log"  
    CustomLog "/var/log/httpd/dummy-host.example.com-access_log" common  
</VirtualHost>  
  
<VirtualHost *:80>  
    ServerAdmin webmaster@dummy-host2.example.com  
    DocumentRoot "/var/www/dummy-host2.example.com"  
    ServerName dummy-host2.example.com  
    ErrorLog "/var/log/httpd/dummy-host2.example.com-error_log"  
    CustomLog "/var/log/httpd/dummy-host2.example.com-access_log" common  
</VirtualHost>
```

Copy the virtualhost

## Step-6

**Creating a directory on th website name**

**mkdir /var/www/namebased.com**

```
[root@client ~]# cd /var/www  
[root@client www]# ls  
apache.com  cgi-bin  html
```


```
[root@client ~]# mkdir /var/www/name.com  
[root@client ~]# cd /var/www  
[root@client www]# ls  
apache.com  cgi-bin  html  name.com  
[root@client www]# cd
```

## Step-7

Create a new config file namebased.conf

vi /etc/httpd/conf.d/name.conf

```
[root@client ~]# vi /etc/httpd/conf.d/name.conf  
[root@client ~]#
```

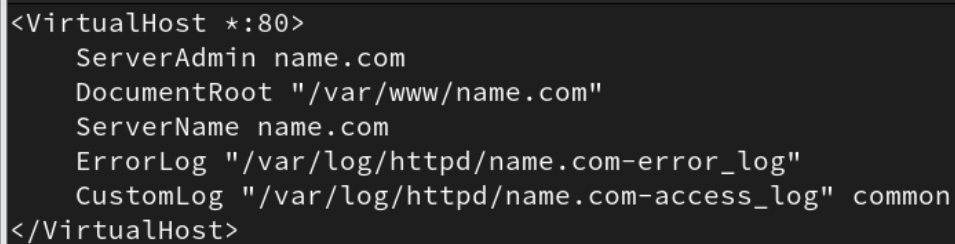


```
<VirtualHost *:80>  
    ServerAdmin name.com  
    DocumentRoot "/var/www/name.com"  
    ServerName name.com  
    ErrorLog "/var/log/httpd/name.com-error_log"  
    CustomLog "/var/log/httpd/name.com-access_log" common  
</VirtualHost>
```

## Step8

Add entry to the local host file to point the domain name of the server's IP

vi /etc/hosts

```
[root@client ~]# vi /etc/hosts
```

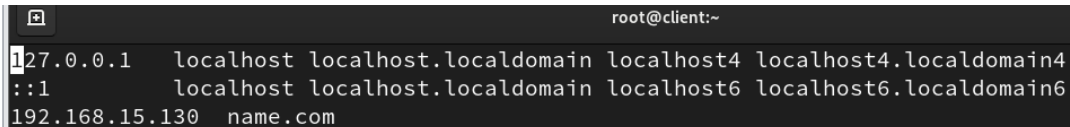

```
127.0.0.1    localhost localhost.localdomain localhost4 localhost4.localdomain4  
::1        localhost localhost.localdomain localhost6 localhost6.localdomain6  
192.168.15.130  name.com
```

```
[root@client ~]# getenforce
Permissive
```

## Step9

## Create new file in the inside the name.com

```
[root@client ~]# vi /var/www/name.com/index.html
```

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Fresh Fruits</title>
  <style>
    body{
      font-family: Arial, sans-serif;
      margin:0;
      padding:0;
      background:#f4fff4;
    }

    header{
      background:#2e8b57;
      color:white;
      text-align:center;
      padding:20px;
    }
  </style>

```

1 change; before #1 3 seconds ago

### Step-10

## Restarting the apache service

## Systemctl restart httpd.service

```
[root@client ~]# systemctl restart httpd
```

## **Step-11**

**Testing the website locally**

**curl <http://namebased.com>**

**Testing the website in the web browser**

