

FILE TRANSFER PROTOCOL

Port no:21 for sending commands (control connection)

Port no:20 for transferring data (data connection) in active mode.

Package: vsftpd


Service name: vsftpd.service

Configuration file : /etc/vsftpd/vsftpd.conf

ON SERVER :

Install the package

#yum install vsftpd ftp -y

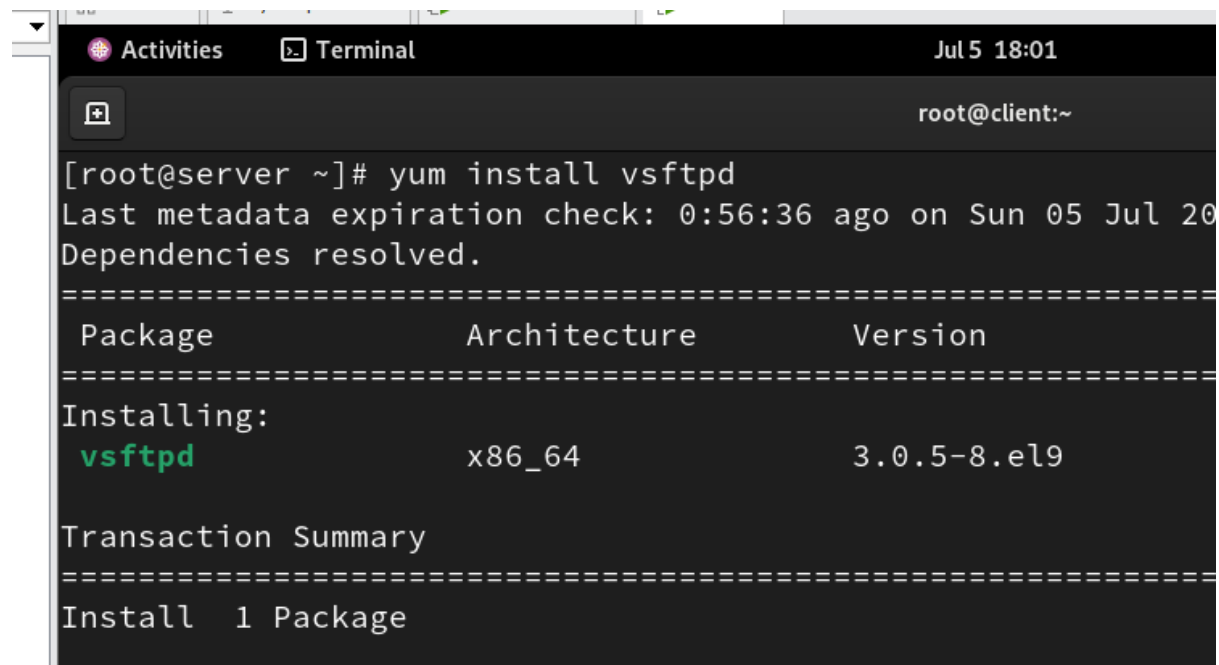A terminal window titled 'Terminal' with a timestamp 'Jul 5 18:01'. The prompt is 'root@client:~'. The user enters '[root@server ~]# yum install vsftpd'. The output shows 'Last metadata expiration check: 0:56:36 ago on Sun 05 Jul 20', 'Dependencies resolved.', and a table of installed packages. The table has columns 'Package', 'Architecture', and 'Version'. Under 'Installing:', it lists 'vsftpd' with architecture 'x86_64' and version '3.0.5-8.el9'. Below this is a 'Transaction Summary' section showing 'Install 1 Package'.

```
[root@server ~]# yum install vsftpd
Last metadata expiration check: 0:56:36 ago on Sun 05 Jul 20
Dependencies resolved.
=====
Package                Architecture          Version
=====
Installing:
vsftpd                 x86_64                3.0.5-8.el9

Transaction Summary
=====
Install 1 Package
```

```
Complete.
[root@server ~]# rpm -qa |grep ftp
vsftpd-3.0.5-8.el9.x86_64
ftp-0.17-89.el9.x86_64
```

```
[root@server ~]# systemctl status vsftpd.service
● vsftpd.service - Vsftpd ftp daemon
   Loaded: loaded (/usr/lib/systemd/system/vsftpd.service; enabled; preset: disabled)
   Active: active (running) since Sun 2026-07-05 18:04:14 IST; 2s ago
     Process: 4054 ExecStart=/usr/sbin/vsftpd /etc/vsftpd/vsftpd.conf (code=exited, status=0/SUCCESS)
    Main PID: 4055 (vsftpd)
       Tasks: 1 (limit: 16264)
      Memory: 864.0K (peak: 1.3M)
         CPU: 20ms
```

Start or enable the service

#systemctl enable --now vsftpd.service

```
Active: inactive (dead)
[root@server ~]# systemctl enable --now vsftpd.service
Created symlink /etc/systemd/system/multi-user.target.wants/vsftpd.service → /usr/lib/systemd/system/vsftpd.service.
```

```
[root@server ~]# ss -tuln | grep :21
tcp    LISTEN 0      32          *:*          *:*
```

Move to configuration file and edit the required entry :


#vi /etc/vsftpd/vsftpd.conf

anonymous_enable=YES

anon_upload_enable=YES

```
[root@server ~]# vi /etc/vsftpd/vsftpd.conf
[root@server ~]#
```

Put anonymous yes

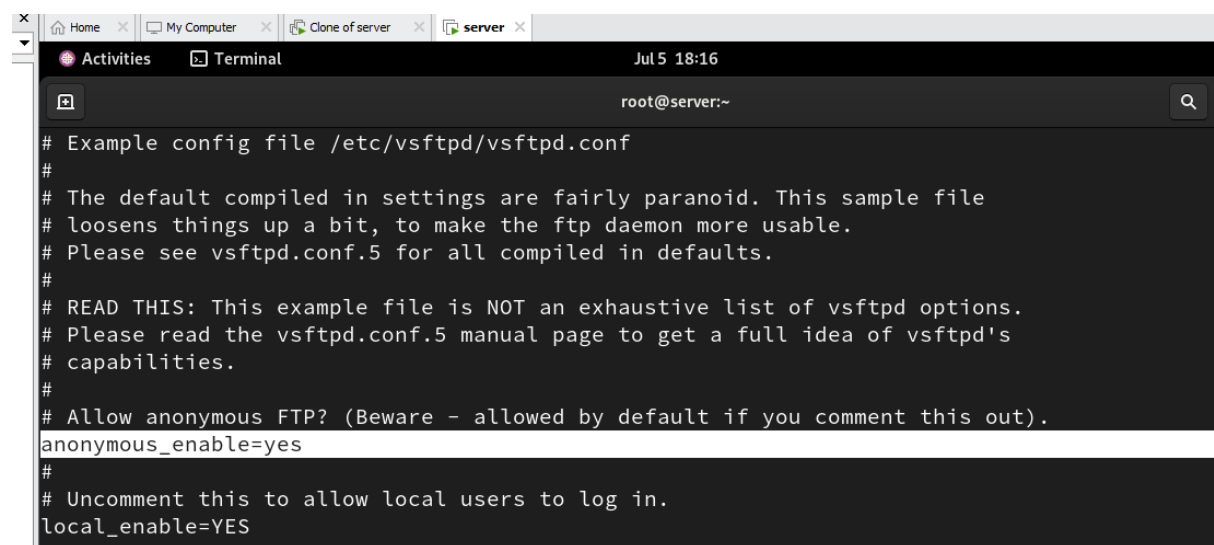

```
# Example config file /etc/vsftpd/vsftpd.conf
#
# The default compiled in settings are fairly paranoid. This sample file
# loosens things up a bit, to make the ftp daemon more usable.
# Please see vsftpd.conf.5 for all compiled in defaults.
#
# READ THIS: This example file is NOT an exhaustive list of vsftpd options.
# Please read the vsftpd.conf.5 manual page to get a full idea of vsftpd's
# capabilities.
#
# Allow anonymous FTP? (Beware - allowed by default if you comment this out).
anonymous_enable=yes
#
# Uncomment this to allow local users to log in.
local_enable=YES
```

Remove the #

```
Activities Terminal Jul 5 18:19
root@server:~
# Uncomment this to allow local users to log in.
local_enable=YES
#
# Uncomment this to enable any form of FTP write command.
write_enable=YES
#
# Default umask for local users is 077. You may wish to change this
# if your users expect that (022 is used by most other ftp servers)
local_umask=022
#
# Uncomment this to allow the anonymous FTP user to upload files. This
# has an effect if the above global write_enable is activated.
# Obviously need to create a directory writable by the FTP user.
# When SELinux is enforcing check for SE bool allow_ftpd_anon_upload
anon_upload_enable=YES
#
# Uncomment this if you want the anonymous FTP user to be able to
```

```
[root@server ~]# systemctl status firewalld.service
○ firewalld.service - firewalld - dynamic firewall daemon
  Loaded: loaded (/usr/lib/systemd/system/firewalld.service; disabled; preset: enabled)
  Active: inactive (dead)
  Docs: man:firewalld(1)
```

```
Docs: man:firewalld(1)
[root@server ~]# getenforce
Enforcing
[root@server ~]# setenforce 0
```

```
[root@server ~]# systemctl restart vsftpd
```

Then restart the service

```
# systemctl restart vsftpd.service
```

Move the /var/ftp/pub then create the file to transfer to the remote machine and make the full permission for pub directory

```
[root@server ~]# cd /var/ftp
[root@server ftp]# ls
pub
[root@server ftp]# ls
pub
[root@server ftp]# cd pub
[root@server pub]# ls
[root@server pub]# touch file{1..4}
[root@server pub]# ls
file1  file2  file3  file4
```

Command Meaning

ls	Show files on the server
pwd	Show current directory on the server
lpwd	Show current directory on the client
cd folder	Change directory on the server
lcd folder	Change directory on the client
get file.txt	Download one file
put file.txt	Upload one file
mget *	Download multiple files
mput *	Upload multiple files
bye	Disconnect from the FTP server

Then go client

ON CLIENT

Install the package

#yum install vsftpd ftp

```
[root@client ~]# yum install vsftpd* -y
Last metadata expiration check: 2:28:08 ago on Su
Package vsftpd-3.0.5-8.el9.x86_64 is already inst
Dependencies resolved.
Nothing to do.
Complete!
```

```
Complete.
[root@client ~]# rpm -qa|grep ftp
vsftpd-3.0.5-8.el9.x86_64
[root@client ~]# yum install ftp
```

```
[root@client ~]# yum install ftp
Last metadata expiration check: 2:28:51 ago on Sun 05 Jul 2026 03:54:24 PM IST.
Dependencies resolved.
```

Package	Architecture	Version	Repository
=====			
Installing:			
ftp	x86_64	0.17-89.el9	appstream

Transaction Summary

```
Complete!
[root@client ~]# rpm -qa|grep ftp
vsftpd-3.0.5-8.el9.x86_64
ftp-0.17-89.el9.x86_64
[root@client ~]#
```

Then connect to the ftp by using ip

#ftp <ip of server>

ftp server ip a

```
[root@client ~]# ftp 192.168.15.130
Connected to 192.168.15.130 (192.168.15.130).
220 (vsFTPd 3.0.5)
Name (192.168.15.130:root):
```

Put anonymous

```
Name (192.168.15.130:root): anonymous
331 Please specify the password.
```

Put password anonymous

```
Password:
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp> ls
```

```
ftp> ls
227 Entering Passive Mode (192,168,15,130,28,70).
150 Here comes the directory listing.
drwxr-xr-x    2 0          0              6 Jan 16 10:23 pub
226 Directory send OK.
```

```
ftp> ls
227 Entering Passive Mode (192,168,15,130,52,199).
150 Here comes the directory listing.
-rw-r--r--    1 0          0              0 Jul 05 13:08 file1
-rw-r--r--    1 0          0              0 Jul 05 13:08 file2
-rw-r--r--    1 0          0              0 Jul 05 13:08 file3
-rw-r--r--    1 0          0              0 Jul 05 13:08 file4
226 Directory send OK.
```

```
ftp> mget file{1..4}
ftp> mget file1
mget file1? y
227 Entering Passive Mode (192,168,15,130,159,128).
150 Opening BINARY mode data connection for file1 (0 bytes).
226 Transfer complete.
```

```
221 0000 bytes
[root@client ~]# ls
anaconda-ks.cfg  file1  zara
```

Now I transfer client to server

I am in server

```
[root@server ftp]# mkdir newdir
[root@server ftp]# ls
home  newdir  pub
```

```
[root@server ~]# cd /var/ftp
[root@server ftp]# chmod 777 newdir/
[root@server ftp]# cd
[root@server ~]# systemctl restart vsftpd
```

Then go client

```
[root@client ~]# ftp 192.168.15.130
Connected to 192.168.15.130 (192.168.15.130).
220 (vsFTPd 3.0.5)
Name (192.168.15.130:root): anonymous
331 Please specify the password.
Password:
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp> ls
```

```
ftp> ls
227 Entering Passive Mode (192,168,15,130,148,184).
150 Here comes the directory listing.
drwxrwxrwx   2 0          0             6 Jul 05 13:45 home
drwxrwxrwx   2 0          0             6 Jul 05 14:00 newdir
drwxrwxrwx   2 0          0            58 Jul 05 13:08 pub
226 Directory send OK.
```

```
ftp> cd newdir
250 Directory successfully changed.
ftp> mput vionth.txt
mput vionth.txt? y
227 Entering Passive Mode (192,168,15,130,110,243).
150 Ok to send data.
226 Transfer complete.
```