# 'Keto' hotel

Datum: 13.03.2022.

Student: Rajko Nešković 23/19 Predmet: Web programiranje PHP2

# Sadržaj

# <u>Sadrzaj</u>

1.Korisceni alati	4
1.1Korisceni alati izradu sajta:	4
1.2 Opis projekta	4
2. Stranice	9
2.1 pages/home	9
2.2 pages/aboutUs	11
2.3.pages/contact	12
2.4. pages/blog	12
2.5.pages/room/room	13
2.6.pages/room	13
2.6.pages/admin/index	14
2.7. pages/admin/rooms	15
3. Kodovi - admin	17
3.1.footer.blade.php	17
3.2 header.blade.php	18
3.3.navigation.blade.php	19
3.4.scripts.blade.php	20
3.5.roomsForm.blade.php	21
3.6.userForm.blade.php	22
3.7.categoty.blade.php	23
3.8 index.blade.php	24
3.9. manu.blade.php	27
3.10 message.blade.php	29
3.11 price.blade.php	30
3.12. rooms.blade.php	31
3.13. users.blade.php	
3.14. AdminController.php	34
3.15. CategoeryAdminController.php	36
3.16.ManuAdminController.php	
3.17. MessageAdminControler	40

3.18. RoomsAminControler	41
3.19 UsersAdiniController	43
3.20 IsAdmin.php	45
4.Kodovi-korisnik	46
4.1.footer.blade.php	46
4.3.navigation.blade.php	48
4.4.scripts.blade.php	49
4.5. slider. blade. php	49
4.6.booking.blade.php	50
4.7.contact.blade.php	51
4.9.roomForm.blade.php	53
4.10.layoutBack.blade.php	54
4.11.layoutFront.blade.php	55
4.12.room/room.blade.php	55
4.13 about.blade.php	56
4.14.blog.blade.php	58
4.15. contact.blade.php	59
4.16.home.blade.php	60
4.18.blog.blade.php	62
4.19.roomPrint.blade.php	63
4.21.AboutController.php	65
4.22 Blogontroller.php	65
4.23.ContactControler	65
4.24.HomeController.blade.php	66
4.25.OsnovniControler.blade.php	66
26.RegLogFromController.blade.php	67
4.27. RoomController.blade.php	68
5.JavaScript	70
5.1.assets/js/main.js	70
5.2.assetsAdmin/js/main.js	73

## 1.Korisceni alati

- 1.1Korisceni alati izradu sajta:
- HTML
- CSS
- JavaScript
- jQuery
- PHP
- Laravel
- Bootstrap
- MySQL

#### 1.2 Opis projekta


Projeka realizuje prikaz hotela koji nudi rezervaciju soba I sve usluge koje on pruza. Funkcionalnosti koje on nudi bice opisane u daljem projektu

Header, Navigacija, Footer, Slider, Forme za korisnike I admina su fixne I one se putem layouta pozivaju I koriste za sve stranice


Svakla stranica ce definisati sadrzaj koji se trazi od nje putem layouta I svih ostalih promenljivih


Request obrada podataka na backu I js obrada na frontu


1.3.Stuktura sajta

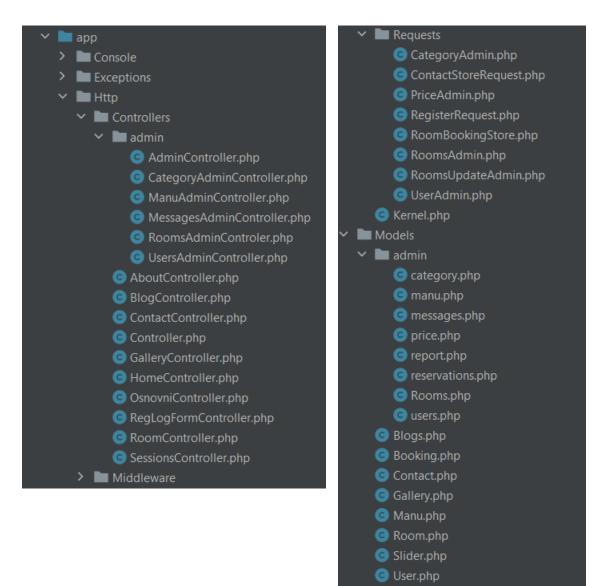


■ Providers

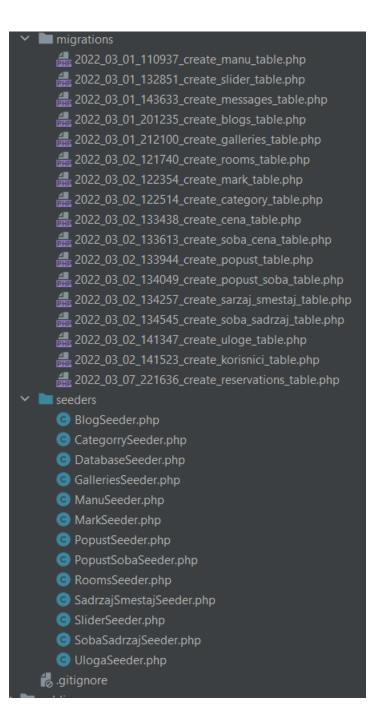

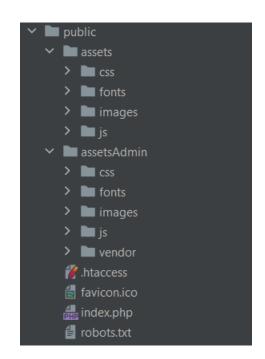


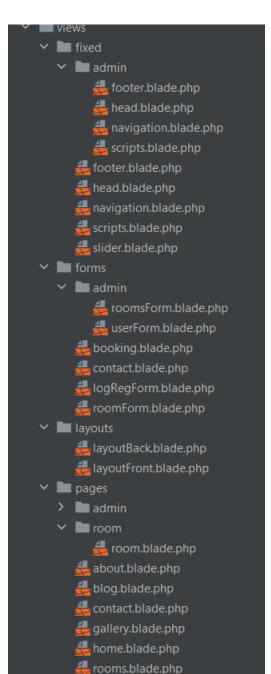




# 2. Stranice


## 2.1 pages/home

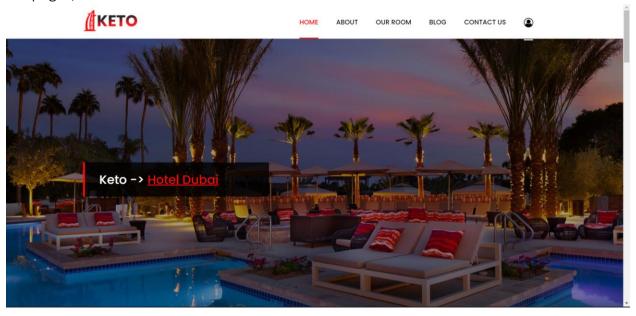


Na pocetnoj starni se ucitava iz baze meni I klikom na ikonicu u desnom uglu korisnik se vodi na stranu za logovanje I registraciju.

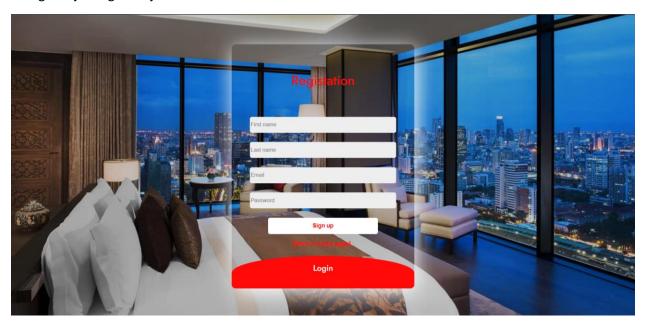


Logovanje I registracija

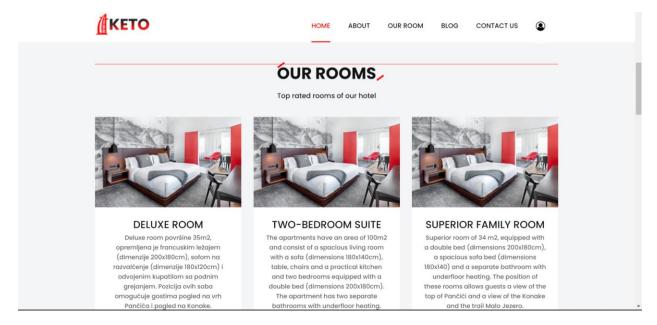


#### Korisniku se prikazuju prvih 6 soba sortiranih po ocenama gostiju hotela

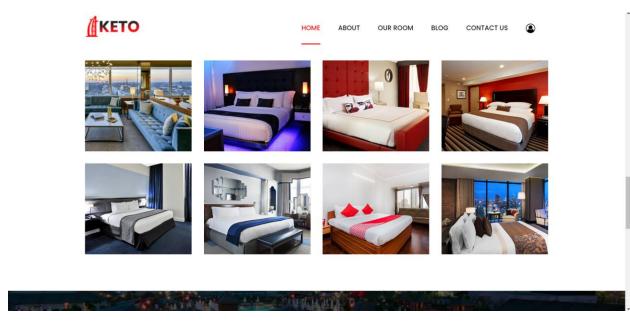


Galerija sa slikama hotela koja se dinamicki ispisuje

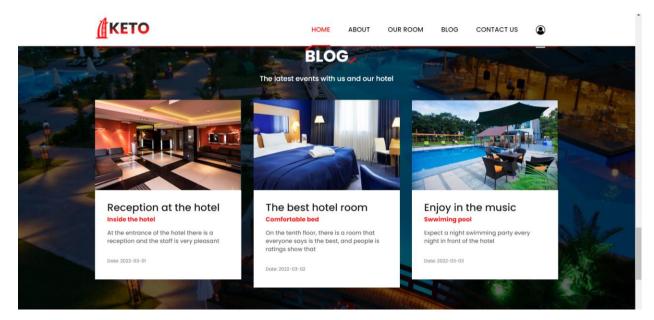


Najnoviji blogovi koji koji se nalaze u bazi I ispisuju

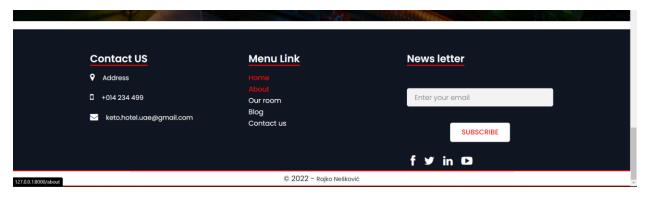

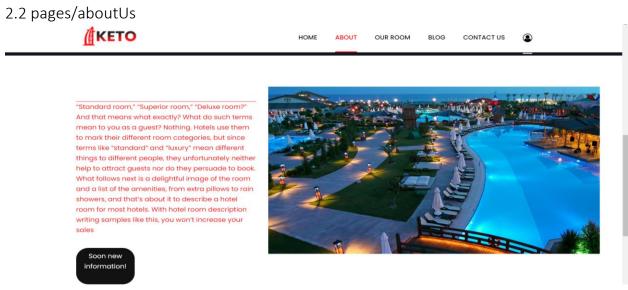


Osnovne informacije korisnik moze da dobije na stanici about as.

## 2.3.pages/contact

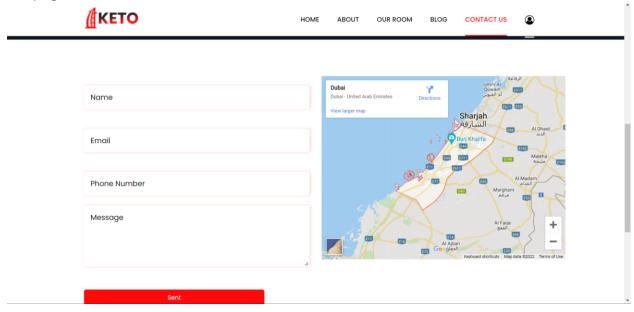


Slane poruke I uvedi u lokaciju je moguce na strani contact a forma za kontact je obradjena celokupnom obradom koda. Putem ajaxa salje se u kontroler I podaci se u modelu upisuju u bazu

## 2.4. pages/blog

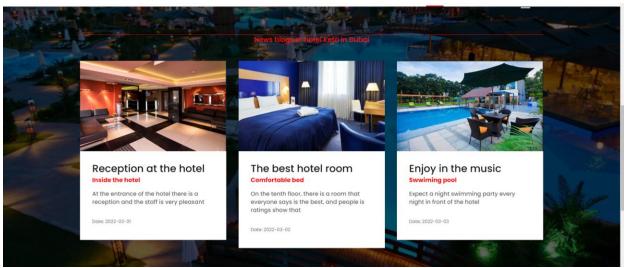


Starnica za prikaz svih blogova hotela, dinamicki ispis iz baze

## 2.5.pages/room/room

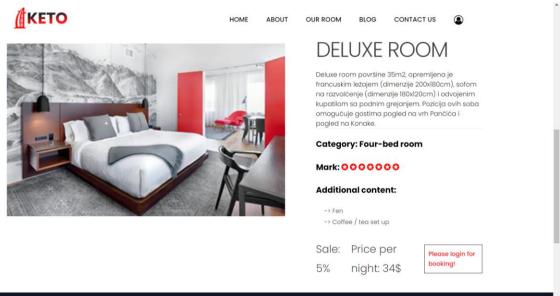


Prikaz informacija jedne sobe. Klikom na Details... korisnik pristupa celokupnom sadrzaju koji se nudi za izabranu sobu.Samo kad je ulogovan korisnik moze da rezervise sobu I popunu formu na home strani.

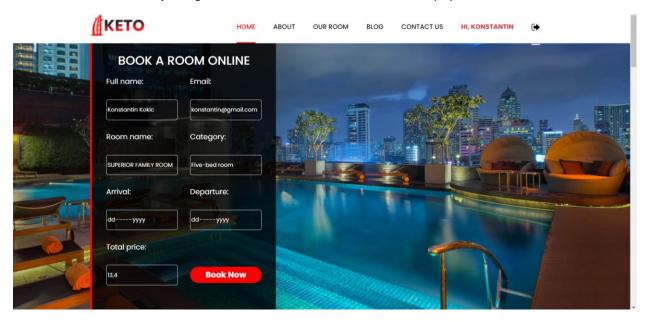


Korisnik bira datum I moze da rezervaciju izvrsi.Odabirom broja dana cena se manje I racuna na osnovu cene po noci I popusta koji ima.Obradjena je forma I podaci se oprenose Ajaxom do modela.


## 2.6.pages/room

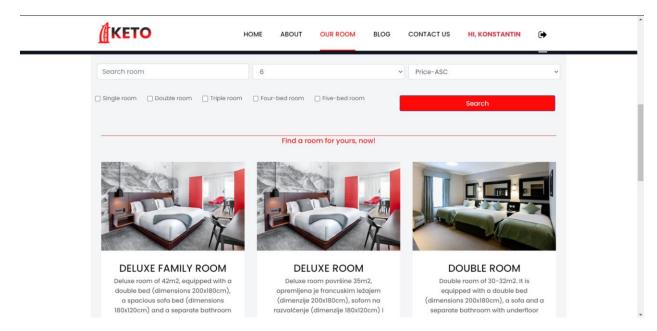

Na stani room korisniku je dato da pretrazi, sortira, filtrira sobe I uradjena je paginacija . Moze da bira ibroj prikaza soba po strani I da ih pretrazuje po zeljama.


## 2.6.pages/admin/index

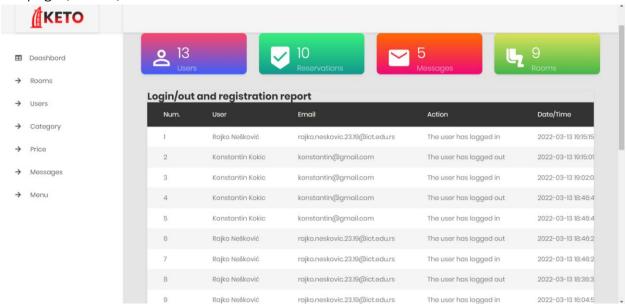

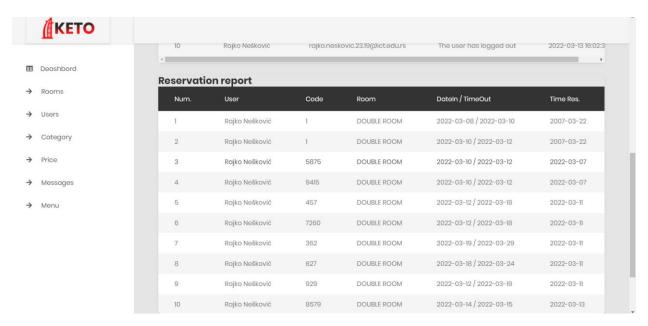


Pocetna index stranica ispisuje najbitnije informacije o hotelu I daje izvestaje o kljucnik desavanjima korisnika na sajti I sve ostale koje su potrebne. Admin panel je uradjen nezavisno od sajta I korcen je layout za izradu gridova


## 2.7. pages/admin/rooms

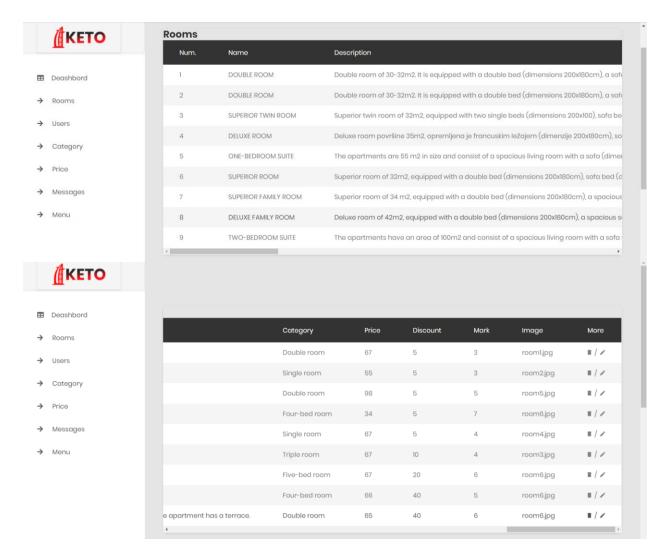

Ispis Svi podataka vezanih za sobe koje hotel poseduje.Klikom na ikonice kontenjer proizvod se prise,klikom na ikonicu olovaka proizvod se upisuje u istu formu kao I za insert I podaci se izmenuju

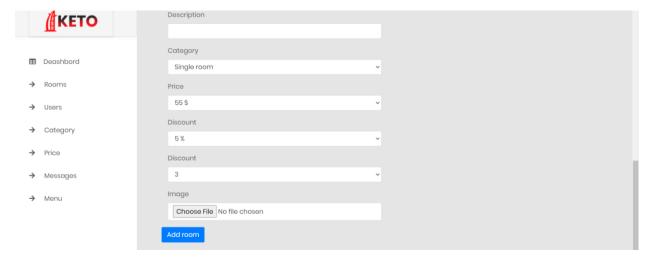

Forma za insert nove sobe sa izborim svih podataka

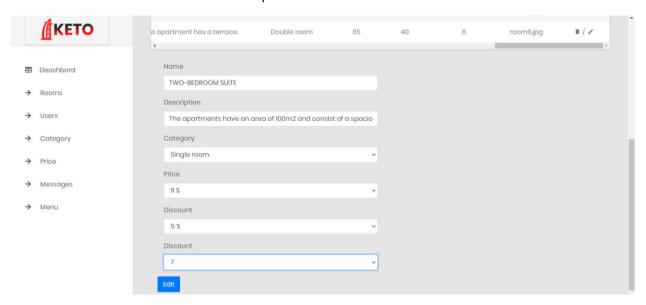

Forma sa izmenu podataka sobe koja se dobija klikom na olovku.

Za sve tabele koje se nalaze u admin panelu je uradjena ista logika rada. Tabela za meni uma samo Select opciju zato sto brisanjem rute ili dodavanjem rute dolazi do greske u folderu web.php

## 3. Kodovi - admin

## 3.1.footer.blade.php

#### 3.2 header.blade.php

```
<head>
    <meta name="author" content="Rajko Nešković">
    <meta name="keywords" content="@yield('key')">
    <title>Dashboard | @yield('title')</title>
media="all">
    <link href="{{asset('assetsAdmin/vendor/font-awesome-5/css/fontawesome-</pre>
all.min.css') }}" rel="stylesheet" media="all">
4.1/bootstrap.min.css')}}" rel="stylesheet" media="all">
    nk
rel="stylesheet" media="all">
    <link href="{{asset('assetsAdmin/css/theme.css')}}" rel="stylesheet"</pre>
```

## 3.3.navigation.blade.php

```
HEADER MOBILE-
                           <span class="hamburger-inner"></span>
                       </span>
       </div>
   </div>
</div>
                   <i class="fas fa-table"></i>Deashbord</a>
           <
                   <i class="fas fa-chart-bar"></i>Charts</a>
           <1i>>
                   <i class="fas fa-table"></i>Tables</a>
                   <i class="far fa-check-square"></i>Forms</a>
           <1i>>
                   <i class="fas fa-calendar-alt"></i>Calendar</a>
           </div>
```

```
</a>
    </div>
                        <i class="fas fa-table"></i>Deashbord</a>
                        <i class="fa fa-arrow-right" aria-hidden="true"></i></i>
                <1i>>
                        <i class="fa fa-arrow-right" aria-hidden="true"></i>
Users</a>
                <1i>>
                        <i class="fa fa-arrow-right" aria-hidden="true"></i></i>
Price</a>
                        <i class="fa fa-arrow-right" aria-hidden="true"></i></i>
Messages </a>
                <1i>>
                        <i class="fa fa-arrow-right" aria-hidden="true"></i></i>
Menu </a>
                </nav>
    </div>
</aside>
```

#### 3.4.scripts.blade.php

```
<!-- Jquery JS-->
<script src="{{asset('assetsAdmin/vendor/jquery-3.2.1.min.js')}}"></script>
<!-- Bootstrap JS-->
<script src="{{asset('assetsAdmin/vendor/bootstrap-
4.1/popper.min.js')}}"></script>
<script src="{{asset('assetsAdmin/vendor/bootstrap-
4.1/bootstrap.min.js')}}"></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script></script
```

#### 3.5.roomsForm.blade.php

### 3.6.userForm.blade.php

## 3.7.categoty.blade.php

```
<div class="row">
          Num.
          Name
          </thead>
          </div>
  </div>
    </div>
```

#### 3.8 index.blade.php

```
</div>
    </div>
</div>
                    </div>
                    </div>
                </div>
            </div>
        </div>
    </div>
        <div class="overview-item overview-item--c2">
                <div class="overview-box clearfix">
                    </div>
                        <span>Reservations</span>
                    </div>
                </div>
            </div>
        </div>
    </div>
                        <i class="zmdi zmdi-email"></i>
                    </div>
                        <span>Messages
                    </div>
                </div>
            </div>
        </div>
    </div>
            <div class="overview inner">
```

```
</div>
                   <h2>{{$data[3]}}</h2>
               </div>
            </div>
         </div>
      </div>
   </div>
</div>
            <h3>Login/out and registration report</h3>
                   Num.
                   User
                   Email
                   Action
                   Date/Time
               {{$count++}}
                      { { $r->poruka } } 
                </div>
      </div>
   </div>
            <h3>Reservation report</h3>
            <table class="table table-borderless table-
```

```
Num.
                        User
                        Code
                        Room
                        DateIn / TimeOut
                        Time res.
                     </thead>
                   </div>
            </div>
         </div>
    </div>
  </div>
</div>
```

#### 3.9. manu.blade.php

```
Num.
      Value
      Route
     </thead>
        { $m->route } } 
 </div>
</div>
```

#### 3.10 message.blade.php

```
<h3>Messages</h3>
                       Num.
                       Name
                       Email
                       Phone
                       Text
                       Date/Time
                       </thead>
class="zmdi zmdi-delete delMess"></i>
```

#### 3.11 price.blade.php

```
>id cena}}" class="zmdi zmdi-delete btnDelete"></i>
       id cena}}"
class="zmdi zmdi-edit btnEdit"></i>
                              </div>
                     </div>
id="newPrice" name="value" aria-describedby="emailHelp" placeholder="Enter
                        </div>
                        <button id="insertPrice" class="btn btn-</pre>
primary">Add price</button>
                     </form>
                     <form class="ml-3" method="get">
name="valueEdit" aria-describedby="emailHelp" >
                         </div>
                         <button id="updatePrice" class="btn btn-</pre>
                     </form>
                 <div class="errors text-danger"></div>
                  <div class="suc text-success"></div>
              </div>
          </div>
   </div>
```

#### 3.12. rooms.blade.php

```
@extends('layouts.layoutBack')
@section('key') Admin,keto,report @endsection
@section('desc') Admin panel for Keto hotel with all functions @endsection
```

```
<div class="container-fluid">
          <div class="row">
                       Num.
                       Name
                       >Description
                       Category
                       Price
                       Discount
                       Mark
                       Image
                       More
                       id="{{$room->id}}" class="editRoom zmdi zmdi-edit"></i>
                    </div>
            <form class="ml-3" enctype="multipart/form-data" >
```

```
coom
/button id="insertRooms" class="btn btn-primary">Add
room
/button id="editRooms" class="btn btn-
primary">Edit
/div class="errors text-danger"></div>
/div class="suc text-success"></div>
/div>
```

#### 3.13. users.blade.php

```
{{$user->email}}
                               </div>
                 </div>
                 </form>
              </div>
              <div class="errors text-danger"></div>
              <div class="suc text-success"></div>
          </div>
       </div>
   </div>
</div>
```

#### 3.14. AdminController.php

```
namespace App\Http\Controllers\admin;

use App\Http\Controllers\Controller;
use App\Http\Requests\PriceAdmin;
use App\Models\admin\admin;

use App\Models\admin\category;
use App\Models\admin\messages;
```

```
use App\Models\admin\report;
use App\Models\admin\reservations;
use App\Models\admin\users;
class AdminController extends Controller
   public function index()
      $data[0]=$this->model->getInfo();
       $this->model=new reservations();
       $data[1]=$this->model->getInfoRes();
      $this->model=new messages();
      $data[2]=$this->model->getInfoMes();
      $data[3]=$this->model->getInfoRoom();
       $data[4]=$this->model->getAll();
      $data[5]=$this->model->getAllReservation();
   public function rooms()
       $this->model=new Rooms();
       $this->data['all']=$this->model->getAllRoom();
   public function users()
       $this->model=new users();
       $data=$this->model->allUsers();
```

```
public function category()
    $this->model=new category();
   $data=$this->model->allCategory();
   $this->model=new price();
    $data=$this->model->allPrice();
public function storePrice(PriceAdmin $request)
    $this->model=new price();
    $data=$this->model->insertPrice($request);
public function priceDelete($id)
    $data=$this->model->deleteP($id);
public function showPrice($id){
    $data=$this->model->onePrice($id);
public function updatePrice(PriceAdmin $request,$id)
    $this->model=new price();
    $data=$this->model->updateP($request,$id);
public function message()
    $this->model=new messages();
    $data=$this->model->getMessages();
```

### 3.15. CategoeryAdminController.php

```
class CategoryAdminController extends Controller
    * @return \Illuminate\Http\Response
   public function index()
    * @return \Illuminate\Http\Response
   public function create()
    * @param \Illuminate\Http\Request $request
>insertCategory($request);
    * @param int $id
    * @return \Illuminate\Http\Response
       $data=$this->catModel->oneCat($id);
```

```
@param int $id
* @return \Illuminate\Http\Response
* @param \Illuminate\Http\Request $request
* @param int $id
public function update(CategoryAdmin $request, $id)
  $data=$this->catModel->updateC($request,$id);
* @param int $id
* @return \Illuminate\Http\Response
public function destroy($id)
   $this->catModel=new category();
```

### 3.16.ManuAdminController.php

```
composed App\Http\Controllers\admin;

use App\Models\admin\manu;
use Illuminate\Http\Request;

class ManuAdminController extends Controller
{
    /**
    * Display a listing of the resource.
    *
    * @return \Illuminate\Http\Response
    */
    private $model;

public function index()
    {
    $this->model=new manu();
}
```

```
$data= $this->model->getAll();
* @return \Illuminate\Http\Response
* @param \Illuminate\Http\Request $request
public function store(Request $request)
* @param int $id
* @return \Illuminate\Http\Response
* @param int $id
* @param \Illuminate\Http\Request $request
 * @param int $id
public function update(Request $request, $id)
```

```
/**

* Remove the specified resource from storage.

*

* @param int $id

* @return \Illuminate\Http\Response

*/

public function destroy($id)

{
    //
}
```

## 3.17. MessageAdminControler

```
use App\Models\admin\messages;
use Illuminate\Http\Request;
    * @return \Illuminate\Http\Response
    * @param \Illuminate\Http\Request $request
    * @return \Illuminate\Http\Response
   public function store(Request $request)
```

```
* @param int $id
* @param int $id
 * @return \Illuminate\Http\Response
* @param \Illuminate\Http\Request $request
* @param int $id
* @return \Illuminate\Http\Response
public function update(Request $request, $id)
* @param int $id
public function destroy($id)
```

#### 3.18. RoomsAminControler

```
<?php
namespace App\Http\Controllers\admin;</pre>
```

```
use App\Http\Requests\RoomsAdmin;
use App\Http\Requests\RoomsUpdateAdmin;
class RoomsAdminControler extends Controller
   public function create()
    * @param \Illuminate\Http\Request $request
    * @return \Illuminate\Http\Response
   public function store(RoomsAdmin $request)
    * @param int $id
    * @return \Illuminate\Http\Response
```

```
public function show($id)
   $this->model=new Rooms();
  $data=$this->model->getOneRoom($id);
 * @param int $id
* @param \Illuminate\Http\Request $request
* @param int $id
public function update(RoomsUpdateAdmin $request, $id)
  $this->data['updateRoom']=$this->model->updateRoom($request,$id);
 * @param int $id
* @return \Illuminate\Http\Response
public function destroy($id)
```

#### 3.19 UsersAdiniController

```
<?php
namespace App\Http\Controllers\admin;
use App\Http\Controllers\Controller;</pre>
```

```
use App\Http\Requests\UserAdmin;
use App\Models\admin\users;
class UsersAdminController extends Controller
    * @return \Illuminate\Http\Response
   public function index()
    * @return \Illuminate\Http\Response
   public function create()
    * @param \Illuminate\Http\Request $request
      $data=$this->modUser->insertUser($request);
    * @param int $id
    * @return \Illuminate\Http\Response
```

```
@param int $id
* @return \Illuminate\Http\Response
* @param \Illuminate\Http\Request $request
* @param int $id
public function update(UserAdmin $request, $id)
  $this->data['userUp']=$this->modUser->updateUser($request,$id);
* @param int $id
* @return \Illuminate\Http\Response
public function destroy($id)
   $this->modUser=new users();
```

### 3.20 IsAdmin.php

```
namespace App\Http\Middleware;

use Closure;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\Auth;

class IsAdmin
{
    /**
    * Handle an incoming request.
    *
    * @param \Illuminate\Http\Request $request
    * @param \Closure(\Illuminate\Http\Request):
(\Illuminate\Http\Response|\Illuminate\Http\RedirectResponse) $next
    * @return \Illuminate\Http\Response|\Illuminate\Http\RedirectResponse
    */
```

```
public function handle(Request $request, Closure $next)
{
    if(!Auth::check() || $request->user()->id_uloga==2) {
        return redirect('/');
    }
    if($request->user()->id_uloga==1)
    {
        return $next($request);
    }
}
```

# 4.Kodovi-korisnik

### 4.1.footer.blade.php

```
<h3>Contact US</h3>
                     <i class="fa fa-map-marker" aria-
hidden="true"></i><a href="#"> keto.hotel.uae@gmail.com</a>
                  </div>
                  <h3>Menu Link</h3>
                  </div>
                  <h3>News letter</h3>
                     <a href="#"><i class="fa fa-facebook" aria-
hidden="true"></i></a>
```

```
<a href="#"><i class="fa fa-twitter" aria-
hidden="true"></i></a>
                       <a href="#"><i class="fa fa-linkedin" aria-
hidden="true"></i></a>
                       <a href="#"><i class="fa fa-youtube-play" aria-</pre>
                   </div>
       </div>
       <div class="copyright">
                   <div class="col-md-10 offset-md-1">
                          © 2022 - <small><a href="#">Rajko
Nešković</a></small>
                   </div>
               </div>
           </div>
   </div>
</footer>
```

#### 4.2.head.blade.php

### 4.3.navigation.blade.php

```
</div>
                          </div>
                     </div>
                 </div>
toggle="collapse" data-target="#navbarsExample04" aria-
                          </button>
>route) } } ">{ {$m->name } } </a>
```

#### 4.4.scripts.blade.php

#### 4.5.slider.blade.php

```
</div>
        </div>
data-slide="prev">
            <span class="carousel-control-prev-icon" aria-</pre>
hidden="true"></span>
            <span class="sr-only">Previous</span>
data-slide="next">
            <span class="sr-only">Next</span>
        </a>
   </div>
                 <div class="col-md-5">
                     </div>
            </div>
        </div>
    </div>
</section>
```

### 4.6.booking.blade.php

### 4.7.contact.blade.php

#### 4.8. logRegForm.blade.php

```
<input type="hidden" name="id uloga" value="2" >
   </div>
required="">
>first('message') }}</strong>
            </span>
   </div>
</div>
</body>
```

### 4.9.roomForm.blade.php

```
<option selected value="{{ $p }}">{{ $p
}}</option>
                            </select>
              </div>
                            <option selected value="{{ $s }}">{{ $s
}}</option>
              </div>
                 <input class="form-check-input" type="checkbox" {{</pre>
>id cat}}">{{$c->name}}</label>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;
              </div>
          </div>
       </form>
</div>
</div>
```

### 4.10.layoutBack.blade.php

```
<!DOCTYPE html>
<html lang="en">
@include('fixed.admin.head')

<body class="animsition">
    <div class="page-wrapper">
```

### 4.11.layoutFront.blade.php

```
<!DOCTYPE html>
<html lang="en">
@include('fixed.head')

<body class="main-layout">
@include('fixed.navigation')
@include('fixed.slider')

@yield('content')

@include('fixed.footer')
@include('fixed.scripts')

@yield("scripts")

</body>
</html>
```

### 4.12.room/room.blade.php

```
<h1>{ \$room->name \} \</h1>
       </div>
               <span class="naslovContent">Additional content: </span>
                 </div>
           <span>Price per night: {{$room->cena}}$ 
now!</a></button>
       </div>
   </div>
</main>
```

#### 4.13 about.blade.php

```
@extends('layouts.layoutFront')
@section('title') AboutUs | Keto @endsection
@section('key')Keto, hotels, about, booking @endsection
```

```
section('description') keto hotel is a hotel located in the United Arab
   Keto -> <spna class="naslov2">About</spna>
           <div class="col-md-12">
                   <h2>About Us</h2>
               </div>
           </div>
       </div>
   </div>
</div>
           <div class="col-md-5">
categories, but since terms like "standard" and "luxury" mean different
nor do they persuade to book. What follows next is a delightful image of the
that's about it to describe a hotel room for most hotels.
                   </div>
               </div>
           </div>
       </div>
    </div>
```

```
</div>
<!-- end about -->
@endsection
```

### 4.14.blog.blade.php

```
@section('key')Keto, hotels, blog, post, booking @endsection
@section('description') keto hotel is a hotel located in the United Arab
Emirates on the coast.is one of the most luxurious hotels with the best offer
               <div class="col-md-12">
                    </div>
               </div>
          </div>
    </div>
</div>
                    </div>
               </div>
          </div>
          </div>
     </div>
</div>
```

### 4.15. contact.blade.php

```
@section('key')Keto, hotels, contact, booking @endsection
Emirates on the coast.is one of the most luxurious hotels with the best offer
            <div class="col-md-12">
            </div>
        </div>
    </div>
href="https://123movies-
align:right;height:400px;width:600px;}</style><a</pre>
href="https://www.embedgooglemap.net">google maps embed code
generator</a><style>.gmap canvas
{overflow:hidden;background:none!important;height:450px;width:600px;}</style>
</div></div>
                    </div>
                </div>
            </div>
        </div>
```

```
</div>
</div>
</div>
<!-- end contact -->
@endsection
```

### 4.16.home.blade.php

```
Emirates on the coast.is one of the most luxurious hotels with the best offer
Dubai</spna>
                    <h2>Our Rooms</h2>
                </div>
            </div>
        </div>
        </div>
    </div>
        <div class="row">
               </div>
```

#### 4.17.rooms.blade.php

```
<h2>Our Rooms</h2>
                 </div>
            </div>
        </div>
    </div>
                 </div>
            </div>
        </div>
        </div>
   </div>
</div>
    </div>
</div>
```

### 4.18.blog.blade.php

```
</div>
```

### 4.19.roomPrint.blade.php

#### 4.20. web.php

```
Route::get('/',[\App\Http\Controllers\HomeController::class, 'index'])-
>name('home');
Route::get('/home/{room?}',[\App\Http\Controllers\HomeController::class,
'index']) ->name('home');
Route::get('/room',[\App\Http\Controllers\RoomController::class,'index'])-
Route::get('/room/{id}',[\App\Http\Controllers\RoomController::class,'show'])
->name('room.show');
>name('room.store');
Route::get('/blog', [\App\Http\Controllers\BlogController::class, 'index'])-
>name('blog');
```

```
Route::get('/contact',[\App\Http\Controllers\ContactController::class,
'index']) ->name('contact');
Route::post('/contact',[\App\Http\Controllers\ContactController::class,
 index']) ->name('forms');
Route::post('/forms',[\App\Http\Controllers\RegLogFormController::class,
'store']) ->name('registration');
Route::middleware('isAdmin')->group(function () {
Route::get('/admin',[\App\Http\Controllers\admin\AdminController::class,'inde
Route::get('/adminR',[\App\Http\Controllers\admin\AdminController::class,'roo
rs']) ->name('admin.users');
egory'])->name('admin.cat');
sage']) ->name('admin.mes');
Route::get('/adminP',[\App\Http\Controllers\admin\AdminController::class,'pri
Route::delete("/price/{id}",[\App\Http\Controllers\admin\AdminController::cla
Route::get('/price/{id}',[\App\\Http\Controllers\admin\AdminController::class,
Route::resource('/categoryAdmin',\App\Http\Controllers\admin\CategoryAdminCon
troller::class);
Route::resource("/userAdmin",\App\Http\Controllers\admin\UsersAdminController
Route::resource("/adminMenu",\App\Http\Controllers\admin\ManuAdminController:
Route::resource('/adminRoom',\App\Http\Controllers\admin\RoomsAdminControler:
```

### 4.21.AboutController.php

```
namespace App\Http\Controllers;

use Illuminate\Http\Request;

class AboutController extends OsnovniController
{
    public function index()
    {
        return view('pages.about',$this->data);
    }
}
```

### 4.22 Blogontroller.php

```
<?php

namespace App\Http\Controllers;

use App\Models\Blogs;
use Illuminate\Http\Request;

class BlogController extends OsnovniController
{
    private $model;
    public function index()
    {
        $this->model=new Blogs();
        $this->data['blogs']=$this->model->getBlogs();
        return view('pages.blog',$this->data);
    }
}
```

### 4.23.ContactControler

```
namespace App\Http\Controllers;

use App\Models\ContactStoreRequest;
use App\Models\Contact;
use Illuminate\Http\Request;

class ContactController extends OsnovniController
{
    private $contactModel;
    private $result;
    public function index()
    {
        return view('pages.contact', $this->data);
    }

    public function store(ContactStoreRequest $request)
    {
        $this->contactModel=new Contact();
}
```

```
$this->result=$this->contactModel->insertMes($request);
return $this->result;
}
```

### 4.24. Home Controller. blade.php

```
use App\Models\Blogs;
use App\Models\Gallery;
use App\Models\Room;
class HomeController extends OsnovniController
      $this->data['rooms']=$this->rooms->getTopRoom(6);
       $this->data['blogs']=$this->blogAll->getBlogs();
       $this->data['qalleries']=$this->qalleryAll->getGallery();
           $this->data['dataForForm']=$this->rooms->getData($roomId);
```

### 4.25.OsnovniControler.blade.php

```
<?php

namespace App\Http\Controllers;

use App\Models\Manu;
</pre>
```

```
use App\Models\Slider;
use Illuminate\Http\Request;

class OsnovniController extends Controller
{
    public $data;
    private $manuModel;
    private $sliderModel;

    public function __construct()
    {
        $this->manuModel=new Manu();
        $this->sliderModel=new Slider();

        $this->data['slider']=$this->sliderModel->getSlider();
        $this->data['manu']=$this->manuModel->getManu();
        }
}
```

### 26.RegLogFromController.blade.php

```
namespace App\Http\Controllers;
use App\Models\admin\report;
class RegLogFormController extends Controller
   public function index()
   public function store()
       $user = User::create(request(['name', 'last name', 'email',
            $this->modelRep->inserReport($user, "The user has registered");
            return redirect()->to('/');
```

```
}
}
```

### 4.27. RoomController.blade.php

```
use App\Http\Requests\RoomBookingStore;
use App\Models\Booking;
use App\Models\Room;
class RoomController extends OsnovniController
       $dataRoom=$this->roomAll->get($request);
  $categories=$this->categoryAll->getAllCategory();
   $qs = $request -> all();
       $this->data['room']=$this->roomAll->getOneRoom($id);
       $this->data['sadrzaj']=$this->roomAll->roomContent($id);
   public function store(RoomBookingStore $request)
           $this->booking = new Booking();
           $data=$this->booking->reservedRoom($request);
```

```
return $data;
}
```

#### 4.28.SessionsControler.blade.php

```
if (auth()->attempt(request(['email', 'password'])) == false) {
          $this->modelReport->inserReport(auth()->user(), "The user has
  public function destroy()
      $this->modelReport->inserReport(auth()->user(),"The user has logged
auth()->logout();
    return redirect()->to('/');
```

# 5.JavaScript

### 5.1.assets/js/main.js

```
e.preventDefault()
  reservation();
   e.preventDefault()
   sentMessage();
var form data = new FormData();
const token = $('meta[name="csrf-token"]').attr('content');
var regexEmai1=`^[\\w-\\.]+@([\\w-]+\\.)+[\\w-]{2,4}$`
var regexPhone=`^(\\+)?([ 0-9]){10,16}$`;
$.ajaxSetup({
        'X-CSRF-TOKEN': token
   form data.set('nameFull', $('#nameFull').val())
   form data.set('roomName', $('#roomName').val());
   form_data.set('dateIn', $('#dateIn').val());
   form data.set('dateOut', $('#dateOut').val());
   form data.set('cena',$("#cena").val())
   form data.set(' token', token);
function reservation(){
   setFormDataForInsertReservation();
   $.ajax({
          $('.res').html("Reservation is successful!")
           deleteInput();
        error:function(xhr) {
           console.log(xhr)
```

```
function deleteInput()
function deleteInputMes()
function setFromDataMessage()
   form data.set ('email', $('#email').val());
   form data.set('phone', $('#phone').val())
   form data.set(' token', token);
   if(!(form data.get('name') && form data.get('name').match(regexName) ))
   if(!(form data.get('email') && form data.get('email').match(regexEmail)
   if(!(form data.get('phone') && form data.get('phone').match(regexPhone)
       $('.nameTel').html("eq. +39 999 999 99599");
       $.ajax({
```

```
deleteInputMes();
error: function (xhr) {
    console.log(xhr)
```

```
//
// });
// var ispis='';
// function printRooms(data){
// console.log('da')
// if(data.length==0)
// {
// ispis="Not rooms found";
// else{
// for (const d of data) {
// ispis+='<div class="col-md-4 col-sm-6">
// <div id="serv_hover" class="room">
// <div id="serv_hover" class="room">
// <div class="room_ing">
// <figure><ing src="${publicFolder}assets/images/${d.image}"
alt="${d.name}"/></figure>
// </div>
// <div class="bed_room">
// <div class="bed_room">
// <ahvair <ahva
```

# 5.2.assetsAdmin/js/main.js

```
const token = $('meta[name="csrf-token"]').attr('content');

console.log(baseUr1);

$.ajaxSetup({
    headers: {
        'X-CSRF-TOKEN': token
    }
});

var form_data = new FormData();
var currentId = null;

function setFormDataForInsert(id) {
    form_data.set('value', $(id).val());
    form data.set(' token', token);
}

function setFormDataForUpdate(id) {
    form_data.set('value', $(id).val());
    form_data.set('value', $(id).val());
    form_data.set('token', token);
}
```

```
setFormDataForInsert("#insertPrice");
    $.ajax({
function insertCat() {
   setFormDataForInsert("#newCat");
    $.ajax({
        url:baseUrl+url,
        error:function(xhr){
           console.log(xhr)
function setFormDataForInsertUser() {
function insertUser() {
   setFormDataForInsertUser();
```

```
console.log(xhr)
function deletePrice(id) {
    $.ajax({
function deleteCat(id) {
    $.ajax({
            console.log(xhr)
            if(xhr.status){$('.errors').html("Invalid value!")}
```

```
console.log(url)
    $.ajax({
        url:baseUrl+url,
            console.log(xhr)
   console.log(url)
    $.ajax({
        url:baseUrl+url,
            console.log(xhr)
            if(xhr.status){$('.errors').html("User not delete!")}
function deleteRoom(id) {
   console.log(id)
    $.ajax({
       url:baseUrl+url,
            $('.suc').html("Room is remove!")
```

```
error:function(xhr) {
function getValueCat(id)
   console.log(url)
            console.log(xhr)
    console.log(url)
            fillUserEditForm(data);
```

```
console.log(xhr)
   console.log(url)
    $.ajax({
            fillRoomEditForm(data);
        error:function(xhr){
            console.log(xhr)
function fillRoomEditForm(data)
    $('#insertRooms').hide();
    $('#mark').val(data['ocena'])
$('#editUser').hide();
   $('#pass').val(data['password'])
   $('#role').val(data['id uloga'])
```

```
function update(id) {
    setFormDataForUpdate("#editPrice");
   var url=`/price/${id}
        url:baseUrl+url,
            document.location.reload(true)
            form data.delete(' method');
function updateCat(id) {
    setFormDataForUpdate("#editCat");
    $.ajax({
            document.location.reload(true)
            form data.delete(' method');
            $('.suc').html("Value is update!")
        error:function(xhr){
function setFormDataForUpdateUser()
    form data.set('name', $('#name').val());
```

```
form_data.set('lname', $('#lastName').val());
form_data.set('email', $('#email').val());
function updateUser(id) {
    setFormDataForUpdateUser();
    $.ajax({
        url:baseUrl+url,
             form data.delete(' method');
        error:function(xhr){
             console.log(xhr)
$('#editRooms').hide();
var data=new FormData();
function setFormDataForInsertRoom() {
    data.set('imageArr', document.getElementById('image').files[0]);
function insertRoom() {
    setFormDataForInsertRoom();
    $.ajax({
```

```
$('.suc').html("Room is add!")
            console.log(xhr)
function setFormDataForUpdateRoom() {
function updateRoom(id) {
    setFormDataForUpdateRoom();
    $.ajax({
        url:baseUrl+url,
            document.location.reload(true)
            form data.delete(' method');
        error:function(xhr){
            console.log(xhr)
```

```
e.preventDefault();
    insertRoom();
    e.preventDefault();
    insertUser();
    e.preventDefault();
    insertCat();
    e.preventDefault();
    insert();
    e.preventDefault();
   update(currentId);
    e.preventDefault();
   updateCat(currentId);
    e.preventDefault();
    updateRoom(currentId);
    e.preventDefault();
    updateUser(currentId);
    e.preventDefault();
    deletePrice(id);
    e.preventDefault();
    e.preventDefault();
   deleteMess(id);
$ (document) .on('click', '.delUser', function (e) {
    e.preventDefault();
    let id = $(this).attr('data-id');
```

```
deleteUser(id);
})
$(document).on('click', '.delCat', function (e) {
    e.preventDefault();
    let id = $(this).attr('data-id');
    deleteCat(id);
})
$(document).on('click', '.btnEdit', function (e) {
    e.preventDefault()
    let id = $(this).attr('data-id');
    currentId=id;
    getValue(id);
})
$(document).on('click', '.editCat', function (e) {
    e.preventDefault()
    let id = $(this).attr('data-id');
    currentId=id;
    getValueCat(id);
})
$(document).on('click', '.editUser', function (e) {
    e.preventDefault()
    let id = $(this).attr('data-id');
    currentId=id;
    getValueUser(id);
})
$(document).on('click', '.editRoom', function (e) {
    e.preventDefault()
    let id = $(this).attr('data-id');
    currentId=id;
    getValueRoom(id);
})
```