

## FUZZY LOGIC


- Fuzzy logic is the logic underlying **approximate**, rather than exact, **modes of reasoning**.
- It is an extension of multivalued logic: **Everything**, including truth, **is a matter of degree**.
- It contains as special cases **not only** the classical two-value logic and multivalue logic systems, **but also** probabilistic logic.
- A proposition  $p$  has a **truth value**
  - 0 or 1 in two-value system,
  - element of a set  $T$  in multivalue system,
  - **Range over the fuzzy subsets of  $T$  in fuzzy logic.**

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & S.N Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

- Boolean logic uses sharp distinctions.
- Fuzzy logic reflects how people think.
- Fuzzy logic is a set of mathematical principles for



(a) Boolean Logic.

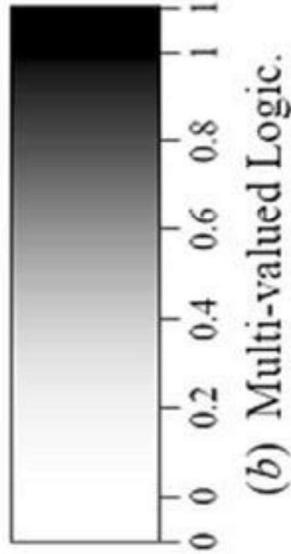

(b) Multi-valued Logic.

- Fuzzy logic is a set of mathematical principles for knowledge representation and reasoning based on degrees of membership.

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & S.N Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

# TYPES AND MODELING OF UNCERTAINTY

## Stochastic Uncertainty:

- ❖ The probability of hitting the target is 0.8

## Lexical Uncertainty:

- ❖ "Tall Men", "Hot Days", or "Stable Currencies"
- ❖ We will probably have a successful business year.
- ❖ The experience of expert A shows that B is Likely to Occur. However, expert C is convinced This Is Not True.

**Example:** One finds in desert two bottles of fluids with the following labels:

- ✓ bottle 1: there is a **probability of 5% that this bottle is poisoned.**
- ✓ bottle 2: this bottle contains a liquid which belongs to the set of **drinkable water with membership function value of 0.95.**

"Principles of Soft Computing, 2<sup>nd</sup> Edition"  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## **FUZZY vs PROBABILITY**

- Fuzzy  $\neq$  Probability
- Probability deals with uncertainty an likelihood
- Fuzzy logic deals with ambiguity an vagueness

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

- Let  $L = \text{set of all liquids}$ 
  - $\mathcal{L}$  be the subset = {all drinkable liquids}
- Suppose you had been in desert (you must drink!) and you come up with two bottles marked C and A.
- Bottle C is labeled  $\mu_{\epsilon}(C)=0.95$  and bottle A is labeled  $\Pr[A \in \mathcal{L}] = 0.95$
- C could contain swamp water, but would not contain any poison. Membership of 0.95 means that the contents of C are fairly similar to perfectly drinkable water.
- The probability that A is drinkable is 0.95, means that over a long run of experiments, the context of A are expected to be drinkable in about 95% of the trials. In other cases it may contain poison.

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
 by S.N. Sivanandam & S.N Deepa  
 Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## **NEED OF FUZZY LOGIC**

- Based on intuition and judgment.
- No need for a mathematical model!
- Provides a smooth transition between members and nonmembers.
- Relatively simple, fast and adaptive.
- Less sensitive to system fluctuations.
- Can implement design objectives, difficult to express mathematically, in linguistic or descriptive rules.

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## **CLASSICAL SETS (CRISP SETS)**

Conventional or crisp sets are Binary. An element either belongs to the set or does not.


**{True, False}**

**{1, 0}**

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

# CRISP SETS

*Crisp Set/Subset*

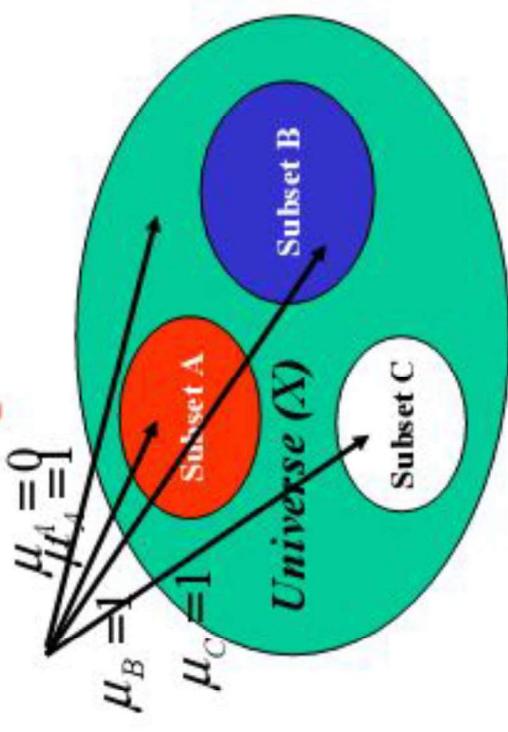

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## FUZZY SETS

Rules of thumb frequently stated in “fuzzy” linguistic terms.

John is *tall*.

If someone is *tall* and *well-built*  
then his basketball skill is good.

### Fuzzy Sets


$0 \leq \mu_S(x) \leq 1$  -----  $\mu_S(x)$  (or  $\mu(S, x)$ ) is the degree of membership of  $x$  in set  $S$

$\mu_S(x) = 0$        $x$  is not at all in  $S$

$\mu_S(x) = 1$        $x$  is fully in  $S$ .

If  $\mu_S(x) = 0$  or  $1$ , then the set  $S$  is **crisp**.

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

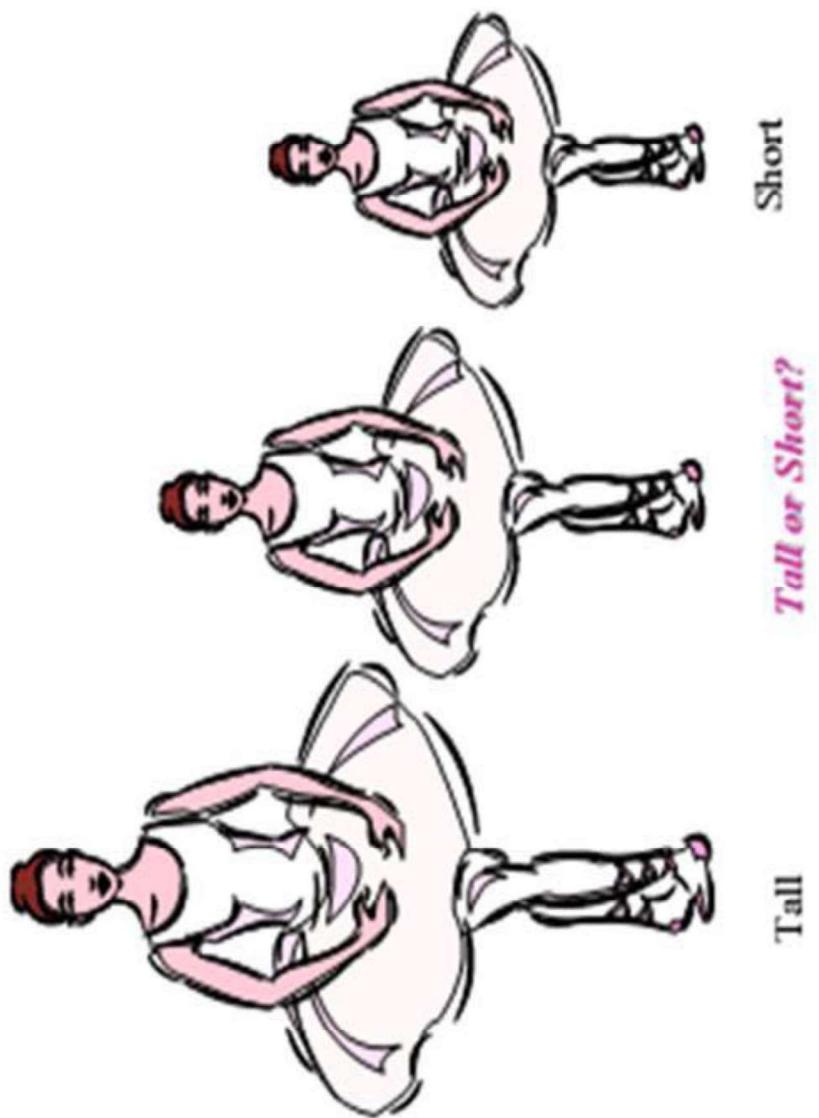


“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.


# Fuzzy set

■ Is a function  $f$ : domain  $\rightarrow [0,1]$

Crisp set (tall men):

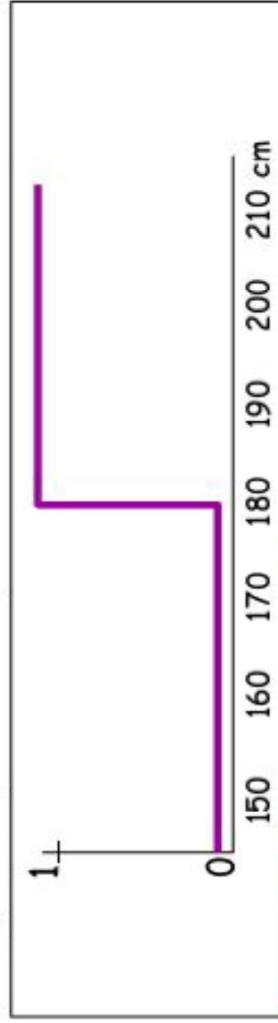

Fuzzy set (tall men):

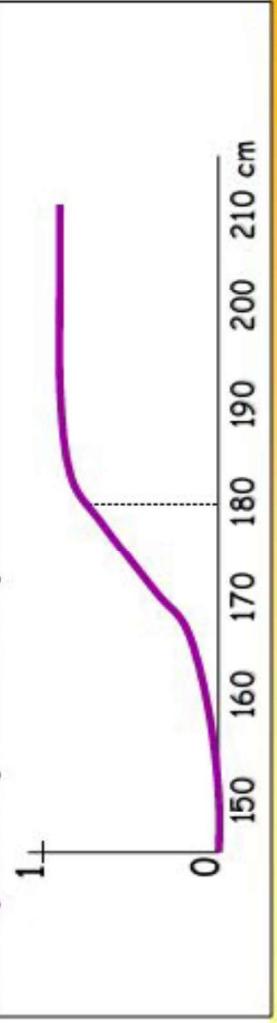


“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

# OPERATIONS ON FUZZY SETS

- Union:  $\mu_{A \cup B}(x) = \max(\mu_A(x), \mu_B(x))$
- Intersection:  $\mu_{A \cap B}(x) = \min(\mu_A(x), \mu_B(x))$
- Complement:  $\mu_{\neg A}(x) = 1 - \mu_A(x)$




Fuzzy union operation or fuzzy *OR*

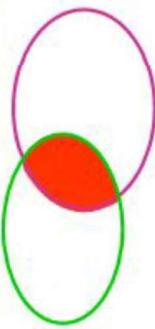

Fuzzy intersection operation or fuzzy *AND*

$$\mu_{A+B}(x) = \max [\mu_A(x), \mu_B(x)]$$

$$\mu_{A \cap B}(x) = \min [\mu_A(x), \mu_B(x)]$$

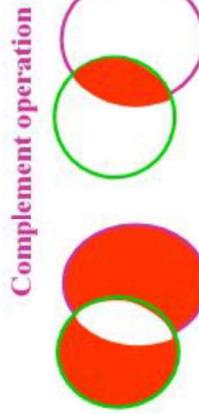


Complement operation

$$\mu_{\neg A}(x) = 1 - \mu_A(x)$$

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## CRISP MEMBERSHIP FUNCTIONS


- Crisp membership functions ( $\mu$ ) are either one or zero.
- Consider the example: Numbers greater than 10. The membership curve for the set A is given by

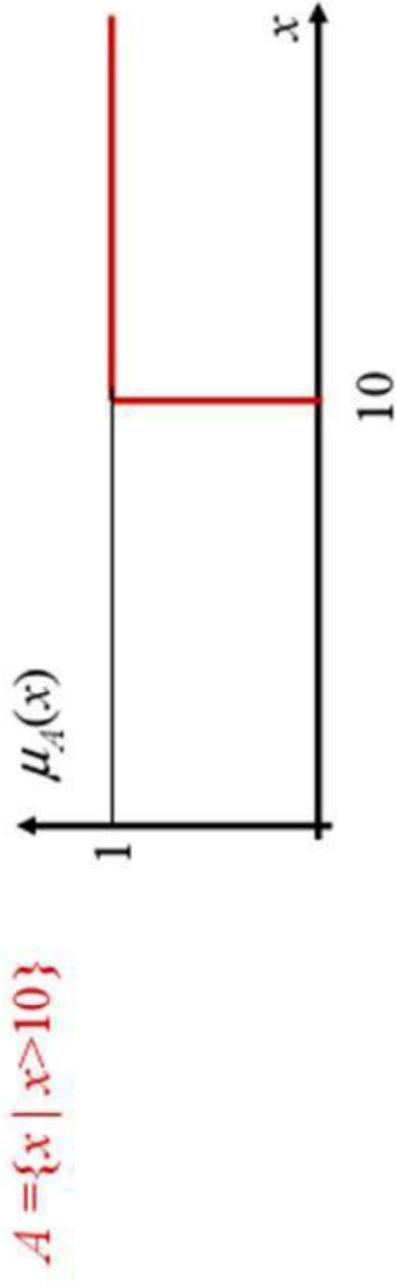

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## REPRESENTING A DOMAIN IN FUZZY LOGIC

Fuzzy sets (men's height):

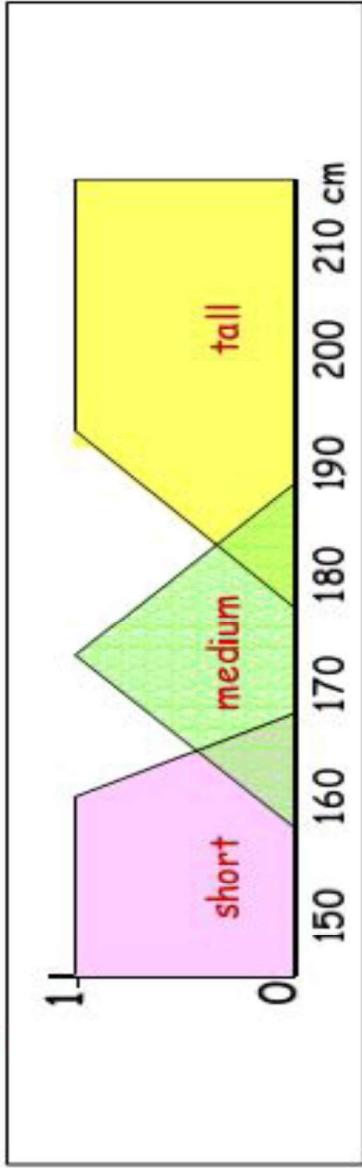

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & S.N. Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## FUZZY MEMBERSHIP FUNCTIONS

- Categorization of element  $x$  into a set  $A$  described through a **membership function**  $\mu_A(x)$
- Formally, given a fuzzy set  $A$  of universe  $X$

$\mu_A(x): X \rightarrow [0,1]$ , where

$$\begin{aligned}\mu_A(x) &= 1 & \mu_{\text{Tall}}(200) &= 1 \\ \mu_A(x) &= 0 & \mu_{\text{Tall}}(160) &= 0 \\ 0 < \mu_A(x) &< 1 & 0 < \mu_{\text{Tall}}(180) &< 1\end{aligned}$$

- (Discrete) Fuzzy set  $A$  is represented as:

$$A = \{\mu_A(x_1)/x_1, \mu_A(x_2)/x_2, \dots, \mu_A(x_n)/x_n\}$$

$$\text{Tall} = \{0/160, 0.2/170, 0.8/180, 1/190\}$$

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## FUZZINESS vs PROBABILITY

- When first exposed to fuzzy logic, humans associate **membership functions** with **density functions**.
- This is not so, since:
  - Probability density is an abstraction from empirical frequency.
  - ⇒ an aggregate property.
    - how often events occur in different ways.
    - ways that are quite **crisp** and mutually exclusive after occurrence.
  - Fuzzy relations, by contrast, are properties of single **events that are always there**, and not different from occurrence to occurrence.

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & S.N Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## LINGUISTIC VARIABLE

- A **linguistic variable** associates words or sentences with a measure of **belief functions**, also called **membership function**.
- The set of values that it can take is called **term set**.
- Each value in the set is a **fuzzy variable** defined over a base **variable**.
- The base variable defines the **Universe of discourse** for all the **fuzzy variables** in the term set.

A **linguistic variable** is a quintuple  $[X, T(X), U, G, M]$  where

- $X$  is the name of the variable,
- $T(X)$  is the term set, i.e. the set of names of linguistic values of  $X$ ,
- $U$  is the universe of discourse,
- $G$  is the grammar to generate the names and
- $M$  is a set of semantic rules for associating each  $X$  with its meaning.


“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## LINGUISTIC VARIABLE

- Let  $x$  be a linguistic variable with the label "speed".
- Terms of  $x$ , which are fuzzy sets, could be "positive low", "negative high" from the term set  $T$ :


$$T = \{\text{PositiveHigh}, \text{PositiveLow}, \text{NegativeLow}, \\ \text{NegativeHigh}, \text{Zero}\}$$

- Each term is a fuzzy variable defined on the base variable which might be the scale of all relevant velocities.

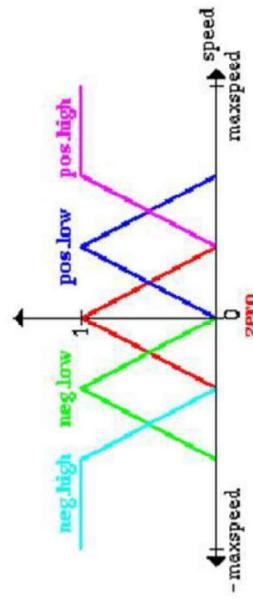


"Principles of Soft Computing, 2<sup>nd</sup> Edition"  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

# MEMBERSHIP FUNCTIONS

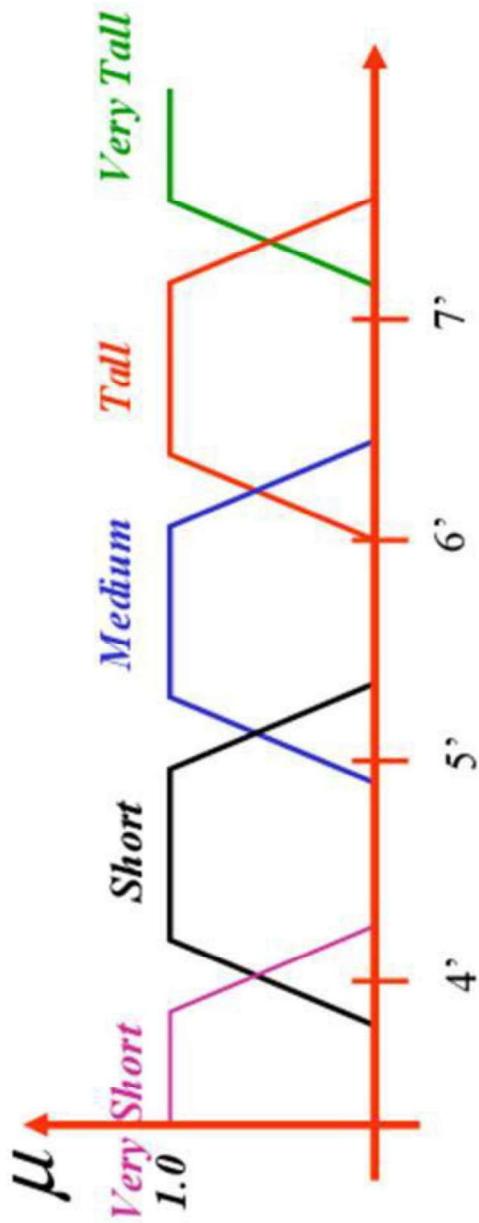

$$\mu = [\mu_{vs}, \mu_s, \mu_m, \mu_t, \mu_{vt}]$$

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

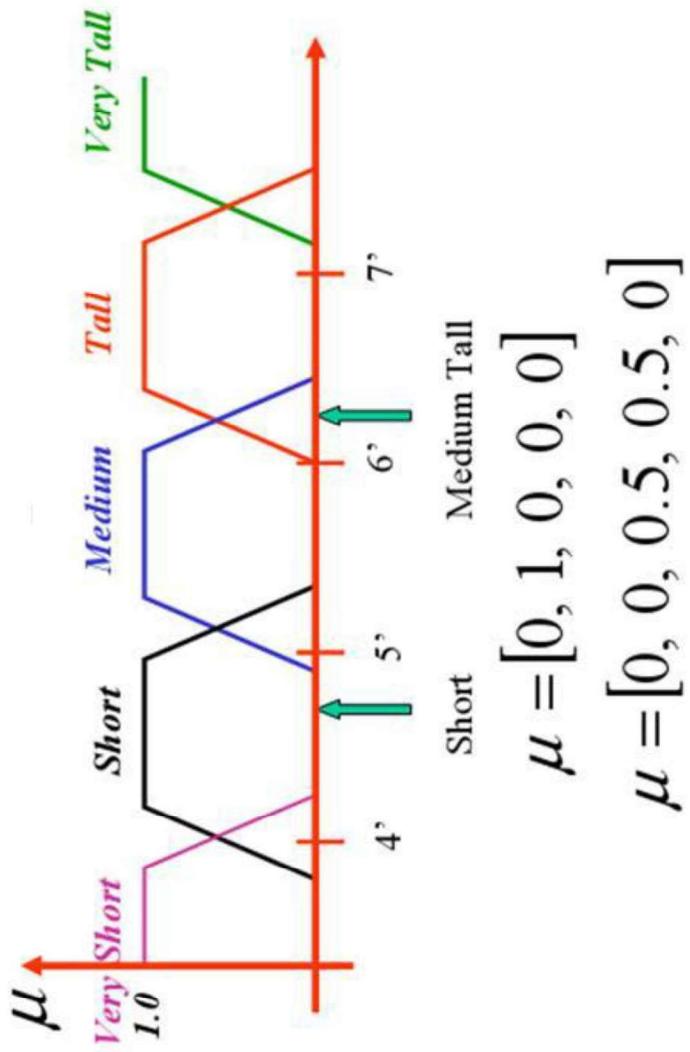


“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
 by S.N. Sivanandam & SN Deepa  
 Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## FUZZIFICATION

- Fuzzifier converts a crisp input into a fuzzy variable.
- Definition of the membership functions must
  - reflects the designer's knowledge
  - provides smooth transition between member and nonmembers of a fuzzy set
  - simple to calculate
- Typical shapes of the membership function are Gaussian, trapezoidal and triangular.

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

- Use crisp inputs from the user.
- Determine membership values for all the relevant classes (i.e., in right Universe of Discourse).

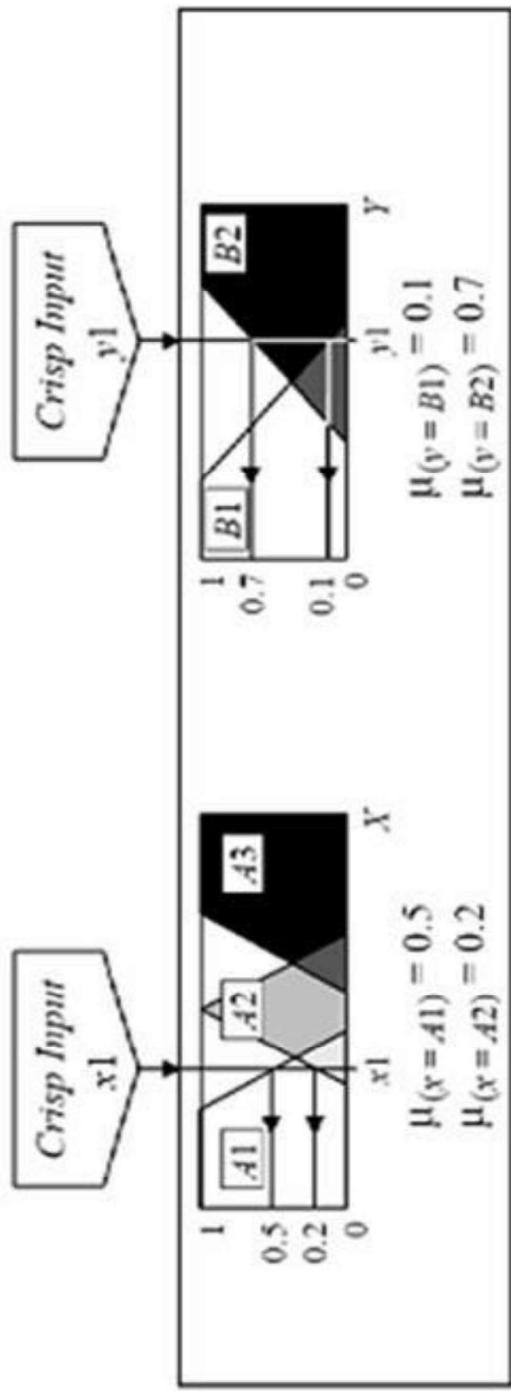


“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## **EXAMPLE - FUZZIFICATION**

- Assume we want to evaluate the health of a person based on his height and weight.
- The input variables are the crisp numbers of the person's height and weight.
- Fuzzification is a process by which the numbers are changes into linguistic words


“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## FUZZIFICATION OF HEIGHT

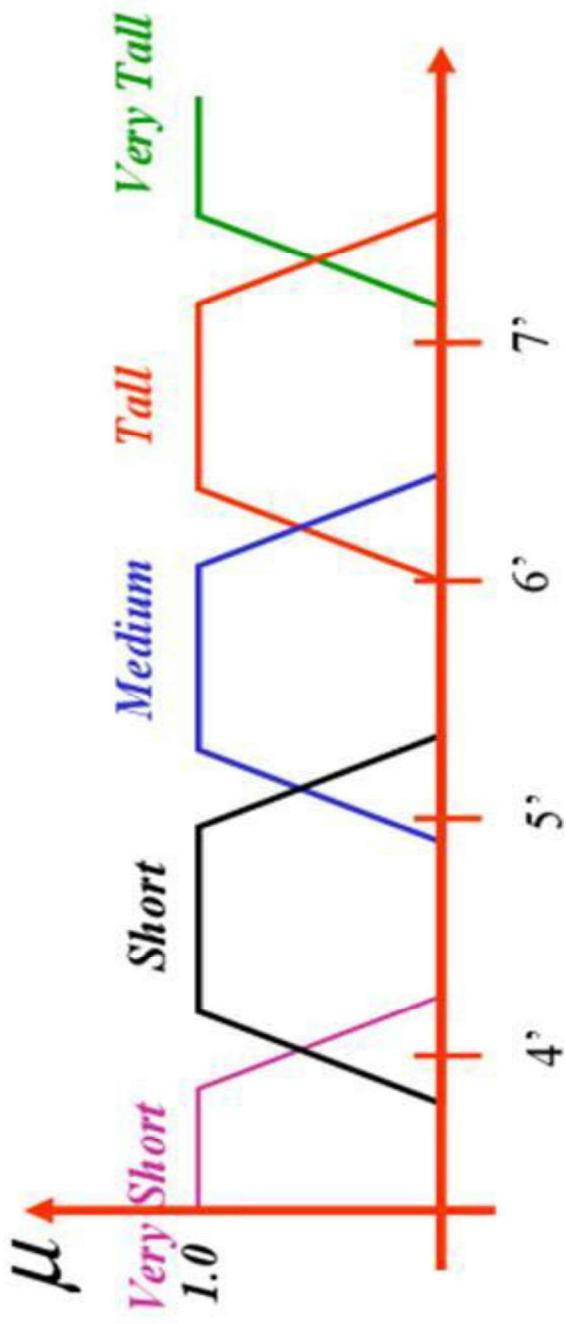

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## FUZZIFICATION OF WEIGHT

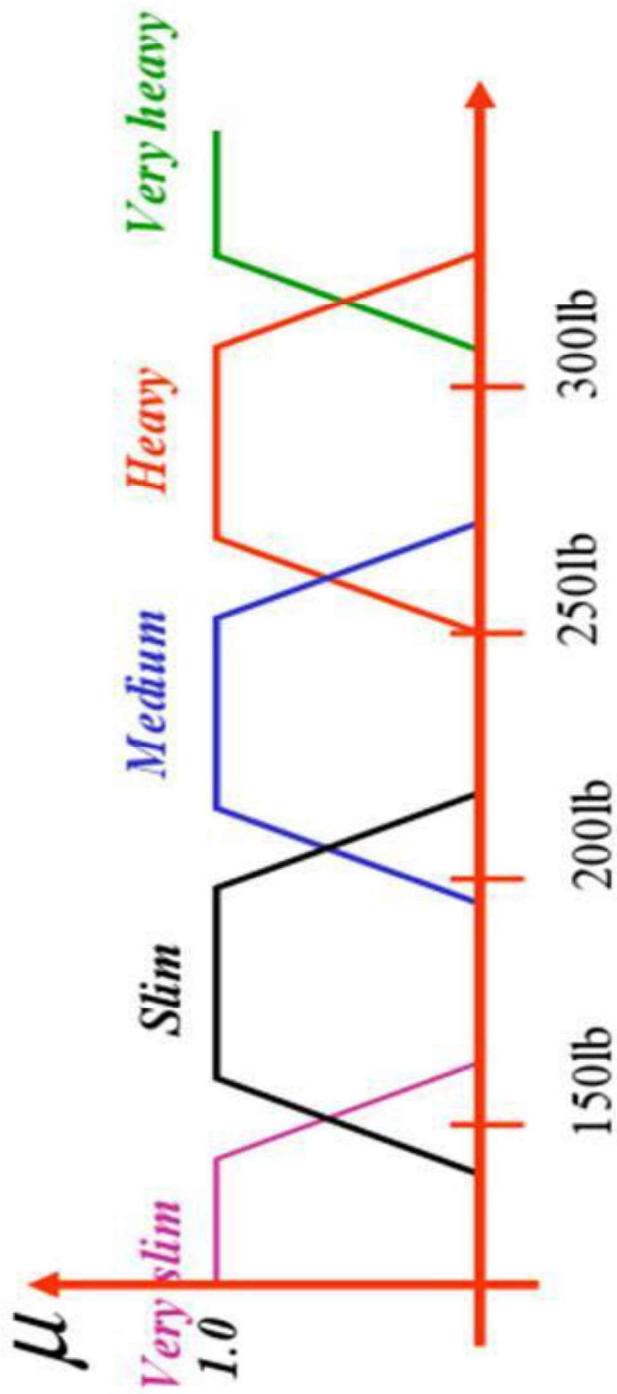

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & S.N Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## **FUZZY RULES AND REASONING**

The degree of an element in a fuzzy set corresponds to the truth value of a proposition in fuzzy logic systems.

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## **FUZZY RULES**

A fuzzy rule is defined as the conditional statement of the form

If  $x$  is A  
THEN  $y$  is B

where  $x$  and  $y$  are linguistic variables and A and B are linguistic values determined by fuzzy sets on the universes of discourse X and Y.

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

- The decision-making process is based on rules with sentence conjunctives **AND**, **OR** and **ALSO**.
- Each rule corresponds to a fuzzy relation.
- Rules belong to a **rule base**.
- Example: If (Distance x to second car is **SMALL**) **OR** (Distance y to obstacle is **CLOSE**) **AND** (speed v is **HIGH**) **THEN** (perform **LARGE** correction to steering angle θ) **ALSO** (make **MEDIUM** reduction in speed v).
- Three antecedents (or premises) in this example give rise to two outputs (consequences).

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## **FUZZY RULE FORMATION**

IF height is tall  
THEN weight is heavy.

Here the fuzzy classes height and weight have a given range (i.e., the universe of discourse).

$$\text{range (height)} = [140, 220]$$

$$\text{range (weight)} = [50, 250]$$

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & S.N Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## **FORMATION OF FUZZY RULES**

Three general forms are adopted for forming fuzzy rules. They are:

- Assignment statements,
- Conditional statements,
- Unconditional statements.

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## **Assignment Statements**

y = small  
Orange color = orange  
 $a = s$   
Paul is not tall and not very short  
Climate = autumn  
Outside temperature = normal

## **Unconditional Statements**

Goto sum.  
Stop.  
Divide by  $a$ .  
Turn the pressure low.

## **Conditional Statements**

IF y is very cool THEN stop.  
IF A is high THEN B is low ELSE B is not low.  
IF temperature is high THEN climate is hot.

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## **DECOMPOSITION OF FUZZY RULES**

A compound rule is a collection of several simple rules combined together.

- Multiple conjunctive antecedent,
- Multiple disjunctive antecedent,
- Conditional statements (with ELSE and UNLESS).

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

# DECOMPOSITION OF FUZZY RULES

## Multiple Conjunctive Antecedents

IF  $x$  is  $\tilde{A}_1, \tilde{A}_2, \dots, \tilde{A}_n$  THEN  $y$  is  $\tilde{B}_m$ .

Assume a new fuzzy subset  $\tilde{A}_m$  defined as

$$\tilde{A}_m = \tilde{A}_1 \cap \tilde{A}_2 \cap \dots \cap \tilde{A}_n$$

and expressed by means of membership function

$$\mu_{\tilde{A}_m}(x) = \min[\mu_{\tilde{A}_1}(x), \mu_{\tilde{A}_2}(x), \dots, \mu_{\tilde{A}_n}(x)].$$

## Conditional Statements ( With Else and Unless )

IF  $\tilde{A}_1$  (THEN  $\tilde{B}_1$ ) UNLESS  $\tilde{A}_2$   
can be decomposed as  
IF  $\tilde{A}_1$  THEN  $\tilde{B}_1$   
OR

IF  $\tilde{A}_2$  THEN NOT  $\tilde{B}_1$   
IF  $\tilde{A}_1$  THEN ( $\tilde{B}_1$ ) ELSE IF  $\tilde{A}_2$  THEN ( $\tilde{B}_2$ )  
can be decomposed into the form  
IF  $\tilde{A}_1$  THEN  $\tilde{B}_1$   
OR  
IF NOT  $\tilde{A}_1$  AND IF  $\tilde{A}_2$  THEN  $\tilde{B}_2$

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & S.N Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## Multiple disjunctive antecedent

IF  $x$  is  $\tilde{A}_1$  OR  $x$  is  $\tilde{A}_2, \dots$ , OR  $x$  is  $\tilde{A}_n$  THEN  $y$  is  $\tilde{B}_m$ .

This can be written as

IF  $x$  is  $\tilde{A}_n$  THEN  $y$  is  $\tilde{B}_m$ ,

where the fuzzy set  $\tilde{A}_m$  is defined as

$$\tilde{A}_m = \tilde{A}_1 \cup \tilde{A}_2 \cup \tilde{A}_3 \cup \dots \cup \tilde{A}_n$$

## **AGGREGATION OF FUZZY RULES**

Aggregation of rules is the process of obtaining the overall consequents from the individual consequents provided by each rule.

- Conjunctive system of rules.
- Disjunctive system of rules.

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & S.N Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## **FUZZY RULE - EXAMPLE**

**Rule 1:** If height is short then weight is light.

**Rule 2:** If height is medium then weight is medium.

**Rule 3:** If height is tall then weight is heavy.

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

### **Problem:** Given

- (a) membership functions for short, medium-height, tall, light, medium-weight and heavy;
- (b) The three fuzzy rules;
- (c) the fact that John's height is 6'1"

estimate John's weight.


“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

**Solution:**


- (1) From John's height we know that
  - John is short (degree 0.3)
  - John is of medium height (degree 0.6).
  - John is tall (degree 0.2).
- (2) Each rule produces a fuzzy set as output by truncating the consequent membership function at the value of the antecedent membership.

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

# Rule 1

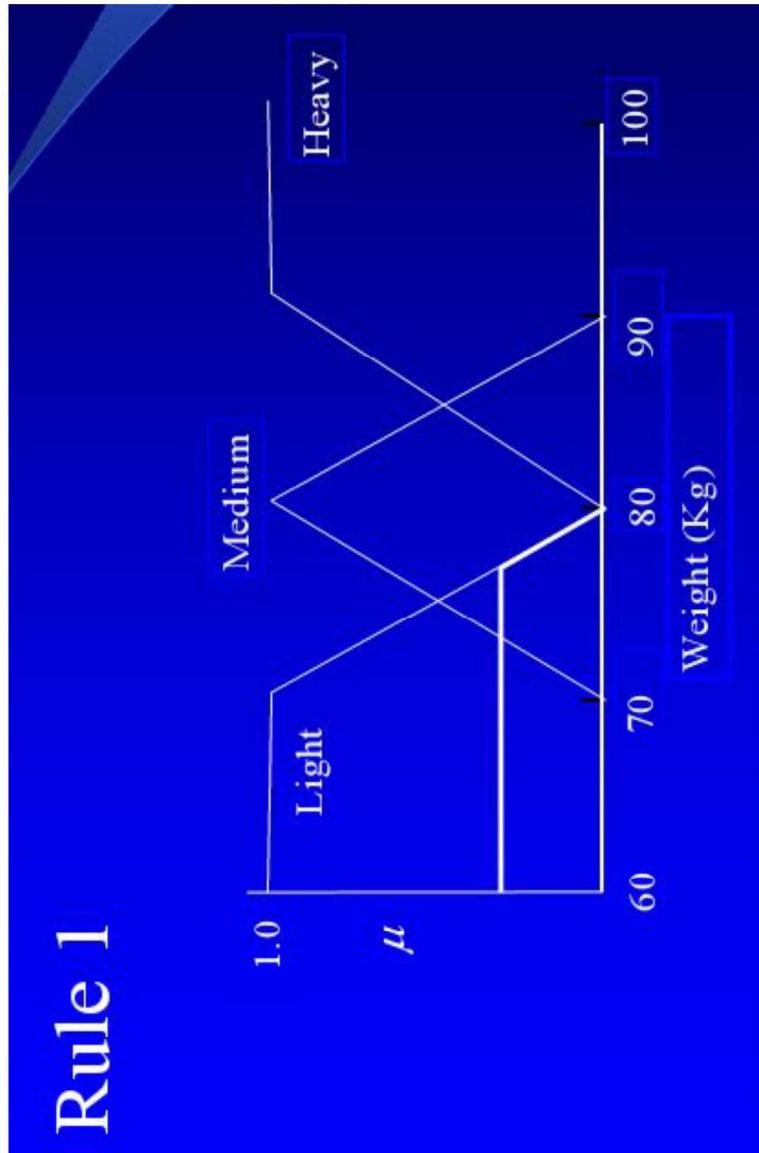


“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

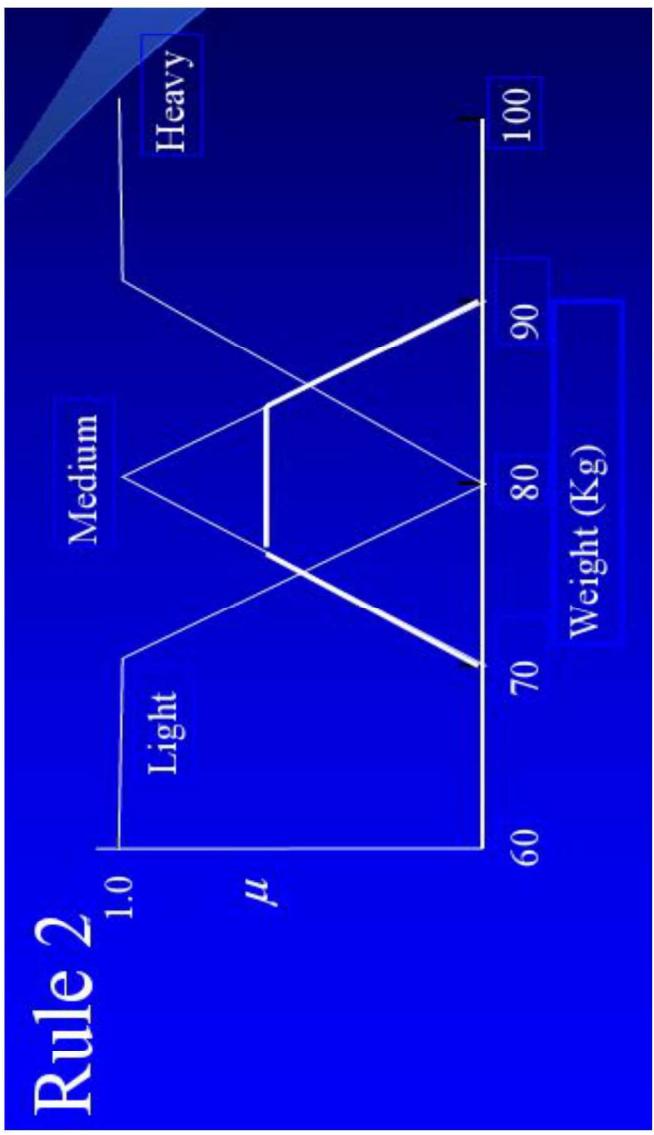


“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & S.N Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## Rule 3

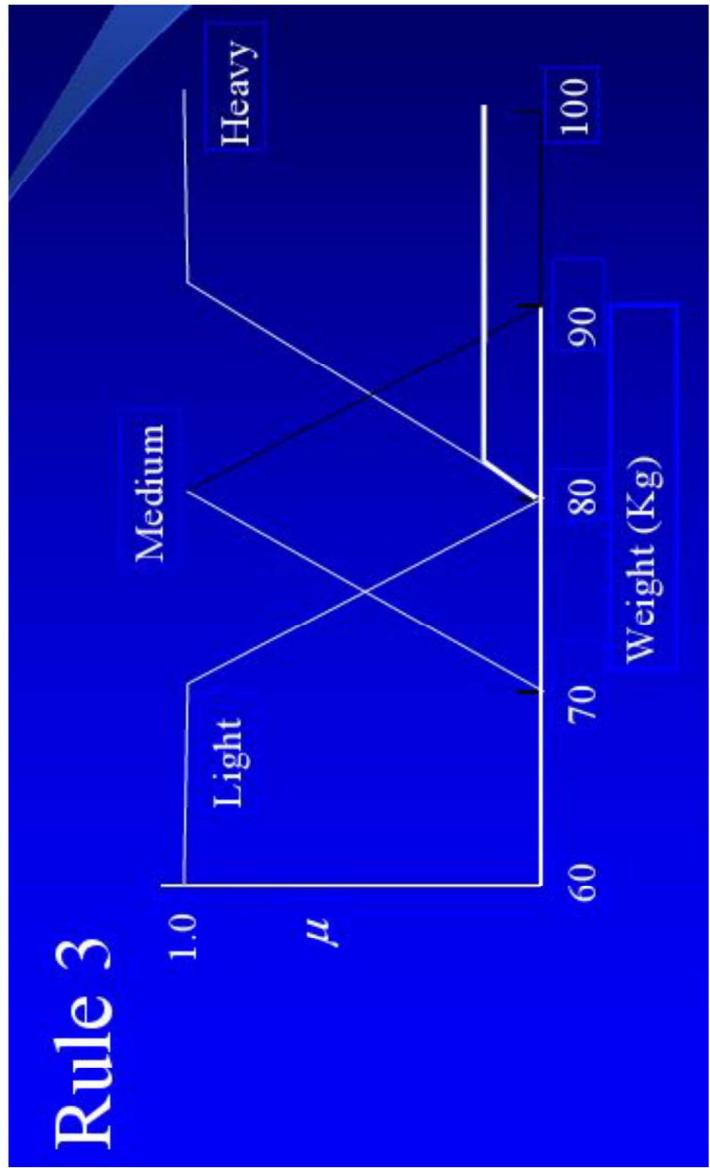

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

- The cumulative fuzzy output is obtained by OR-ing the output from each rule.
- Cumulative fuzzy output (weight at 6'1").

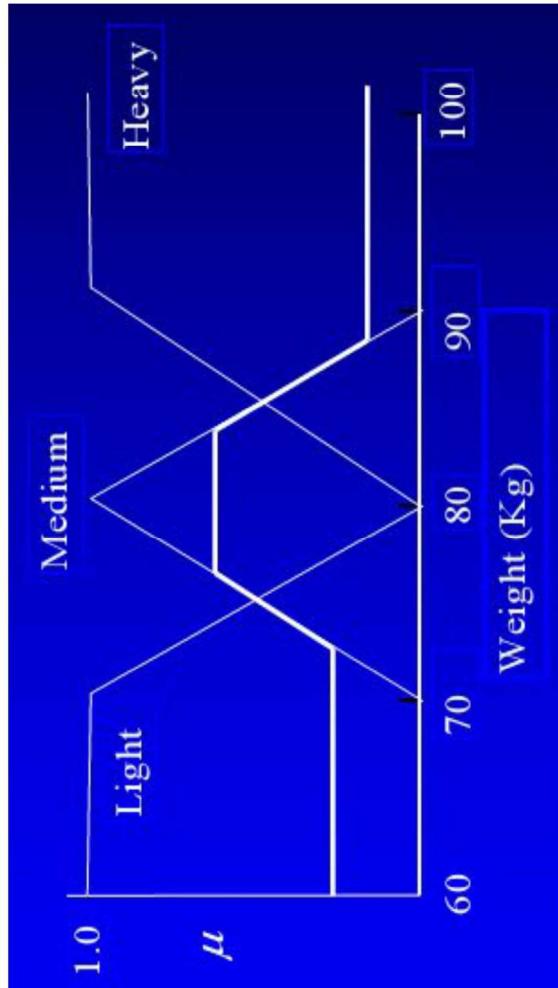

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

1. De-fuzzify to obtain a numerical estimate of the output.
2. Choose the middle of the range where the truth value is maximum.
3. John's weight = 80 Kg.


“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## **FUZZY INFERENCE SYSTEMS (FIS)**

- Fuzzy rule based systems, fuzzy models, and fuzzy expert systems are also known as fuzzy inference systems.
- The key unit of a fuzzy logic system is FIS.
- The primary work of this system is decision-making.
- FIS uses "IF...THEN" rules along with connectors "OR" or "AND" for making necessary decision rules.
- The input to FIS may be fuzzy or crisp, but the output from FIS is always a fuzzy set.
- When FIS is used as a controller, it is necessary to have crisp output.
- Hence, there should be a defuzzification unit for converting fuzzy variables into crisp variables along FIS.

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & S.N Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## BLOCK DIAGRAM OF FIS

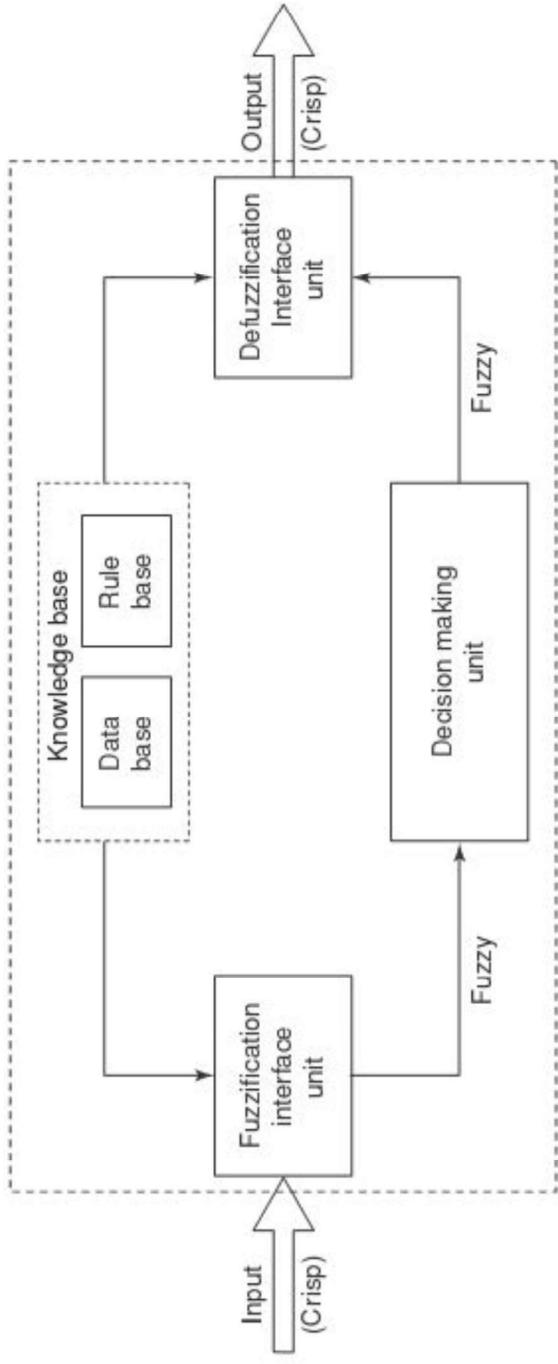

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & S.N Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## **TYPES OF FIS**

There are two types of Fuzzy Inference Systems:

- Mamdani FIS(1975)
- Sugeno FIS(1985)

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## **MAMDANI FUZZY INFERENCE SYSTEMS (FIS)**

- Fuzzify input variables:
  - Determine membership values.
- Evaluate rules:
  - Based on membership values of (composite) antecedents.
- Aggregate rule outputs:
  - Unify all membership values for the output from all rules.
- Defuzzify the output:
  - COG: Center of gravity (approx. by summation).

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## **SUGENO FUZZY INFERENCE SYSTEMS (FIS)**


The main steps of the fuzzy inference process namely,

1. fuzzifying the inputs and
2. applying the fuzzy operator are exactly the same as in MAMDANI FIS.

The main difference between Mamdani's and Sugeno's methods is that Sugeno output membership functions are either linear or constant.

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & S.N Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

# SUGENO FIS

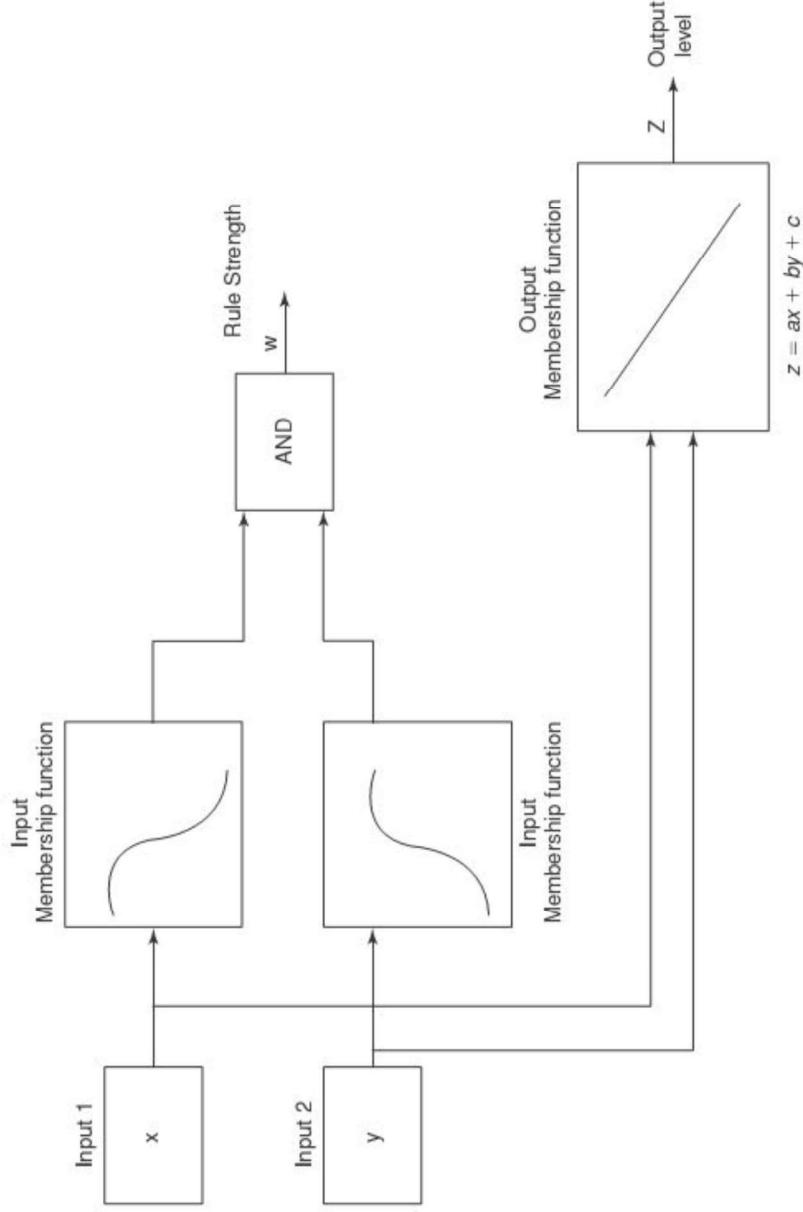

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.


# **FUZZY EXPERT SYSTEMS**

An expert system contains three major blocks:

- Knowledge base that contains the knowledge specific to the domain of application.
- Inference engine that uses the knowledge in the knowledge base for performing suitable reasoning for user's queries.
- User interface that provides a smooth communication between the user and the system.

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & SN Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.

## BLOCK DIAGRAM OF FUZZY EXPERT SYSTEMS

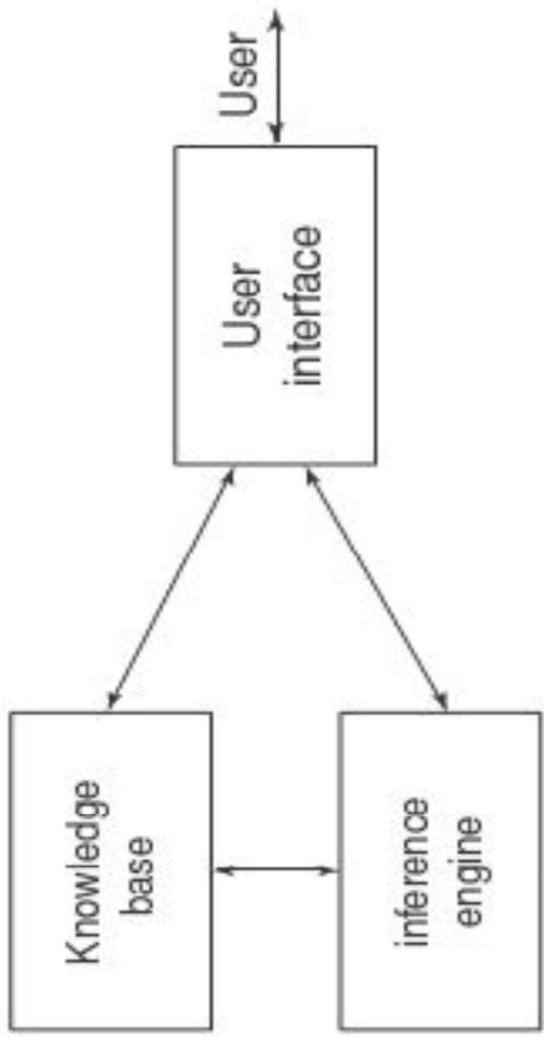

**Examples of Fuzzy Expert System include Z-II, MILORD.**

“Principles of Soft Computing, 2<sup>nd</sup> Edition”  
by S.N. Sivanandam & S.N Deepa  
Copyright © 2011 Wiley India Pvt. Ltd. All rights reserved.