

Global-e SFCC Integration

Table of Contents

- [Table of Contents](#)
- [Version](#)
- [Terms and Acronyms](#)
- [Introduction](#)
 - [About Global-e](#)
 - [About this Guide](#)
 - [Supported Features](#)
 - [Limitations and Restrictions](#)
- [Requirements](#)
- [Global-e Cartridges](#)
 - [Core business logic cartridge](#)
 - [Extension cartridges](#)
- [Installation](#)
 - [Build client CSS & JS files](#)
 - [Upload Cartridges](#)
 - [Add Cartridges](#)
 - [SiteGenesis Pipelines or Controllers](#)
 - [SFRA](#)
 - [Import Metadata](#)
 - [Services](#)
 - [Scheduled Jobs](#)
 - [Payment Method](#)
 - [Shipping Methods](#)
- [Configuration](#)
 - [Site Preferences](#)
 - [SFCC Global-e Custom Site Preferences OCAPI Configuration](#)
 - [SFCC OCAPI Configuration](#)
 - [Setting Pipeline URLs mapping](#)
 - [Scheduled Jobs](#)
- [Initialization](#)
 - [Hooks](#)
 - [SiteGenesis](#)
 - [SFRA](#)
 - [Custom Hooks](#)
 - [globale.onInit](#)
 - [globale.getGuestEmail](#)
 - [globale.getCustomerAddresses](#)
 - [globale.getUrlParameters](#)
 - [globale.getPLICustomMetadata](#)
 - [globale.getPliEstimatedDeliveryDate](#)
 - [globale.getPliBackOrdered](#)
 - [globale.getCookieConsent](#)
 - [globale.getAllowMailsFromMerchant](#)
 - [globale.getAllowDirectCommunicationFromMerchant](#)
 - [globale.beforeSendCartRequest](#)
 - [globale.getPliHubCode](#)
 - [globale.validateCart](#)
 - [globale.onBeforeApplyCouponCode](#)
 - [globale.onBeforeRemoveCouponCode](#)
 - [globale.onGenerateBasketFromPayload](#)

- [globale.onAfterCreateOrder](#)
- [globale.onAfterCreateMixedOrder](#)
- [globale.onBeforePlaceOrder](#)
- [globale.onAfterPlaceOrder](#)
- [globale.onAfterUpdateOrder](#)
- [globale.onAfterUpdateMixedOrders](#)
- [globale.onAfterPaymentUpdate](#)
- [globale.onAfterPaymentUpdateMixedOrders](#)
- [globale.onAfterStatusUpdate](#)
- [globale.onAfterStatusUpdateMixedOrders](#)
- [globale.onAfterShippingUpdate](#)
- [globale.onAfterRefund](#)
- [globale.onAfterGeRmaUpdate](#)
- [globale.customerVerification](#)
- [globale.customerRegistration](#)
- [globale.outboundOrderStatusUpdate](#)
- [globale.outboundOrderDispatchUpdate](#)
- [globale.outboundOrderRefundUpdate](#)
- [globale.outboundOrderRMAUpdate](#)
- [globale.getProductInventoryListId](#)
- [globale.getProductImageUrl](#)
- [globale.getHubId](#)
- [globale.onAfterVoidReservation](#)
- Client JS SDK
 - [Global-e Client JS SDK Initialization](#)
 - [Welcome pop up](#)
 - [Global-e Welcome pop up](#)
 - [Country Switcher](#)
 - [Global-e Country Switcher](#)
 - [Global-e Checkout](#)
 - [Global-e Checkout](#)
- [Global-e Welcome pop up](#)
- [Global-e Country Switcher](#)
 - [Overview](#)
 - [Installation of Global-e country switcher on non operated by Globale SFCC sites](#)
 - [Configuration Details](#)
- [Custom Country Switcher](#)
 - [Country list](#)
 - [Country Site redirect URL](#)
 - [Currency list](#)
- [Currency Conversion within the content area](#)
 - [Currency conversion for amount](#)
 - [Currency conversion for discount amount](#)
 - [Summary](#)
- [Price Calculation](#)
 - [What is List and Sale Price in terms of Salesforce B2C Commerce?](#)
 - [How we calculate International Price](#)
 - [Fixed Price](#)
 - [Dynamic Price](#)
 - [Price Rounding and Formatting](#)
 - [Price Calculation on other pages](#)
 - [Price Book custom attributes configuration](#)

- Coefficient Rates
 - Coefficient Rate GlobaleSettings Job Step
 - Product Class / Category Coefficient Rate
 - Country Coefficient Rate
- Marketing feeds
- Customer Groups
 - Global-e Session custom Attributes
 - Dynamic Customer Group
- Promotions
 - Promotion Thresholds
 - Global-e Promotion Custom Attributes
 - Promotion Discount Type
 - Do not Convert Promotional Discount
 - Global-e Free Shipping Method
 - Campaign
 - Free International Shipping Promotion
 - Promotion
 - Campaign
 - Global-e Checkout
 - Promotions Support Matrix
 - Examples
 - 10% off all men's gloves (Product Promotion - Percent Off)
 - 10\$ Off All Earrings for focus countries (Product Promotion - Amount Off)
 - Buy Cluster Drop Necklace, Get Free Matching Earrings (Product Promotion - Bonus Product)
 - \$50 off when buying 5 or more items (Order Promotion - Amount Off)
- Restricted Forbidden Products
 - Excluding products from the Search Result
 - Code details
 - SFRA
 - SiteGenesis Pipelines / Controllers
 - Site Preference
 - Promotion and Campaign
 - Disable the ability to purchase restricted/forbidden products
 - SFRA
 - SiteGenesis Pipelines / Controllers
 - Einstein Product Recommendations
 - SFRA and SiteGenesis Pipelines / Controllers
 - Global-e Checkout with restricted/forbidden product(s)
- Global-e Checkout
 - Checkout Flow
 - Stock Validation
 - Third-party Inventory Calls
 - Test Global-e Checkout
- Global-e Order
 - Order Confirmation Order Number
 - Order Confirmed
 - Order Paid
 - Order Cancelled
 - Shipping Status Updated
 - Order Refunded
- Global-e Session and Cookie attributes
 - SFCC Session attributes

- Global-e Cookies
- Custom Attributes (Metadata)
- Customize/Extend Global-e Cartridge functionality
 - Properties and Translations
 - Checkout Analytics Data Implementation
 - Checkout Analytics Data implementation
 - Global-e Price API
 - Price
 - Global-e Price factory
 - Money
 - Global-e Money factory
 - Option Model
 - Global-e Product Option Model factory
 - Price Model
 - Global-e Product Price Model factory
 - Hiding non-applicable elements
 - cartShippingMethodSelection.isml
 - Display product status on Global-e checkout
 - Display back-ordered product status
 - Global-e Free Shipping Banner
 - Free Shipping Banner
- The Failover and Recovery Process
- Global-e Compatibility Mode Requirements
 - Compatibility Mode of Salesforce B2C Commerce Digital is older than 17.7
 - SFRA Storefront
 - SiteGenesis Storefront
 - Wildcard Replace
 - module.superModule Replace
 - Compatibility Mode older than 15.5
- SFCC OMS

Version

Version Type	Version
Current Stable Version	release-23.4.0
SFRA Version	v.7.0.0

Terms and Acronyms

Please refer to this table of Terms and Acronyms if you'll find any in any Global-e SFCC annexed document.

Acronym	Description
Salesforce B2C Commerce (Cloud)	Salesforce B usiness to C lient Commerce (Cloud)
SFCC	S alesforce C ommerce C loud
DMW, DWRE	D emand w are (former name of Salesforce B2C Commerce)
Digital, Commerce Cloud Digital or Salesforce B2C Commerce Digital	Sandbox/Development/Staging/Production instance
BM	B usiness M anager (Admin panel of Salesforce B2C Commerce)
Storefront	An e-commerce solution for merchants who want to host a website on Salesforce B2C Commerce Platform that advertises their products or services and for which consumer transactions are generated online
MVC	M odel V iew C ontroller (Programming Design Pattern or Architectural Pattern)
SiteGenesis	Old version of Salesforce B2C Commerce Demo Site
MFRA	M obile F irst R eference A rchitecture - new Salesforce B2C Commerce MVC architecture concept
SFRA	S torefront R eference A rchitecture - new Salesforce B2C Commerce Storefront Architecture
SFDC	Salesforce Dot Com (S ales F orce. C om)
SGJC	S ite G enesis J ava S cript C ontrollers
WCAG	W eb C ontent A ccessibility G uidelines
CDN	C ontent D elivery N etwork
link_globale	Root folder of Global-e LINK cartridges and all documentation on Salesforce B2C Commerce GitHub repository
int_globale	The main Global-e Salesforce B2C Commerce Cartridge which will be used as basis for any Merchant Storefront version
int_globale_sitegenesis	Global-e Salesforce B2C Commerce extension cartridge for SiteGenesis (Pipelines/Controllers) based Storefront All changes in this cartridge are made based on (comparing to) Link SiteGenesis Community.
int_globale_sfra	Global-e Salesforce B2C Commerce extension cartridge for SFRA based Storefront All changes in this cartridge are made based on (comparing to) Storefront Reference Architecture.
int_globale_sitegenesis_popups	Global-e Salesforce B2C Commerce extension cartridge for SiteGenesis (Pipelines/Controllers) based Storefront All changes in this cartridge are made based on (comparing to) Link SiteGenesis Community. This cartridge contains a light version of Global-e integration and it allows to use the Global-e Country Switcher in the SFCC site that is not operated by Global-e.

int_globale_sfra _popups	Global-e Salesforce B2C Commerce extension cartridge for SFRA based Storefront All changes in this cartridge are made based on (comparing to) Storefront Reference Architecture. This cartridge contains a light version of Global-e integration and it allows to use the Global-e Country Switcher in the SFCC site that is not operated by Global-e.
int_globale_headless	Global-e Salesforce B2C Commerce extension cartridge for supporting SFCC PWA/Mobile application with the Global-e integration.

Introduction

About Global-e

Global-e is the leading provider of end-to-end cross-border solutions for retailers and brands. We are the chosen partner for dozens of leading brands worldwide.

Global-e simplifies cross-border eCommerce for merchants while offering a seamless local shopping experience to their international shoppers.

Our leading technology solution is backed by our unrivalled knowledge, international market insights and our multiple installed commerce cloud merchants.

Via our certified Salesforce Commerce Cloud cartridge integration, merchants can offer their international shoppers a fully localized shopping experience and seamlessly boost their international online sales in more than 200 destinations worldwide.

We handle every aspect of your cross-border sales, removing all friction points to sell globally.

Our comprehensive solution supports localized pricing and 95+ local currencies, 80+ different payment methods, localized multi-lingual checkout, multiple shipping options, convenient domestic returns, local duty and tax calculation and pre-payment options.

We also handle the risk of fraud, providing our merchants with a simple, risk-free experience, and making cross-border sales as simple as domestic ones.

By localizing the customer shopping experience, our clients enjoy a significant increase in international sales conversion rates leading to accelerated cross-border growth and higher customer satisfaction.

About this Guide

This document describes the process of installation, integration, configuration and customization of the Global-e SFCC cartridges on basis of SiteGenesis, SFRA (MFRA) or PWA/Mobile application architectures.

Supported Features

- **Dynamic Prices**

convert prices (rendered on the storefront) dynamically on your Salesforce B2C Commerce backend, based on your primary price book price + FX rate + Product/Country coefficient rate + local price rounding rules.

- **Fixed Prices**

full control of the prices from any of your Salesforce B2C Commerce standard price book(s) and render them AS IS on the storefront for end-customer shipping country/currency without making any additional calculation.

- **Price Formatting**

International prices are formatted properly by applying the currency symbol and current request locale.

- **Local Currency Price Rounding Rules**

the international price can be rounded according to the common rounding of selected/identified shipping country/currency, or your own rules.

- **GROSS and NET Site Taxation**

customers will be able to see international prices including/excluding Tax amount (VAT) according to the selected/identified shipping country.

- **Country Coefficient**

the international prices can be calculated including shipping country coefficient price uplift, so Customers will see the final prices on your storefront.

- **Product Class/Group Coefficient**

the end-customer prices can be calculated including product class/group coefficient price uplift, so Customers will see the final prices on your storefront.

- **Price Cache**

the end-customer prices will be cached on your storefront (i.e. PLP, PDP) for selected/identified shipping countries and currencies.

- **Loyalty Cards**

customers will be able to pay loyalty cards on Global-e checkout.

- **Gift Cards**

customers will be able to buy gift cards as regular products and pay by gift cards on Global-e checkout.

- **Any Salesforce B2C Commerce Promotion/Campaign/Coupon**

you are free to use and configure most of the available in Salesforce B2C Commerce Promotions, Campaigns and Coupon Codes as you want with slight additional configuration (for Promotions) for international (Global-e) checkout.

You can even configure some Promotion(s) for a specific market, like for Spain only, using standard Salesforce B2C Commerce Customer Group and Campaign.

- **Customer Group**

you are fully free to use your own customer groups, but you can also configure customer group(s) for your international customers, using any Global-e session custom attributes available at any time for your storefront.

For example, if you want to show some ad banner on your home page for some specific market - you can do it by using the content slot + Customer Group.

- **Global-e Checkout as your own Checkout**

customers will see Global-e checkout integrated into your own site page container, so the URL in the Customer's browser will remain your brand URL, with no confusion and any unexpected redirects.

Please bear in mind that some Payment Providers however will force users to be redirected to their hosted payment page, with getting back to your site page container in the end.

- **Customers Address book**

customers will be able to see and choose the address from the address book stored in Salesforce B2C Commerce Customer's profile on Global-e Checkout (Shipping/Billing address).

Moreover, your Customer will be able to create a new address directly on Global-e Checkout, which will be then stored in the Customer's profile address book.

- **Customer Subscription**

customers will be able to subscribe to any of their newsletters directly from Global-e Checkout.

- **Standard Salesforce B2C Commerce Order**

the international Orders in Salesforce B2C Commerce will be created and placed in exactly the same (standard) way as your local/domestic Orders, following the standard B2C Commerce Order creation flow.

- **Dispatched Orders**

if you have all the necessary data in Salesforce B2C Commerce you can use the Job out-of-the-box of Global-e cartridge to export the dispatched Orders to Global-e.

- **Order Status**

if you have all the necessary data in Salesforce B2C Commerce you can use the Job out-of-the-box of Global-e cartridge to send the Order status update to Global-e, and visa versa - any Order status updates on the Global-e side to Salesforce B2C Commerce Digital.

- **Shipping Status**

Global-e cartridge also supports income API requests from Global-e to update the Order Shipping status on the Salesforce B2C Commerce side.

- **Refunds**

Global-e cartridge supports income API requests to update the refund status of the Order on the Salesforce B2C Commerce side, and also to send the Refund requests to the Global-e server.

- **Catalog Export**

Global-e cartridge can handle the fully customized and configurable catalog export in CSV format and send it to your SFTP folder, so then Global-e will be able to pull it from there.

- **Restricted Items Export**

Global-e cartridge can handle the fully customized and configurable restricted products export in CSV format and send it to your SFTP folder, so then Global-e will be able to pull it from there.

- **Products Restrictions**

Global-e cartridge supports product restrictions.

- **Return Merchandise Authorization**

- **Content currency conversion**

- **Stock validation**

- **Customer Registration**

Global-e cartridge supports customer registration on the confirmation page.

- **Displaying the estimated shipping cost on PDP and cart pages**

- **Content price conversion**

Global-e cartridge supports content price conversion on the client side.

- **Mixed Orders feature**

- **Any Storefront architecture supported**

Our solution supports any architecture of your Storefront, SiteGenesis based on Pipelines or Controllers, SFRA, PWA/Mobile application.

Limitations and Restrictions

- **SEO: Page Meta Tag Rules**

Global-e cartridge can not convert the price in Page Meta Tag Rules by using Convenience Object ProductPrice, like \${ProductPrice}

- **Source Code Groups: Price Books**

Global-e cartridge does not support Price Books assigned to a Source Code Group. It should be configured as Promotion with a qualifier source code groups

Requirements

Compatibility Mode: Due to the new script APIs usage, Global-e cartridges can be installed and used on the Salesforce B2C Commerce Digital with compatibility mode 15.5 or higher (**17.7** or higher is recommended).

Browsers: The latest version of Firefox, Chrome and Safari. Internet Explorer version 10 and later, Microsoft Edge.

Mobile devices: Android (only Chrome), iPhone and iPad (only Safari).

Limit Storefront Order Access: Please set this setting to "No" (as shown in the screenshot below)

[Merchant Tools](#) > [Site Preferences](#) > Order

Order Preferences

The screenshot shows the 'Order Access Settings' section. Two dropdown menus are visible: 'Limit Storefront Order Access' and 'Storefront Order Filter by Customer Session'. Both are set to 'No'. The 'Limit Storefront Order Access' dropdown is highlighted with a red rectangle. To the right of the dropdowns, there is explanatory text: 'Specify how access to orders from the s...', 'When enabled, this adds an additional l...', 'Storefront session.', and 'The preference should be enabled unles...'.

Failed Orders Settings:

By default, this field is empty, which means that SFCC will not automatically fail Orders in CREATED status, so please set it to the desired amount of time (minutes), for example - 4320 (3 days).

[Merchant Tools](#) > [Site Preferences](#) > Order

Order Preferences

The screenshot shows the 'Failed Orders Setting' section. A text input field labeled 'Auto-Fail Orders:' contains the value '4320'. To the right of the input field, there is explanatory text: 'Minutes afte...', 'eligible for a...', and 'should neve...'.

*If the configuration of the preference 'Place Order On Payment Update'(in the project's account on the Global-e side) is set to 'Yes' then the amount of time for 'Auto-Fail Orders' should be longer, for example - 20160 (14 days).

The screenshot shows the 'Failed Orders Setting' section. A text input field labeled 'Auto-Fail Orders:' contains the value '20160'. To the right of the input field, there is explanatory text: 'Minutes after which the orders that haven't been placed become eligible for automatic failing. Leave this blank if non-placed orders should never be auto-failed.'

Site Default Currency Settings:

For all Global-e operated sites, the Default Currency must be in a base Merchant currency.

The screenshot shows the 'RefArchGlobal - General' section. A dropdown menu labeled 'Default Currency:' is set to 'USD'. The dropdown is highlighted with a red rectangle. Other fields like 'Name:', 'Site Name:', 'Features:', 'Customer List:', 'Billing Entity:', and 'Description:' are also visible.

Global-e Cartridges

Core business logic cartridge

The main cartridge which contains all core business logic of Global-e is **int_globale**. This cartridge should be always added to any Site where you are supposed to use Global-e functionality.

Extension cartridges

There are 4 different extension Global-e cartridges, and each of them should be used in a specific case.

required:

- **int_globale_sitegenesis** - this cartridge should be used with int_globale cartridge for SiteGenesis Pipelines or Controllers-based Storefront.
This cartridge extends/overlaps any template/script/Controller or Pipeline which needs to be adopted to Global-e logic.
- **int_globale_sfra** - this cartridge should be used with the int_globale cartridge for the SFRA-based Storefront.
This cartridge extends/overlaps any template/model/Controller which needs to be adapted to Global-e logic.

optional:

- **int_globale_sitegenesis_popups** - this cartridge should be used with int_globale cartridge for SiteGenesis Pipelines or Controllers-based Storefront.
It contains a light version of Global-e integration and it allows to use of the Global-e Country Switcher in the SFCC site that is not operated by Global-e.
- **int_globale_sfra_popups** - this cartridge should be used with the int_globale cartridge for SFRA-based Storefront.
It contains a light version of Global-e integration and it allows to use of the Global-e Country Switcher in the SFCC site that is not operated by Global-e.
- **int_globale_headless** - this cartridge should be used if needs to support SFCC PWA/Mobile application architecture.

Installation

The installation of the Global-e Salesforce B2C Commerce cartridge(s) should be as simple as just uploading Global-e cartridges, adding them to the cartridge path of the Site, importing metadata, setting the configuration in Site Preferences and running GlobaleSettings Job.

Build client CSS & JS files

Before you will be able to run any node npm commands in your terminal you will need to install node.js (the latest stable version is recommended).

Once it is installed please run the following command in your terminal:

```
1 npm install
```

This will install all required npm packages and modules to build CSS and JS files as well as SGMF ([Salesforce B2C Commerce Cloud](#)) scripts.

After npm is installed you can now run the following npm commands in your terminal (from top to bottom in package.json):

run unit tests:

```
1 npm run test
```

compile CSS for SiteGenesis only

```
1 npm run compile:scss:sitegenesis
```

compile CSS for SFRA only

```
1 npm run compile:scss:sfra
```

compile all available CSS in all extension cartridges

```
1 npm run compile:scss
```

compile js for sitegenesis only

```
1 npm run compile:js:sitegenesis
```

compile js for SFRA only

```
1 npm run compile:js:sfra
```

compile all available js in all extension cartridges

```
1 npm run compile:js
```

lint your CSS

```
1 npm run lint:css
```

lint your js

```
1 npm run lint:js
```

Upload Cartridges

Upload Global-e Core cartridge **int_globale** and the extension cartridge, according to the architecture you are using on your storefront (**int_globale_sfra** for SFRA or **int_globale_sitegenesis** for SiteGenesis), to your Salesforce B2C Commerce Digital with using either the

following npm command in terminal:

for SiteGenesis extension cartridge only (which will actually upload **int_globale** and **int_globale_sitegenesis** cartridges)

```
1 npm run uploadCartridge:sitegenesis
```

for SFRA extension cartridge only (which will actually upload **int_globale** and **int_globale_sfra** cartridges)

```
1 npm run uploadCartridge:sfra
```

or once for all extension cartridges (which will actually upload **int_globale**, **int_globale_sitegenesis** and **int_globale_sfra** cartridges)

```
1 npm run uploadCartridge
```

or using your Studio (eclipse).

i Please note, before you'll upload the cartridges to your Salesforce B2C Commerce Digital you might need to build your CSS and JS files (please follow the instruction above or read README.md).

Add Cartridges

Administration > Sites > Manage Sites > (Your Site) > [Settings Tab]


Our cartridges are built and written following all requirements, recommendations and standards of Salesforce, so after adding Global-e cartridges on DEMO SiteGenesis or SFRA Storefront they should be ready for work.

With slight adoption to your custom logic in **int_globale_sitegenesis** (for SiteGenesis-based Storefront) or **int_globale_sfra** (for SFRA-based Storefront), you will be able to use all power of Global-e on your brand Site.

Please add Global-e cartridges as shown in the following screenshots.


SiteGenesis Pipelines or Controllers

Please add two Global-e cartridges before your brand cartridges (from left to right) - **int_globale_sitegenesis** and **int_globale**, as shown on the screenshot:

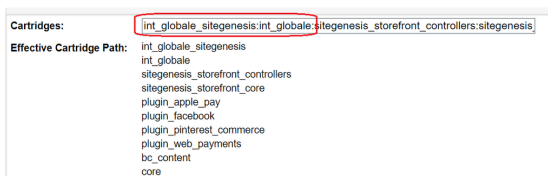

SFRA

Please add two Global-e cartridges before the app_storefront_base cartridge and after your brand cartridges (from left to right) - **int_globale_sfra** and **int_globale**, as shown on the screenshot:

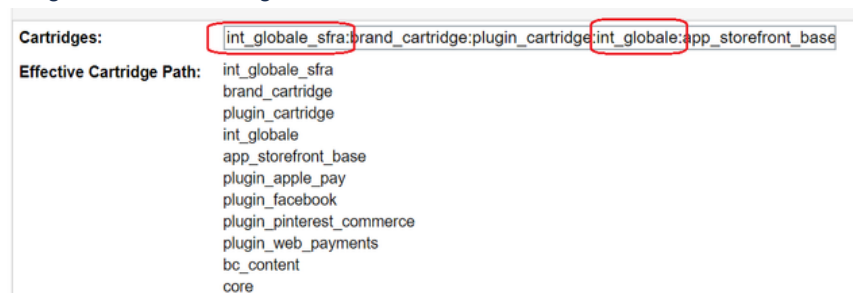


Import Metadata

Before you will start using the Global-e cartridge functionality you have to import Global-e metadata (metadata/*.xml)

Metadata File Name	Description
globale.system.xml	System object Global-e custom attributes
globale.custom.xml	Global-e Custom object definitions
globale.services.xml	Global-e Services, to be used by Global-e cartridge
globale.jobs.xml	Global-e Scheduled Jobs
globale.paymentmethods.xml	Global-e Payment Methods
globale.shippingmethods.xml	Global-e Shipping Methods

Please import these files in the following order (all in MERGE mode):


1. for globale.system.xml and globale.custom.xml files:

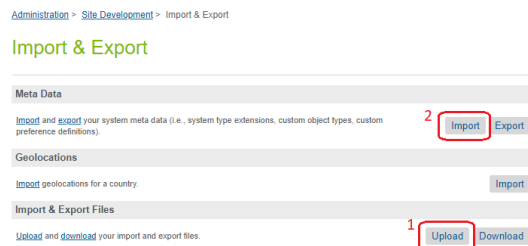

2. for globale.services.xml and globale.jobs.xml files:



3. Create the GLOBALE Payment Processor manually.

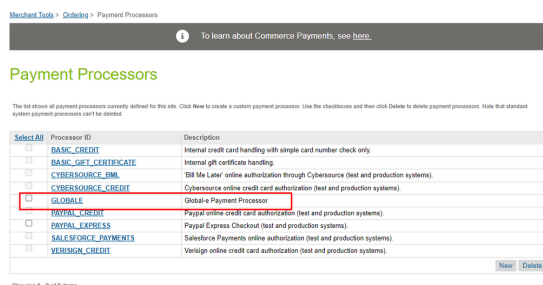

4. For globale.paymentmethods.xml and globale.shippingmethods.xml files:

Import & Export

The screenshot shows the 'Import & Export' interface with several sections. Red boxes and numbers highlight specific actions: 1. 'Upload' button in the 'Import & Export Files' section. 2. 'Import' button in the 'Shipping Methods' section. 3. 'Import' button in the 'Payment Methods' section.

Orders (XML)
Manage order [imports](#) & [exports](#). Export orders into XML files. [Import](#) [Export](#)

Tax Table
Manage tax table [imports](#) & [exports](#). Import or export tax classes, tax jurisdictions, and tax rates from or into XML files. [Import](#) [Export](#)

Shipping Methods
Manage shipping method [imports](#) & [exports](#). Import or export shipping methods from or into XML files. [Import](#) [Export](#)

Payment Methods
Manage payment method [imports](#) & [exports](#). Import or export payment methods from or into XML files. [Import](#) [Export](#)

Import & Export Files
[Upload](#) import files and [download](#) export files. [Upload](#) [Download](#)

Please check the **Tax Class** for Global-e Shipping Methods, after fresh import, it might be reset to an undefined or non-existing Tax Class.

Services

After importing the `globale.services.xml` metadata file, you will have Global-e Services (starts as "Globale-") which will be used by Global-e cartridges.

Each service has a respective Global-e Service Credential which normally will contain only the second part of the service URL (like `"/Browsing/AppSettings"`), the first part of the Global-e service will be stored in Global-e Site Preferences since it is the same for all Global-e services, so the full service URL will be calculated automatically in Global-e cartridge as a combination of the value stored in Global-e Site Preference and respective Global-e service Credential.

- i** Please make sure that the Rate Limit for Global-e SendCart Service is disabled, and the Communication Log is enabled for all Global-e Services at least for the first couple of weeks after Production launch.

Scheduled Jobs

After importing the `globale.jobs.xml` metadata file, you will have Global-e Jobs (starts as "Globale").

- i** Please note that all Global-e Jobs except 'GlobaleSettings' are just samples, so you might have to extend/customize them according to your business logic/requirements.
All Global-e Jobs (except GlobaleSettings) are disabled by default, so you have to review the configuration of each job and enable those jobs which need to be enabled.
Please also check the Site assignments of each Global-e Job, they have to be assigned only to those Sites which will be operated by Global-e.

Payment Method

After importing the `globale.peymentmethods.xml` metadata file you will have the Global-e General Method (GLOBALE) for which will be assigned to Global-e Payment Processor (GLOBALE). The payment processor you need to create manually (see step 4 above).

Shipping Methods

After importing the `globale.shippingmethods.xml` metadata file you will have Global-e Shipping Methods (starts as "GLOBALE_").

- i** Please note that these imported Shipping Methods are not "real Global-e Shipping Methods", it is needed only to make Salesforce B2C Commerce able to Create SFCC Order properly.

Please also check the **Tax Class** of each Global-e Shipping Method, it should be either Standard or any of your custom Tax Class, but not "Undefined".

ID:*	GBLALE_STANDARD
Name:	GBLALE STANDARD
Description:	Global-e Standard Shipping Method
Enabled:	☒
Default:	☐
Based On: *	-None- ▼
Tax Class:	Standard ▼
Currency	US Dollar (USD) ▼

Configuration

Site Preferences

Supposedly you've obtained already all Merchant details (i.e. Merchant ID, Merchant GUID, etc.) from your Global-e Project/Account manager. If not - please contact your Global-e manager.

Then please set mandatory Site Preferences in the GLOBALE preference group (all the values should be replaced, according to the Merchant Account details provided by your Global-e Project/Account manager):

Name	Value	Default Value
Global-e Enabled	Yes ▼ Specifies if Global-e integration is enabled	No
Global-e Client JS SDK Base URL*	Global-e Staging (https://www2.bglobale.cor ▼ The Base URL for Global-e Client JS SDK	Global-e Staging
Client JS SDK Source (/SOURCE)*	Global-e JS SDK Source (/scripts/merchants/t ▼ The Source for Global-e Client JS SDK	Global-e JS SDK Source
Global-e API URL*	Global-e Staging (https://connect2.bglobale. ▼ The base URL for Global-e API	Global-e Staging

Client JS Merchant ID*

\$

The Merchant Id that is used to load the welc...

Merchant GUID*

e03

Unique identifier of the Merchant on Global-e

Also please set the proper image view type in the GLOBALE-PRODUCT Site Preference group:

Product Image ViewType

large

The ViewType of the image that will be sent to...

The rest of the Site Preferences are not mandatory but are highly recommended to check.
More detailed information about site preferences with descriptions and configuration examples can be found in a dedicated document with a complete list of metadata(that document exists in "documentation" folder in the repository with Global-e cartridges).

SFCC Global-e Custom Site Preferences OCAPI Configuration

OCAPI Versaion and OCAPI Client ID are mandatory. The OCAPI version should be specified using a different format comparing to the system OCAPI configuration, e.g. for the version "21.3" the value should be "v21_3".

Merchant Tools / Site Preferences / Custom Site Preference Groups /

Global OCAPI Settings

Cancel Apply to Other Sites Save

Instance Type
Sandbox

Search by ID 1-3 of 3

Name	Value	Default Value
OCAPI Domain		
(geOCAPIDomain) (String) OCAPI Domain	OCAPI Domain	Edit Across Sites
OCAPI Version		
(geOCAPIVersion) (String) OCAPI Version	v21_3	Edit Across Sites
OCAPI ClientId		
(geOCAPIClientId) OCAPI ClientId	OCAPI ClientId	Edit Across Sites

SFCC OCAPI Configuration

```

1  {
2    "_v" : "21.3",
3    "clients":
4    [
5      {
6        "client_id": "*****",
7        "resources":
8        [
9          {
10         "resource_id": "/customers/auth",
11         "methods": ["post"],
12         "read_attributes": "(**)",
13         "write_attributes": "(**)"
14       },
15       {
16         "resource_id": "/sessions",
17         "methods": ["post"],
18         "read_attributes": "(**)",
19         "write_attributes": "(**)"
20       },
21       {
22         "resource_id": "/baskets/*",
23         "methods": ["patch", "delete"],
24         "read_attributes": "(**)",
25         "write_attributes": "(**)"
26       },
27       {
28         "resource_id": "/orders",
29         "methods": ["post"],
30         "read_attributes": "(**)",
31         "write_attributes": "(**)"
32       }
33     ]
34   }
35 ]
36 }
```

Setting Pipeline URLs mapping

Go to *Business Manager > Site > Merchant Tools > Site URLs > URL Rules > Pipeline URLs* (tab) and set the following Pipeline aliases:

Alias	Pipeline
-------	----------

Scheduled Jobs

After you've imported Global-e Jobs, you have to assign all of them to your Global-e operated Sites, which are supposed to be used with Global-e Checkout.

Run the 'GlobeleSettings' Job manually to pull all configuration data from Global-e and store it locally to GLOBALE_* Custom Objects.

On your Production, GlobeleSettings Job will be running on a scheduled basis, which is 2 AM UTC.

All other Global-e jobs should be scheduled on a regular basis

- for 'GlobeleSettings', 'GlobeleCatalogFeed', 'GlobeleRestrictedItemsFeed' - every day by default

- for 'GlobeleProducts', 'GlobeleOrderNotifications' - every 15 minutes by default

if needed, otherwise either disable them or remove them:

Administration / Operations /

Jobs 

☐	ID	Status	Last Run
☐	GlobeleCatalogFeed	-	
☐	GlobeleOrderNotifications	-	
☐	GlobeleProducts	-	
☐	GlobeleSettings	-	

Initialization

Global-e initialization is handled in the `int_globale/cartridge/scripts/globale/globaleInit.js` file, for any storefront call. Global-e will skip the initialization if Global-e is disabled in Site Preferences or country and currency are not changed since the last call or the client IP address is one of the whitelisted IPs.

Hooks

Each Global-e extension cartridge has its own hooks.

SiteGenesis

`int_globale_sitegenesis/package.json`
`int_globale_sitegenesis/cartridge/scripts/hooks.json`

Hook Name	Hook Script	Description
<code>dw.system.request.onRequest</code>	<code>int_globale/cartridge/scripts/hooks/request/OnRequest.js</code>	Performs Main Global-e Initialization on every storefront request
<code>dw.ocapi.shop.basket.calculate</code>	<code>int_globale_sitegenesis/cartridge/scripts/cart/calculate.js</code>	Performs Cart/Basket prices recalculation (for older SiteGenesis)
<code>dw.order.calculate</code>	<code>int_globale_sitegenesis/cartridge/scripts/cart/calculate.js</code>	Performs Cart/Basket prices recalculation (when it's called from <code>int_globale</code>)
<code>dw.order.createOrderNo</code>	<code>int_globale_sitegenesis/cartridge/scripts/hooks/order.js</code>	Returns SFCC order number to be used during order creation.
<code>dw.ocapi.shop.basket.beforePATCH</code>	<code>int_globale_sitegenesis/cartridge/scripts/hooks/basket.js</code>	The function is called before updating of the basket.
<code>dw.ocapi.shop.basket.coupon.beforePOST</code>	<code>int_globale_sitegenesis/cartridge/scripts/hooks/basket/coupon.js</code>	The function is called before adding a coupon to a basket.
<code>dw.ocapi.shop.basket.coupon.beforeDELETE</code>	<code>int_globale_sitegenesis/cartridge/scripts/hooks/basket/coupon.js</code>	The function is called before removing a coupon from a basket.
<code>dw.ocapi.shop.order.beforePOST</code>	<code>int_globale_sitegenesis/cartridge/scripts/hooks/order.js</code>	The function is called before an order is created for the basket.
<code>dw.ocapi.shop.order.afterPOST</code>	<code>int_globale_sitegenesis/cartridge/scripts/hooks/order.js</code>	The function is called after an order was created from the basket.

SFRA

`int_globale_sfra/package.json`
`int_globale_sfra/hooks.json`

Hook Name	Hook Script	Description
<code>dw.system.request.onRequest</code>	<code>int_globale_sfra/cartridge/scripts/hooks/request/OnRequest</code>	Performs Main Global-e Initialization on every storefront request

dw.order.calculate	int_globale_sfra/cartridge/scripts/hooks/cart/calculate.js	Performs Cart/Basket prices recalculation
dw.order.createOrderNo	int_globale_sfra/cartridge/scripts/hooks/order.js	Returns SFCC order number to be used during order creation.
dw.ocapi.shop.basket.beforePATCH	int_globale_sfra/cartridge/scripts/hooks/basket.js	The function is called before updating of the basket.
dw.ocapi.shop.basket.coupon.beforePOST	int_globale_sfra/cartridge/scripts/hooks/basket/coupon.js	The function is called before adding a coupon to a basket.
dw.ocapi.shop.basket.coupon.beforeDELETE	int_globale_sfra/cartridge/scripts/hooks/basket/coupon.js	The function is called before removing a coupon from a basket.
dw.ocapi.shop.order.beforePOST	int_globale_sfra/cartridge/scripts/hooks/order.js	The function is called before an order is created for the basket.
dw.ocapi.shop.order.afterPOST	int_globale_sfra/cartridge/scripts/hooks/order.js	The function is called after an order was created from the basket.

Custom Hooks

globale.onInit

Description

The custom hook is invoked after the integration initialization (on the first customer visit or when the country/currency is changed). OOTB it's used to recalculate basket prices for the SGJC architecture.

Custom hooks handler arguments

No arguments are submitted to the hook handler.

Returns

Void. The hook handler result is not used further.

globale.getGuestEmail

Description

The custom hook is invoked before the SendCart request and should be used to pre-populate the customer's email field in the Global-e checkout (guest checkout scenario). OOTB the custom hook handler returns null.

Custom hooks handler arguments

No arguments are submitted to the hook handler.

Returns

The hook handler must return the guest customer email address if it was filled in by the customer before proceeding to the Global-e checkout or null.

globale.getCustomerAddresses

Description

The custom hook is invoked before the SendCart request and should be used to return all the customer's addresses (logged-in checkout scenario). OOTB the custom hook handler returns all the addresses that are stored in the SFCC customer's address book.

Custom hooks handler arguments

Argument Name	Argument Type	Description
basket	dw.order.Basket	The customer's basket

Returns

The hook handler must return null or the array of all customer's addresses.

globale.getUrlParameters

Description

The custom hook is invoked before the SendCart request and could be used to extend the Global-e UrlParameters SendCart payload property.

It might be helpful in case some additional basket-related data should be restored if Global-e invokes the fallback order creation scenario (an order is created from a new basket and all the original basket custom attributes are lost in this case).

OOTB the custom hook handler returns an empty object.

Custom hooks handler arguments

Argument Name	Argument Type	Description
basket	dw.order.Basket	The customer's basket

Returns

The hook handler must return null or the object (e.g., { key1: "value1", key2: "value2" }).

globale.getPLICustomMetadata

Description

The custom hook is invoked before the SendCart request for each product line item in the basket and could be used to extend the Global-e ProductLineItem Metadata property in the SendCart payload.

It might be helpful in case some additional product line item-related data should be restored if Global-e invokes the fallback order creation scenario (an order is created from a new basket and all the original product line item custom attributes are lost in this case) or in the case if it's required to pass additional metadata (flash sale products, etc.).

OOTB the custom hook handler returns an empty object.

Custom hooks handler arguments

Argument Name	Argument Type	Description
productLineItem	dw.order.ProductLineItem	Product line item

Returns

The hook handler must return null or the object (e.g., { key1: "value1", key2: "value2" }).

globale.getPliEstimatedDeliveryDate

Description

The custom hook is invoked before the SendCart request for each product line item in the basket and could be used to return the estimated delivery date value.

Allows displaying a new template for delivery date estimation (preorder/backorder products). The notification will be displayed next to the product, like product attributes.

OOTB the custom hook handler returns null.

Custom hooks handler arguments

Argument Name	Argument Type	Description
productLineItem	dw.order.ProductLineItem	Product line item

Returns

The hook handler must return null or the string value using the format "YYYY-MM-DD" (e.g., 2022-05-15).

globale.getPliIsBackOrdered

Description

The custom hook is invoked before the SendCart request for each product line item in the basket and could be used to return the IsBackOrdered value.

OOTB the custom hook handler returns false.

Custom hooks handler arguments

Argument Name	Argument Type	Description
productLineItem	dw.order.ProductLineItem	Product line item

Returns

The hook handler must return boolean value.

globale.getCookieConsent

Description

The custom hook is invoked before the SendCart request and could be used to return the customer cookie consent.

OOTB the custom hook handler returns 1 or 0 depending on if a customer has accepted the cookies consent.

Returns

The hook handler must return integer value. The possible values are:

- 0 - No consent
- 1 - Consent to all cookies
- 2 - Consent to the essential cookies only

globale.getAllowMailsFromMerchant

Description

The custom hook is invoked before the SendCart request and could be used to return the AllowMailsFromMerchant value. OOTB the custom hook handler returns false.

Returns

The hook handler must return boolean value.

globale.getAllowDirectCommunicationFromMerchant

Description

The custom hook is invoked before the SendCart request and could be used to return the AllowDirectCommunicationFromMerchant value. OOTB the custom hook handler returns false.

Returns

The hook handler must return boolean value.

globale.beforeSendCartRequest

Description

The custom hook is invoked before the SendCart request.

OOTB the custom hook handler is not defined.

Note: be careful with the hook handler since it allows modifying the payload object before the SendCart request which might lead to the SendCart API error (in this case the Global-e checkout is not loaded).

Custom hooks handler arguments

Argument Name	Argument Type	Description
basket	dw.order.Basket	The customer's basket
payload	Object	SendCart payload object

Returns

Void.

globale.getPliHubCode

Description

The custom hook is invoked for setting hub code on the product level of the SendCart request body.

OOTB the custom hook handler is not defined.

Custom hooks handler arguments

Argument Name	Argument Type	Description
productLineItem	dw.order.ProductLineItem	Product line item

Returns

The hook handler must return string value.

globale.validateCart

Description

The custom hook is invoked on the ValidateCart request that is sent by Global-e once a customer clicks the “Place Order” CTA to check if all the products are still in stock.

OOTB the custom hook handler logic can check product availability using the SFCC inventory lists. Depending on the configuration can check the product availability using ProductMgr or in the OCAPI basket context.

Custom hooks handler arguments

Argument Name	Argument Type	Description
payload	Object	ValidateCart payload object

Returns

The hook handler must return the object that contains these properties: errorCode, errorMessage, amendedProducts, reservationRequestId (e.g., { errorCode: null, errorMessage: null, amendedProducts: [], reservationRequestId: null }).

globale.onBeforeApplyCouponCode

Description

The custom hook is invoked before the Apply Coupon Code SFCC OCAPI request (the feature requires additional configuration on both Global-e and SFCC sides).

OOTB the custom hook handler is not implemented. Could be used to add additional payload data or the request headers.

Custom hooks handler arguments

Argument Name	Argument Type	Description
service	dw.svc.Service	SFCC service
payload	Object	The Apply Coupon Code SFCC OCAPI request payload

Returns

Void.

globale.onBeforeRemoveCouponCode

Description

The custom hook is invoked before the Remove Coupon Code SFCC OCAPI request (the feature requires additional configuration on both Global-e and SFCC sides).

OOTB the custom hook handler is not implemented. Could be used to add additional payload data or the request headers.

Custom hooks handler arguments

Argument Name	Argument Type	Description
---------------	---------------	-------------

service	dw.svc.Service	SFCC service
payload	Object	The Remove Coupon Code SFCC OCAPI request payload

Returns

Void.

globale.onGenerateBasketFromPayload

Description

The custom hook is invoked right after the basket is recreated on the SFCC side.
OOTB the custom hook handler is not implemented.

Custom hooks handler arguments

Argument Name	Argument Type	Description
order	dw.order.Order	SFCC Order
payload	Object	The request payload (could have different structure depending on if it's the default or fallback order creation scenario)

Returns

Void.

globale.onAfterCreateOrder

Description

The custom hook is invoked right after an order is created on the SFCC side (could be triggered not only on the OrderClientCreate request but also on the SendOrderToMerchant request if the fallback order creation scenario is applied).
OOTB the custom hook handler is not implemented.

Custom hooks handler arguments

Argument Name	Argument Type	Description
order	dw.order.Order	SFCC Order
payload	Object	The request payload (could have different structure depending on if it's the default or fallback order creation scenario)

Returns

Void.

globale.onAfterCreateMixedOrder

Description

The custom hook is invoked only if "Mixed Orders" feature is used and right after processing on Global-e "Order Create" request on the SFCC side

OOTB the custom hook handler is not implemented.

Custom hooks handler arguments

Argument Name	Argument Type	Description
isBasketExist	Boolean	The flag which indicates the state of SFCC basket.
payload	Object	The request payload (could have different structure depending on if it's the default or fallback order creation scenario)

Returns

Void.

globale.onBeforePlaceOrder

Description

The custom hook is invoked right before an order is placed on the SFCC side.
OOTB the custom hook handler updates the customer cookie consent information.

Custom hooks handler arguments

Argument Name	Argument Type	Description
order	dw.order.Order	SFCC Order
payload	Object	The request payload (could have different structure depending on if it's the default or fallback order creation scenario)

Returns

Void.

globale.onAfterPlaceOrder

Description

The custom hook is invoked right after an order is placed on the SFCC side.
OOTB the custom hook handler updates the customer cookie consent information.

Custom hooks handler arguments

Argument Name	Argument Type	Description
order	dw.order.Order	SFCC Order
payload	Object	The request payload (could have different structure depending on if it's the default or fallback order creation scenario)

Returns

Void.

globale.onAfterUpdateOrder

Description

The custom hook is invoked right after an order is updated on the SFCC side (SendOrderToMerchant request).
OOTB the custom hook handler is not implemented.

Custom hooks handler arguments

Argument Name	Argument Type	Description
order	dw.order.Order	SFCC Order
payload	Object	The request payload

Returns

Void.

globale.onAfterUpdateMixedOrders

Description

The custom hook is invoked right after mixed orders are updated on the SFCC side (SendOrderToMerchant request).
OOTB the custom hook handler is not implemented.

Custom hooks handler arguments

Argument Name	Argument Type	Description
orders	dw.util.ArrayList	Array of orders(main and sub orders)
payload	Object	The request payload

Returns

Void.

globale.onAfterPaymentUpdate

Description

The custom hook is invoked right after an order payment status is updated on the SFCC side (PaymentNotification request).
OOTB the custom hook handler is not implemented.

Custom hooks handler arguments

Argument Name	Argument Type	Description
order	dw.order.Order	SFCC Order
payload	Object	The request payload

Returns

Void.

globale.onAfterPaymentUpdateMixedOrders

Description

The custom hook is invoked right after mixed orders payment statuses are updated on the SFCC side (PaymentNotification request). OOTB the custom hook handler is not implemented.

Custom hooks handler arguments

Argument Name	Argument Type	Description
orders	dw.util.ArrayList	Array of orders(main and sub orders)
payload	Object	The request payload

Returns

Void.

globale.onAfterStatusUpdate

Description

The custom hook is invoked right after the order status is updated on the SFCC side (OrderStatusUpdate request). OOTB the custom hook handler is not implemented. Could be used to apply any required custom logic when Global-e sends order status update request.

Custom hooks handler arguments

Argument Name	Argument Type	Description
order	dw.order.Order	SFCC Order
payload	Object	The request payload

Returns

Void.

globale.onAfterStatusUpdateMixedOrders

Description

The custom hook is invoked right after the mixed orders statuses are updated on the SFCC side (OrderStatusUpdate request). OOTB the custom hook handler is not implemented. Could be used to apply any required custom logic when Global-e sends order status update request.

Custom hooks handler arguments

Argument Name	Argument Type	Description
---------------	---------------	-------------

orders	dw.util.ArrayLi st	Array of orders(main and sub orders)
payload	Object	The request payload

Returns

Void.

globale.onAfterShippingUpdate

Description

The custom hook is invoked right after the order shipping information is updated on the SFCC side (OrderShippingInfoUpdate request). OOTB the custom hook handler is not implemented. Could be used to apply any required custom logic when Global-e sends order shipping information update request.

Custom hooks handler arguments

Argument Name	Argument Type	Description
order	dw.order.Orde r	SFCC Order
payload	Object	The request payload

Returns

Void.

globale.onAfterRefund

Description

The custom hook is invoked right after the order refund information is updated on the SFCC side (OrderRefund request). OOTB the custom hook handler is not implemented. Could be used to apply any required custom logic when Global-e sends an order refund request.

Custom hooks handler arguments

Argument Name	Argument Type	Description
order	dw.order.Orde r	SFCC Order
payload	Object	The request payload

Returns

Void.

globale.onAfterGeRmaUpdate

Description

The custom hook is invoked right after the order RMA information is updated on the SFCC side (RMA request). OOTB the custom hook handler is not implemented. Could be used to apply any required custom logic when Global-e sends an order RMA request.

Custom hooks handler arguments

Argument Name	Argument Type	Description
order	dw.order.Order	SFCC Order
payload	Object	The request payload

Returns

Void.

globale.customerVerification

Description

The custom hook is invoked once Global-e sends a customer verification request (additional configuration is required on the Global-e side for this feature).

OOTB the custom hook handler checks if a customer has the SFCC account.

Custom hooks handler arguments

Argument Name	Argument Type	Description
payload	Object	The request payload

Returns

Returns customer verification status (e.g., { success: true, registered: false, errorCode: null, eventName: 'status' }).

globale.customerRegistration

Description

The custom hook is invoked once Global-e sends a customer registration request (additional configuration is required on the Global-e side for this feature).

OOTB the custom hook handler creates the SFCC account, assigns the last order to the customer and creates addresses in the SFCC address book.

Custom hooks handler arguments

Argument Name	Argument Type	Description
payload	Object	The request payload

Returns

Returns customer registration status (e.g., { success: true, registered: true, errorCode: null, eventName: 'register' }).

globale.outboundOrderStatusUpdate

Description

The custom hook is not invoked OOTB, instead should be used to initiate OrderStatusUpdate notification from SFCC to Global-e (if the feature is in the integration scope).

OOTB the custom hook handler creates notification custom object that is processes by the GlobaleOrderNotifications job further.

Custom hooks handler arguments

Argument Name	Argument Type	Description
orderId	String	The notification order number
payload	Object	The notification payload

Returns

Returns the notification creation status (dw.system.Status).

globale.outboundOrderDispatchUpdate

Description

The custom hook is not invoked OOTB, instead should be used to initiate OrderDispatchUpdate notification from SFCC to Global-e (if the feature is in the integration scope).

OOTB the custom hook handler creates notification custom object that is processes by the GlobaleOrderNotifications job further.

Custom hooks handler arguments

Argument Name	Argument Type	Description
orderId	String	The notification order number
payload	Object	The notification payload

Returns

Returns the notification creation status (dw.system.Status).

globale.outboundOrderRefundUpdate

Description

The custom hook is not invoked OOTB, instead should be used to initiate OrderRefundUpdate notification from SFCC to Global-e (if the feature is in the integration scope).

OOTB the custom hook handler creates notification custom object that is processes by the GlobaleOrderNotifications job further.

Custom hooks handler arguments

Argument Name	Argument Type	Description
orderId	String	The notification order number
payload	Object	The notification payload

Returns

Returns the notification creation status (dw.system.Status).

globale.outboundOrderRMAUpdate

Description

The custom hook is not invoked OOTB, instead should be used to initiate OrderRMAUpdate notification from SFCC to Global-e (if the feature is in the integration scope).

OOTB the custom hook handler creates notification custom object that is processes by the GlobaleOrderNotifications job further.

Custom hooks handler arguments

Argument Name	Argument Type	Description
orderId	String	The notification order number
payload	Object	The notification payload

Returns

Returns the notification creation status (dw.system.Status).

globale.getProductInventoryListId

Description

The custom hook is not invoked if enabled site preference "Use Custom Product Inventory Lists"

OOTB the custom hook handler returns null value.

Custom hooks handler arguments

Argument Name	Argument Type	Description
product	dw.catalog.Product	SFCC product

Returns

Returns the ID of the inventory list or null.

globale.getProductImageUrl

Description

The custom hook is invoked when needs to get the product's image URL(before the "SendCart" request and on run of SFCC job "GlobaleCatalogFeed")

OOTB the custom hook handler returns a null value.

Custom hooks handler arguments

Argument Name	Argument Type	Description
product	dw.catalog.Product	SFCC product

Returns

Returns the URL of the product or null.

globale.getHubId

Description

The custom hook is invoked before the SendCart request and could be used to return the HubId value.
OOTB the custom hook handler returns null or Global-e Hub ID(if the proper setting is enabled on the Global-e side).

Returns

The hook handler must return boolean value.

globale.onAfterVoidReservation

Description

The custom hook is invoked when Global-e VoidReservation notification is received on the platform side.
OOTB there is no custom hook handler.

Returns

The hook handler must return boolean value.

Client JS SDK

On all pages of your storefront, it's mandatory to load Global-e Client JS SDK.
The Global-e Client JS SDK is needed for showing the Welcome pop-up, Global-e standard (default) Country Switcher and Global-e Checkout, but it also gathers some important analytics data for Global-e.

Here is the list of URL endpoints where the Global-e Client JS SDK will be loaded from, depending on which Global-e instance is connected to the Merchant environment:

Global-e Instance	SFCC Instance	Global-e hostname	Global-e Client JS SDK URI
Staging	Sandbox, Development, Staging	https://www2.bglobale.com	/merchant/clientsdk/{merchantId}
Staging with CDN	-	https://stgservices.bglobale.com	
Production	Production	https://web.global-e.com	
Production with CDN	-	https://webservices.global-e.com	

Additionally to the full URL, the Global-e Client SDK API version parameter will be added (stored in GLOBALE_APP_SETTINGS, Custom Object, "Web Client Version" attribute).

Any Global-e function, which is defined in Client JS SDK can be called (executed) only when the Client JS SDK itself is loaded and the following JavaScript functions are triggered:

Global-e Client JS SDK Initialization

```
1 GlobalE.SetMerchantParameters({client_settings}); // JSON object
2 GlobalE.ScriptsURL("Global-e_client_js_sdk_hostname"); // for ex. https://www2.bglobale.com
3 GlobalE.SetCookieDomain("site_cookie_domain"); // for ex. www.site.com
```

More details about Global-e Client JS SDK, available commands and functions are in [Global-e Client SDK online document](#).

Welcome pop up

Standard Global-e welcome pop-up can be initialized by executing the JavaScript function:

Global-e Welcome pop up

```
1 GlobalE.LoadWelcome("US", "en-US", "USD");
```

It is triggered in int_globale_{architecture}/cartridge/client/default/js/geScriptLoader.js file.

Country Switcher

Standard Global-e Country Switcher can be initialized by executing the JavaScript function:

Global-e Country Switcher

```
1 GlobalE.LoadShippingSwitcher("US", "en-US", "USD", false);
```

It is triggered in `int_globale_{architecture}/cartridge/client/default/js/geScriptLoader.js` file.

Global-e Checkout

Global-e Checkout is loading in an `iframe` within standard SFCC container (by default `int_globale_{architecture}/cartridge/templates/default/globale/checkout/iframe.isml`):

Global-e Checkout

```
1 GlobalE.Checkout("cart_token", "id_wrapper_tag");
```

Global-e Welcome pop up

The Welcome pop-up for international customers can be integrated with two ways:

- **Standard** - Global-e Client JS SDK will show the welcome pop-up (enabled by default), based on the configuration made on the Global-e side, only for Global-e operated countries.

The layout, look & feel and other elements of the Standard Global-e welcome pop-up is configured on the Global-e side and will be applied on Merchant's storefront by Global-e Client JS SDK automatically.

- **Custom** - You are fully free to implement your own custom Welcome pop-up using standard SFCC content slots/assets, templates and any other components.

The Standard Global-e welcome pop-up should be disabled on the Global-e side.

Global-e Country Switcher

Overview

If you want to use the Standard Global-e Country Switcher (enabled by default) - you don't have to do anything on your platform, it is already available in our cartridge.

You need only to provide the requirements and design of your Country Switcher to your Global-e Project/Account manager and it will be configured on the Global-e side only.

Once the predefined event (by default defined in `int_globale_{architecture}/cartridge/client/default/js/geScriptLoader.js`) is triggered on your storefront - Global-e Client JS SDK will show the Country Switcher pop-up.

Once the customer has selected Country/Currency and clicked on Save/Submit button - the Country Switcher pop up will be closed and the page will be refreshed staying on the same URL or redirecting to the predefined Site URL to the selected Country (if it's configured so). You can change the look & feel of the Standard Global-e Country Switcher by providing your design (HTML CSS and JS) to your Global-e Account/Project Manager.

The global-e country switcher is very flexible and can be adapted according to your needs.

Global-e cartridges allow:

1. **Display Global-e country switcher on operated and non operated by Globale SFCC sites.**

On the non-operated SFCC sites is possible to display the Global-e country switcher just by adding '`int_globale_sfra_popups`'/`int_globale_sitegenesis_popups`' that contain a simple version of Global-e integration and is used only for displaying the country switcher.

2. **Redirect to the same page in the scope of one site or across different SFCC sites.**

In the current context 'redirect' means in case of the changing country/language/currency.

The redirect works properly only if at the end of the site's path is existed action/page location (for example homepage, cartpage, etc.)

3. **Define allowed/disallowed countries for the site.**

Global-e country switcher allows defining allowed/disallowed countries for the site.

For disallowed countries as a fallback will be preselected site default country.

4. **Define allowed/disallowed countries for the locale.**

Global-e country switcher allows defining allowed/disallowed countries for the locale.

For disallowed countries as a fallback will be preselected site default country.

5. **Define only one allowed country for the locale.**

Makes sense to use only if each country has its own locale.

6. **Use different domains across SFCC sites and set the correct country during redirection.**

7. **Use language selector for countries.**

Global-e country switcher allows using multiple languages in the scope of one country.

8. **Set the right language of the welcome popup depending on the selected language in the selector.**

Installation of Global-e country switcher on non operated by Globale SFCC sites

The installation of the Global-e Salesforce B2C Commerce cartridge(s) should be as simple as just upload Global-e cartridges, adding them to the cartridge path of the Site, import metadata, set the configuration of site preferences and run `GlobaleSettings` Job.

- **Upload Global-e Core cartridge**

`int_globale` and the extension cartridge, according to the architecture you are using on your storefront (`int_globale_sfra_popups` for SFRA or `int_globale_sitegenesis_popups` for SiteGenesis), to your Salesforce B2C Commerce Digital with using either the following `npm` command in terminal:

for SiteGenesis extension cartridge only (which will actually upload `int_globale` and `int_globale_sitegenesis_popups` cartridges)

```
1 npm run uploadCartridge:sitegenesis:popups
```

for SFRA extension cartridge only (which will actually upload **int_globale** and **int_globale_sfra_popups** cartridges)

```
1 npm run uploadCartridge:sfra:popups
```

or with using your Studio (eclipse).

Please note, before you'll upload the cartridges to your Salesforce B2C Commerce Digital you might need to build your CSS and JS files.

- **Add Cartridges**

Administration > Sites > Manage Sites > (Your Site) > [Settings Tab]

Please add Global-e cartridges as shown on the following screenshots.

SiteGenesis Pipelines or Controllers. Please add two Global-e cartridges before your brand cartridges (from left to right) - **int_globale_sitegenesis_popups** and **int_globale**.

SFRA. Please add two Global-e cartridges before app_storefront_base cartridge and after your brand cartridges (from left to right) - **int_globale_sfra_popups** and **int_globale**.

- **Metadata**

Please search the details of import metadata in this document.

Configuration Details

For activation, the Global-e country switcher on the site should be configured additional settings on the SFCC and Global-e sides

- Required Site preferences (`Marchant Tools > Site Preferences > GLOBALE`) that should be configured
 - 'Global-e Enabled' - should be enabled!;
 - 'Global-e API URL';
 - 'Client JS Merchant ID';
 - 'Merchant GUID';and all mandatory preferences that are not used but needed for saving changes.
- Shipping switcher Configuration - this configuration is added on the Global-e side. Please communicate with the Global-e team/developers and send them all the requirements you have regarding the behavior/view of the country switcher.
- Once all the configuration points above are ready, please run the job 'GlobaleSettings'.

The default implementation of the Global-e country switcher works out of the box with Global-e cartridges.

The selected country is determined and set in the SFCC backend, but also in the 'int_globale_{architecture}/cartridge/client/default/js/geScriptLoader.js' file there is a logic/function that shows the Global-e country switcher to the customer one time if the customer's geolocation country exists in the country list and is not equal to the selected country(then customer can switch to geolocation country).

Custom Country Switcher

Country list

The list of all available Countries for the Merchant can be obtained from GLOBALE_COUNTRIES Custom Object.

Each Global-e Country:

- is an instance of Country configured on the Global-e side, and stored into GLOBALE_COUNTRIES Custom Object by running scheduled GlobaleSettings Job
- has Name ("name" {string} custom attribute of Custom Object)
- has ISO2 Country Code ("code" {string} custom attribute of Custom Object)
- can be operated/non-operated by Global-e ("isOperatedByGlobalE" {boolean} custom attribute of Custom Object)
- has default ISO3 Currency Code ("defaultCurrencyCode" {string} custom attribute of Custom Object)
- can have a Site URL, where the customer should be redirected to if the customer selects this country ("siteUrl" {string|null} custom attribute of Custom Object)

Country Site redirect URL

The Site URL on the Global-e side for each operated or non-operated country (present in the Country Switcher) can be empty, set as a string (static URL) or special format, which should be used on the SFCC side for generating the real static URL.

If it's empty (or not set) - the customer will not be redirected to any custom Site URL, the page will be just refreshed and the customer will stay on the same page with the same URL parameters.

If it's set as a string (static URL) - it should contain http(s):// or www. in it, so the script in the int_globale cartridge will properly identify it. In this case, the customer will be redirected to the URL specified for this country.

If it's set in the special format "**action|SiteID|locale[|hostName|[URLParameters]]**" - the end Site URL should be first generated by Salesforce B2C Commerce Digital (by default in int_globale cartridge), returned to front-end and then used as the final Site redirect URL.

Here are the parameters of the special Site URL format:

- **action** - standard SFCC action (i.e. "Home-Show")
- **SiteID** (optional) - standard SFCC Site ID (i.e. "SiteGenesis"). If present - will be used to replace the Site ID in the URL.
- **locale** - standard SFCC request locale (i.e. "en_US")
- **hostName** (optional) - the host which is different from the main host of the current storefront. Must be defined properly in SFCC BM for any available Site, otherwise, it won't work. If present - will be used to replace the current storefront host in the URL.
- **URLParameters** (optional) - any additional URL parameters denoted by vertical line ("|") which should be passed to the end Site URL, in format parameter1=value1|parameter2=value2|...|parameterN=valueN. If present - will be added as additional URL parameters to the final Site redirect URL.

For example, the following Site URL (configured on the Global-e side for selected Country) "Home-Show|RefArch|en_US|demo.merchant.com|source=12345678" will be parsed and generated to the "https://demo.merchant.com/s/SiteGenesis/home?source=12345678" final Site redirect URL.

Currency list

The list of all supported by Global-e Currencies can be obtained from GLOBALE_CURRENCIES Custom Object.

Each Global-e Currency:

- is an instance of Currency configured on the Global-e side, and stored into GLOBALE_CURRENCIES Custom Object by running scheduled GlobaleSettings Job
- has Name ("name" {string} custom attribute of Custom Object)
- has ISO3 Currency Code ("code" {string} custom attribute of Custom Object)
- has Currency Symbol ("symbol" {string} custom attribute of Custom Object)

- has Max Decimal Places ("maxDecimalPlaces" {int} custom attribute of Custom Object)

Currency Conversion within the content area



This document describes the feature which allows converting the price from merchant to end customer currencies on the Storefront.

If you have pricing shown within the body of content asset, slot, promotion callout message, etc/ and need to have them converted for Global-e operated countries, use the following syntax to specify the pricing amount in your HTML content.

- 'data-ge-convert-price' - is required to add inside of processed HTML tag.
- 'data-original-price' - is required for currency/price conversion of value in the original currency and can be used with any of the HTML tags

Currency conversion for amount

```
1 <span data-ge-convert-price data-original-price="300">$300</span>
```

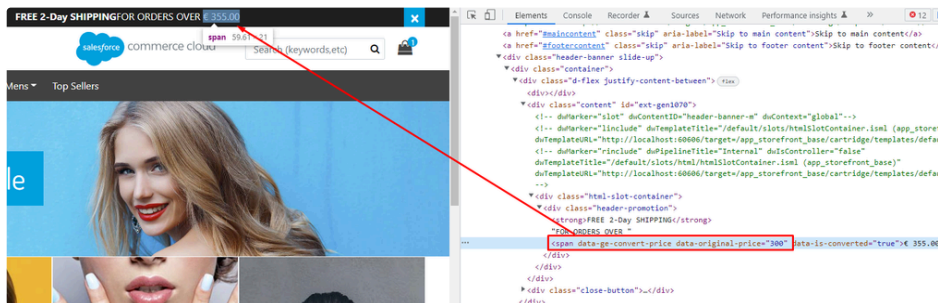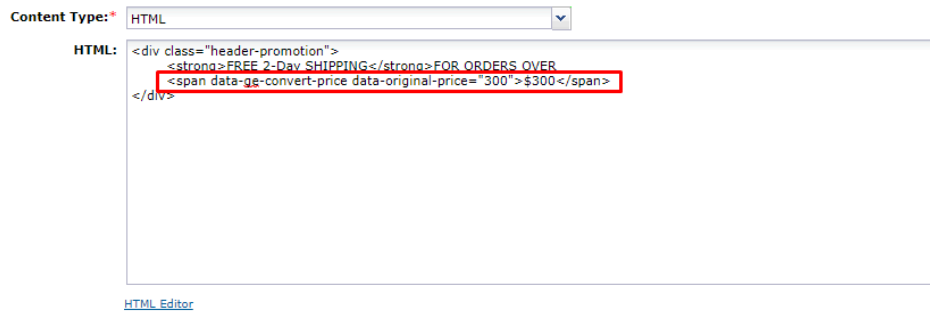



- 'data-is-discount' - is optional for currency/price conversion. If the attribute is set to true, the conversion will not take the pricing coefficient and rounding into account.

For example:

Currency conversion for discount amount

```
1 <span data-ge-convert-price data-original-price="300" data-is-discount="true">$300</span>
```


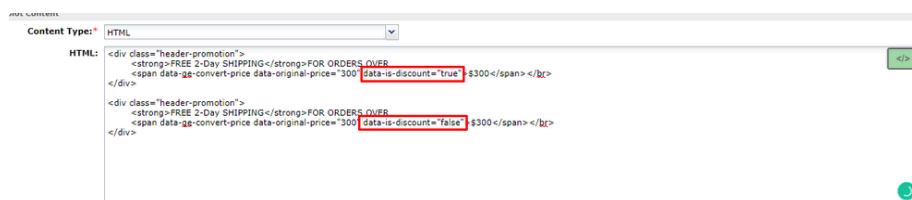


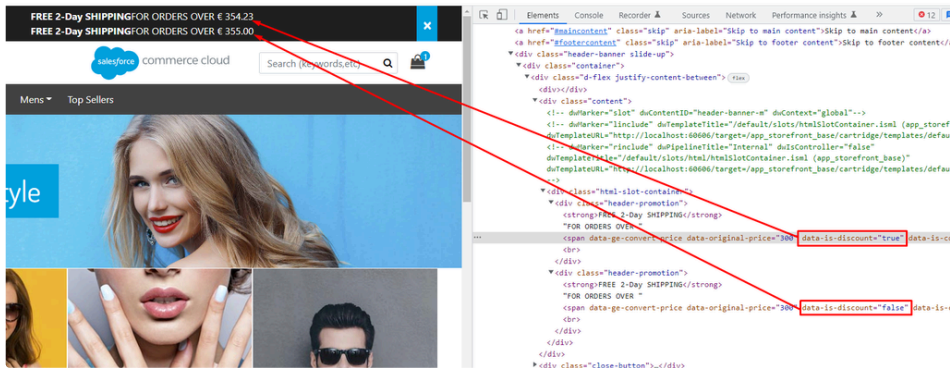

- 'data-product-id' - is required for currency/price conversion of product's price. If the attribute contains a value, it means that the converted price is related to the product and to the price should be applied to tax rates, product coefficients, etc.
- !Recommend doing price conversion for products on the client-side only in some really specific cases. By default should be used backend conversion.

For example:

```
1 <span data-ge-convert-price data-product-id='793775064963M'></span>
```

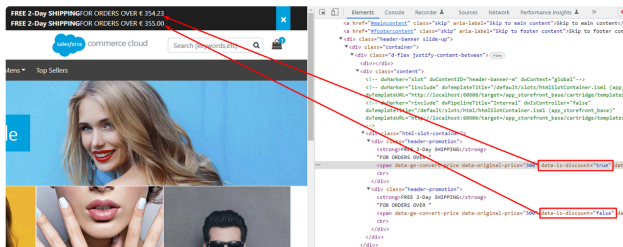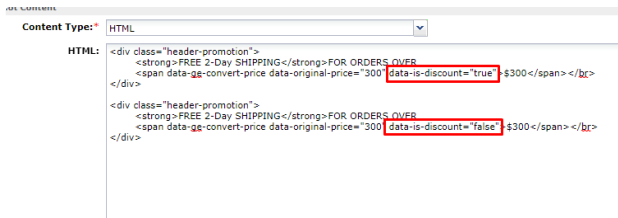

Summary

The feature described in this document allows doing price conversion on the client side from the original currency to selected/end customer currency.

Possible to convert price value OR show product price in selected/end customer currency.

- if is needed to convert product price value then 'data-product-id' attribute should exist in HTML tag
- if is needed to convert price value then 'data-original-price' attribute should exist in HTML tag

If both data attributes('data-product-id' and 'data-original-price') exist in HTML tag than is taken into account only the value from 'data-product-id' and the value of 'data-original-price' is skipped.

Price Calculation

Global-e cartridges can calculate the end-customer price in several different ways. Here is about them.

What is List and Sale Price in terms of Salesforce B2C Commerce?

By default, SFCC can return only maximum **two price book prices** for the same product on Storefront, whether it's PLP, PDP or Cart page. If SFCC found **one price book**, active and assigned to the Site, which has valid product-price assignment (definition) - there will be **only one price** (Sale) rendered on storefront.

If SFCC found **two price books**, active and assigned to the Site, which have valid product-price assignments (definitions) - there will be **two prices** rendered on storefront:

List price (the highest) and **Sale price** (the lowest).

Additionally to this logic, SFCC can also find a **Promotional price** (if it can be determined/calculated on the current page).

If there is Promotional price and it is lower than current Sale price - then SFCC will render **always two prices**:

List price, which is current Sale price, and **Sale price**, which is Promotional price.

How we calculate International Price

The logic of calculating the price for selected Country and Currency is as following:

- Product Price
 - Dynamic Price
 - get the merchant Promotional price or price from the current, available, active and assigned to the Site price book(s)
 - apply Product TAX VAT Coefficients
 - multiply on end-customer Currency FX Rate
 - multiply on end-customer Product Class/Country Coefficient Rate
 - apply end-customer Rounding and Formatting
 - render the end-customer price
 - Fixed SFCC Price
 - get the SFCC fixed price from fixed price book(s) if configured and defined
 - render the price as is
 - if no fixed price found in fixed price book - go to Dynamic Price and calculate price dynamically
- Not Product Prices (like search refinement by price)
 - get the merchant price
 - multiply on end-customer Currency FX Rate
 - multiply on end-customer Country Coefficient Rate
 - apply end-customer Rounding and Formatting
 - render the end-customer price
- The Basket Prices
 - Global-e Cartridge will calculate the price for each Line Item in the Basket and reset it by using standard SFCC `LineItem.setPriceValue(...)` API method.
So all the rest calculations, like price adjustments, order total price, etc., will be done by SFCC engine (with minimum adjustments from Global-e Cartridge).
- The Order Prices (My Account / Order History)
 - All prices for International Order (including product line item, shipping, taxes & duties, order totals) will be calculated based on the values from custom attributes of the Order and it's Line Items.

- All prices for your domestic Order (non-international or not Global-e Order) will be retrieved and rendered in exactly the same way as before (without) Global-e cartridge.

Fixed Price

If the current shipping country is set as Fixed Price Country, **customer will not be able to change the currency** in the Country Switcher and the following logic for price rendering will be applied.

Fixed SFCC Price is the end-customer price which won't be converted dynamically but will be used AS IS from Salesforce B2C Commerce standard price books if it's configured so in Global-e Price book custom attributes ("**Global-e Fixed Pricebook**", "**Applicable To Countries**" and "**Applicable To Currencies**"). The Fixed Price Books exists and they have valid product price assignments (definitions). If there is only one Fixed Price in one of the Fixed Price Book (list or sale), or only one Fixed Price Book is configured (with valid product price assignment) - only one Fixed Price will be shown, even if there are two prices defined in the original/primary/default Merchant price books (list and sale).

Configuration example:

[Merchant Tools](#) > [Products and Catalogs](#) > [Price Books](#) > AUD-AU-fixed-list-prices - Attributes

General **Attributes** Site Assignments Price Definitions 

AUD-AU-fixed-list-prices

On this page you can edit the attributes of the price book. Fields with a red asterisk (*) are mandatory. Click **Apply** to save changes. Click **Reset** to revert you

Global-e

Global-e Not Applicable for Dynamic Countries: ☐

Global-e Base Price Book: ☐

Global-e Fixed Price Book: ☒

Applicable To Countries: [Add Another Value](#)

Applicable To Currencies: [Add Another Value](#)

Applicable to Merchant ID:

Global-e Cache Price Book: ☐

Global-e Cache Price Book Combinations:

[<< Back to List](#)

Fixed Price Books should not be assigned to the required site but should be active/enabled.

Depending on configuration on the Global-e side, if is selected Fixed Price country are possible next scenarios/handle ways.

Only fixed pricebooks are taken into account/processed

- the the prices are searched and taken only from Fixed price books for country.
- then if the price definition doesn't exist in Fixed price books then is displayed n/a(null) price on the storefront

The fixed and based pricebooks are taken into account/processed

- the prices are searched and taken from Fixed price books for the country.
- then if the price definition doesn't exist in Fixed price books then the prices are searched and taken from base price books (site assigned price books in merchant's currency) and doing Dynamic price conversion.
- then is displayed the converted price(which is generated based on the price definition of base price book) or n/a(null).

By default on the Global-e side is activated option - **Only fixed pricebooks are taken into account/processed**.

Please communicate with the Global-e team if should be used the option - **The fixed and based pricebooks are taken into account/processed** instead of default.

Examples of some use cases:

Case: One Fixed List Price, one Regular List Price

Description	Sample
-------------	--------

Given	Regular List Price Book has a valid product price assignment. Fixed Price Book is configured and it has valid product price assignment.	gbp-m-list-prices = £11.00 fixed-list-US-USD = \$14.44
Result	The Price (only one) will be used from Fixed List Price Book and rendered on the storefront Prices (list and sale)	\$14.44

Case

	Description	Sample
Given	Regular List and Sale Price Books have valid product price assignment. Fixed List Price Book is configured and it has valid product price assignment.	gbp-m-list-prices = £11.00, gbp-m-sale-prices = £10.00 fixed-list-US-USD = \$14.44
Result	The Price (only one) will be used from Fixed List Price Book and rendered on the storefront	\$14.44

Case: One Fixed Sale Price, two Regular Prices (list and sale)

	Description	Sample
Given	Regular List and Sale Price Books have valid product price assignment. Fixed Sale Price Book is configured and it has valid product price assignment.	gbp-m-list-prices = £11.00, gbp-m-sale-prices = £10.00 fixed-sale-US-USD = \$13.13
Result	The Price (only one) will be used from Fixed Sale Price Book and rendered on the storefront	\$13.13

Case: Two Fixed Prices (list and sale), one Regular List Price

	Description	Sample
Given	Regular List Price Book has a valid product price assignment. Fixed List and Sale Price Books are configured and they have valid product price assignments.	gbp-m-list-prices = £11.00 fixed-list-US-USD = \$14.44, fixed-sale-US-USD = \$13.13
Result	Two Fixed Prices (list and sale) will be used from Fixed List and Sale Price Books and rendered on the storefront	\$14.44 \$13.13

Case: Two Fixed Prices (list and sale), two Regular Prices (list and sale)

	Description	Sample
Given	Regular List and Sale Price Books have valid product price assignment.	gbp-m-list-prices = £11.00, gbp-m-sale-prices = £10.00


	Fixed List and Sale Price Books are configured and they have valid product price assignments.	fixed-list-US-USD = \$14.44, fixed-sale-US-USD = \$13.13
Result	Two Fixed Prices (list and sale) will be used from Fixed List and Sale Price Books and rendered on the storefront	\$14.44 \$13.13

Case: No Fixed Price, two Regular Prices (list and sale), with "Use Only Fixed Prices"

	Description	Sample
Given	Regular List and Sale Price Books have valid product price assignment. No Fixed List and no Fixed Sale Price Books are configured. "Use Only Fixed Prices" Global-e Site Preference is configured to "Yes"	gbp-m-list-prices = £11.00, gbp-m-sale-prices = £10.00 null, null "Yes"
Result	null will be rendered	null

Dynamic Price

If the current country is not Fixed Price country, or current Product does not have any Fixed Price defined in the Fixed Price books, the end-customer Global-e price will be calculated dynamically, according to this logic:

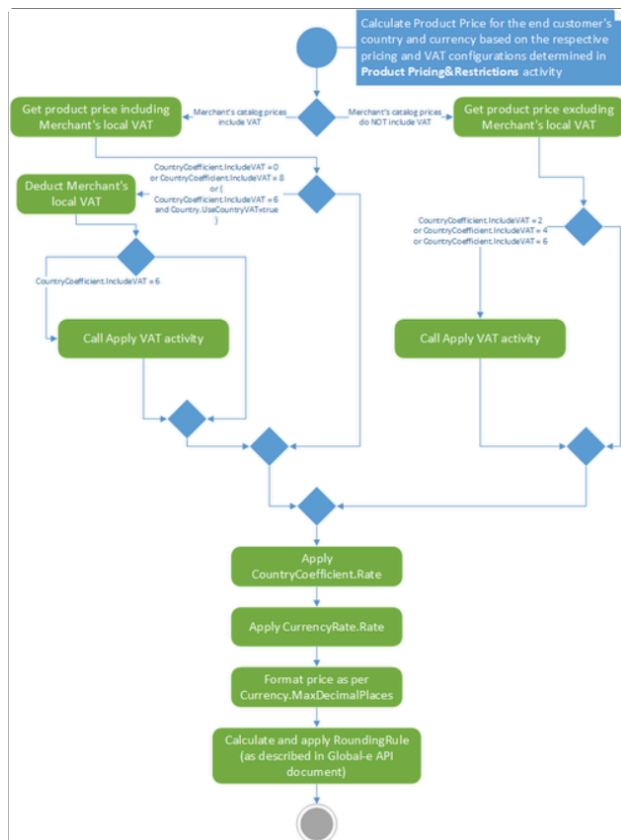

Price Rounding and Formatting

After the end-customer Price is calculated/converted, it can be rounded and formatted in accordance to the configuration of the end-customer Currency and current Locale (in Request).

The Price is formatting only for displaying it properly on Storefront and any View component, but not for internal (back-end) calculations (like for SendCart, etc.).

Examples:

Price (before rounding and formatting)	Max Decimal Places	Current Request (Customer's) Locale	Formatted Price	Comments
1234.45678	2	en_GB	£1,234.46	Price is rounded to 1234.46 and then formatted with using Global-e Currency (GBP) Symbol and current Customer's Locale (en_GB)
1234.45678	3	en_US	\$1,234.457	Price is rounded to 1234.457 and then formatted with using Global-e Currency (USD) Symbol and current Customer's Locale (en_US)
1234.45678	2	ru_RU	RUB1 234,46	Price is rounded to 1234.46 and then formatted with using Global-e Currency (RUB) Symbol and current Customer's Locale (ru_RU)
1234.45678	0	ja_JP	¥1,234	Price is rounded to 1234 and then formatted with using Global-e Currency (JPY) Symbol and current Customer's Locale (ja_JP)

Price Calculation on other pages

Price

☐ £0.00 - £20.00

☐ £20.00 - £50.00

☐ £50.00 - £100.00

☐ £100.00 - £500.00

Price

☐ \$0.00 - \$26.99
 ☐ \$26.99 - \$67.99
 ☐ \$67.99 - \$136.99
 ☐ \$136.99 - \$684.00

Like you see on these two screenshots (Price Refinement filter), the left one is in local (original) Merchant GBP Currency, the right one - is in Global-e end-customer USD Currency.

In this case, the values will be converted regardless of Product Class Coefficient Rate and Fixed Price country configuration, only Country coefficient Rate will be taken into account.

Hence, the real filtered products prices on PLP might be slightly higher or lower than it is selected in the Price filter.

For fixed countries/currencies separately should be configured price refinements levels and then they will be taken and shown on PLP (as they are), otherwise, price refinements block will not be shown if is selected fixed price country but were not configured price refinements levels for the currency of the selected country.

Price Book custom attributes configuration

Custom attribute	Description
Global-e Not Applicable for Dynamic Countries	In some cases, it's required to exclude some price books which are active and assigned to a site for Global-e customers. If the setting is enabled the price book is excluded from applicable price books (relevant only for dynamic price conversion).
Global-e Base Price Book	If a price book should be used as a base price book (assigned to a site and uses default merchant currency) for dynamic conversion and as a fixed price book for some countries this setting should be enabled.
Global-e Fixed Pricebook	Identifies if a price book should be used for fixed-price countries.
Applicable To Countries *	Identifies for which countries the price book is applicable (relevant for both dynamic and fixed price strategies).
Applicable To Currencies *	Identifies for which currencies the price book is applicable (relevant for both dynamic and fixed price strategies).
Global-e Cache Price Book **	Identifies if a price book is used for caching purposes
Global-e Cache Price Book Combinations **	Global-E country/currency combinations to which the price book is applicable

* - at least one of these custom attributes should be populated in case of using the price book with the fixed price strategy.

** - never change the values manually, such attributes are populated by the code.

Coefficient Rates

On top of the regular FX Rate, additional Product Class / Category or Country Coefficient Rate can be applied to the end-customer price, according to the Merchant preferences.

Product Class / Category Coefficient Rate has higher priority than Country Coefficient Rate, means that if Product Class / Category Coefficient Rate is provided - Country Coefficient Rate will be ignored for products of specified Product Class / Category.

Coefficient Rate GlobaleSettings Job Step

Global-e Cartridge int_globale has a scheduled job - GlobaleSettings, which is part of the cartridge and ready to use out-of-the-box.

One of the step of this job is CountryCoefficients, this step is pulling the data about coefficients (/Browsing/CountryCoefficients) and store it either into GLOBALE_COUNTRY_COEFFICIENTS or GLOBALE_PRODUCT_CLASS_COEFFICIENTS Custom Object, depends on type of the Coefficient.

Product Class / Category Coefficient Rate

If "ProductClassCode" is provided then the Coefficient Rate will be applied for products of the specified Product Class / Category, Country Coefficient Rate will be ignored.

Merchant has to specify (in Global-e Site Preferences GLOBALE-PRODUCT) the attribute (system or custom, both supported) of the system object Product which will be storing the ID/name of Product Class / Category, which should be used when the end-customer price is calculated:

Merchant Tools / Site Preferences / Custom Site Preference Groups /

Global-e Product Settings

Instance Type
Sandbox

Search by IDs...  

Name	Value
Product Class Code Property ID/Name	custom.coefficientClass The ID/name of the property to check againsts...

The value can be simple ID of the product attribute (like "brand"), in this case Global-e cartridge will try to find that attribute as system attribute "brand" of the product.

Also custom attributes are supported, please set the attribute as "custom.any_custom_attribute" and Global-e cartridge will try to find that attribute as custom attribute "any_custom_attribute" of the product ("any_custom_attribute" should be replaced by the ID of your custom attribute).

Once the Product Class Code Property ID/Name has been found, Global-e cartridge will go to GLOBALE_PRODUCT_CLASS_COEFFICIENTS Custom Object and try to find the record of Coefficient Rate configured to the specified Product Class / Category and Shipping Country:

Merchant Tools > Custom Objects > Custom Objects > T70_UA - General

General

Manage 'T70_UA' (GLOBALE_PRODUCT_CLASS_COEFFICIENTS)

Fields with a red asterisk (*) are mandatory. You can view and edit the name and description in other languages, if required. Click **Apply** to save the details.

Global-e Product Class Coefficients

ProductClassCode: T70

Rate: 1.20 (Number)

CountryCode: UA

Apply

Country Coefficient Rate

If "ProductClassCode" is empty (not provided) then the Country Coefficient Rate will be applied.
Global-e cartridge will go to GLOBALE_COUNTRY_COEFFICIENTS Custom Object and try to find the record of Coefficient Rate configured to the specified Shipping Country:

[Merchant Tools](#) > [Custom Objects](#) > [Custom Objects](#) > UA - General

General

Manage 'UA' (GLOBALE_COUNTRY_COEFFICIENTS)

Fields with a red asterisk (*) are mandatory. You can view and edit the name and description in other languages, if required. Click **Appl**

Global-e Country Coefficients	
Rate:	1.06 (Number)
IncludeVAT:	0 (Integer)
 CountryCode:*	UA

Marketing feeds

To generate converted prices the Global-e cartridge contains the helper function which could be used to initialize the integration depending on shipping country and currency.

Please check the script 'int_globale/cartridge/scripts/helpers/globaleHelpers.js' -> function setSession.

It expects to receive two parameters: countryCode and currencyCode, there is also example of how it could be used:

```
1  * @example
2  * // set global-e session in job context
3  * var globaleHelpers = require('*/cartridge/scripts/helpers/globaleHelpers');
4  * var globalePriceModel = require('*/cartridge/scripts/factories/globale/priceModel');
5  *
6  * globaleHelpers.setSession('UA', 'UAH'); // setSession(countryCode, currencyCode);
7  * var priceModel = globalePriceModel(product.priceModel, product);
8  * var productPrice = priceModel.price;
```

It could be used in an existing job to get converted product price.

To generate the correct links there are possible different options:

- Add GET parameters (glCountry, glCurrency). If one SFCC locale is used for a few operated by Global-e countries then is needed to add additional GET parameters (glCountry, glCurrency) for links to the product page to preselect shipping country and currency to make sure that google crawlers see the correct prices with correct currencies.
- Use separate SFCC locale for every Global-e operated country. If for every operated by Global-e country exists a dedicated SFCC locale then the links to the product page should be generated with the right SFCC locale values.

Customer Groups

Global-e cartridge(s) exposes several session custom attributes which you can use while you're configuring Dynamic Customer Group. You can use then the Customer Group in your Content Slots, Promotion Campaigns, etc.

Global-e Session custom Attributes

Here is the list of Global-e custom attributes of SFCC session object (full list of exposed attributes you can find in `int_globale/cartridge/models/globale/session.js`):

Attribute	Type	Description	Default Value	Sample Value
geEnabled	Boolean	Whether the Global-e is enabled in Site Preference or not	false	true
geCountry	String	The currently selected (or identified by SFCC GeoLocation) country ISO2 code		US
geOperatedCountry	Boolean	Whether the currently selected (or identified by SFCC GeoLocation) Country operated by Global-e or not	false	true
geSupportsFixedPrices (deprecated)	Boolean	Whether the currently selected (or identified by SFCC GeoLocation) Country is set as Fixed Price Country or not	false	true
geUseFixedPricesOnly	Boolean	Whether only prices defined in Fixed Price Country price book will be used on Storefront (if currently selected country is Operated by Global-e and set as Fixed Price Country) or Dynamic price conversion fallback as well	false	true
geCurrency	String	The Currency ISO3 Code, selected in Global-e Country Switcher or default Currency Code of selected (or identified by SFCC GeoLocation) Country		USD

gePriceStrategy	String	Whether the currently selected (or identified by SFCC GeoLocation) Country is set as FIXED or DYNAMIC price strategy	DYNAMIC	FIXED
-----------------	--------	--	---------	-------

Dynamic Customer Group

For example you want some Promotions be applicable only for Australia, which is operated by Global-e (any currency), then you can configure Dynamic Customer Group as shown on the picture below:

Merchant Tools / Customers / Customer Groups /

Edit Customer Group Global-e Australia Customer Group

General Members

ID* Type*

Global-e Australia Customer Group Dynamic

Description

Australian Customers (operated by Global-e)

Membership Rule

Include Customers with

session.custom.geOperatedCountry exists

And

session.custom.geOperatedCountry is true

And

session.custom.geCountry = AU

Add

Go to "Membership Rule" / "Include Customers with" section and add three "Session Custom Attribute" parameters:

Search

Storefront Session

- Active Source Code Group (session.sourceCodeGroup)
- Agent User Authenticated (session.agentUserAuthenticated)
- Authenticated (session.authenticated)
- Customer Groups (customer.customerGroups)
- Referrer Host (session.referrerHost)
- Referrer Keywords (session.referrerKeywords)
- Referrer URL (session.referrerURL)
- Registered (customer.registered)
- Session Currency (session.currency)
- Session Custom Attribute (session.custom)

- geOperatedCountry = exists
- AND
- geOperatedCountry = "is true"
- AND
- geCountry = ["AU"]

You can combine geOperatedCountry, geCountry, geCurrency and any other available (not only Global-e) session custom attribute with "AND", "OR", etc.

Promotions

Our cartridge(s) supports most of the common Promotions available in Salesforce B2C Commerce. In Business Manager, you configure promotions just like you would for domestic customers with a few additional Global-e custom attributes. In this document, you will find the basic settings for Promotions that you will be using for International Customers (applicable for Global-e checkout).

i Any of your Promotion will be considered as applicable promotion for Global-e Checkout, only if it is valid and active, assigned to ongoing Campaign, triggered by one of the valid Campaign Qualifiers: Customer Group, Coupon Code or Source Code. Additionally, there will be extra custom attributes of the Promotion object which needs to be configured.

i Please keep in mind that showing of product promotional price on PLP(Category page)/Search page/PDP, etc. requires at least one price book in base/site currency with price definitions to be assigned to SFCC site. Even if SFCC site has only Global-e Fixed countries and only SFCC "fixed" price books are used there, the price book in base/currency should be assigned to the site. The price from base price books will not be taken into account and used on the SFCC storefront, but base price books allows to show products promotional price.

Promotion Thresholds

Please keep in mind that **the promotion thresholds are always based on Merchant Default Currency** (regardless of what strategy is used(fixed or dynamic) or currency is selected).

For example:

- The Merchant Default Currency is GBP currency
- The promotion should be applied only to fixed price countries in EURO currency
- If configured promotion threshold is 70 - it means that promotion will be applied to the basket only if the basket total is equal to or greater than 70 GBP

Global-e Promotion Custom Attributes

Promotion Discount Type

The custom attribute represents all Discount Types currently supported by Global-e. It should be set to the same value under the SFCC "Promotion Rule" section.

The screenshot shows the 'Global-e Settings' form. The 'Promotion Discount Type' dropdown is open, displaying a list of options: PERCENTAGE (TYPE_PERCENTAGE), None, AMOUNT (TYPE_AMOUNT), BONUS (TYPE_BONUS), BONUS_CHOICE (TYPE_BONUS_CHOICE), FIXED_PRICE (TYPE_FIXED_PRICE), FREE (TYPE_FREE), PRICE_BOOK_PRICE (TYPE_PRICEBOOK_PRICE), and TOTAL_FIXED_PRICE (TYPE_TOTAL_FIXED_PRICE). The 'Do not Convert Promotional Discount' checkbox is unchecked. The 'Global-e Free Shipping Method' dropdown is also visible. Below the form, there are two footnotes: '* For Product promotions, create discounts and specify Excluded Products and Qualifying Products. Excluded products don't contribute to the promotion' and '* For Order promotions, create discounts and optionally specify Excluded Products and Qualifying Products. Excluded products don't contribute to the promotion'.

Do not Convert Promotional Discount

If this is enabled, the promotion discount value is used as is, which is calculated by SFCC logic in the native currency. For example, check this box if you would like the promotion to give a discount of 10 currency value regardless of the currency the customers use (e.g. \$10, €10, or £10). This is only applicable for AMOUNT, FIXED_PRICE, PRICE_BOOK_PRICE or TOTAL_FIXED_PRICE discount types.

Global-e Free Shipping Method

The custom attribute allows to define free shipping method in the Global-e checkout. Relevant only for free shipping promotions.

i Please keep in mind that SFCC shipping methods are not linked with the Global-e ones so it's not possible to specify free shipping method using the system promotion configuration.

Campaign

The Campaign should be configured as usually, no special requirements. But in most of the cases, to be able to distinguish between Domestic and International Promotions you will be using Customer Groups.

So when you are assigning the Promotion to any of your Campaign, depends on your requirements - assign proper Customer Group.

Free International Shipping Promotion

Our cartridge supports Free International Shipping Promotion.

This Promotion can be configured with using special custom attributes provided by Global-e metadata, based on Coupon/Source Code or for some certain market (for example for Netherlands Customers) with using the Customer Group(s).

This Promotions can be used ONLY with Global-e Checkout.

Promotion

1. Open SFCC BM, go to Merchant Tools → Online Marketing → Promotions
2. Create new Promotion (ID, Name, Description, Callout Message - totally up to you)

[Merchant Tools](#) > [Online Marketing](#) > [Promotions](#) > Promotion: DEMO-FREE-SHIPPING

DEMO-FREE-SHIPPING

ID:	DEMO-FREE-SHIPPING
Name:	Demo Free Shipping
Currency:	All ▼
Enabled:	Yes ▼
Archived:	No ▼
Searchable:	No ▼
Callout Message:	Demo Free Shipping

Compatibility

Exclusivity: NO (Can be combined with any promotion) ▼

Exclusivity is totally up to you.

Global-e Settings	
Promotion Discount Type:	FREE (TYPE_FREE) ▼
Do not Convert Promotional Discount:	☐
Global-e Free Shipping Method:	1 (Express Courier, Express Courier (Air), Express Shipping, Express Plus) ▼

3. Click on Apply button to save the initial settings.
4. Configure Promotion Rule (Qualifying Products, Shipping Methods, all Global-e predefined SFCC Shipping Methods) like on the screenshot below:

Example: Buy # 2 or more qualifying products and get 100 percent on shipment costs (free shipping).

Promotion Class: Shipping With Number of Shipment-Qualifying Products

Discount: Buy # or More and Get Free shipping

[Add](#)

Qualifying Products: Products in category 'root(Storefront Catalog - EN)' or subcategories

[Edit](#)

Shipping Methods: GLOBALE_STORE_COLLECTION, GLOBALE_EXPRESS, GLOBALE_STANDARD

[Edit](#)

Restrictions: ☐ The shipment must contain only qualifying products.

Maximum Applications: Per Order

5. Click on Apply button to save all changes.

All settings of the Promotion are optional (following the standard SFCC Rules), so you can configure it according to your requirements, except only the following:

1. Global-e Settings / **Is applicable to Global-e** - should not be set to **NONE**
2. Global-e Settings / **Promotion Discount Type** - should be set to **FREE**
3. **Promotion Class** - should be **Shipping**
4. **Discount** - should be configured so it will be always **Free** shipping

Campaign

1. Open SFCC BM, go to Merchant Tools → Online Marketing → Campaigns
2. Create a new Campaign (or open existing one, where you want to assign your Promotion to):

[Merchant Tools](#) > [Online Marketing](#) > [Promotions](#) > Promotion: DEMO-FREE-SHIPPING

DEMO-FREE-SHIPPING

ID:

Name:

Currency: All

Enabled: Yes

Archived: No

Searchable: No

Callout Message:

Compatibility


Exclusivity: NO (Can be combined with any promotion)

3. If you need to assign any special Customer Group - assign it in **Customer Groups**:
in this example the Customer Group **GlobaleCustomers** is assigned to this Campaign.
4. If you need to Apply this Campaign with the created above Promotion based on Coupon Code - please create Coupon Code as usually and assign it in **Coupons**.
5. Assign Promotion created earlier to this Campaign.
6. Please make sure that **Required Qualifiers** is set to **All** in Promotions Experience.
7. Click on Apply button to save all changes.

All settings of the Campaign are optional, so you can configure it according to your requirements, based on standard SFCC instructions.

Global-e Checkout

Once the Promotion and Campaign become applicable (either due to Customer Group, Source Code or Coupon Code entered on a Cart page), the Customer should be able to see **Free** shipping option on Global-e Checkout:

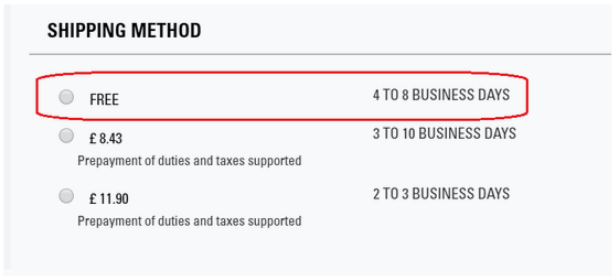

Promotions Support Matrix

Promo tion class	Condition Type	Discount Type	GE Promotio n Discount Type	GE Do not Conver t Promot ional Discou nt	Support ed Dynamic Price	Supp orted Fixed Price	Comment	
Produc t	Without Qualifying Products	Percent Off	PERCENT AGE	—	Yes	Yes	See 10% off all men's gloves example	
		Amount Off	AMOUNT	Support ed	Yes	Yes	See 10\$ Off All Earrings for focus countries example	
		Fixed Price	FIXED_PR ICE	Support ed	Yes	Yes		
		Price From Pricebook	PRICE_B OOK_PRI CE	Support ed	Yes	Yes		
		Percent Off Product Options	PERCENT AGE	—	Yes	Yes		
		Bonus Product(s)	BONUS	—	Yes	Yes		
		Choise Of Bonus Products (List)	BONUS_C HOICE	—	Yes	Yes		
		Choise Of Bonus Products (Rule)	BONUS_C HOICE	—	Yes	Yes		

	Fixed Price Shipping	—	—	—	No	No	Shipping price calculated on GE side
	Free shipping	—	—	—	No	No	Shipping price calculated on GE side
With amount (value) of qualifying products *	Percent Off	PERCENT AGE	—	Yes	Yes		
	Amount Off	AMOUNT	Support ed	Yes	Yes		
	Fixed Price	FIXED_PRICE	Support ed	Yes	Yes		
	Price From Pricebook	PRICE_BOOK_PRICE	Support ed	Yes	Yes		
	Percent Off Product Options	PERCENT AGE	—	Yes	Yes		
	Bonus Product(s)	BONUS	—	Yes	Yes		
	Choise Of Bonus Products (List)	BONUS_CHOICE	—	Yes	Yes		
	Choise Of Bonus Products (Rule)	BONUS_CHOICE	—	Yes	Yes		
	Fixed Price Shipping	—	—	—	No	No	Shipping price calculated on GE side
	Free shipping	—	—	—	No	No	Shipping price calculated on GE side
With number (quantity) of qualifying products	Percent Off	PERCENT AGE	—	Yes	Yes		
	Amount Off	AMOUNT	Support ed	Yes	Yes		
	Fixed Price	FIXED_PRICE	Support ed	Yes	Yes		
	Price From Pricebook	PRICE_BOOK_PRICE	Support ed	Yes	Yes		

		Percent Off Product Options	PERCENT AGE_OFF _OPTION S	—	No	No		
		Bonus Product(s)	BONUS	—	Yes	Yes	See <i>Buy Cluster Drop Necklace, Get Free Matching Earrings</i> example	
		Choise Of Bonus Products (List)	BONUS_C HOICE	—	Yes	Yes		
		Choise Of Bonus Products (Rule)	BONUS_C HOICE	—	Yes	Yes		
		Fixed Price Shipping	—	—	—	No	No	Shipping price calculated on GE side
		Free shipping	—	—	—	No	No	Shipping price calculated on GE side
	With Combination of Qualifying Products	Percent Off	PERCENT AGE	—	Yes	Yes		
		Amount Off	AMOUNT	Support ed	Yes	Yes		
		Fixed Price	FIXED_PR ICE	Support ed	Yes	Yes		
		Price From Pricebook	PRICE_B OOK_PRI CE	Support ed	Yes	Yes		
		Percent Off Product Options	PERCENT AGE_OFF _OPTION S	—	No	No		
		Bonus Product(s)	BONUS	—	Yes	Yes		
		Choise Of Bonus Products (List)	BONUS_C HOICE	—	Yes	Yes		
		Choise Of Bonus Products (Rule)	BONUS_C HOICE	—	Yes	Yes		

		Fixed Price Shipping	—	—	—	No	No	Shipping price calculated on GE side
		Free shipping	—	—	—	No	No	Shipping price calculated on GE side
	Buy X/Get Y	Percent Off	PERCENT AGE	—	Yes	Yes		
		Amount Off	AMOUNT	Supported	Yes	Yes		
		Fixed Price	FIXED_PRICE	Supported	Yes	Yes		
		Price From Pricebook	PRICE_BOOK_PRICE	Supported	Yes	Yes		
		Free	FREE	—	Yes	Yes		
	Buy X and Y/Get Z	Percent Off	PERCENT AGE	—	Yes	Yes		
		Amount Off	AMOUNT	Supported	Yes	Yes		
		Fixed Price	FIXED_PRICE	Supported	Yes	Yes		
		Price From Pricebook	PRICE_BOOK_PRICE	Supported	Yes	Yes		
		Free	FREE	—	Yes	Yes		
	Buy X for Total	Buy N for total price of Y	TOTAL_FIXED_PRICE	Supported	Yes	Yes		
Order	With amount of qualifying products *	Percent Off	PERCENT AGE	—	Yes	Yes		
		Amount Off	AMOUNT	Supported	Yes	Yes		
		Bonus Product(s)	BONUS	—	Yes	Yes		
		Choise Of Bonus Products (List)	BONUS_CHOICE	—	Yes	Yes		
		Choise Of Bonus Products (Rule)	BONUS_CHOICE	—	Yes	Yes		

	With number of qualifying products	Percent Off	PERCENT AGE	—	Yes	Yes		
		Amount Off	AMOUNT	Supported	Yes	Yes	See \$50 off when buying 5 or more items example	
		Bonus Product(s)	BONUS	—	Yes	Yes		
		Choose Of Bonus Products (List)	BONUS_CHOICE	—	Yes	Yes		
		Choose Of Bonus Products (Rule)	BONUS_CHOICE	—	Yes	Yes		
	With a Combination of Products	Percent Off	PERCENT AGE	—	Yes	Yes		
		Amount Off	AMOUNT	Supported	Yes	Yes		
		Bonus Product(s)	BONUS	—	Yes	Yes		
		Choose Of Bonus Products (List)	BONUS_CHOICE	—	Yes	Yes		
		Choose Of Bonus Products (Rule)	BONUS_CHOICE	—	Yes	Yes		
Shipping	With Amount of Shipment-Qualifying Products *	Percent Off	PERCENT AGE	—	No	No		
		Amount Off	AMOUNT	—	No	No		
		Fixed Price	FIXED_PRICE		No	No		
		Free	FREE	—	Yes	Yes		
	With Number of Shipment-Qualifying Products	Percent Off	PERCENT AGE	—	No	No		
		Amount Off	AMOUNT	—	No	No		
		Fixed Price	FIXED_PRICE	—	No	No		
		Free	FREE	—	Yes	Yes		

- | | | | | | | |
|--|------------|-------------|-------------|---|----|----|
| <ul style="list-style-type: none"> - the promotion threshold amounts could be specified only in the Merchant Default Currency (end-customer currency threshold amounts are not supported) | Continuing | | | | | |
| | Qualifying | Amount Off | AMOUNT | — | No | No |
| | Products | Fixed Price | FIXED PRICE | — | No | No |

Examples

10% off all men's gloves (Product Promotion - Percent Off)

Examples	With Continuation of Shipping Qualifying Products	Percent Off	PERCENT	—	No	No		
- the promotion threshold amounts could be specified only in the Merchant Default Currency (end-customer currency threshold amounts are not supported)		Amount Off	AMOUNT	—	No	No		
		Fixed Price	FIXED_PRICE	—	No	No		
10% off all men's gloves (Product Promotion - Percent Off)		Free	FREE	—	Yes	Yes		

You currently run 10% off all men's gloves promotion for your domestic customers. Your current promotion is configured as shown below.

[illegible]

You want to extend this promotion to all international customers as well. To extend this promotion to an international customer, in the same Promotion, go to the “Global-e Settings” section and add the following.

Global-e Settings

Promotion Discount Type: PERCENTAGE (TYPE_PERCENTAGE)

Do not Convert Promotional Discount: ☐

Global-e Free Shipping Method: - None -

Make sure the Customer Group for your Campaign includes international customers. It could be “Everyone” customer group, or any other specific customer group you setup that you'd like to qualify for the promotion. For example, if you would like only customers from Canada to receive this discount in addition to your domestic customers, you could configure a specific customer group for them and add it here.

Experiences

+ Add Experience +


(Set Configurations (2 Experiences))

Promotions (1 Experience)

ID	Schedule	Customer Groups	Source Codes	Coupons	Required Quantities	Rank	Exclusivity	Enabled
10e6ff78ba94d4c7f9e6d6a2c	Continuously	NonGlobalCustomer, GlobalCustomers			All	- None -	NO	YES

Sorting Rules (2 Experiences)

On the storefront, the promotion is now applicable to both domestic and Global-e operated countries.

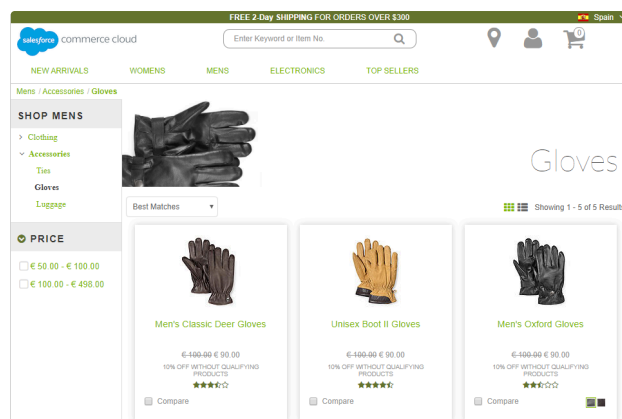

10\$ Off All Earrings for focus countries (Product Promotion - Amount Off)

You currently run a “10\$ Off All Earrings” promotion for your domestic customers. Your current promotion is configured as shown below.

Example: 10 percent off

Promotion Class: Without Qualifying Products

Discount: Amount Off

Discounted Products: Products in category 'women's-jewelry-earrings(Earrings)' or subcategories

[Edit](#)

Maximum Applications: Per Order

You want to extend this promotion to customers in your focus countries which include Canada, Spain, and Italy. And instead of giving them 10 USD off, you want to give the customer the discount equivalent to 10 of the customer currency. To do that, the following updates are made to the promotion. Note the “Do Not Convert Promotional Discount” is checked.

Global-e Settings

Promotion Discount Type:

AMOUNT (TYPE_AMOUNT)

Do not Convert Promotional Discount:

☒

Global-e Free Shipping Method:

- None -

A new customer group is created to include Canada, Spain and Italy.

Merchant Tools / Customers / Customer Groups /

Edit Customer Group Global-e Focus Customers

GENERALMEMBERS

ID*

Global-e Focus Customers

Type*

Dynamic

Description

Membership Rule

Include Customers with

session.custom.geOperatedCountry exists

X

And

session.custom.geOperatedCountry = true

X

And

session.custom.geCountry = IT, CA, ES

X

Add

Then update the associated Campaign to include this customer group.

Experiences

Add Experience

Slot Configurations (0 Experiences)

Promotions (1 Experience)

ID

Schedule

Customer Groups

Source Codes

Coupons

GE_Demo_10\$OFF_Earrings

Continuously

Global-e Focus Customers, Non GE Customers

Sorting Rules (0 Experiences)

Keyword Search Sorting Rules (0 Experiences)

On the storefront, the promotion is now applicable for domestic customers, and customers from Canada, Spain and Italy. Note that the discount amount is in customer currency.

LoginItaly

salesforcecommerce cloud

Search (keywords,etc)

New ArrivalsWomensMensElectronicsTop Sellers

Womens / Jewelry / Earrings

Pink and Gold Hoop Earring

Item No. 01374200015JM★★★★★

Select Color

Quantity

1

Availability:

Back Order

Earrings Promotion

€ 30.00

€ 20.00

Add to Cart

Buy Cluster Drop Necklace, Get Free Matching Earrings (Product Promotion - Bonus Product)

You currently run a “Buy Cluster Drop Necklace, Get Free Matching Earrings” promotion for your domestic customers. Your current promotion is configured as shown below.

Example: Buy 100 or more qualifying products and get 10 percent on discounted products.

Promotion Class: **Product** With Amount of Qualifying Products

Discount: Buy 1.00 or More and Get Bonus Product(s) (013742003154M)

Qualifying Products: Products with ID = 25728008M

Restrictions: ☐ The promotion applies to identical products only. May apply up to the application limit for each separate product.

Maximum Applications: Per Order

Apply

You want to extend this promotion to all international customers as well. To extend this promotion to an international customer, in the same Promotion, go to the “Global-e Settings” section and add the following.

Global-e Settings

Promotion Discount Type: **BONUS (TYPE_BONUS)**

Do not Convert Promotional Discount: ☐

Global-e Free Shipping Method: **- None -**

Make sure the Customer Group for your Campaign includes international customers. It could be “Everyone” customer group, or any other specific customer group you setup that you’d like to qualify for the promotion. For example, if you would like only customers from Canada to receive this discount in addition to your domestic customers, you could configure a specific customer group for them and add it here.

Add Experience

Slot Configurations (0 Experiences)									
Promotions (1 Experience)									
ID	Schedule	Customer Groups	Source Codes	Coupons	Required Qualifiers	Rank	Exclusivity	Enabled	
GE_Demo_BonusProduct	Continuously	Everyone			Any	- None -	NO	Yes	
Sorting Rules (0 Experiences)									
Keyword Search Sorting Rules (0 Experiences)									

On the storefront, when a customer adds the Cluster Drop Necklace to their basket, the Cluster Drop Earrings are added as a bonus for all domestic customers and customers from GE operated countries.

Login Hong Kong salesforce commerce cloud Search (keywords,etc)

New Arrivals Womens Mens Electronics Top Sellers Hong Kong

Your Cart

Continue Shopping 2 Items Need Help? Call 1-800-555-0199

Cluster Drop Necklace

Color: Silver
In Stock

Each **HK\$ 239.00**

Quantity **1**

Total **HK\$ 239.00**

Edit

Enter Promo Code

Promo Code Submit

Estimated Total **HK\$ 239.00**

Checkout

Bonus Product

Cluster Drop Earring

Color: Silver
In Stock

Edit

\$50 off when buying 5 or more items (Order Promotion - Amount Off)

You currently run a \$50 off when buying 5 or more items promotion for your domestic customers. You want to extend this promotion to all international customers as well. Your current promotion is configured as shown below.

Promotion Rule

Select the Promotion Class you want ("Product", "Order", "Shipping"), then choose from the promotion types available for the respective promotion class.

* For Product promotions, create discounts and specify **Qualifying Products** (the products which trigger the discount) and **Discounted Products** (the products to which the discount is applied).

* For Order promotions, create discounts and optionally specify **Excluded Products** and **Qualifying Products**. Excluded products don't contribute to the merchandise condition and aren't discounted. If "Qualifying Products" is left empty, all non-excluded products in the order contribute towards the merchandise condition. Otherwise, the specified amount of qualifying products is required to trigger the discount.

* For Shipping promotions, create discounts and specify **Qualifying Products** and **Shipping Methods**. For promotions based on a certain number of qualifying products, qualifying products are mandatory. For promotions based on a certain amount of qualifying products, qualifying products are optional. If left empty, all products in the shipment contribute towards the merchandise condition. One of the specified shipping methods must be selected in the Storefront to trigger the discount.

Multiple Discount tiers are available for some promotion types. Click Add to create multiple tiers or delete an existing tier by clicking the removal icon. **Maximum Applications** limits the number of times the promotion can be applied per order.

Example: Buy # 2 or more and get 10 percent on order merchandise total.

Promotion Class: Order | With Number of Qualifying Products

Discount: Buy # 5 or More and Get 50.00 Amount Off

Excluded Products: Products with price >= 200.00

Qualifying Products: Products in category 'electronics(Electronics)' or subcategories

Discounted Products: ☒ Same as qualifying products. If unchecked, or no qualifying products are defined, all non-excluded products in the order are discounted.

Payment Methods: No payment methods have been selected yet.

Apply

To extend this promotion to an international customer, in the same Promotion, go to the "Global-e Settings" section and add the following.

Global-e Settings

Promotion Discount Type: AMOUNT (TYPE_AMOUNT)

Do not Convert Promotional Discount: ☐

Global-e Free Shipping Method: - None -

Make sure the Customer Group for your Campaign includes international customers. It could be "Everyone" customer group, or any other specific customer group you setup that you'd like to qualify for the promotion. For example, if you would like only customers from Canada to receive this discount in addition to your domestic customers, you could configure a specific customer group for them and add it here.

Experiences

Slot Configurations (0 Experiences)

Promotions (5 Experiences)

ID	Schedule	Customer Groups	Source Codes	Coupons	Required Qualifiers	Rank	Exclusivity	Enabled
\$50offOrderCountAbove5	Continuously	Everyone			Any	- None -	NO	Yes

On the storefront, the promotion is now applicable to both domestic and Global-e operated countries.

Login Spain | Salesforce Commerce Cloud | Search (keywords,etc)

New Arrivals | Womens | Mens | Electronics | Top Sellers | Spain

Your Cart

Continue Shopping | 5 Items | Need Help? Call 1-800-555-0199

GPX ML838 Digital Media Player

In Stock | Each | Quantity: 5 | Total: € 400.00

Enter Promo Code

Promo Code: | Submit

\$50offOrderCountAbove5 - € 49.71

Order Discount - € 49.71

Estimated Total € 350.29

Checkout

Since "Do not Convert Promotional Discount" is unchecked, the \$50 discount is automatically converted to customer's currency.

Restricted Forbidden Products

Global-e Cartridge supports restricted/forbidden products per Country, which means that:

- is possible to exclude restricted/forbidden products from Search result based on their configuration.;
- is possible to disable for the customer the ability to purchase restricted/forbidden products based on their configuration.

The data about restricted and forbidden products will be retrieved automatically from Global-e by calling Global-e RecentProductCountryS API, which is part of GlobaleProducts Job, and will be stored to the custom attribute "geIsForbidden"(example of value: true/false) or "geRestrictedCountries"(contains the list of country codes for the example: AU,UA) of each Restricted / Forbidden product.

Excluding products from the Search Result

By default, restricted/forbidden products will not be excluded from the search result.

If you want to exclude restricted/forbidden products from Search result you can create and configure special Promotion in BM as described below.

The best way for performance-wise to exclude restricted/forbidden products from the Search result is to set Promotion ID and Promotion Product Type to Product Search Model.

Code details

The function helper that applies the promotion to the search result is defined here: "int_globale/cartridge/scripts/helpers/globaleHelpers.js"

```
1  /**
2   * Apply searchable products promotion
3   * @param {dw.catalog.SearchModel} apiProductSearch - SearchModel
4   * @param {boolean} isExecuteSearch - allow/prevent executing 'search' method of 'dw.catalog.SearchModel' class
5   * @returns {dw.catalog.SearchModel} SearchModel
6   */
7  function applySearchableProductsPromotion(apiProductSearch, isExecuteSearch) {
8      /**
9       * It is possible to exclude Restricted or Forbidden products from search results
10      * In the example below, the exclusion will be done by using the Promotion ID,
11      * for example SearchableProducts_AU - will be applied only for Australia,
12      * where all Restricted or Forbidden products will be added in 'Qualifying Products' => 'Excluding
products',
13      * so the promotion will have qualifying products but won't have any discounted products,
14      * thus we can filter the search results but the promotional callout message won't be displayed on
storefront.
15      */
16      var globaleSession = require('*/cartridge/models/globale/session');
17      if (!globaleSession.get('geOperatedCountry')) {
18          return apiProductSearch;
19      }
20      var searchableProductsPromotionId = getPreference(preferenceKeys.geSearchableProductsPromotionId);
21      var searchableProductsPromotion;
22      if (searchableProductsPromotionId) {
23          var PromotionMgr = require('dw/campaign/PromotionMgr');
24          var collections = require('*/cartridge/scripts/util/globale/collections');
25          searchableProductsPromotionId = searchableProductsPromotionId
26              .replace(/\{country\}/ig, globaleSession.get('geCountry'))
27              .replace(/\{currency\}/ig, globaleSession.get('geCurrency'))
28          ;
29          var applicablePromotions = PromotionMgr.getActiveCustomerPromotions().getProductPromotions();
30          if (applicablePromotions && applicablePromotions.length > 0) {
```

```

31     searchableProductsPromotion = collections.find(applicablePromotions, function (promotion) { return
(promotion.ID === searchableProductsPromotionId); });
32     }
33     if (searchableProductsPromotion) {
34         var ProductSearchModel = require('dw/catalog/ProductSearchModel');
35         apiProductSearch.setPromotionID(searchableProductsPromotion.ID);
36         apiProductSearch.setPromotionProductType(ProductSearchModel.PROMOTION_PRODUCT_TYPE_QUALIFYING);
37         if (isExecuteSearch) {
38             apiProductSearch.search();
39         }
40     }
41 }
42 return apiProductSearch;
43 }

```

SFRA

In SFRA architecture the search result is modified here: "int_globale_sfra/cartridge/scripts/helpers/searchHelpers.js"

searchHelpers

```

1  setupSearch: {
2      value: function () {
3          var globaleHelpers = require('*/cartridge/scripts/helpers/globaleHelpers');
4          var apiProductSearch = this.super.setupSearch.apply(this.super, Array.prototype.slice.call(arguments));
5          // apply searchable products promotion
6          apiProductSearch = globaleHelpers.applySearchableProductsPromotion(apiProductSearch);
7          return apiProductSearch;
8      }
9  }

```

SiteGenesis Pipelines / Controllers

In SiteGenesis architecture the search result is modified here: "int_globale_sitegenesis/cartridge/scripts/models/SearchModel.js"

```

1  initializeProductSearchModel: {
2      value: function () {
3          var globaleHelpers = require('*/cartridge/scripts/helpers/globaleHelpers');
4          var apiProductSearch = this.super.initializeProductSearchModel.apply(this.super,
Array.prototype.slice.call(arguments));
5          // apply searchable products promotion
6          apiProductSearch = globaleHelpers.applySearchableProductsPromotion(apiProductSearch);
7
8          return apiProductSearch;
9      }
10 }

```

Site Preference

This is how the Site Preference in GLOBALE preference group can be configured:

Searchable Products Promotion ID	DEMO-RESTRICTED-PRODUCTS
This Promotion ID will be used in searchHelpers....	

Promotion and Campaign

The Promotion in the example below is configured for Australia only (with using Customer Groups), so the restricted/forbidden products will be excluded from Search result for Australia only.

You can also configure one promotion for more than one Global-e operated country, by using the Customer Group in Campaign.

1. Create Promotion

[Merchant Tools](#) > [Online Marketing](#) > [Promotions](#) > Promotion: DEMO-RESTRICTED-PRODUCTS

DEMO-RESTRICTED-PRODUCTS

ID:

Name:

Currency:

Enabled:

Archived:

Searchable:

Callout Message:

Compatibility

Exclusivity: NO (Can be combined with any promotion) ▼

[illegible]

2. Set Qualifying Products:

please add All products into "Included Products 1", and into "Excluded Products 1" please choose 'Global-e RestrictedCountries' product custom attribute and values of country codes that should be excluded in the scope of active promotion

Included Products 1

Qualifier	Operator	Value	Catalog
Category	equals (or is child of)	newarrivals(New Arrivals) , womens(Womens) , mens(Mens) , gift-certificat...	storefront-


Excluded Products 1

Qualifier	Operator	Value
Global-e RestrictedCountries (custom.geRestrictedCountries)	contains	AU

Based on this example will be excluded all products which have 'AU'(Australia) in the custom attribute 'Global-e RestrictedCountries' from the Search result for Australia.

3. Set Discounted Products:

Please remove "Included Products 1", and add All products into "Excluded Products 1", so no products will be discounted, it's needed for correct prices shown on PLP/PDP and Basket

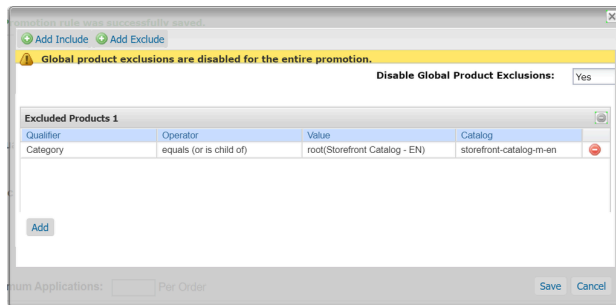

4. Run Search Indexes in BM:

[Merchant Tools](#) > [Search](#) > Search Indexes

Search Indexes +

* Instances of the type Sandbox/Cloudbox are not configured to

☒	Index Type
☒	Product Index
☒	Content Index
☒	Synonym Index
☒	Suggestion Index
☒	Active Data Index
☒	Shared Index Type
☒	Availability Index
Rebuild	

Please note, that Salesforce B2C Commerce ignores the campaign configuration for Promotions used in `ProductSearchModel.setPromotionID()`, but we would like to use Campaign and assigned Customer Groups to be able to filter the restricted/forbidden products only for Global-e operated countries (in this example - Australia), so we will assign this Promotion to one of the existing Global-e Campaign and Australian Customer Group.

Configure a dynamic customer group and apply it to the campaign is not necessary if the promotion ID contains the placeholders according to the code below.

```

1      searchableProductsPromotionId = searchableProductsPromotionId
2      .replace(/\{country\}/ig, globaleSession.get('geCountry'))
3      .replace(/\{currency\}/ig, globaleSession.get('geCurrency'))


```

If the promotion ID doesn't contain placeholders then for promotion should be applied dynamic group(it should be done in a configuration of the campaign).

Disable the ability to purchase restricted/forbidden products

By default, the Restricted or Forbidden product will be shown on PDP with the respective message in the availability section.

It is also possible to not show restricted/forbidden products for selected Shipping Country on PDP.

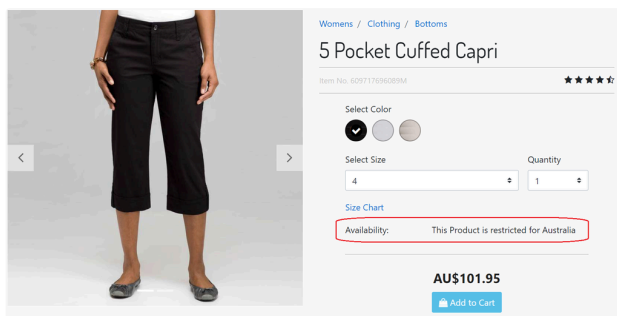

SFRA

In SFRA architecture it can be implemented in the "Product" controller with the next piece of the code.

Redirect to Home Page for Restricted and/or Forbidden products

```
1  /**
2   * Global-e Product Show
3   *
4   * Merchant Customization: Add custom code to this route if you need custom behavior for
5   * Restricted or Forbidden product on PDP page. For example, you could redirect international
6   * customers to home page if they click on a restricted or forbidden product as shown in
7   * the example below.
8   * @example
9   * var URLUtils = require('dw/web/URLUtils');
10  * var ProductMgr = require('dw/catalog/ProductMgr');
11  * var globaleSession = require('@literal */cartridge/models/globale/session');
12  * var globaleHelpers = require('@literal */cartridge/scripts/helpers/globaleHelpers');
13  * var apiProduct = ProductMgr.getProduct(req.querystring.pid);
14  * // Restricted and Forbidden Products
15  * var geRestrictionForbiddenMessage = globaleHelpers.getProductRestrictionMessage(apiProduct,
    globaleSession.get('geCountry'));
16  * // Restricted Products only
17  * var geRestrictionMessage = globaleHelpers.getProductRestrictionMessage(apiProduct,
    globaleSession.get('geCountry'), true);
18  * // Forbidden Products only
19  * var geForbiddenMessage = globaleHelpers.getProductRestrictionMessage(apiProduct,
    globaleSession.get('geCountry'), false, true);
20  * if (geRestrictionForbiddenMessage) {
21  *     res.redirect(URLUtils.url('Home-Show')); // redirect to home page
22  *     next();
23  * }
24  */
```

SiteGenesis Pipelines / Controllers

In SiteGenesis architecture it can be implemented in the "Product" controller/pipeline with the next piece of the code.

Redirect to Home Page for Restricted and/or Forbidden products

```
1  /**
2   * Global-e Product Show
3   *
4   * Merchant Customization: Add custom code to this route if you need custom behavior for
5   * Restricted or Forbidden product on PDP page. For example, you could redirect international
6   * customers to home page if they click on a restricted or forbidden product as shown in
7   * the example below.
8   * @example
9   * var URLUtils = require('dw/web/URLUtils');
10  * var ProductMgr = require('dw/catalog/ProductMgr');
11  * var globaleSession = require('@literal */cartridge/models/globale/session');
12  * var globaleHelpers = require('@literal */cartridge/scripts/helpers/globaleHelpers');
13  * var apiProduct = ProductMgr.getProduct(params.pid.stringValue);
14  * // Restricted and Forbidden Products
15  * var geRestrictionForbiddenMessage = globaleHelpers.getProductRestrictionMessage(apiProduct,
    globaleSession.get('geCountry'));
16  * // Restricted Products only
17  * var geRestrictionMessage = globaleHelpers.getProductRestrictionMessage(apiProduct,
    globaleSession.get('geCountry'), true);
18  * // Forbidden Products only
19  * var geForbiddenMessage = globaleHelpers.getProductRestrictionMessage(apiProduct,
    globaleSession.get('geCountry'), false, true);
20  * if (geRestrictionForbiddenMessage) {
```



```

21 *      response.redirect(URLUtils.https('Home-Show')); // redirect to home page
22 * }
23 */

```

Einstein Product Recommendations

By default If the customer will click on the link of recommended restricted/forbidden product – the customer will see a restricted/forbidden message (or any other specific behaviour, if it's implemented in Product.js controller) and the Customer will not be able to add restricted/forbidden product to Basket.

SFRA and SiteGenesis Pipelines / Controllers

To hide the restricted/forbidden products from the Einstein Product Recommendations - adjust the templates which renders the Einstein Product Recommendations, according to the [instruction provided in SFCC documentation](#).

A sample is below:

Hide Global-e Restricted/Forbidden Products from Einstein Product Recommendations

```

1  <iscontent type="text/html" charset="UTF-8" compact="true"/>
2  <iscomment> should not be cached, the tiles are cached individually.</iscomment>
3  <isset name="globaleHelpers" value="{require('*/cartridge/scripts/helpers/globaleHelpers')}" scope="page" />
4  <isset name="globaleSession" value="{require('*/cartridge/models/globale/session')}" scope="page"/>
5  <isif condition="{slotcontent}">
6      <div class="product-listing product-listing-1x4">
7          <h2>${slotcontent.calloutMsg}</h2>
8          <ul class="search-result-items tiles-container">
9              <isloop items="{slotcontent.content}" var="product" begin="0" end="3">
10                 <isobject object="{product}" view="recommendation">
11                     <isif condition="{globaleHelpers.getProductRestrictionMessage(product,
globaleSession.get('geCountry'))}"><iscontinue/></isif>
12                     <li class="grid-tile">
13                         <isinclude url="{URLUtils.url('Product-HitTile',
14                             'pid', product.ID,
15                             'showswatches', 'true',
16                             'showpricing', 'true',
17                             'showpromotion', 'true',
18                             'showrating', 'true')}" />
19                     </li>
20                 </isobject>
21             </isloop>
22         </ul>
23     </div>
24 </isif>

```


Global-e Checkout with restricted/forbidden product(s)

If for some reason customer though has reached the Global-e Checkout with restricted/forbidden products in the Basket - there is Global-e internal handler for such cases and Customer will see respective restricted/forbidden message on Global-e Checkout page and still won't be able to proceed.


Global-e Checkout

- i** Please note that all storefront screenshots which you may see here are made on basis of either standard SFCC SFRA or SFCC SiteGenesis Demo Site.
- The logo on Global-e Checkout, look & feel will be adopted to your design, according to the requirements provided by you to Global-e Account/Project manager.

Once the customer clicks on the "Checkout" CTA on the Cart/Basket page - he/she will be redirected to the Login page if the Customer is not authenticated yet, which is standard default SFCC behaviour:

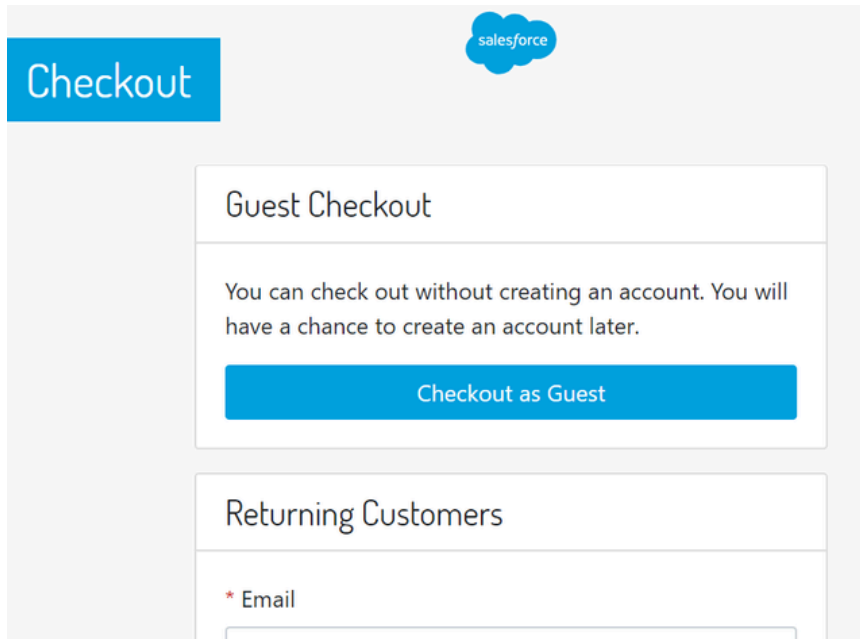

If the customer clicks on "Checkout as Guest" or the Customer is already registered, and logged in and the selected country is Operated by Global-e - then he/she will be redirected to the Global-e Checkout page:

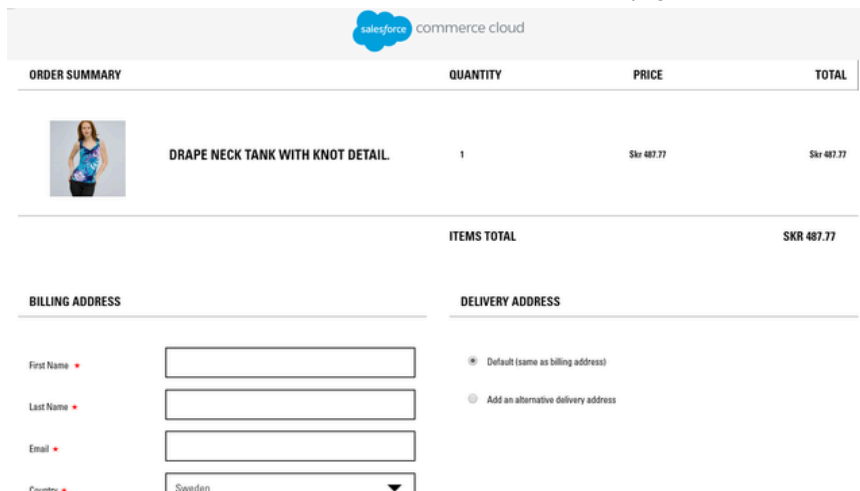

ORDER SUMMARY	QUANTITY	PRICE	TOTAL
 DRAPE NECK TANK WITH KNOT DETAIL.	1	SKr 487.77	SKr 487.77
ITEMS TOTAL			SKR 487.77

BILLING ADDRESS

First Name ▼

Last Name ▼

Email ▼

Country ▼

DELIVERY ADDRESS

☒ Default (same as billing address)

☐ Add an alternative delivery address

If the Customer is registered, logged in and has any addresses in his/her SFCC Profile Address Book, then the default (or the first available) address, complying with the selected country and all required fields (like Post Code, State, etc.) will be pre-populated:



ORDER SUMMARY	QUANTITY	PRICE	TOTAL
 DRAPE NECK TANK WITH KNOT DETAIL.	1	SKR 487.77	SKR 487.77
ITEMS TOTAL			SKR 487.77

BILLING ADDRESS

DELIVERY ADDRESS

Saved Address

Ivan Melnyk
Address 1
City, 12345

Address 1

Default (same as billing address)

Add an alternative delivery address

Customers will be able to select any other available and valid address from his/her Address Book or enter the new one.

Valid - means with all mandatory/required fields.

Checkout Flow

As Global-e checkout takes place outside of the SFCC ecosystem, orders are first created on the Global-e side and then using a set of APIs they will get created on SFCC. This document describes the order creation flow as part of the default functionality of the Global-e SFCC cartridge.


Global-e checkout journey:

- Send Cart API** - as Global-e checkout takes place in an iframe served from Global-e servers, it's necessary to send all basket information to Global-e to have a clone of the basket in order to display it on Global-e checkout. The response for this API will be a **cartToken** that holds the same cart from the Global-e side.
- Reserve inventory** - Global-e will reserve the inventory for a configurable amount of time while the customer is creating his order using `basket.reserveInventory()`
- Show checkout** - to show the checkout Global-e cartridge is adding `iframe.isml` template which is the container page that renders the Global-e checkout iframe using the `cartToken` we received from `SendCart API`.
- Validate Cart** - validate cart functionality checks if products exist and if all products in the payload have the quantity that is available (see custom hook handler `cartridges\int_globale\cartridge\scripts\globale\hooks\onGlobaleValidateCart.js`). If there is no inventory for that product, the customer will see a popup on checkout indicating an issue with the order and will be redirected back to the cart page after clicking OK on the pop-up. No order will be created on SFCC or Global-e side.
- Order creation** - after the checkout is completed and the order was created on the Global-e platform, it's necessary to create it on the SFCC side as well, due to the API limitations, it's only possible to convert a basket to an order with its inventory reservation when we're bounded to the original session. To do that, the Global-e iframe will send a post message to the container page and then using an ajax request, `orderCreate()` API from the Global-e cartridge will get called to create the order. Order creation can fail for a few reasons such as session expiry, stock issues or basket changes. In case the order will fail due to one of those, a retry mechanism on Global-e servers will try to re-create the basket and convert it to an order based on the stored basket information.
- Send Order To Merchant API** - newly created orders status will be "Created" and will only contain a piece of bare information about the transaction. A few moments after, the Global-e service will send an API call to SFCC to update all the international transaction information onto the order.
- PerformPayment API** - once payment passed all the fraud checks, payment notification will be sent to SFCC, the order status will change to "New", the Payment status will change to "Paid" and the Export status will change to "Ready for export".

Stock Validation

The out-of-box functionality for stock validation on the Global-e side is to do a check against the inventory stored in SFCC.

This is done when a user clicks the Place Order button on checkout. The code however can be customized to include third party product availability checks.

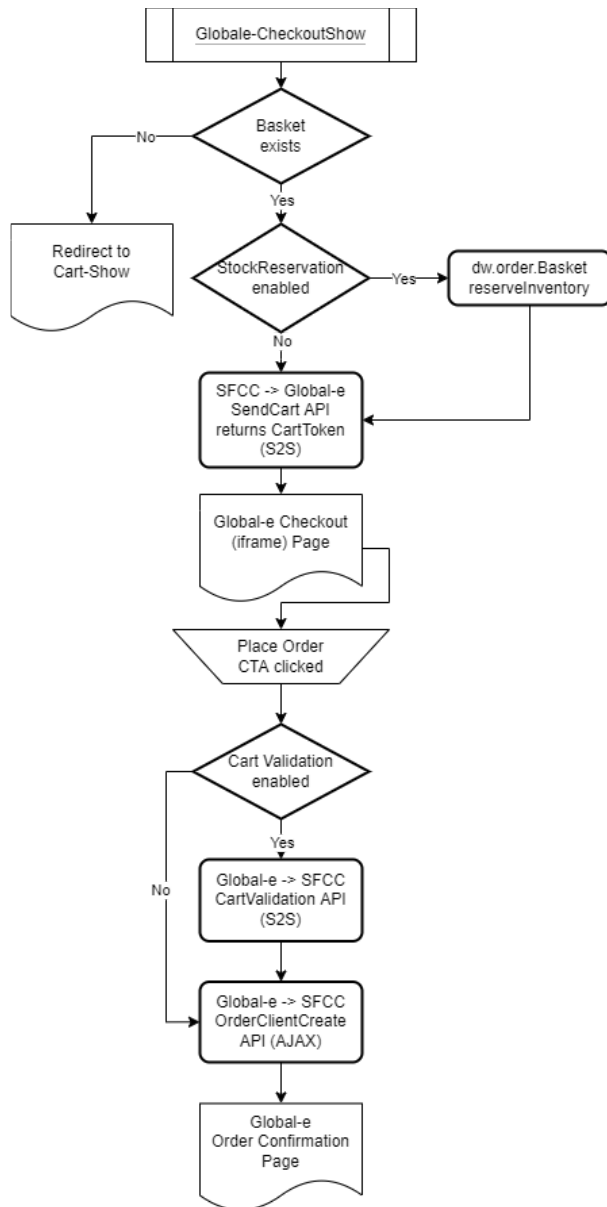

Once global-e checkout is initiated, we check if stock reservation site preference is enabled. The main use of this is to reserve the basket inventory for the designated time in Global-e checkout. This feature is optional for our merchants.

There are site preferences that handle the stock reservation functionality

1. **Enable Stock Reservation** - Reserve basket inventory before Send Cart request.
2. **Stock reservation Time** - The amount of time in minutes for stock to be reserved in Global-e checkout, default is 30 minutes.

After that, we send basket data to Global-e using the Send Cart API and global-e checkout is loaded. When the “Place order” CTA is clicked, the `ValidateCart` endpoint is called (see file `Globale.js`). We have settings on the Global-e side that enable this feature, if enabled the code linked with this endpoint is called. Validate cart functionality checks if products exist and if all products in the payload have the quantity that is available (see file `stockValidation.js`).

If there is no inventory for that product, the customer will see a popup on checkout indicating an issue with the order and will be redirected back to the cart page after clicking OK on the pop-up. No order will be created on SFCC or Global-e side.

When cart validation functionality is disabled, the user will see the confirmation page, but the SFCC order will not create due to an inventory issue and SFCC logs will indicate the product does not have inventory. Order will create on the Global-e side but it will be marked as failed.

When the inventory check is successful order will get created in SFCC with the status ‘CREATED’ and on the Global-e side as well.

Third-party Inventory Calls

To integrate third party API calls in Global-e code please check the custom hook handler
cartridges\int_globale\cartridge\scripts\globale\hooks\onGlobaleValidateCart.js.

Test Global-e Checkout

If you want to pass a fraud check automatically while you testing Global-e Checkout (on SFCC Sandbox, Development, Staging) you should use a special phone number (for security reasons we are not putting it here, Global-e Account/Project Manager or QA to provide) in the Billing Address form.

You can also use test Credit/Debit Cards (for security reasons we are not putting it here, Global-e Account/Project Manager or QA to provide).

Please always try to use valid and real addresses in Billing/Shipping address forms.

Global-e Order

Order Confirmation Order Number

Customer by default (if otherwise is not configured on the Global-e side) will see Global-e Order Number in the Order Confirmation Page, My Account / Order History page and all transactional emails.

For domestic orders, your Customers will still see your SFCC Order Number.

salesforce commerce cloud

Order Confirmation

Hello Ivan
Thank you for shopping with us. Your order has been received and you will shortly receive a confirmation email to ivan.melnik@global-e.com.

Order number: GEB560348GB
Order Date: 23/12/2018
Delivery method: Tracked Post

CONTINUE SHOPPING

ORDER SUMMARY	QUANTITY	PRICE	TOTAL
 DRAPE NECK TANK WITH KNOT DETAIL.	1	€ 37.95	€ 34.15 Was: € 37.95 You Save: € 3.80

DELIVERY INFORMATION

Billing Address
Ivan Melnyk
Address 1
City 12345
San Marino
Phone: 0000000000

Delivery Address
Ivan Melnyk
Address 1
City 12345
San Marino
Phone: 0000000000
Tracked Post € 7.76
7 to 9 business days

PAYMENT METHOD

Visa

BILLING SUMMARY

Items total	€ 34.15
Shipping	€ 7.76
Total For Your Order	€ 41.91


ABOUT SSL CERTIFICATES

Order Confirmed

When Global-e will check the Order and it's OK - the Order Confirmation update will be sent to Global-e Cartridge end-point URL (Globale-OrderSendToMerchant) and the Order will be placed (Order status will be updated to **New**), and the Order Confirmation Status will be updated to **Confirmed**. This update normally comes right after an Order has been created, within the next few seconds.

Order Paid

When Global-e will perform an Order Payment check (Fraud check) and it's OK - the Order Payment update will be sent to Global-e Cartridge end-point URL (Globale-OrderPerformPayment), Order Payment status will be updated to **Paid** and the Order Export status will be updated to **Ready For Export**. This update normally comes only when the "Order Confirmed" update has been sent already.

Order Cancelled

If the Order Payment/Fraud check did not pass, or the Order was not confirmed by Global-e - the Order Cancel update will be sent to Global-e Cartridge end-point URL (Globale-OrderUpdateStatus, and/or Globale-OrderRefund) and the Customer will be refunded automatically. The order status will be updated to **Cancelled**, Order payment status will remain **Not Paid**. This update normally comes only when the "Order Confirmed" update has been sent already.

Shipping Status Updated

If any event of Order Shipment update will happen on the Global-e side - the Shipping Status update can be sent to Global-e Cartridge end-point URL (Globale-OrderUpdateShippingInfo).

The Shipping Tracking Number/URL will be updated according to what has been sent in the Shipping Status Update.

Order Shipping status will NOT be updated to **SHIPPED**. Shipping Status of SFCC Order may be updated by Merchant if it's needed when the Order has been dispatched to Global-e Hub.

Order Refunded

If an Order has been refunded on the Global-e side (not by sending an API request to Global-e) - Order Refund Notification will be sent to Global-e Cartridge end-point URL (Globale-OrderRefund).

By default, Global-e Cartridge does not update any system/custom attributes in SFCC Order on Refund Notification requests.

However, Order Refund Notification may add Notes to SFCC Order and info messages in GLOBALE_INFO Log.

Global-e Session and Cookie attributes

SFCC Session attributes

As long as the Global-e cartridge is connected to the Site (added to the cartridge path of the Site) the following **session custom attributes** will be always present and accessible for any purpose (like configuring Customer Group):

Session Parameter	Description	Default Value	Sample Value
geEnabled	Whether the Global-e is enabled in Site Preference or not	false	true
geCountry	The country code, which is identified with using SFCC GeoLocation, from Global-e country switcher or default Country Code	country code parsed from current request locale (if possible)	GB
geCountryName	The country name of the country ISO2 code, stored in geCountry	-	Great Britain
geOperatedCountry	Whether the current Country (selected in Country Switcher or identified by geo IP) operated by Global-e (if Global-e is enabled) or not	false	true
geSupportsFixedPrices (deprecated)	Whether the fixed prices (from fixed-price price books) should be used for the current Country or not	false	true
gePriceStrategy	Whether the fixed prices (from fixed-price price books) should be used for the current Country or not	DYNAMIC	FIXED
geUseFixedPricesOnly	Only Fixed Prices will be used for the Site, the price will not be dynamically converted	false	true
geCurrency	The Currency code for end-customer prices, calculated based on current Country (if Global-e is enabled and current Country is operated by Global-e) or from	session.currency.currency Code	GBP

	session.currency.currency Code		
geCurrencySymbol	Selected Global-e Currency's Symbol. Normally used in displaying end-customer price on the storefront.	"	£
geCurrencyMaxDecimalPlaces	Selected Global-e Currency's Max Decimal Places	2	2
geCulture	The Culture Code (similar to locales code, but in a different format, e.g. 'en-GB'), calculated based on current Country (if Global-e is enabled and current Country is operated by Global-e), or parsed from request.locale	parsed from request.locale	en-GB
geLocaleID	ID of selected SFCC locale	locale.ID	en_GB
geClientSettings	The string of JSON object, which contains some important Global-e parameters for further usage on script loader	'{}'	<pre>1 {"AllowClientTracking": {"Value": "true"}, 1 "FullClientTracking": {"Value": "true"}, 1 "IsMonitoringMerchant": {"Value": "true"}, 1 "IsV2Checkout": {"Value": "true"}, 1 "TabletAsMobile": {"Value": "true"}, 1 "CheckoutCDNURL": {"Value": 1 "https://www2.bglobale.com/"}, 1 "CheckoutContainerSuffix": {"Value": 1 "Global- e_International_Checkout"}}</pre>
geSiteRedirectUrl	The URL where the Global-e has redirected Customer when the new Country was selected in the country switcher	-	https://merchant-site.com/en

geUseCountryVAT	Allows to use Country VAT	false	true
geDefaultCountryVATRate	Country VAT Rate	null	5.00
geCountryCoefficientRate	Country Coefficient Rate	null	5.00
geCountryCoefficientIncludeVAT	Include VAT into Country Coefficient. Possible values: 0, 2, 4, 6, 8	null	6
geApiVersion	The version of Global-e API	-	2.1.4
geCartHash	The hash of Cart received in response from Global-e SendCart API	null	1f038df1-974f-49a7-835c-d1c905edcde9
geMerchantOrderNumber	SFCC Order Number	-	-

Global-e Cookies

The name of Global-e Cookie is 'GlobalE_Data':

Cookie Parameter	Description	Sample Value
countryISO	<i>The same as session.custom.geCountry</i>	GB
cultureCode	<i>The same as session.custom.geCulture</i>	en-GB
currencyCode	<i>The same as session.custom.geCurrency</i>	GBP
apiVersion	<i>The same as session.custom.geApiVersion</i>	2.1.4

Custom Attributes (Metadata)

The list of custom attributes for any system object will be updated regularly, please follow the updates on [our SFCC GitHub repository](#).

Customize/Extend Global-e Cartridge functionality

Global-e Cartridges are built and written following all requirements and recommendations for SFCC LINK Partners.

This means that by installing the Global-e cartridge you don't have to change anything in the `app_storefront_base` cartridge, but that also means that Global-e does not recommend you to change anything directly in the `int_globale` cartridge.

If you need to customize/extend any logic in the Global-e extension cartridge you have to follow [the recommendations of SFCC in regards to customizing/extending the app_storefront_base cartridge](#) and apply them to the `int_globale_sfra` (or `int_globale_sitegenesis`) cartridge in the same way.

So if, for example, you need to customize/extend any Controller/Model or template from the `int_globale` cartridge - you need to make a copy of that file or extend it in `int_globale_sfra` or `int_globale_sitegenesis` cartridge and put all of your customization/extensions there.

Pay attention: some templates in `int_globale_sitegenesis` were overridden from basic SiteGenesis (Pipelines/Controllers) cartridges and in a few places hardcoded the id of the core cartridge (like this one: `importScript('app_storefront_core:catalog/libCompareList.ds')`) - please change the id of the cartridge to the core cartridge that is used in your project's code (if it is required).

Properties and Translations

Global-e Cartridge has its own `globale.properties` file (`int_globale/cartridge/templates/resources/globale.properties`).

It contains only English translations, so if you want to show localized Global-e messages you have to translate them to all your desired locales and put them into an extension cartridge (`int_globale_sitegenesis` or `int_globale_sfra`).

Checkout Analytics Data Implementation

Once a customer started the Global-e checkout flow, Global-e Client JS SDK will notify the client (Customer's browser parent window from Global-e Checkout iframe) on every step loaded via triggering a JavaScript event, for some steps, the data of the Basket/Order is passed as the parameter to the function which will be handling the event. By default, the **OnCheckoutStepLoaded** event will be triggered twice, once for the initial checkout page load and the second time for the checkout confirmation page.

i Please note that when **OnCheckoutStepLoaded** is triggered on the Global-e checkout confirmation page, the SFCC order may not yet be created.

Therefore, it is crucial to work with and retrieve all necessary details/info from the input **data** object, which is passed as an argument to **OnCheckoutStepLoaded**.

Here is the example of how the Checkout Analytics Data can be integrated into your `int_globale_{extension}/cartridge/client/default/js/geScriptLoader.js`:

Checkout Analytics Data implementation

```
1  /**
2   * Handler function of 'GlobalE.OnCheckoutStepLoadedHandler' event
3   * @param {Object} data - Event data
4   */
5  GeScriptLoader.prototype.onCheckoutStepLoadedHandler = function (data) {
6      try {
7          if (data.StepId === data.Steps.CONFIRMATION) {
8              // stop sending keepAlive ajax call
9              if (('globaleKeepAlive' in window) && window.globaleKeepAlive) {
10                 clearInterval(window.globaleKeepAlive);
11             }
12         }
13     }
14     /**
15      * If you need to implement the frontend analytics please put it here
16      */
17 }
```

```

18      /**
19       * Only for Backend Analytics, like standard SFCC Merchant Tools / Analytics / Purchase Reports.
20       * Should be handled in Globale-Analytics controller
21       */
22       var geIframe = document.querySelector('#gle_iframe');
23       Helpers.makeJsonAjaxCall(geIframe.dataset.analyticsUrl, 'POST', JSON.stringify(data))
24         .then(function (response) { // eslint-disable-line no-unused-vars
25             // handle response
26         })
27         .catch(function (e) {
28             console.warn(e); // eslint-disable-line no-console
29         });
30     } catch (e) {
31         console.warn(e); // eslint-disable-line no-console
32     }
33 };
34

```

Global-e Price API

Global-e cartridge int_globale contains several factories which you can use when you customize your files due to Global-e integration. All available Global-e factories you will find at int_globale/cartridge/scripts/factories/globale/ folder.

Here is the list of the most common price conversion Global-e factories:

Price

This factory will convert the price to the end-customer price using the end-customer currency set in the current session (session.custom.geCurrency).

This factory will return the Global-e Money object (by default) but also can return the Global-e Price object if returnPriceObject is set to true.

Path to the file (relatively to int_globale/cartridge/scripts/factories/globale/ folder): price.js

Parameters:

Parameter	Type	Mandatory	By default	Description
price	number	yes		Original price (in Merchant currency) of the product
productId	string	no	undefined	The product ID, if the resulting price is calculated for a specific SFCC product
quantity	number	no	1	The quantity of the Product for which the Global-e price is being calculated
skipRounding	boolean	no	false	If true - skip the currency rounding part of Global-e price conversion
formatOnly	boolean	no	false	If true - don't calculate Global-e price, just format the value according to the end-customer currency
returnPriceObject	boolean	no	false	If true - will return Global-e Price object, otherwise - Global-e Money object

discount	boolean	no	false	If true - calculate the end-customer price as discounts (excluding rounding rules, etc.)
----------	---------	----	-------	--

Sample:

Global-e Price factory

```
1 var globalePrice = require('*/cartridge/scripts/factories/globale/price');
2 var gePrice = globalePrice(11.12, 12345678);
```

Money

This factory is extending the standard SFCC Money object, adding several extra properties to it.

You can use it for example, when you need to work with a standard SFCC Money object.

This factory will return the Global-e Money object.

Path to the file (relatively to int_globale/cartridge/scripts/factories/globale/ folder): money.js

Parameters:

Parameter	Type	Mandatory	By default	Description
moneyValue	number	yes		Money value
currencyCode	string	yes		The currency code to which this Money will be formatted
originalMoney	object	no	null	The original Money object will be set as .super property of returned Global-e Money object.
fixedPrice	boolean	no	false	If true - will set fixedPrice property of Global-e Money to true, otherwise to false
fixedPriceBookId	string	no	null	If true - will set fixedPriceBookId property of Global-e Money to what is passed, otherwise to null

Sample:

Global-e Money factory

```
1 var globaleMoney = require('*/cartridge/scripts/factories/globale/money');
2 var geMoney = globaleMoney(11.12, 'USD');
```

Option Model

This factory is extending the standard SFCC Product Option Model object, adding several extra properties to it.

You have to use it when you calculate the price for product options (method optionModel.getPrice()).

This factory will return the Global-e ProductOptionModel object.

Path to the file (relatively to int_globale/cartridge/scripts/factories/globale/ folder): optionModel.js

Parameters:

Parameter	Type	Mandatory	By default	Description
-----------	------	-----------	------------	-------------

optionModel	object	yes		Original Product Option Model will be set as .super to returned Global-e Product Option Model object
-------------	--------	-----	--	--

Sample:

Global-e Product Option Model factory

```

1 var globaleOptionModel = require('*/cartridge/scripts/factories/globale/optionModel');
2 var geOptionModel = globaleOptionModel(product.optionModel);

```

Price Model

This factory is extending the standard SFCC Product Price Model object, replacing the logic of existing methods (and values of properties) and adding several extra properties to it.

You have to use it when you calculate the product price on PLP/PDP (and other similar) pages.

This factory will return the Global-e Product Price Model object.

Path to the file (relatively to int_globale/cartridge/scripts/factories/globale/ folder): priceModel.js

Parameters:

Parameter	Type	Mandatory	By default	Description
priceModel	object	yes		Original Product Price Model will be set as .super property to returned Global-e Product Price Model object
product	object	yes		Original AFCC Product object will be set as .product property to returned Global-e Product Price Model object

Sample:

Global-e Product Price Model factory

```

1 var globalePriceModel = require('*/cartridge/scripts/factories/globale/priceModel');
2 var gePriceModel = globalePriceModel(product.priceModel, product);

```

Hiding non-applicable elements

If you have elements on your storefront that are only applicable to your domestic customers, we advise that you hide them from Global-e customers by checking the Global-e session. For example, the SFRA default cart template shows shipping methods. With Global-e, these shipping methods do not apply to Global-e customers since we use specific Global-e shipping methods. As such, we only show these shipping methods if the customers are not Global-e customers. See an example of this logic in

int_globale_sfra/cartridge/templates/default/cart/cartShippingMethodSelection.isml

cartShippingMethodSelection.isml

```

1 <isset name="globaleSession" value="{require('*/cartridge/models/globale/session')}" scope="page"/>
2 <isif condition="{!globaleSession.get('geOperatedCountry')}">
3     <div class="col-12">
4         ...
5     </div>
6 </isif>
7

```

Common elements to remove for Global-e customers:

- Domestic shipping methods on the cart page

- PayPal payment method or other payment methods on the cart page
- In-store pickup
- Domestic customer service contact information

Display product status on Global-e checkout

Global-e allows the display of custom product status next to the product line item on Global-e checkout and Global-e confirmation email. You can set this product status to any value by adding an attribute containing the message to be displayed to the line item of the basket when sending it to Global-e. Following SFCC guidelines, it is recommended that you create an extension of our base metadata model, located at `int_globale\cartridge\models\globale\sendCart\product\decorators\metadata.js`, to add this attribute. Below is a code example of sending back ordered product status to be displayed on Global-e checkout. Please note that this is just an example and your logic to determine whether a product is back-ordered could be different.

Display back-ordered product status

```

1  /**
2   * Calculates and returns Global-e Product.Metadata API
3   * @returns {Object|null} - Global-e Product.Metadata API
4   */
5  function getMetadata() {
6      var metadata = {};
7      var attributes = [];
8
9      // For backordered products
10     if (this.apiProduct.availabilityModel.availabilityStatus ===
dw.catalog.ProductAvailabilityModel.AVAILABILITY_STATUS_BACKORDER) {
11         var StringUtils = require('dw/util/StringUtils');
12         var Resource = require('dw/web/Resource');
13         var backOrderAttribute = {};
14         var backOrderedMsg = StringUtils.format(Resource.msg('global.allbackorder', 'locale', null));
15
16         if (this.apiProduct.availabilityModel.inventoryRecord != null &&
17             this.apiProduct.availabilityModel.inventoryRecord.inStockDate != null &&
18             this.apiProduct.availabilityModel.inventoryRecord.inStockDate > new Date()
19         ) {
20             backOrderedMsg += StringUtils.format(
21                 Resource.msg('global.inStockDate', 'locale', null),
22                 this.apiProduct.availabilityModel.inventoryRecord.inStockDate.toString()
23             );
24         }
25         backOrderAttribute.AttributeKey = 'Backordered';
26         backOrderAttribute.AttributeValue = backOrderedMsg;
27         attributes.push(backOrderAttribute);
28     }
29
30     if (attributes.length > 0) {
31         metadata.Attributes = attributes;
32     }
33     return metadata;
34 }

```

Global-e Free Shipping Banner

Free shipping promotions for Global-e operated countries are managed on the Global-e platform and can be configured for each country individually. Allow us to display a free shipping promotion banner on your site by adding the container below either directly to your header

template or via a content slot. Please note that if you choose to add it via the content slot, this content slot needs to be configured and active at all times.

Free Shipping Banner

```
1 <div id="GlobaleFreeShippingBannerContainer"> </div>
```

The Failover and Recovery Process

The failover process can occur manually. If Global-e services are unavailable for some reason the integration could be disabled by setting Site Preference "Global-e Enabled" to "No".

Global-e Compatibility Mode Requirements

Our cartridges are fully compatible with **Compatibility Mode 17.7**, so we strongly recommend to upgrade your Salesforce B2C Commerce Digital (i.e Sandbox, Staging, Development and Production) to this version of Compatibility Mode.

Our cartridges are using the **wildcard** (require('*/*...')) and **module.superModule** features of CommonJS, which are available only if the Compatibility Mode is 17.7 or newer.

Compatibility Mode of Salesforce B2C Commerce Digital is older than 17.7

SFRA Storefront

Unfortunately you won't be able to use our cartridges for SFRA Storefront Architecture if the Compatibility Mode of your SFCC Digital is older than 17.7.

SiteGenesis Storefront

If for any reason you're unable to upgrade the Compatibility Mode of your Salesforce B2C Commerce Digital to 17.7 please use the following workaround that will allow Global-e cartridges to work with your Compatibility Mode version.



Please note, if you are making any changes in the main Global-e SFCC cartridge int_globale - you won't be able to apply our updates easily, you will always have to thoroughly check the differences manually.

*So we strongly recommend do not change any files in int_globale cartridge but copy any original files from main cartridge int_globale into your * ext cartridge and make any required changes there.*


The screenshots below are from the UI of eclipse.

Wildcard Replace

1. Find all files of Global-e SFCC cartridges (int_globale, int_globale_sitogenesis and int_globale_bm, if you going to use it) in your UX Studio where the wildcard (require('*/*...')) of CommonJS is used:

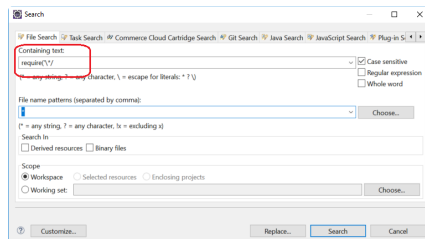

2. You should be able to see the list of all found files which uses the wildcard in require('*/*...')

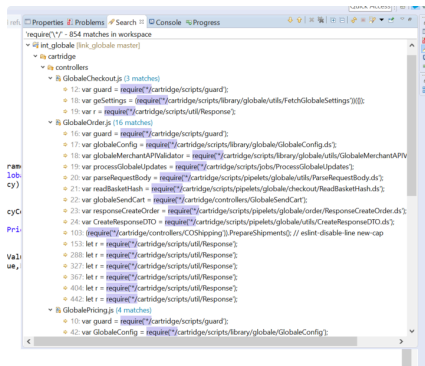

- Copy files, which uses wildcard into your *_ext cartridge and replace '*' in require('*/*') by what works well in your Compatibility Mode (for example, 'app_storefront_core/*'):



to (for files which are loaded from int_globale cartridge)




or (for files which are loaded from app_storefront_controllers cartridge)




module.superModule Replace

- Find all files within Global-e cartridges (int_globale, int_globale_sitegenesis) which uses the feature of module.superModule:

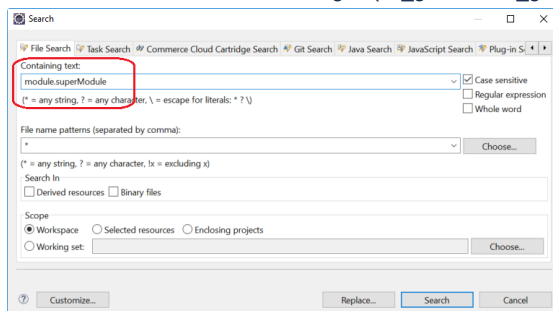


- You should be able to see the list of files which uses module.superModule:

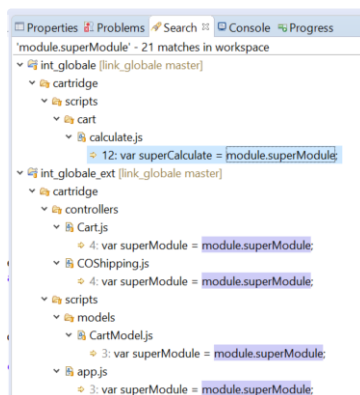

- Copy only those files, which uses module.superModule to your extension (int_globale_sitegenesis) cartridge and change them respectively.

For example: copy calculate.js into int_globale_sitegenesis cartridge, and modify):



to

```
11 //  
12 var superCalculate = require('app_storefront_core/cartridge/scripts/cart/calculate.js');  
13 var globalizeConfig = require('app_storefront_core/cartridge/scripts/storefront/globalize-config.js');  
14 var priceCalculator = null;  
15 }
```

Compatibility Mode older than 15.5

Global-e cartridges are **not compatible** with SFCC Digital **Compatibility Mode older than 15.5** at all.

SFCC OMS

In case when is used SFCC OMS - the order's status is not possible to update when the order is exported from SFCC to OMS.

In that case, is recommended to use Global-e Custom Statuses for sending updates from Global-e to SFCC.

The Global-e Custom Statuses should be handled on the SFCC side in a few ways:

- via creation of hook handler for custom hook 'globale.onGlobaleOrderStatusUpdate';
- via SFCC job which will extract data from SFCC order custom attribute(where are stored custom statuses) 'Order Status Updates received from Global-e (geReceivedOrderStatusUpdates)' and process stored values.

If your project uses SFCC OMS then please notify the Global-e SFCC team about it and then discuss all required changes.