


Week 12-Q1

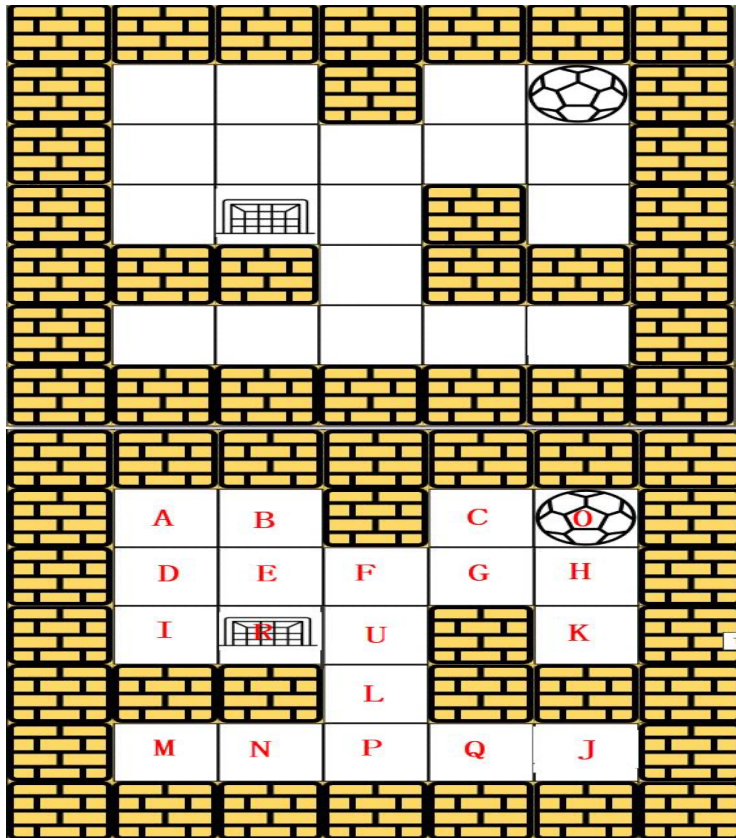

Visited: 0 Queue: 0	Visited: 0 Queue: 0 1) Add 0 to the queue 2) Mark 0 as visited	Visited: 0 1 Queue: 1) Remove 0 from the queue 2) Print: 0.	Visited: 0 C K 1 1 1 Queue: C K 1) Add C and K to the queue 2) Mark C and K as visited.
Visited: 0 C K 1 1 1 Queue: K 1) Remove C from the queue 2) Print 0 C.	Visited: 0 C K G 1 1 1 1 Queue: K G 1) Add G to the queue 2) Mark G as visited.	Visited: 0 C K G 1 1 1 1 Queue: G 1) Remove K from the queue. 2) Print: 0 C K	Visited: 0 C K G 1 1 1 1 Queue: 1) Remove G from the queue. 2) Print: 0 C K G
Visited: 0 C K G D 1 1 1 1 1 Queue: D 1) Add D to the queue 2) Mark D as visited.	Visited: 0 C K G D 1 1 1 1 1 Queue: 1) Add D to the queue 2) Print: 0 C K G D	Visited: 0 C K G D A I 1 1 1 1 1 1 1 Queue: A I 1) Add A, I to the queue 2) Mark A, I as visited Visited: 0 C K G D A I 1 1 1 1 1 1 1 Queue: I 1) Remove A from the queue 2) Print: 0 C K G D A	Visited: 0 C K G D A I B 1 1 1 1 1 1 1 1 Queue: I B 1) Add B to the queue 2) Mark B as visited
Visited: 0 C K G D A I B 1 1 1 1 1 1 1 1 Queue: B 1) Remove I from the queue 2) Print: 0 C K G D A I	Visited: 0 C K G D A I B R 1 1 1 1 1 1 1 1 1 Queue: B R 1) Add R to the queue 2) Mark R as visited.	Visited: 0 C K G D A I B R 1 1 1 1 1 1 1 1 1 Queue: R 1) Remove B from the queue. 2) Print 0 C K G D A I B	Visited: 0 C K G D A I B R 1 1 1 1 1 1 1 1 1 Queue: 1) Remove R from the queue. 2) Print: 0 C K G D A I B R

Code (Chatgpt):

```
from collections import deque
```

```
def hasPath(maze, start, destination):
    rows, cols = len(maze), len(maze[0])
    directions = [(0, 1), (0, -1), (1, 0), (-1, 0)]
```

```

def is_valid(x, y):
    return 0 <= x < rows and 0 <= y < cols and maze[x][y] == 0

queue = deque([start])
visited = set([start])

while queue:
    x, y = queue.popleft()

    if (x, y) == destination:
        return True

    for dx, dy in directions:
        newX, newY = x + dx, y + dy

        while is_valid(newX, newY):
            newX += dx
            newY += dy

        newX -= dx
        newY -= dy

        if (newX, newY) not in visited:
            queue.append((newX, newY))
            visited.add((newX, newY))

    return False

# Example test case
maze = [
    [0, 0, 1, 0, 0],
    [0, 0, 0, 0, 0],
    [0, 0, 0, 1, 0],
    [1, 1, 0, 1, 1],
    [0, 0, 0, 0, 0]
]
start = (0, 4)
destination = (4, 4)
print(hasPath(maze, start, destination)) # Output: True

```

CodeFileEditSelectionViewGoRunTerminalWindowHelp

Users > rakesh_kasha > Desktop > week12-q1.py > ...

1from collections import deque

2

3def hasPath(maze, start, destination):

4 rows, cols = len(maze), len(maze[0])

5 directions = [(0, 1), (0, -1), (1, 0), (-1, 0)]

6

7 def is_valid(x, y):

8 return 0 <= x < rows and 0 <= y < cols and maze[x][y] == 0

9

10 queue = deque([start])

11 visited = set([start])

12

13 while queue:

14 x, y = queue.popleft()

15

16 if (x, y) == destination:

17

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

Python + - [] ... ^ x

/usr/local/bin/python3 /Users/rakesh_kasha/Desktop/week12-q1.py

● (base) rakesh_kasha@Rakesh-kashas-MacBook-Pro ~ % /usr/local/bin/python3 /Users/rakesh_kasha/Desktop/week12-q1.py

True

○ (base) rakesh_kasha@Rakesh-kashas-MacBook-Pro ~ %

Ln 57, Col 1Spaces: 4UTF-8LFPython 3.10.7 64-bit

CodeFileEditSelectionViewGoRunTerminalWindowHelp

Users > rakesh_kasha > Desktop > week12-q1.py > ...

42

43 start = (0, 4)

44 destination = (4, 4)

45 print(hasPath(maze, start, destination)) # Output: True

46

47 maze2 = [

48 [0, 0, 0, 0, 0],

49 [1, 1, 0, 0, 0],

50 [0, 0, 0, 0, 0],

51 [0, 1, 0, 0, 1],

52 [0, 1, 0, 0, 0]

53]

54 start = (4, 3)

55 destination = (0, 1)

56 print(hasPath(maze, start, destination)) # Output: False

57

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

Python + - [] ... ^ x

/usr/local/bin/python3 /Users/rakesh_kasha/Desktop/week12-q1.py

● (base) rakesh_kasha@Rakesh-kashas-MacBook-Pro ~ % /usr/local/bin/python3 /Users/rakesh_kasha/Desktop/week12-q1.py

True

● (base) rakesh_kasha@Rakesh-kashas-MacBook-Pro ~ % /usr/local/bin/python3 /Users/rakesh_kasha/Desktop/week12-q1.py

True

False

○ (base) rakesh_kasha@Rakesh-kashas-MacBook-Pro ~ %

Ln 57, Col 1Spaces: 4UTF-8LFPython 3.10.7 64-bit