


Decision Trees

Random Forests

Definition

- A tree-like model that illustrates series of events leading to certain decisions
- Each node represents a test on an attribute and each branch is an outcome of that test


Who to loan?



- Not a student
- 45 years old
- Medium income
- Fair credit record




- Student
- 27 years old
- Low income
- Excellent credit record

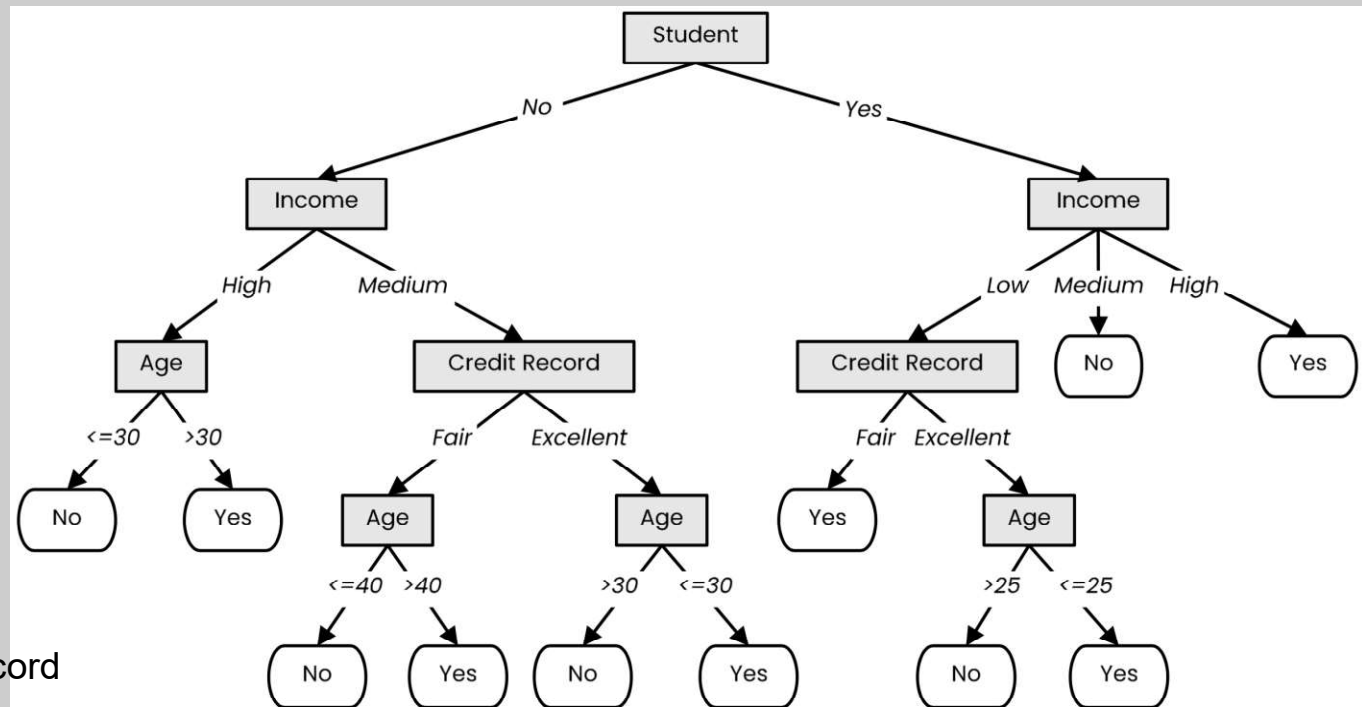

Definition

- A tree-like model that illustrates series of events leading to certain decisions
- Each node represents a test on an attribute and each branch is an outcome of that test


Who to loan?



- Not a student
 - 45 years old
 - Medium income
 - Fair credit record
- Yes




- Student
- 27 years old
- Low income
- Excellent credit record

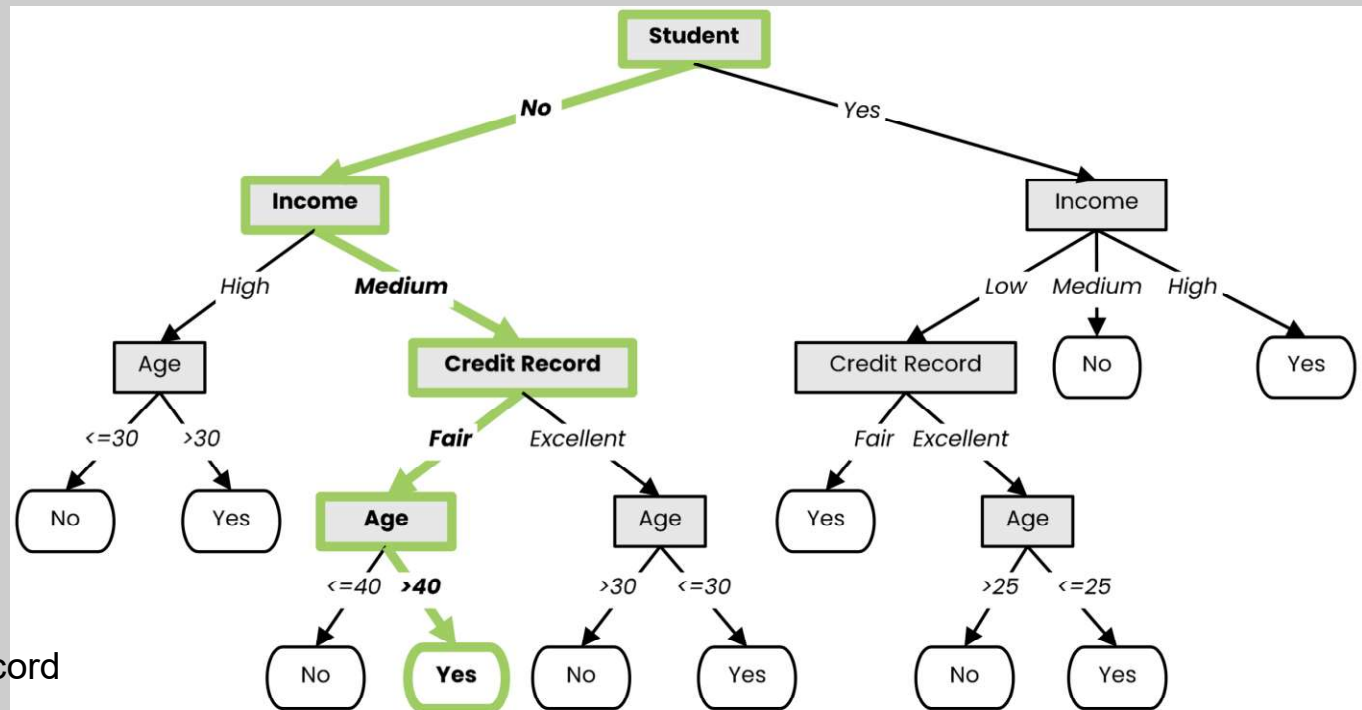

Definition

- A tree-like model that illustrates series of events leading to certain decisions
- Each node represents a test on an attribute and each branch is an outcome of that test

Who to loan?




- Not a student
- 45 years old
- Medium income
- Fair credit record

➤ Yes



- Student
- 27 years old
- Low income
- Excellent credit record



➤ No

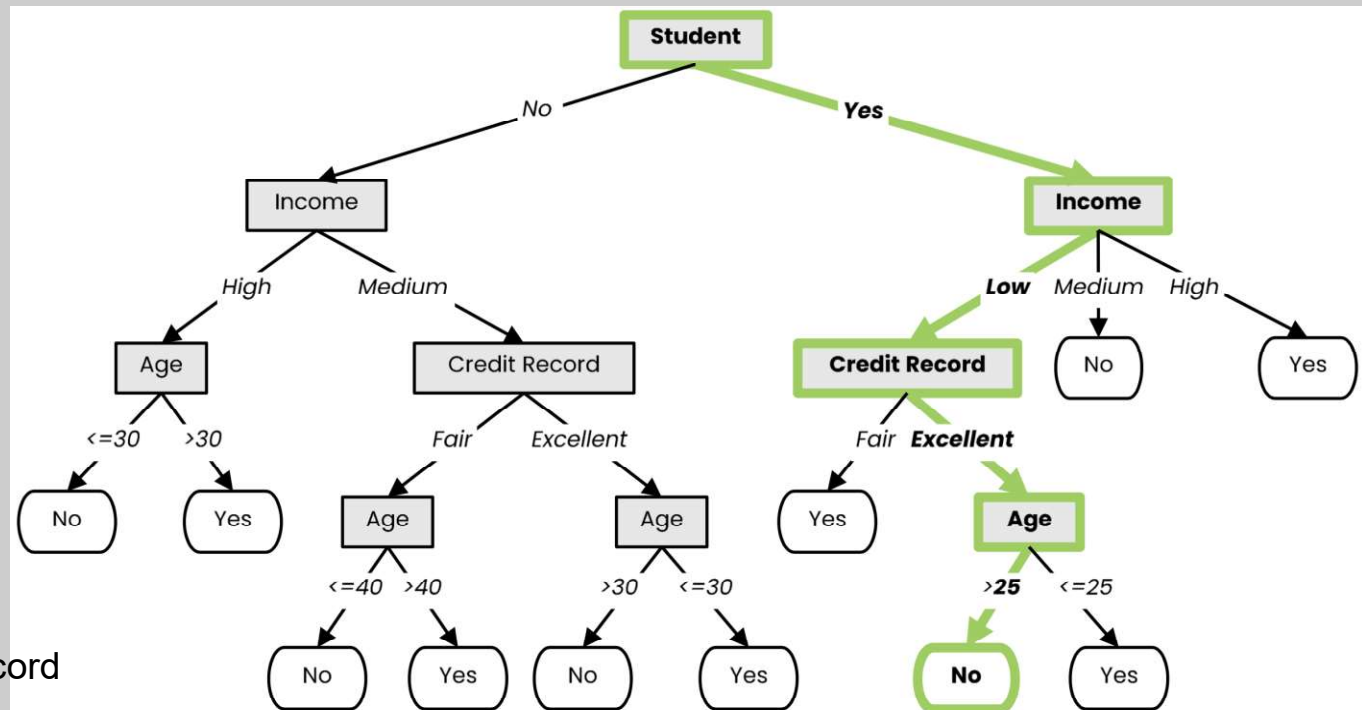

Decision Tree Learning

- We use labeled data to obtain a suitable decision tree for future predictions
 - We want a decision tree that works well on unseen data, while asking as few questions as possible

Outlook	Temperature	Humidity	Wind	Play Tennis?
Sunny	Hot	High	Weak	No
Sunny	Hot	High	Strong	No
Overcast	Hot	High	Weak	Yes
Rainy	Mild	High	Weak	Yes
Rainy	Cool	Normal	Weak	Yes
Rainy	Cool	Normal	Strong	No
Overcast	Cool	Normal	Strong	Yes
Sunny	Mild	High	Weak	No
Sunny	Cool	Normal	Weak	Yes
Rainy	Mild	Normal	Weak	Yes
Sunny	Mild	Normal	Strong	Yes
Overcast	Mild	High	Strong	Yes
Overcast	Hot	Normal	Weak	Yes
Rainy	Mild	High	Strong	No

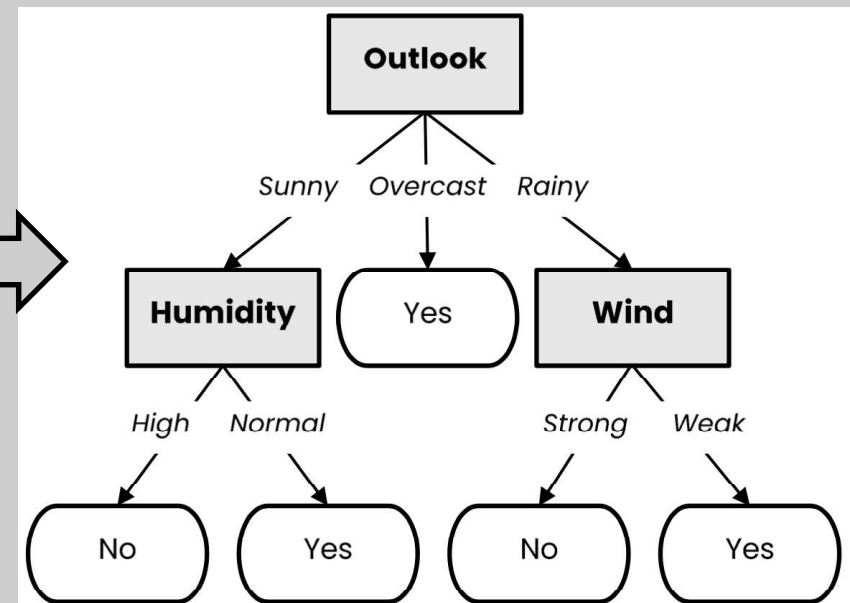

Decision Tree Learning

- Basic step: choose an attribute and, based on its values, split the data into smaller sets
 - Recursively repeat this step until we can surely decide the label


Outlook	Temperature	Humidity	Wind	Play Tennis?
Sunny	Hot	High	Weak	No
Sunny	Hot	High	Strong	No
Overcast	Hot	High	Weak	Yes
Rainy	Mild	High	Weak	Yes
Rainy	Cool	Normal	Weak	Yes
Rainy	Cool	Normal	Strong	No
Overcast	Cool	Normal	Strong	Yes
Sunny	Mild	High	Weak	No
Sunny	Cool	Normal	Weak	Yes
Rainy	Mild	Normal	Weak	Yes
Sunny	Mild	Normal	Strong	Yes
Overcast	Mild	High	Strong	Yes
Overcast	Hot	Normal	Weak	Yes
Rainy	Mild	High	Strong	No

Outlook

Decision Tree Learning

- Basic step: choose an attribute and, based on its values, split the data into smaller sets
 - Recursively repeat this step until we can surely decide the label


Outlook = Sunny	Temperature	Humidity	Wind	Play Tennis?
	Hot	High	Weak	No
	Hot	High	Strong	No
	Mild	High	Weak	No
	Cool	Normal	Weak	Yes
Outlook = Overcast	Mild	Normal	Strong	Yes
	Temperature	Humidity	Wind	Play Tennis?
	Hot	High	Weak	Yes
	Cool	Normal	Strong	Yes
	Mild	High	Strong	Yes
Outlook = Rainy	Hot	Normal	Weak	Yes
	Temperature	Humidity	Wind	Play Tennis?
	Mild	High	Weak	Yes
	Cool	Normal	Weak	Yes
	Cool	Normal	Strong	No
	Mild	Normal	Weak	Yes
	Mild	High	Strong	No

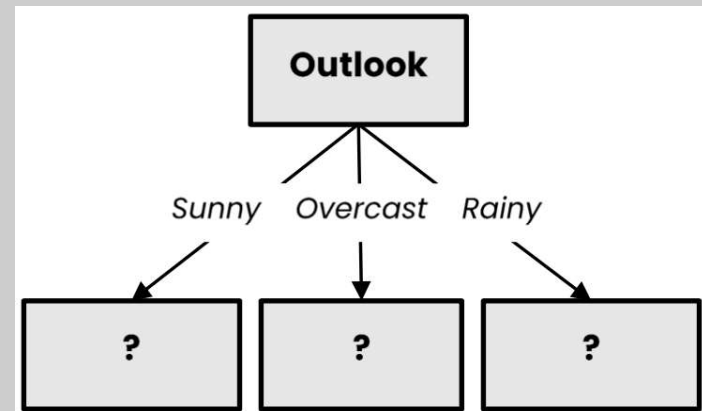

Decision Tree Learning

- Basic step: choose an attribute and, based on its values, split the data into smaller sets
 - Recursively repeat this step until we can surely decide the label

Outlook = Sunny	Temperature	Humidity	Wind	Play Tennis?
	Hot	High	Weak	No
	Hot	High	Strong	No
	Mild	High	Weak	No
	Cool	Normal	Weak	Yes
	Mild	Normal	Strong	Yes
Outlook = Overcast	Temperature	Humidity	Wind	Play Tennis?
	Hot	High	Weak	Yes
	Cool	Normal	Strong	Yes
	Mild	High	Strong	Yes
	Hot	Normal	Weak	Yes
Outlook = Rainy	Temperature	Humidity	Wind	Play Tennis?
	Mild	High	Weak	Yes
	Cool	Normal	Weak	Yes
	Cool	Normal	Strong	No
	Mild	Normal	Weak	Yes
	Mild	High	Strong	No

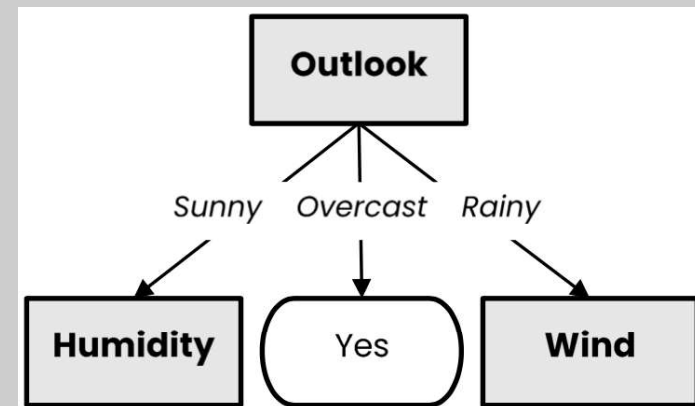

Decision Tree Learning

- Basic step: choose an attribute and, based on its values, split the data into smaller sets
 - Recursively repeat this step until we can surely decide the label

Outlook = Sunny

Humidity = High		
Temperature	Wind	Play Tennis?
Hot	Weak	No
Hot	Strong	No
Mild	Weak	No

Humidity = Normal		
Temperature	Wind	Play Tennis?
Cool	Weak	Yes
Mild	Strong	Yes


Outlook = Overcast

Temperature	Humidity	Wind	Play Tennis?
Hot	High	Weak	Yes
Cool	Normal	Strong	Yes
Mild	High	Strong	Yes
Hot	Normal	Weak	Yes

Outlook = Rainy

Wind = Strong		
Temperature	Humidity	Play Tennis?
Cool	Normal	No
Mild	High	No

Wind = Weak		
Temperature	Humidity	Play Tennis?
Mild	High	Yes
Cool	Normal	Yes
Mild	Normal	Yes

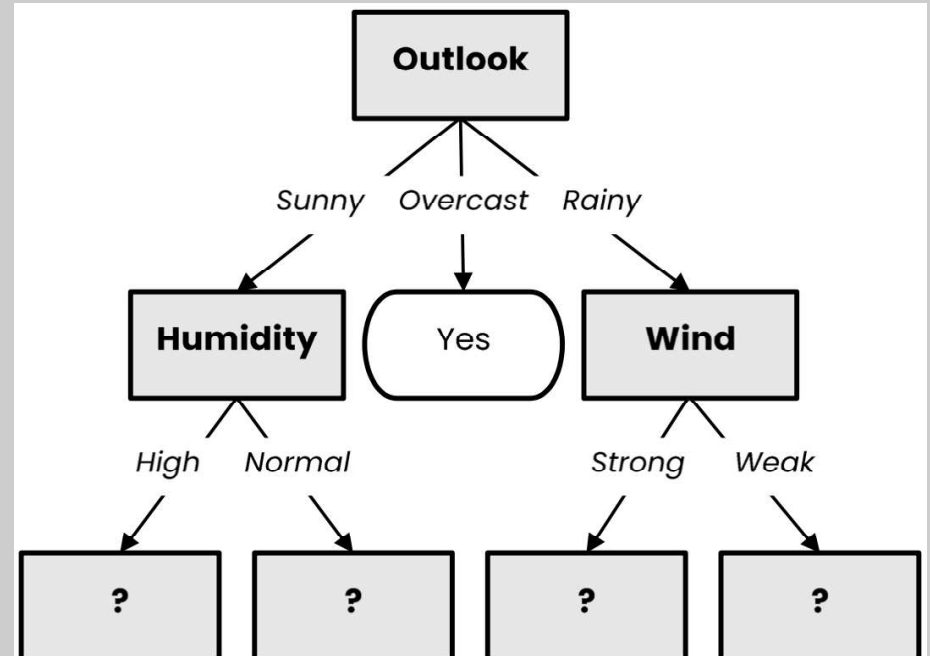

Decision Tree Learning

- Basic step: choose an attribute and, based on its values, split the data into smaller sets
 - Recursively repeat this step until we can surely decide the label

Outlook = Sunny

Humidity = High		
Temperature	Wind	Play Tennis?
Hot	Weak	No
Hot	Strong	No
Mild	Weak	No

Humidity = Normal		
Temperature	Wind	Play Tennis?
Cool	Weak	Yes
Mild	Strong	Yes


Outlook = Overcast

Temperature	Humidity	Wind	Play Tennis?
Hot	High	Weak	Yes
Cool	Normal	Strong	Yes
Mild	High	Strong	Yes
Hot	Normal	Weak	Yes

Outlook = Rainy



Wind = Strong		
Temperature	Humidity	Play Tennis?
Cool	Normal	No
Mild	High	No

Wind = Weak		
Temperature	Humidity	Play Tennis?
Mild	High	Yes
Cool	Normal	Yes
Mild	Normal	Yes

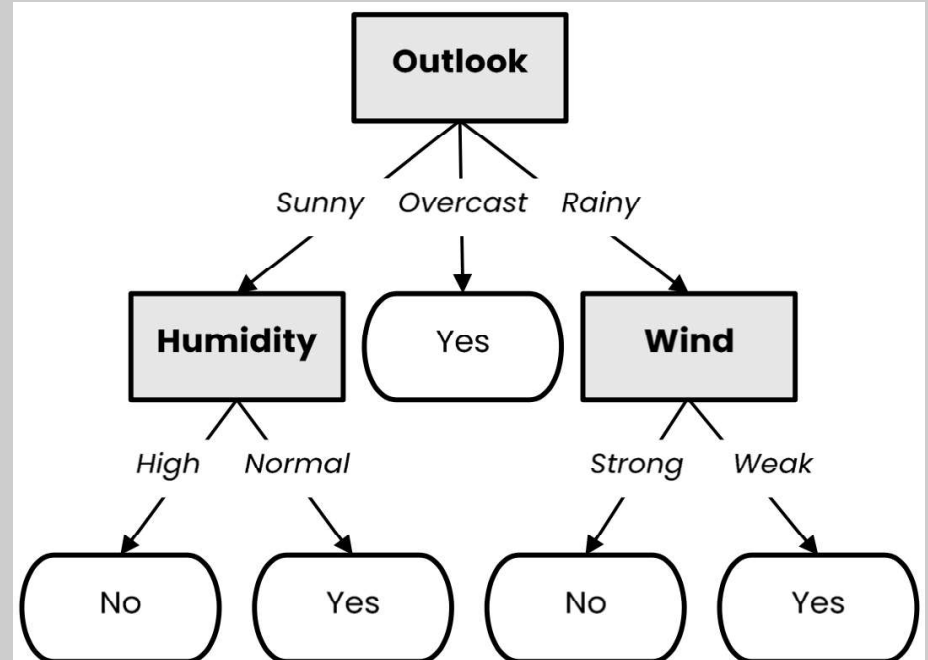

What is a good attribute?

Does it fly?	Color	Class
No	Brown	Mammal
No	White	Mammal
Yes	Brown	Bird
Yes	White	Bird
No	White	Mammal
No	Brown	Bird
Yes	White	Bird

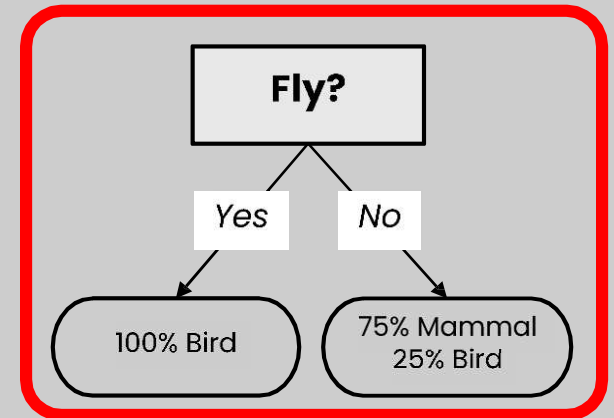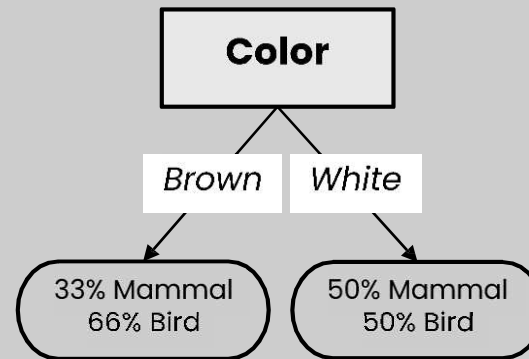

- Which attribute provides **better** splitting?
- Why?
 - Because the resulting subsets are more **pure**
 - Knowing the value of this attribute gives us **more information** about the label (the entropy of the subsets is lower)

Information Gain

Entropy

- Entropy measures the degree of randomness in data

Low entropy



High entropy




- For a set of samples X with k classes:

$$\text{entropy}(X) = - \sum_{i=1}^k p_i \log_2(p_i)$$

where p_i is the proportion of elements of class i

- Lower entropy implies greater predictability!

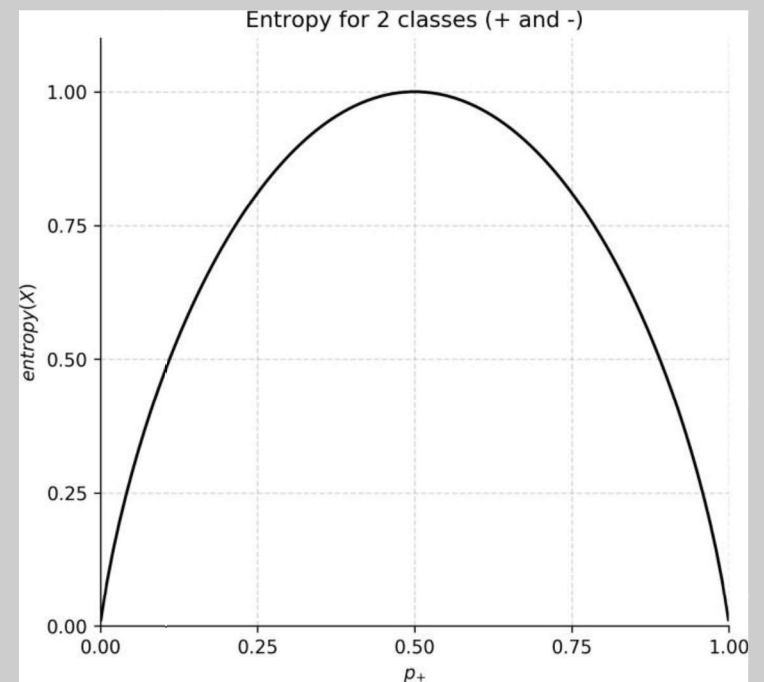

Information Gain



- The information gain of an attribute a is the expected reduction in entropy due to splitting on values of a :

$$\text{gain}(X, a) = \text{entropy}(X) - \sum_{v \in \text{Values}(a)} \frac{|X_v|}{|X|} \text{entropy}(X_v)$$

where X_v is the subset of X for which $a = v$

Best attribute = highest information gain



Does it fly?	Color	Class
No	Brown	Mammal
No	White	Mammal
Yes	Brown	Bird
Yes	White	Bird
No	White	Mammal
No	Brown	Bird
Yes	White	Bird

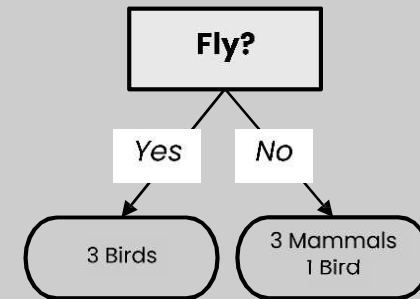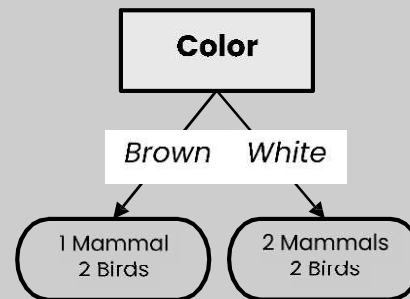

$$\text{entropy}(X) = -p_{\text{mammal}} \log_2 p_{\text{mammal}} - p_{\text{bird}} \log_2 p_{\text{bird}} = -\frac{3}{7} \log_2 \frac{3}{7} - \frac{4}{7} \log_2 \frac{4}{7} \approx 0.985$$

Best attribute = highest information gain

Does it fly?	Color	Class
No	Brown	Mammal
No	White	Mammal
Yes	Brown	Bird
Yes	White	Bird
No	White	Mammal
No	Brown	Bird
Yes	White	Bird

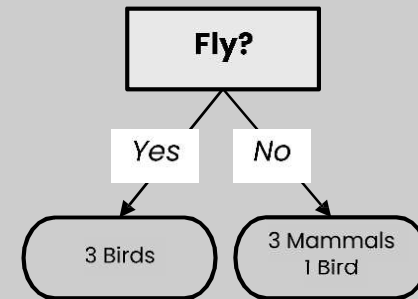
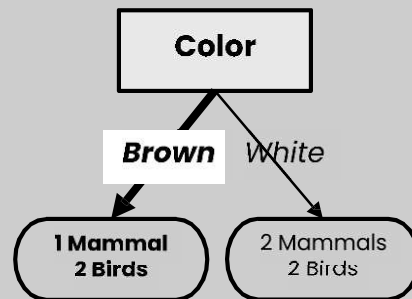


$$\text{entropy}(X) = -p_{\text{mammal}} \log_2 p_{\text{mammal}} - p_{\text{bird}} \log_2 p_{\text{bird}} = -\frac{3}{7} \log_2 \frac{3}{7} - \frac{4}{7} \log_2 \frac{4}{7} \approx 0.985$$

$$\text{entropy}(X_{\text{color=brown}}) = -\frac{1}{3} \log_2 \frac{1}{3} - \frac{2}{3} \log_2 \frac{2}{3} \approx 0.918$$

Best attribute = highest information gain

Does it fly?	Color	Class
No	Brown	Mammal
No	White	Mammal
Yes	Brown	Bird
Yes	White	Bird
No	White	Mammal
No	Brown	Bird
Yes	White	Bird

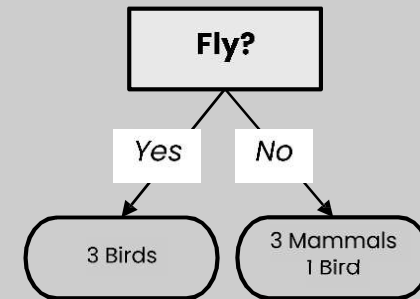
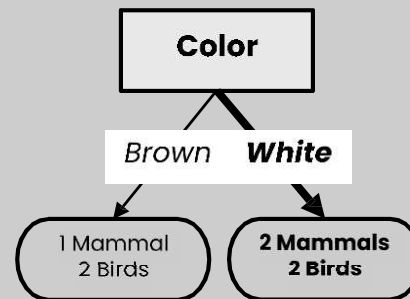


$$\text{entropy}(X) = -p_{\text{mammal}} \log_2 p_{\text{mammal}} - p_{\text{bird}} \log_2 p_{\text{bird}} = -\frac{3}{7} \log_2 \frac{3}{7} - \frac{4}{7} \log_2 \frac{4}{7} \approx 0.985$$

$$\text{entropy}(X_{\text{color=brown}}) = -\frac{1}{3} \log_2 \frac{1}{3} - \frac{2}{3} \log_2 \frac{2}{3} \approx 0.918 \quad \text{entropy}(X_{\text{color=white}}) = 1$$

Best attribute = highest information gain

Does it fly?	Color	Class
No	Brown	Mammal
No	White	Mammal
Yes	Brown	Bird
Yes	White	Bird
No	White	Mammal
No	Brown	Bird
Yes	White	Bird

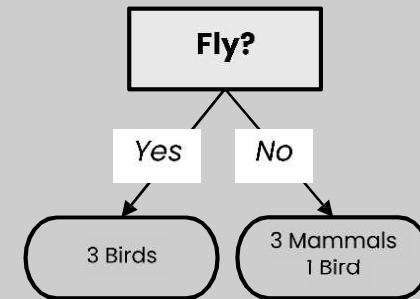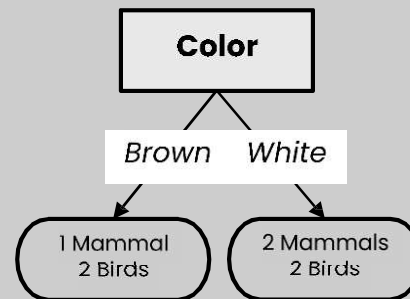



$$\text{entropy}(X) = -p_{\text{mammal}} \log_2 p_{\text{mammal}} - p_{\text{bird}} \log_2 p_{\text{bird}} = -\frac{3}{7} \log_2 \frac{3}{7} - \frac{4}{7} \log_2 \frac{4}{7} \approx 0.985$$

$$\text{entropy}(X_{\text{color}=\text{brown}}) = -\frac{1}{3} \log_2 \frac{1}{3} - \frac{2}{3} \log_2 \frac{2}{3} \approx 0.918 \quad \text{entropy}(X_{\text{color}=\text{white}}) = 1$$

$$\text{gain}(X, \text{color}) = 0.985 - \frac{3}{7} \cdot 0.918 - \frac{4}{7} \cdot 1 \approx 0.020$$

Best attribute = highest information gain

Does it fly?	Color	Class
No	Brown	Mammal
No	White	Mammal
Yes	Brown	Bird
Yes	White	Bird
No	White	Mammal
No	Brown	Bird
Yes	White	Bird

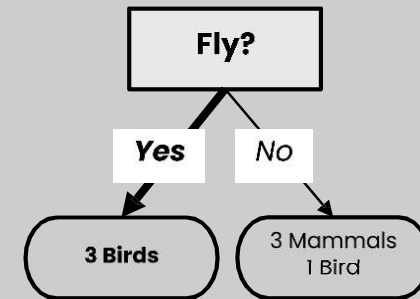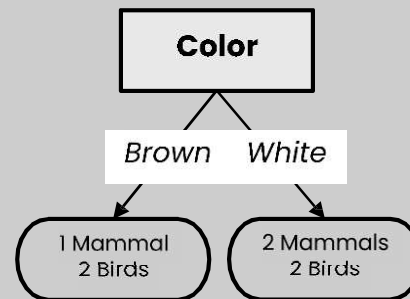

$$\text{entropy}(X) = -p_{\text{mammal}} \log_2 p_{\text{mammal}} - p_{\text{bird}} \log_2 p_{\text{bird}} = -\frac{3}{7} \log_2 \frac{3}{7} - \frac{4}{7} \log_2 \frac{4}{7} \approx 0.985$$



$$\text{entropy}(X_{\text{color}=\text{brown}}) = -\frac{1}{3} \log_2 \frac{1}{3} - \frac{2}{3} \log_2 \frac{2}{3} \approx 0.918 \quad \text{entropy}(X_{\text{color}=\text{white}}) = 1$$

$$\text{gain}(X, \text{color}) = 0.985 - \frac{3}{7} \cdot 0.918 - \frac{4}{7} \cdot 1 \approx 0.020$$

$$\text{entropy}(X_{\text{fly}=\text{yes}}) = 0$$

Best attribute = highest information gain

Does it fly?	Color	Class
No	Brown	Mammal
No	White	Mammal
Yes	Brown	Bird
Yes	White	Bird
No	White	Mammal
No	Brown	Bird
Yes	White	Bird

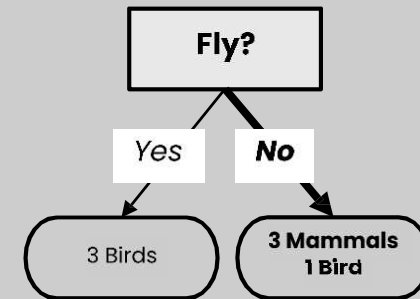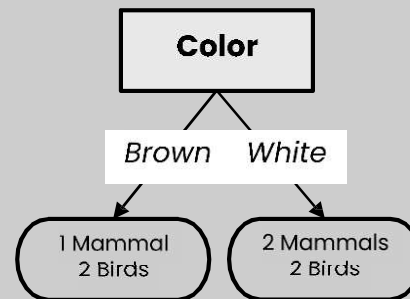

$$\text{entropy}(X) = -p_{\text{mammal}} \log_2 p_{\text{mammal}} - p_{\text{bird}} \log_2 p_{\text{bird}} = -\frac{3}{7} \log_2 \frac{3}{7} - \frac{4}{7} \log_2 \frac{4}{7} \approx 0.985$$

$$\text{entropy}(X_{\text{color}=\text{brown}}) = -\frac{1}{3} \log_2 \frac{1}{3} - \frac{2}{3} \log_2 \frac{2}{3} \approx 0.918 \quad \text{entropy}(X_{\text{color}=\text{white}}) = 1$$



$$\text{gain}(X, \text{color}) = 0.985 - \frac{3}{7} \cdot 0.918 - \frac{4}{7} \cdot 1 \approx 0.020$$

$$\text{entropy}(X_{\text{fly}=\text{yes}}) = 0 \quad \text{entropy}(X_{\text{fly}=\text{no}}) = -\frac{3}{4} \log_2 \frac{3}{4} - \frac{1}{4} \log_2 \frac{1}{4} \approx 0.811$$

Best attribute = highest information gain

In practice, we compute *entropy*(*X*) only once!

Does it fly?	Color	Class
No	Brown	Mammal
No	White	Mammal
Yes	Brown	Bird
Yes	White	Bird
No	White	Mammal
No	Brown	Bird
Yes	White	Bird

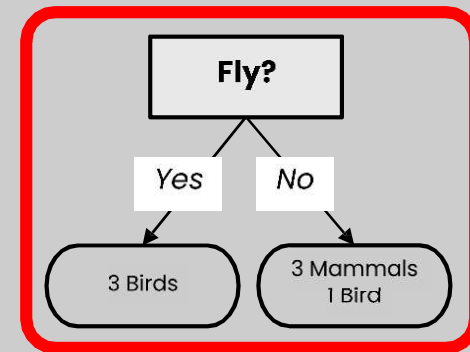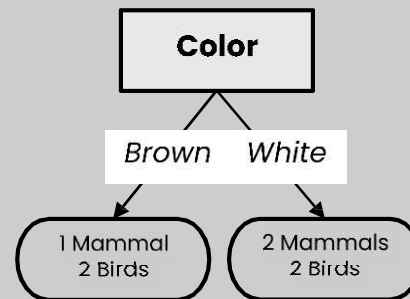

$$\text{entropy}(X) = -p_{\text{mammal}} \log_2 p_{\text{mammal}} - p_{\text{bird}} \log_2 p_{\text{bird}} = -\frac{3}{7} \log_2 \frac{3}{7} - \frac{4}{7} \log_2 \frac{4}{7} \approx 0.985$$

$$\text{entropy}(X_{\text{color}=\text{brown}}) = -\frac{1}{3} \log_2 \frac{1}{3} - \frac{2}{3} \log_2 \frac{2}{3} \approx 0.918 \quad \text{entropy}(X_{\text{color}=\text{white}}) = 1$$

$$\text{gain}(X, \text{color}) = 0.985 - \frac{3}{7} \cdot 0.918 - \frac{4}{7} \cdot 1 \approx 0.020$$

$$\text{entropy}(X_{\text{fly}=\text{yes}}) = 0 \quad \text{entropy}(X_{\text{fly}=\text{no}}) = -\frac{3}{4} \log_2 \frac{3}{4} - \frac{1}{4} \log_2 \frac{1}{4} \approx 0.811$$

$$\text{gain}(X, \text{fly}) = 0.985 - \frac{3}{7} \cdot 0 - \frac{4}{7} \cdot 0.811 \approx 0.521$$

Gini Impurity

Gini Impurity

- Gini impurity measures how often a randomly chosen example would be incorrectly labeled if it was randomly labeled according to the label distribution




Error of classifying
randomly picked
fruit with randomly
picked label



- For a set of samples X with k classes:

$$gini(X) = 1 - \sum_{i=1}^k p_i^2$$

where p_i is the proportion of elements of class i


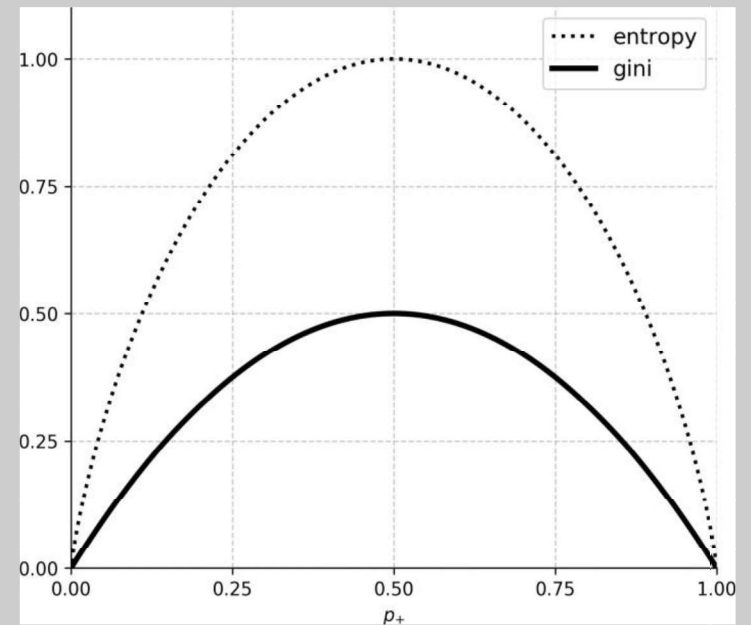


- Can be used as an alternative to entropy for selecting attributes!

Best attribute = highest impurity decrease

In practice, we compute $gini(X)$ only once!

Does it fly?	Color	Class
No	Brown	Mammal
No	White	Mammal
Yes	Brown	Bird
Yes	White	Bird
No	White	Mammal
No	Brown	Bird
Yes	White	Bird

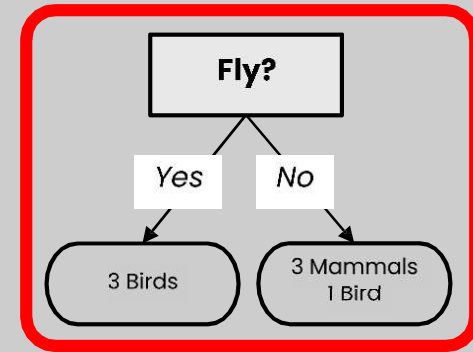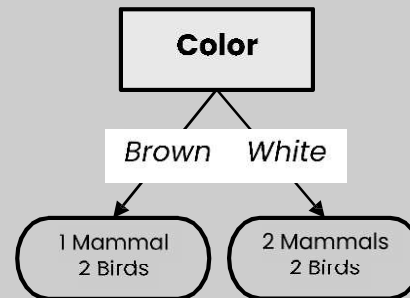

$$gini(X) = 1 - \left(\frac{3}{7}\right)^2 - \left(\frac{4}{7}\right)^2 \approx 0.489$$

$$gini(X_{color=brown}) = 1 - \left(\frac{1}{3}\right)^2 - \left(\frac{2}{3}\right)^2 \approx 0.444$$

$$\Delta gini(X, color) = 0.489 - \frac{3}{7} \cdot 0.444 - \frac{4}{7} \cdot 0.5 \approx 0.013$$

$$gini(X_{fly=yes}) = 0$$


$$\Delta gini(X, fly) = 0.489 - \frac{3}{7} \cdot 0 - \frac{4}{7} \cdot 0.375 \approx 0.274$$

$$gini(X_{color=white}) = 0.5$$

$$gini(X_{fly=no}) = 1 - \left(\frac{3}{4}\right)^2 - \left(\frac{1}{4}\right)^2 \approx 0.375$$

Entropy versus Gini Impurity

- Entropy and Gini Impurity give similar results in practice
 - They only disagree in about 2% of cases
“Theoretical Comparison between the Gini Index and Information Gain Criteria” [Răileanu & Stoffel, AMAI 2004]
 - Entropy might be slower to compute, because of the log

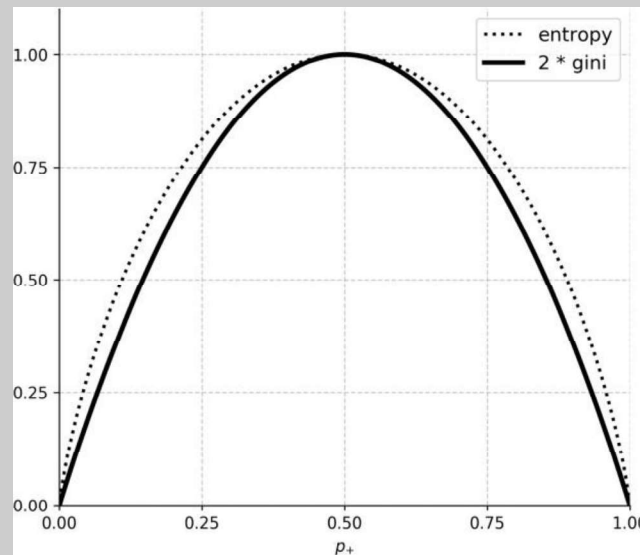

Pruning

Pruning

- Pruning is a technique that reduces the size of a decision tree by removing branches of the tree which provide little predictive power
- It is a **regularization** method that reduces the complexity of the final model, thus reducing overfitting
 - Decision trees are prone to overfitting!
- Pruning methods:
 - Pre-pruning: Stop the tree building algorithm before it fully classifies the data
 - Post-pruning: Build the complete tree, then replace some non-leaf nodes with leaf nodes if this improves validation error


Handling Numerical Attributes

Handling numerical attributes

- How does the ID3 algorithm handle numerical attributes?
 - Any numerical attribute would almost always bring entropy down to zero
 - This means it will completely overfit the training data

Consider a numerical value for humidity

Outlook	Temperature	Humidity	Wind	Play Tennis?
Sunny	Hot	90	Weak	No
Sunny	Hot	87	Strong	No
Overcast	Hot	93	Weak	Yes
Rainy	Mild	89	Weak	Yes
Rainy	Cool	79	Weak	Yes
Rainy	Cool	59	Strong	No
Overcast	Cool	77	Strong	Yes
Sunny	Mild	91	Weak	No
Sunny	Cool	68	Weak	Yes
Rainy	Mild	80	Weak	Yes
Sunny	Mild	72	Strong	Yes
Overcast	Mild	96	Strong	Yes
Overcast	Hot	74	Weak	Yes
Rainy	Mild	97	Strong	No

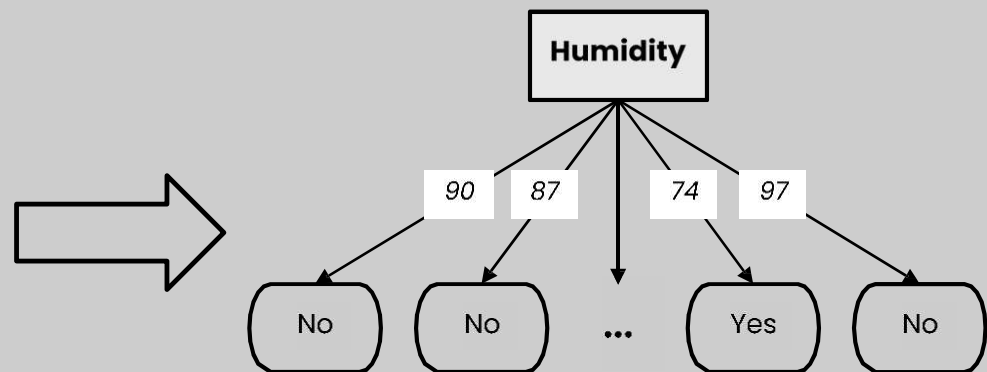


Handling numerical attributes

- Numerical attributes have to be treated differently
 - Find the best splitting value

Gain of numerical attribute a if we split at value t

$$gain(X, a, t) = entropy(X) - \frac{|X_{a \leq t}|}{|X|} entropy(X_{a \leq t}) - \frac{|X_{a > t}|}{|X|} entropy(X_{a > t})$$

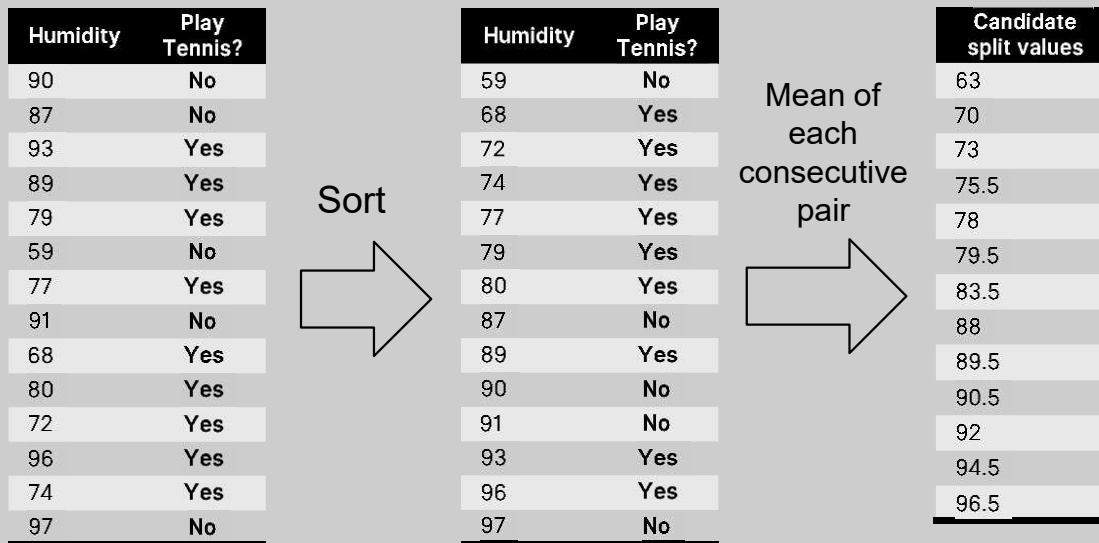


Handling numerical attributes

- Numerical attributes have to be treated differently
 - Find the best splitting value

$$gain(X, a, t) = entropy(X) - \frac{|X_{a \leq t}|}{|X|} entropy(X_{a \leq t}) - \frac{|X_{a > t}|}{|X|} entropy(X_{a > t})$$


Humidity	Play Tennis?
90	No
87	No
93	Yes
89	Yes
79	Yes
59	No
77	Yes
91	No
68	Yes
80	Yes
72	Yes
96	Yes
74	Yes
97	No

Sort



Humidity	Play Tennis?
59	No
68	Yes
72	Yes
74	Yes
77	Yes
79	Yes
80	Yes
87	No
89	Yes
90	No
91	No
93	Yes
96	Yes
97	No

Mean of each consecutive pair



Candidate split values
63
70
73
75.5
78
79.5
83.5
88
89.5
90.5
92
94.5
96.5

$gain(X, humidity, 83.5) =$


Handling numerical attributes

- Numerical attributes have to be treated differently
 - Find the best splitting value

$$gain(X, a, t) = \text{entropy}(X) - \frac{|X_{a \leq t}|}{|X|} \text{entropy}(X_{a \leq t}) - \frac{|X_{a > t}|}{|X|} \text{entropy}(X_{a > t})$$


Humidity	Play Tennis?
90	No
87	No
93	Yes
89	Yes
79	Yes
59	No
77	Yes
91	No
68	Yes
80	Yes
72	Yes
96	Yes
74	Yes
97	No

Sort



Humidity	Play Tennis?
59	No
68	Yes
72	Yes
74	Yes
77	Yes
79	Yes
80	Yes
87	No
89	Yes
90	No
91	No
93	Yes
96	Yes
97	No

Mean of each consecutive pair



Candidate split values
63
70
73
75.5
78
79.5
83.5
88
89.5
90.5
92
94.5
96.5

$$gain(X, \text{humidity}, 83.5) = 0.94$$


Handling numerical attributes

- Numerical attributes have to be treated differently
 - Find the best splitting value

$$gain(X, a, t) = entropy(X) - \frac{|X_{a \leq t}|}{|X|} entropy(X_{a \leq t}) - \frac{|X_{a > t}|}{|X|} entropy(X_{a > t})$$


Humidity	Play Tennis?
90	No
87	No
93	Yes
89	Yes
79	Yes
59	No
77	Yes
91	No
68	Yes
80	Yes
72	Yes
96	Yes
74	Yes
97	No

Sort



Humidity	Play Tennis?
59	No
68	Yes
72	Yes
74	Yes
77	Yes
79	Yes
80	Yes
87	No
89	Yes
90	No
91	No
93	Yes
96	Yes
97	No

Mean of each consecutive pair



Candidate split values
63
70
73
75.5
78
79.5
83.5
88
89.5
90.5
92
94.5
96.5


$$gain(X, humidity, 83.5) = 0.94 - \frac{7}{14} \cdot 0.59$$

Handling numerical attributes


- Numerical attributes have to be treated differently
 - Find the best splitting value

$$gain(X, a, t) = entropy(X) - \frac{|X_{a \leq t}|}{|X|} entropy(X_{a \leq t}) - \frac{|X_{a > t}|}{|X|} entropy(X_{a > t})$$

Humidity	Play Tennis?
90	No
87	No
93	Yes
89	Yes
79	Yes
59	No
77	Yes
91	No
68	Yes
80	Yes
72	Yes
96	Yes
74	Yes
97	No



Humidity	Play Tennis?
59	No
68	Yes
72	Yes
74	Yes
77	Yes
79	Yes
80	Yes
87	No
89	Yes
90	No
91	No
93	Yes
96	Yes
97	No



Candidate split values
63
70
73
75.5
78
79.5
83.5
88
89.5
90.5
92
94.5
96.5

$$gain(X, humidity, 83.5) = 0.94 - \frac{7}{14} \cdot 0.59 - \frac{7}{14} \cdot 0.98$$


Handling numerical attributes

- Numerical attributes have to be treated differently
 - Find the best splitting value

$$gain(X, a, t) = entropy(X) - \frac{|X_{a \leq t}|}{|X|} entropy(X_{a \leq t}) - \frac{|X_{a > t}|}{|X|} entropy(X_{a > t})$$


Humidity	Play Tennis?
90	No
87	No
93	Yes
89	Yes
79	Yes
59	No
77	Yes
91	No
68	Yes
80	Yes
72	Yes
96	Yes
74	Yes
97	No

Sort



Humidity	Play Tennis?
59	No
68	Yes
72	Yes
74	Yes
77	Yes
79	Yes
80	Yes
87	No
89	Yes
90	No
91	No
93	Yes
96	Yes
97	No

Mean of each consecutive pair




Candidate split values
63
70
73
75.5
78
79.5
83.5
88
89.5
90.5
92
94.5
96.5

$$gain(X, humidity, 83.5) = 0.94 - \frac{7}{14} \cdot 0.59 - \frac{7}{14} \cdot 0.98 \approx 0.152$$


Handling numerical attributes

- Numerical attributes have to be treated differently
 - Find the best splitting value


Humidity	Play Tennis?
90	No
87	No
93	Yes
89	Yes
79	Yes
59	No
77	Yes
91	No
68	Yes
80	Yes
72	Yes
96	Yes
74	Yes
97	No



Humidity	Play Tennis?
59	No
68	Yes
72	Yes
74	Yes
77	Yes
79	Yes
80	Yes
87	No
89	Yes
90	No
91	No
93	Yes
96	Yes
97	No



Candidate split values
63
70
73
75.5
78
79.5
83.5
88
89.5
90.5
92
94.5
96.5



Information gain
0.113
0.01
0.0004
0.015
0.045
0.09
0.152
0.048
0.102
0.025
0.0004
0.01
0.113

83.5 is the best splitting value with an information gain of 0.152

Handling numerical attributes

- Numerical attributes have to be treated differently
 - Find the best splitting value

Outlook	Temperature	Humidity	Wind	Play Tennis?
Sunny	Hot	> 83.5	Weak	No
Sunny	Hot	> 83.5	Strong	No
Overcast	Hot	> 83.5	Weak	Yes
Rainy	Mild	> 83.5	Weak	Yes
Rainy	Cool	≤ 83.5	Weak	Yes
Rainy	Cool	≤ 83.5	Strong	No
Overcast	Cool	≤ 83.5	Strong	Yes
Sunny	Mild	> 83.5	Weak	No
Sunny	Cool	≤ 83.5	Weak	Yes
Rainy	Mild	≤ 83.5	Weak	Yes
Sunny	Mild	≤ 83.5	Strong	Yes
Overcast	Mild	> 83.5	Strong	Yes
Overcast	Hot	≤ 83.5	Weak	Yes
Rainy	Mild	> 83.5	Strong	No

- 83.5 is the best splitting value for **Humidity** with an information gain of 0.152
- **Humidity** is now treated as a categorical attribute with two possible values
- A new optimal split is computed at every level of the tree
- A numerical attribute can be used several times in the tree, with different split values


Random Forests

(Ensemble learning with decision trees)


Random Forests

- Random Forests:
 - Instead of building a single decision tree and use it to make predictions, build many slightly different trees and combine their predictions
- We have a single data set, so how do we obtain slightly different trees?
 1. Bagging (**B**ootstrap **A**ggregating):
 - Take random subsets of data points from the training set to create N smaller data sets
 - Fit a decision tree on each subset
 2. Random Subspace Method (also known as Feature Bagging):
 - Fit N different decision trees by constraining each one to operate on a random subset of features

Bagging at training time

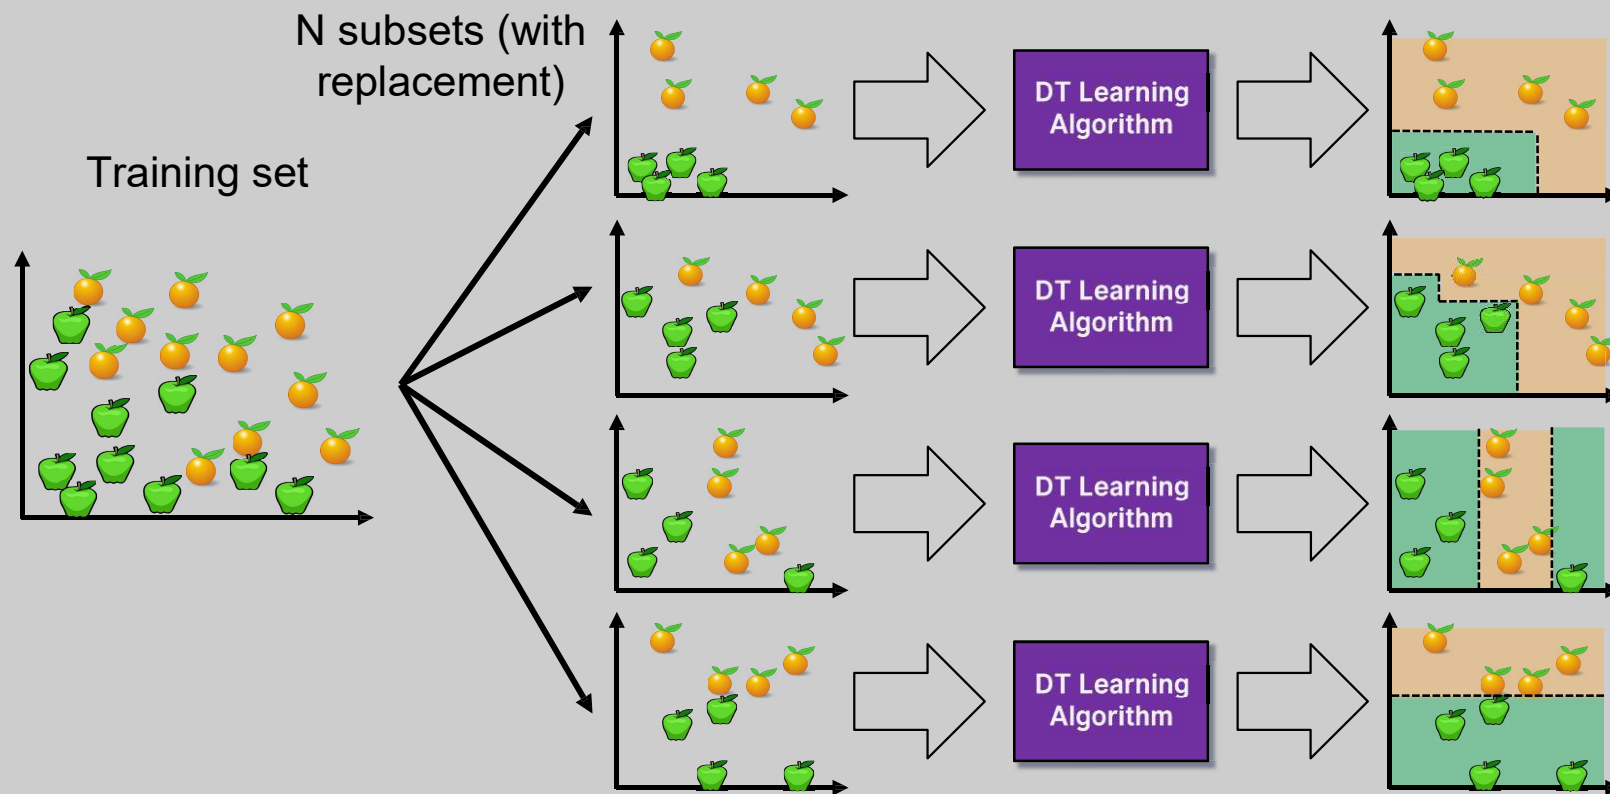


Bagging at inference time

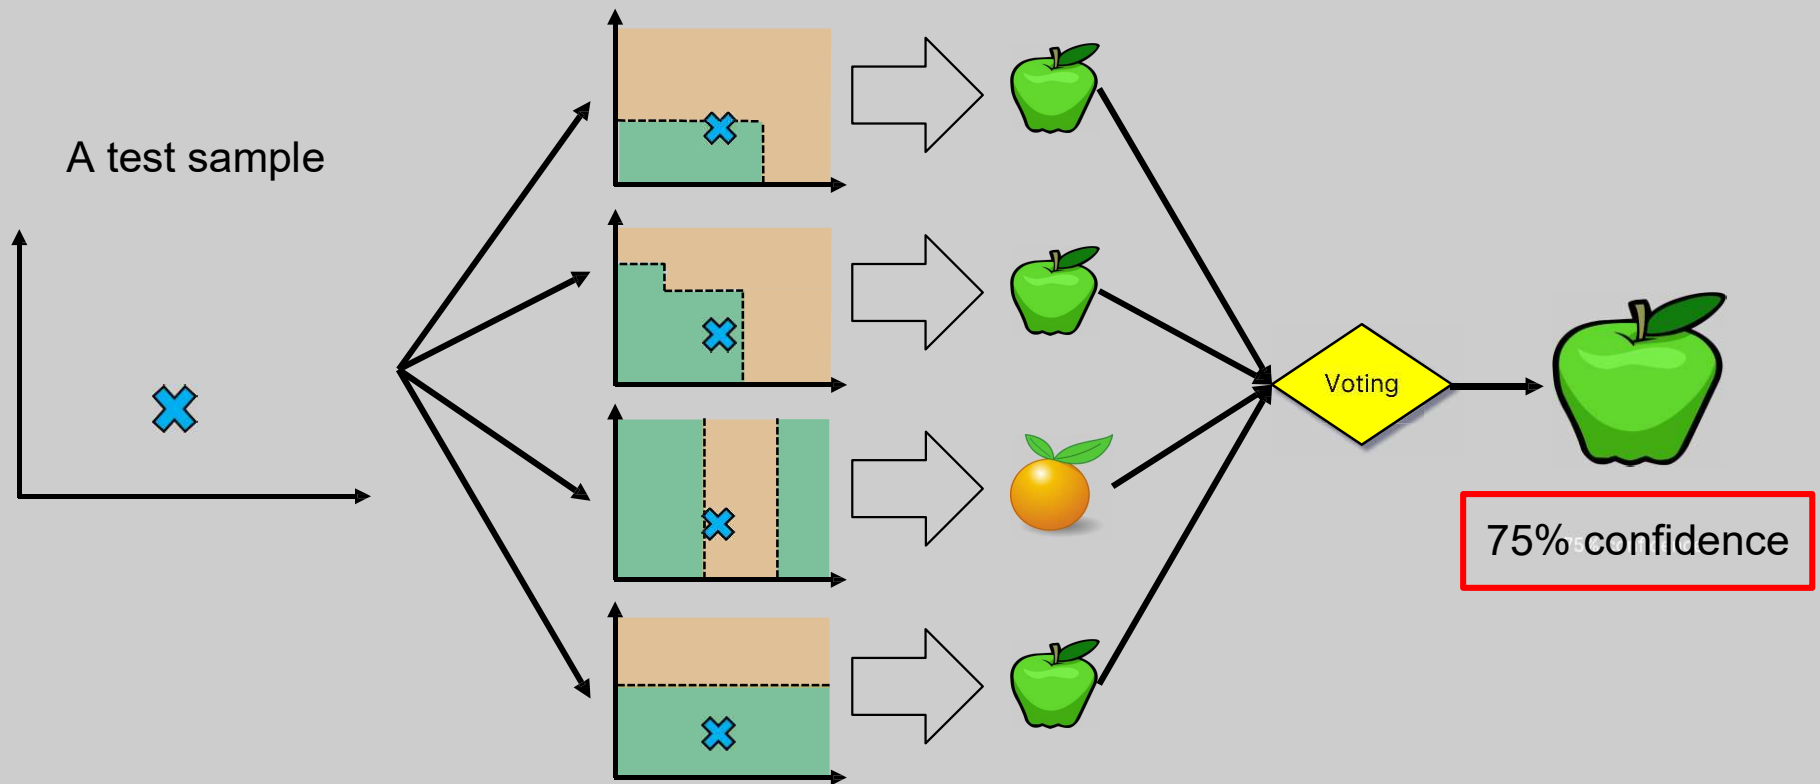


Random Subspace Method at training time

Training data

Mass (g)	Color	Texture	pH	Label
84	Green	Smooth	3.5	Apple
121	Orange	Rough	3.9	Orange
85	Red	Smooth	3.3	Apple
101	Orange	Smooth	3.7	Orange
111	Green	Rough	3.5	Apple
...				
117	Red	Rough	3.4	Orange

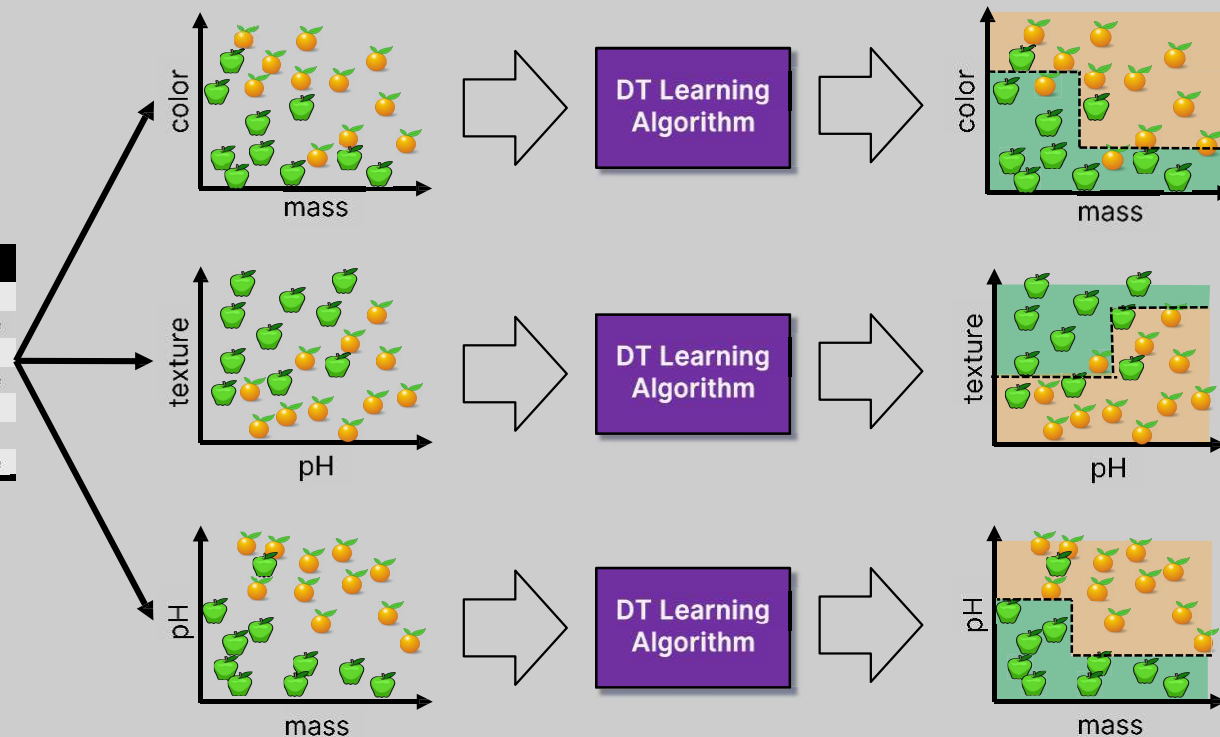

Random Subspace Method at inference time

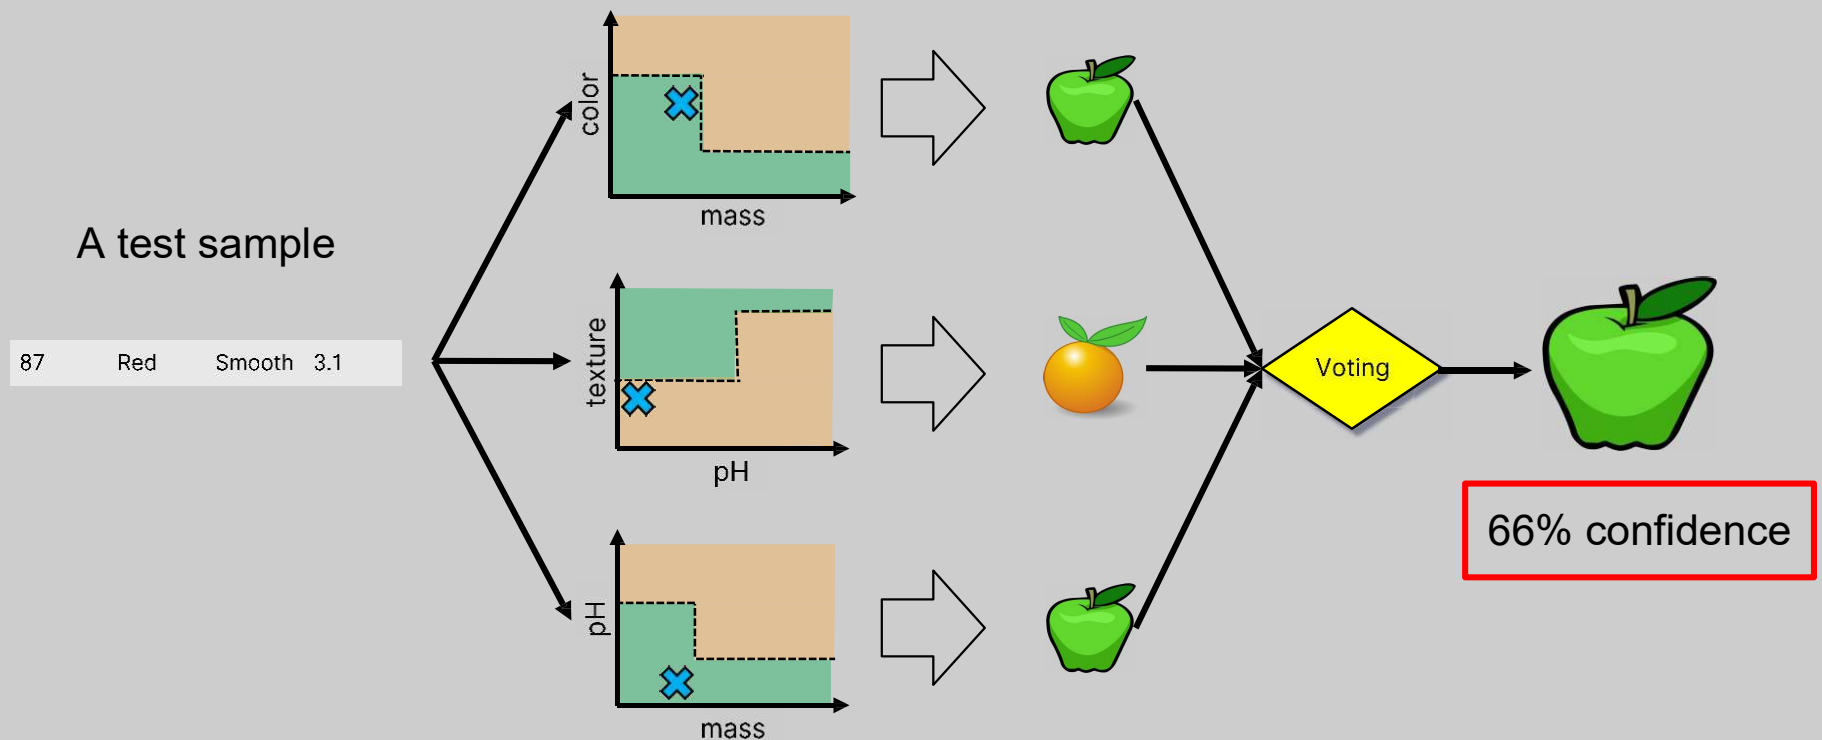

Random Forests

Mass (g)	Color	Texture	pH	Label
84	Green	Smooth	3.5	Apple
121	Orange	Rough	3.9	Orange
85	Red	Smooth	3.3	Apple
101	Orange	Smooth	3.7	Orange
111	Green	Rough	3.5	Apple
...				
117	Red	Rough	3.4	Orange



Bagging +
Random Subspace Method +
Decision Tree Learning Algorithm




History of Random Forests

- Introduction of the Random Subspace Method
 - “Random Decision Forests” [Ho, 1995] and “The Random Subspace Method for Constructing Decision Forests” [Ho, 1998]
- Combined the Random Subspace Method with Bagging. Introduce the term **Random Forest** (a trademark of Leo Breiman and Adele Cutler)
 - “Random Forests” [Breiman, 2001]


Ensemble Learning

- Ensemble Learning:
 - Method that combines multiple learning algorithms to obtain performance improvements over its components
- **Random Forests** are one of the most common examples of ensemble learning
- Other commonly-used ensemble methods:
 - **Bagging**: multiple models on random subsets of data samples
 - **Random Subspace Method**: multiple models on random subsets of features
 - **Boosting**: train models iteratively, while making the current model focus on the mistakes of the previous ones by increasing the weight of misclassified samples


Boosting

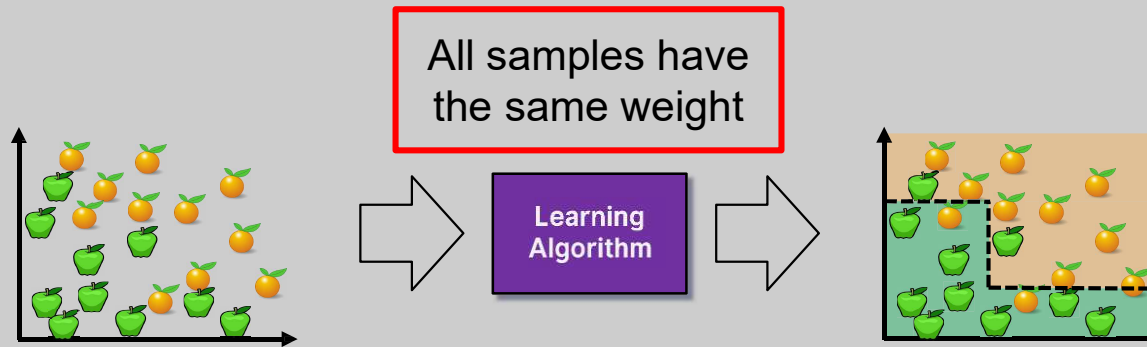


Boosting

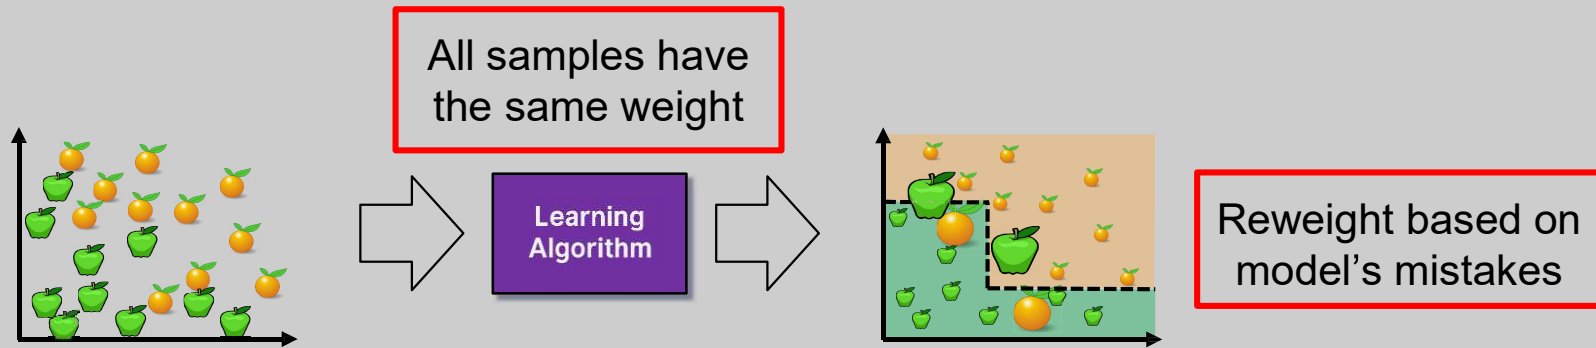


Boosting

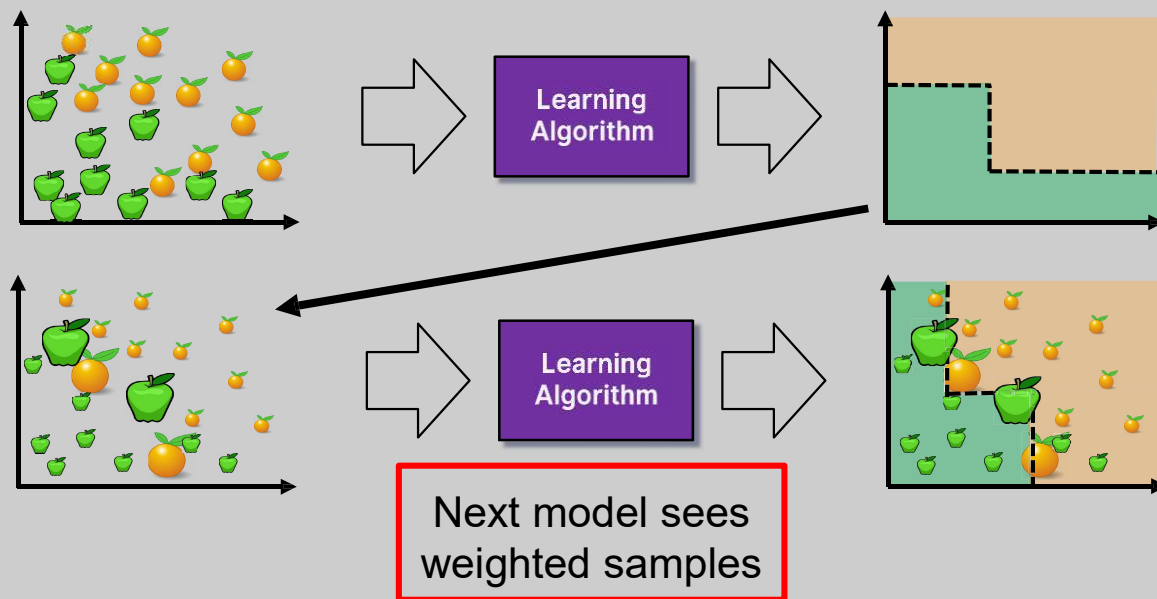


Boosting

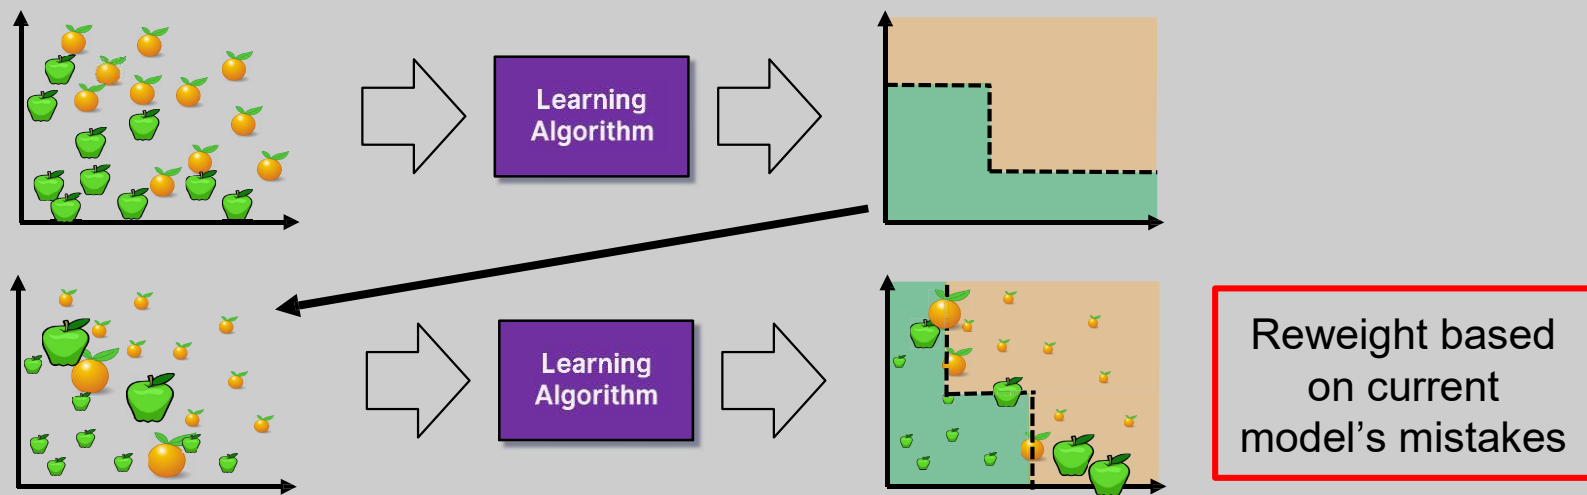

Boosting

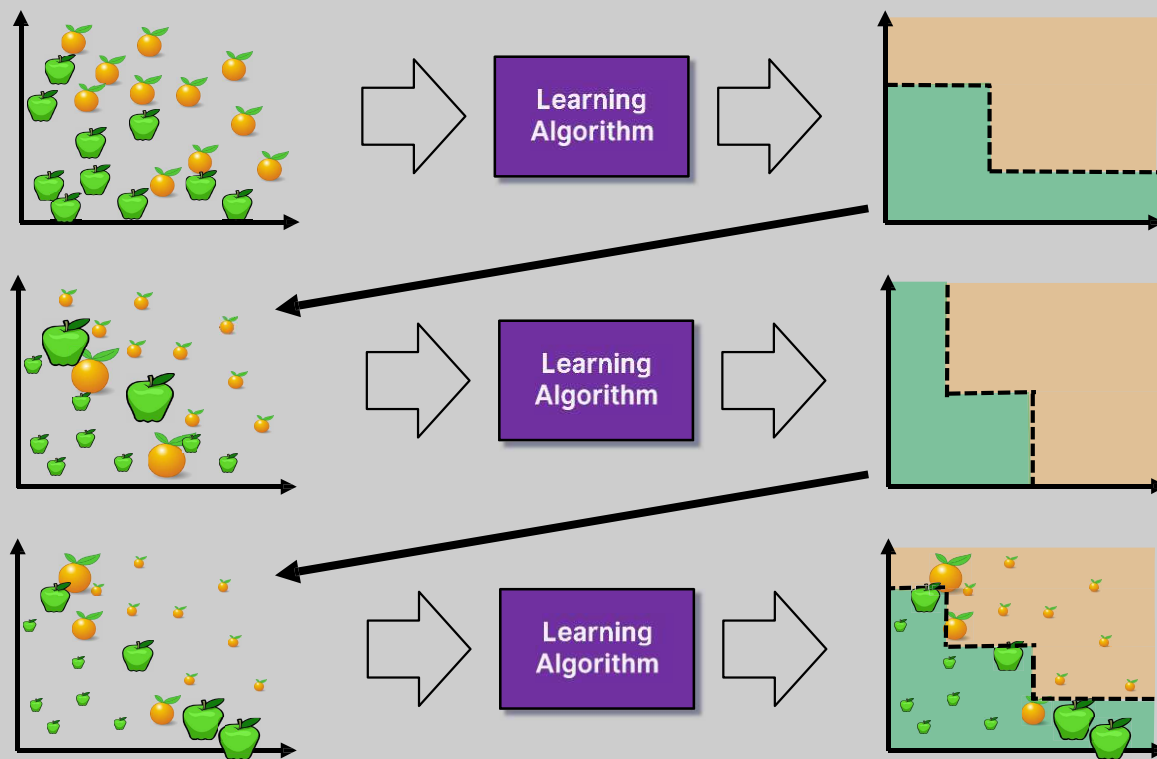

Boosting

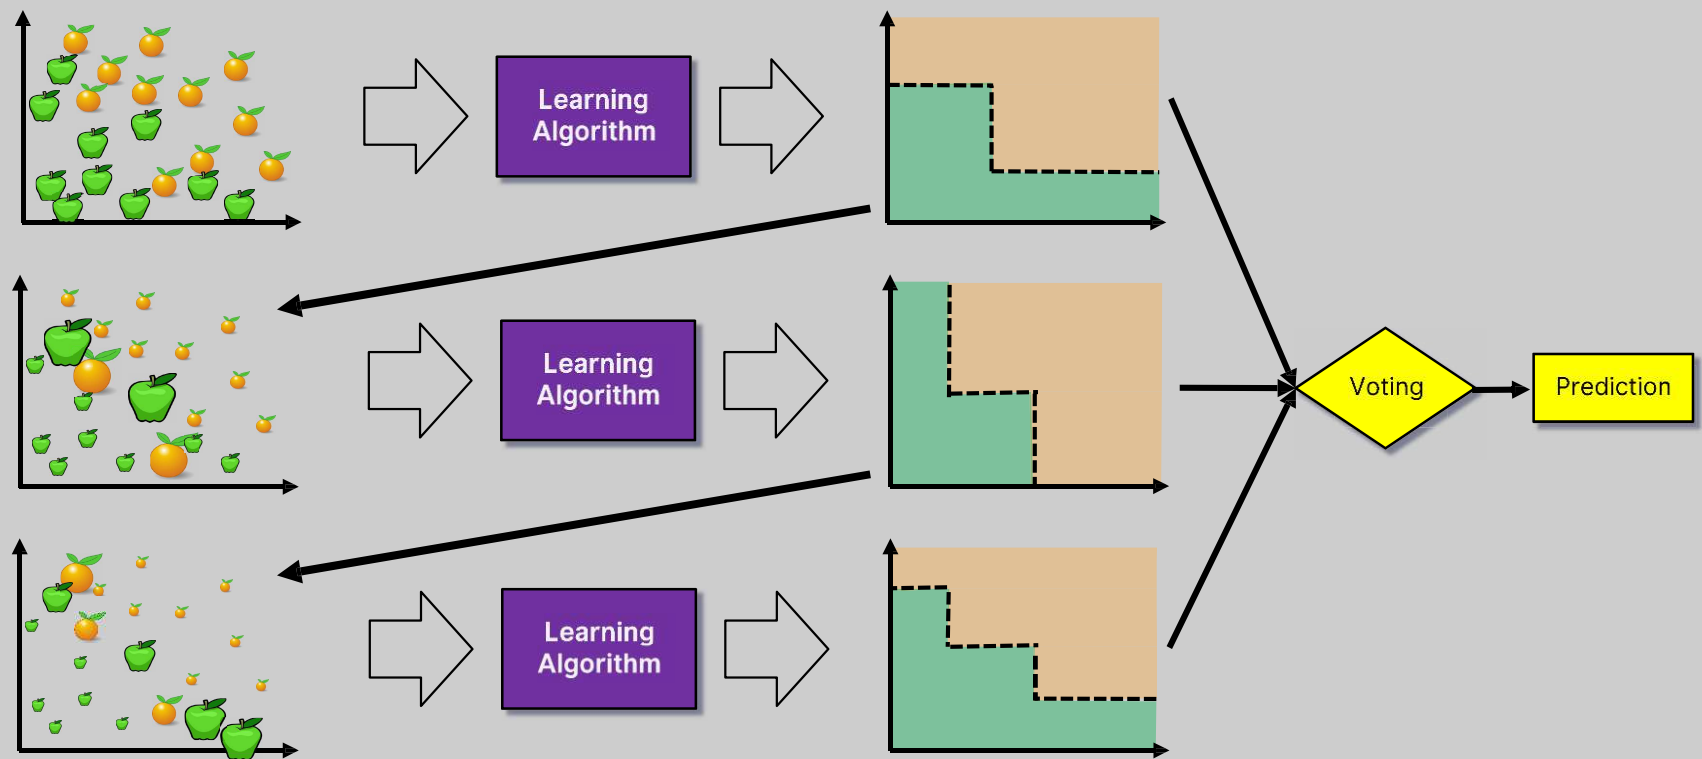

Summary

- Ensemble Learning methods combine multiple learning algorithms to obtain performance improvements over its components
- Commonly-used ensemble methods:
 - Bagging (multiple models on random subsets of data samples)
 - Random Subspace Method (multiple models on random subsets of features)
 - Boosting (train models iteratively, while making the current model focus on the mistakes of the previous ones by increasing the weight of misclassified samples)
- **Random Forests** are an ensemble learning method that employ decision tree learning to build multiple trees through **bagging** and **random subspace method**.
 - They rectify the overfitting problem of decision trees!

Thank You!

Slide Courtesy: Prof. Radu Ionescu, PhD.
Faculty of Mathematics and Computer Science
University of Bucharest