

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e447f1f9c5320ca6bce4/6773e494f1f9c5320ca6bd76/6773e9c2f4ab787... 202401090126@mitaoe.ac.in Support Logout

CODETANTRA Home

1.1.1. Calculate Momentum

36:59 A ⚡ -

Write a program that accepts the mass of an object (in kilograms) and its velocity (in meters per second), then calculates and displays the momentum of the object. The momentum p is calculated using the formula:

$$p = m \times v$$

where:

m is the mass of the object (in kilograms).

v is the velocity of the object (in meters per second).

Input Format:
A single floating-point number representing the mass of the object in kilograms.
A single floating-point number representing the velocity of the object in meters per second.

Output Format:
The output will display calculated momentum with appropriate units (kgm/s) (rounded up to 2 decimal places).

Sample Test Cases

Terminal Test cases

calculate...

```
1 m=float(input())
2 v=float(input())
3 p=m*v
4 print(f"{p:.2f}kgm/s")
```

< Prev Reset Submit Next >

Upload files · Raman1901884/E Course

mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e447f1f9c5320ca6bce4/6773e494f1f9c5320ca6bd76/6773eb5df4ab787... ☆

CODETANTRA Home 202401090126@mitaoe.ac.in Support Logout

1.1.2. Conditional Calculation Based on the Number of Digits

30:39 AA ⚡ -

Write a Python program that accepts an integer n as input. Depending on the number of digits in n .

Constraints:
 $1 \leq n \leq 999$

Input Format:
The input consists of a single integer n .

Output Format:
If n is a single-digit number, print its square.
If n is a two-digit number, print its square root (rounded to two decimal places).
If n is a three-digit number, print its cube root (rounded to two decimal places).
Else print "Invalid".

condition...

```
1 import math
2 n=int(input())
3 if 1<=n<=9:
4     n=n*n
5     print(n)
6 elif 10<=n<=99:
7     n= math.sqrt(n)
8     print(f"{n:.2f}")
9 elif 100<=n<=999:
10    n=n**(1/3)
11    print(f"{n:.2f}")
12 else:
13     print("Invalid")
```

Sample Test Cases

Terminal Test cases

< Prev Reset Submit Next

Type here to search

7:32 PM 5/6/2025

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e447f1f9c5320ca6bce4/6773e494f1f9c5320ca6bd76/6773ef42f4ab787e... ★

CODETANTRA Home

202401090126@mitaoe.ac.in Support Logout

1.1.3. Age and Salary Calculation

22:38

Write a Python program that reads the birth date and salary of employees.

Input Format:
The input consists of:
A string representing the birth date of the employee in the format *DD – MM – YYYY*.
A floating-point number representing the salary of the employee in rupees.

Output Format:
The output should include:
The age of the employee.
The salary of the employee in dollars.

Note:
1INR=0.012USD

Sample Test Cases

```
birthDate...
import datetime

def calculate_age(birthdate):
    today = datetime.datetime.now().date()
    birthdate = datetime.datetime.strptime(birthdate, "%d-%m-%Y").date()
    age = int((today-birthdate).days / 365.25)
    return age

def convert_salary_to_dollars(salary_in_rupees):
    exchange_rate = 0.012
    salary_in_dollars = salary_in_rupees*exchange_rate
    return salary_in_dollars

birthdate = input()
salary_in_rupees = float(input())
age = calculate_age(birthdate)
salary_in_dollars = convert_salary_to_dollars(salary_in_rupees)
print(f"Age: {age}")
print(f"Salary in dollars: {salary_in_dollars:.2f}")
```

Terminal Test cases

< Prev Reset Submit Next >

Type here to search

32°C 5/6/2025 7:32 PM

Upload files · Raman1901884/E Course

mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e447f1f9c5320ca6bce4/6773e494f1f9c5320ca6bd76/6774c276f4ab787... ☆

CODETANTRA Home 202401090126@mitaoe.ac.in Support Logout

1.1.4. Reverse a Number

19:35 AA -

You are given an integer number. Your task is to reverse the digits of the number and print the reversed number.

Input Format
The input is an integer.

Output Format
Print a single integer which is the reversed number.


reverseN...

```
1 n= int(input())
2 reversed_n=0
3 while n !=0:
4     digit = n % 10
5     reversed_n= reversed_n*10 + digit
6     n //=10
7 print(reversed_n)
```

Sample Test Cases

Terminal Test cases

< Prev Reset Submit Next >

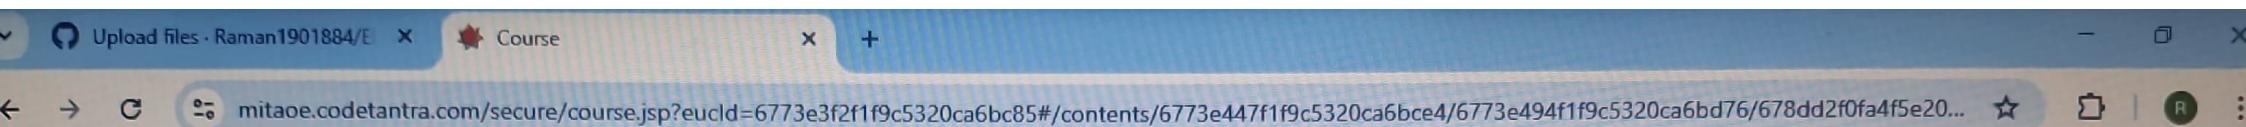

1.1.5. Multiplication Table

08:39 AA ☾ ✎ -

Write a Python program that takes an integer as input and prints the multiplication table for that integer from 1 to 10.

Input Format:

The first line of input contains an integer that represents the number for which the multiplication table is to be printed.

Output Format:

Print the multiplication table for the given number.

Explorer multiplica...

```
1 n=int(input())
2 for i in range(1,11):
3     a=n*i
4     print(n, 'x', i, '=', n*i)
```

Sample Test Cases

Terminal Test cases

< Prev Reset Submit Next >

Upload Files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e447f1f9c5320ca6bce4/6773e49af1f9c5320ca6bd79/6773f211f4ab787e... 202401090126@mitaoe.ac.in Support Logout

CODETANTRA Home

1.2.1. Pass or Fail

32.35 AA ☽ ↻ -

Write a Python program that accepts the number of courses and the marks of a student in those courses.

The grade is determined based on the aggregate percentage:

- If the aggregate percentage is greater than 75, the grade is Distinction.
- If the aggregate percentage is greater than or equal to 60 but less than 75, the grade is First Division.
- If the aggregate percentage is greater than or equal to 50 but less than 60, the grade is Second Division.
- If the aggregate percentage is greater than or equal to 40 but less than 50, the grade is Third Division.

Input Format:
The first input will be an integer n , the number of courses.
The second input will be n integers representing the marks of the student in each of the n courses, separated by a space.

Output Format:

Sample Test Cases

passorFa...

```
1 n = int(input()) # Number of courses
2 marks = list(map(int, input().split())) # Marks for each course
3
4 # Check if the student has failed in any course
5 v if any(mark < 40 for mark in marks):
6     print("Fail")
7 v else:
8     # Calculate the total marks and aggregate percentage
9     total_marks = sum(marks)
10    aggregate_percentage = (total_marks / (n * 100)) * 100
11
12    # Print the aggregate percentage rounded to 2 decimal places
13    print(f"Aggregate Percentage: {aggregate_percentage:.2f}")
14
15    # Determine and print the grade based on the aggregate percentage
16    v if aggregate_percentage > 75:
17        print("Grade: Distinction")
18    v elif 60 <= aggregate_percentage <= 75:
```

Terminal Test cases

< Prev Reset Submit Next >

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e447f1f9c5320ca6bce4/6773e49af1f9c5320ca6bd79/65f7d776bfe2dc3e... ☆



202401090126@mitaoe.ac.in Support Logout

1.2.2. Fibonacci series using Recursive Function

03:17 A ☾ ↻ -

Write a Python program to find the Fibonacci series of a given number of terms using recursive function calls.

Expected Output-1:

Enter terms for Fibonacci series: 5
0 1 1 2 3

Expected Output-2:

Enter terms for Fibonacci series: 9
0 1 1 2 3 5 8 13 21

Instructions:

- Your input and output must follow the input and output layout mentioned in the visible sample test case.
- Hidden test cases will only pass when users' input and output match the expected input and output.

Sample Test Cases

Explorer fib.py

```
1 v def fib(n):
2 v   if n<=1:
3 v     return n
4 v   return fib(n-1) + fib(n-2)
5
6 n=int(input("Enter terms for Fibonacci series: "))
7 for i in range (n):
8   print(fib(i),end=" ")
```

Terminal Test cases

< Prev Reset Submit Next >

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e447f1f9c5320ca6bce4/6773e49af1f9c5320ca6bd79/6774c521f4ab787...
CODETANTRA Home 202401090126@mitaoe.ac.in Support Logout

1.2.3. Pattern - 1

02:50 A ☾ ↻ ⏪ ⏩

Write a Python program to print a pattern of asterisks in the form of a right-angled triangle.

Input Format:
The input is an integer, representing the number of rows in the pattern.

Output Format
The output should display the pattern of asterisks (*), with each row containing an increasing number of asterisks.

Note:
Refer to the displayed test cases for the sample pattern.

Sample Test Cases

Terminal Test cases

rightangl...
1 n=int(input())
2 for i in range(1,n+1):
3 print('*'*i)

< Prev Reset Submit Next

Upload files · Raman1901884/E Course

mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e447f1f9c5320ca6bce4/6773e49af1f9c5320ca6bd79/6774cc86f4ab787e... ☆

CODETANTRA Home 202401090126@mitaoe.ac.in Support Logout

1.2.4. Pattern - 2

04:05 AA ☾ ↻ -

Write a Python program to print a right-angled triangle pattern of numbers.

Input Format:
The input is an integer, representing the number of rows in the pattern.

Output Format:
The output should display the pattern of numbers, with each row containing increasing numbers starting from 1 up to the row number.

Note:
Refer to the displayed test cases for the sample pattern.

Sample Test Cases

numberP...
1 n=int(input())
2 v for i in range (1,n+1):
3 v → for j in range (1,i+1):
4 v → → print(j, end=" ")
5 → print()

Terminal Test cases

< Prev Reset Submit Next

2.1.1. List operations

43:54 AA ⏴ ⏵ ⏷ ⏸

 Submit

Write a Python program that implements a menu-driven interface for managing a list of integers. The program should have the following menu options:

1. Add
 2. Remove
 3. Display
 4. Quit

The program should repeatedly prompt the user to enter a choice from the menu.

Depending on the choice selected, the program should perform the following actions

- **Add:** Prompts the user to enter an integer and add it to the integer list. If the input is not a valid integer, display "Invalid input".
 - **Remove:** Prompts the user to enter an integer to remove from the list. If the integer is found in the list, remove it; otherwise, display "Element not found". If the list is empty, display "List is empty".
 - **Display:** Displays the current list of integers. If the list is empty, display "List is empty".
 - **Quit:** Exits the program.

Sample Test Cases

listOps.py

```
Ex 1 v def main():
2   int_list = []
3
4 v   while True:
5     print("1. Add")
6     print("2. Remove")
7     print("3. Display")
8     print("4. Quit")
9     choice = input("Enter choice: ")
10
11 v       if choice == '1':
12 v         try:
13           num = int(input("Integer: "))
14           int_list.append(num)
15           print(f"List after adding: {int_list}")
16 v         except ValueError:
17           print("Invalid input")
18
19 v       elif choice == '2':
20 v         if not int_list:
21           print("List is empty")
```

Terminal Test cases

[◀ Prev](#) [Reset](#) [Submit](#) [Next ▶](#)

Upload files · Raman1901884/E Course

mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e44bf1f9c5320ca6bce8/6773e49ef1f9c5320ca6bd7d/677bb1ca63fd602... ☆

CODETANTRA Home 202401090126@mitaoe.ac.in Support Logout

2.1.2. Dictionary Operations

41:08 A ⚡ -

Write a Python program to perform the following dictionary operations:

- Create an empty dictionary and display it.
- Ask the user how many items to add, then input key-value pairs.
- Show the dictionary after adding items.
- Ask the user to update a key's value. Print "Value updated" if the key exists, otherwise print "Key not found".
- Retrieve and print a value using a key. If not found, print "Key not found".
- Use get() to retrieve a value. If the key doesn't exist, print "Key not found".
- Delete a key-value pair. If the key exists, delete and print "Deleted". If not, print "Key not found".
- Display the updated dictionary.

Note: Refer to visible test cases.

Sample Test Cases

dictOpera...

```
1 # 1. Create an empty dictionary and display it
2 my_dict = {}
3 print("Empty Dictionary:", my_dict)
4
5 # 2. Ask the user how many items to add, then input key-value
6 # pairs
7 size = int(input("Number of items: "))
8 for _ in range(size):
9     key = input("key: ")
10    value = input("value: ")
11    my_dict[key] = value
12
13 # 3. Show the dictionary after adding items
14 print("Dictionary:", my_dict)
15
16 # 4. Update a key's value
17 key_to_update = input("Enter the key to update: ")
18 if key_to_update in my_dict:
19     new_value = input("Enter the new value: ")
20     my_dict[key_to_update] = new_value
21     print("Value updated")
```

< Prev Reset Submit Next

Type here to search

7:34 PM 5/6/2025

6 7 8 9 https://repl.it/@vivek12345/Python-Dictionaries

CODETANTRA @ home

2024/03/20 09:00 AM · Logout

Dictionary Operations

Given a Python program to perform the following dictionary operations:

- 1. Create an empty dictionary and display it.
- 2. Ask the user how many items to add, then input key-value pairs.
- 3. Show the dictionary after adding items.
- 4. Ask the user to update a key's value. Print "Value updated" if the key exists, otherwise print "Key not found".
- 5. Remove and print a value using a key. If not found, print "Key not found".
- 6. Use get() to retrieve a value. If the key doesn't exist, print "Key not found".
- 7. Delete a key-value pair. If the key exists, delete and print "Deleted". If not, print "Key not found".
- 8. Display the updated dictionary.

Note: Refer to sample test cases.

Sample Test Cases

```
# 1. Create an empty dictionary and display it.
my_dict = {}
print("Empty Dictionary:", my_dict)

# 2. Ask the user how many items to add, then input key-value pairs.
size = int(input("Number of items: "))
for _ in range(size):
    key = input("Key: ")
    value = input("Value: ")
    my_dict[key] = value

# 3. Show the dictionary after adding items
print("Dictionary:", my_dict)

# 4. Update a key's value
key_to_update = input("Enter the key to update: ")
if key_to_update in my_dict:
    new_value = input("Enter the new value: ")
    my_dict[key_to_update] = new_value
    print("Value updated")

# 5. Remove and print a value using a key. If not found, print "Key not found".
key_to_delete = input("Enter the key to delete: ")
if key_to_delete in my_dict:
    del my_dict[key_to_delete]
    print("Deleted")
else:
    print("Key not found")
```

Terminal Test cases

File Report Submit Help

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e44bf1f9c5320ca6bce8/6773e4b0f1f9c5320ca6bd85/64ac0cb9b454710... ★

CODETANTRA Home

2.2.1. Linear search Technique 00:22 A ⚡ -

Write a program to check whether the given element is present or not in the array of elements using linear search.

Input format:

- The first line of input contains the array of integers which are separated by space
- The last line of input contains the key element to be searched

Output format:

- If the element is found, print the index.
- If the element is not found, print **Not found**.

Sample Test Case:

Input:
1 2 3 4 3 5 6
3

Output:
2

Sample Test Cases +

CTP1709... Explorer

```
1 v def linear_search(arr, key):
2 v     for index in range(len(arr)):
3 v         if arr[index] == key:
4 v             return index
5 v     return "Not found"
6
7 arr = list(map(int, input().split()))
8
9 key = int(input())
10
11 result = linear_search(arr, key)
12 print(result)
```

Terminal Test cases < Prev Reset Submit Next >

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e44bf1f9c5320ca6bce8/6773e4b0f1f9c5320ca6bd85/6774d0abf4ab787... ★

CODETANTRA

Home 202401090126@mitaoe.ac.in Support Logout

2.2.2. Captain of the Team

01:46

You are provided with the heights of 11 cricket players (in centimeters). Your task is to identify the tallest player, who will be selected as the captain of the team.

Input Format:
The first line of input will contain 11 integers, each representing the height of a player (in centimeters), each separated by a space.

Output Format
The output should be the height (in centimeters) of the tallest player.

Sample Test Cases

Explorer captainof...

```
1 # Input: Heights of 11 players (space-separated)
2 heights = list(map(int, input().split()))
3
4 # Find the tallest player's height using the max function
5 tallest_player_height = max(heights)
6
7 # Output the height of the tallest player
8 print(tallest_player_height)
```

Terminal Test cases

< Prev Reset Submit Next



Type here to search



32°C 7:34 PM
5/6/2025

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e451f1f9c5320ca6bd17/6773e4ccf1f9c5320ca6bdb2/6684d40e5d95376... 202401090126@mitaoe.ac.in Support Logout



3.1.1. Numpy array operations

14:04

Write a python program to demonstrate the usage of ndim, shape and size for a Numpy Array. The program should create a NumPy array using the entered elements and display it. Assume all input elements are valid numeric values.

Input Format:

- User inputs the number of rows and columns with space separated values.
- User inputs elements of the array row-wise followed line by line, separated by spaces.

Output Format:

- The created NumPy array based on the input dimensions and elements.
- Dimensions (ndim): Number of dimensions of the array.
- Shape: Tuple representing the shape of the array (number of rows, number of columns).
- Size: Total number of elements in the array.

Note: Use reshape() function to reshape the input array with the specified number of rows

Sample Test Cases

numpyarr...

```
1 import numpy as np
2 rows, cols= list(map(int,input().split()))
3 matrix= []
4 for i in range (rows) :
5     row = list(map(int,input().split()))
6     matrix.append(row)
7 matrix= np.array(matrix).reshape(rows,cols)
8
9 print(matrix)
10 print(matrix.ndim)
11 print(matrix.shape)
12 print(matrix.size)
13
```

Terminal Test cases

< Prev Reset Submit Next >

3.2.1. Numpy: Matrix Operations

05:24 A ☾ ↻ -

The given code takes two 3×3 matrices, `matrix_a`, and `matrix_b`, as input from the user and converts them into NumPy arrays.

Task:

You are required to compute and display the results of the following matrix operations:

1. Addition (`matrix_a + matrix_b`)
2. Subtraction (`matrix_a - matrix_b`)
3. Element-wise Multiplication (`matrix_a * matrix_b`)
4. Matrix Multiplication (`matrix_a . matrix_b`)
5. Transpose of Matrix A

Input Format:

- The user will input 3 rows for `matrix_a`, each containing 3 integers separated by spaces.
- Similarly, the user will input 3 rows for `matrix_b`, each containing 3 integers separated by spaces.

Sample Test Cases

matrixOp...

```
import numpy as np

# Input matrices
print("Enter Matrix A:")
matrix_a = np.array([list(map(int, input().split())) for i in range(3)])

print("Enter Matrix B:")
matrix_b = np.array([list(map(int, input().split())) for i in range(3)])

# Addition
print("Addition (A + B):")
print(matrix_a + matrix_b)

# Subtraction
print("Subtraction (A - B):")
print(matrix_a - matrix_b)

# Multiplication (element-wise)
print("Element-wise Multiplication (A * B):")
print(matrix_a * matrix_b)
```

Terminal Test cases

< Prev Reset Submit Next >

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e451f1f9c5320ca6bd17/6773e4d1f1f9c5320ca6bdb8/6774ee19f4ab787... ★

CODETANTRA Home

202401090126@mitaoe.ac.in Support Logout

3.2.2. Numpy: Horizontal and Vertical Stacking of Arrays

00:12 A 🔍 ↻

You are given two arrays `arr1` and `arr2`. You need to perform horizontal and vertical stacking operations on them using NumPy.

- **Horizontal Stacking:** Stack the two matrices horizontally (side by side).
- **Vertical Stacking:** Stack the two matrices vertically (one below the other).

Input Format:

- The program should first prompt the user to input two 3×3 arrays.
- Each array consists of 3 rows, and each row contains 3 space-separated integers.
- The user will input the two arrays row by row.

Output Format:

- The program should display the result of the Horizontal Stack (side-by-side stacking) of the two arrays.
- The program should then display the result of the Vertical Stack (one below the other) of the two arrays.

Sample Test Cases

stacking.py

```
import numpy as np

# Input matrices
print("Enter Array1:")
arr1 = np.array([list(map(int, input().split())) for i in range(3)])

print("Enter Array2:")
arr2 = np.array([list(map(int, input().split())) for i in range(3)])

# Perform horizontal stacking (hstack)
a = np.hstack((arr1, arr2))
print("Horizontal Stack:")
print(a)

# Perform vertical stacking (vstack)
b = np.vstack((arr1, arr2))
print("Vertical Stack:")
print(b)
```

Terminal Test cases

< Prev Reset Submit Next >

Type here to search

The screenshot shows a web-based Python code editor interface. At the top, there's a header with tabs for 'Upload files · Raman1901884/E' and 'Course'. The main title is 'mitaoe.codetantra.com/secure/course.jsp?euId=6773e3f2f1f9c5320ca6bc85#/contents/6773e451f1f9c5320ca6bd17/6773e4d1f1f9c5320ca6bdb8/6774ee9df4ab787...'. Below the header, the 'CODETANTRA' logo and 'Home' link are visible. On the right, there are user details '202401090126@mitaoe.ac.in', 'Support', and 'Logout' buttons.

The main content area has a title '3.2.3. Numpy: Custom Sequence Generation'. It contains instructions: 'Write a Python program that takes the following inputs from the user:' followed by a list:

- Start value: The starting point of the sequence.
- Stop value: The sequence should end before this value.
- Step value: The increment between each number in the sequence.

It also states: 'The program should then generate a sequence using numpy based on these inputs and print the generated sequence.'

Input Format:

- The user will input three integer values: start, stop, and step, each on a new line.

Output Format:

- The program should print the generated sequence based on the input values.

In the code editor, there's a file named 'customS...' with the following Python code:

```
import numpy as np

# Take user input for the start, stop, and step of the sequence
start = int(input())
stop = int(input())
step = int(input())

# Generate the sequence using np.arange()
a = np.arange(start, stop, step)
print(a)

# Print the generated sequence
```

At the bottom, there are buttons for 'Terminal' and 'Test cases'. The status bar at the very bottom shows system information like '32°C', '7:35 PM', and the date '5/6/2025'.

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e451f1f9c5320ca6bd17/6773e4d1f1f9c5320ca6bdb8/6774ef2cf4ab787... ★

CODETANTRA

Home

3.2.4. Numpy: Arithmetic and Statistical Operations, Mathematical Op... 00:31

You are given two arrays A and B. Your task is to complete the function array_operations, which will convert these lists into NumPy arrays and perform the following operations:

1. Arithmetic Operations:

- Compute the element-wise sum, difference, and product of the two arrays.

2. Statistical Operations:

- Calculate the mean, median, and standard deviation of array A.

3. Bitwise Operations:

- Perform bitwise AND, bitwise OR, and bitwise XOR on the arrays (ex: $A_1 \text{ OR } B_1$).

Input Format:

- The first line contains space-separated integers representing the elements of array A.
- The second line contains space-separated integers representing the elements of array B.

Sample Test Cases

different...

```
import numpy as np
def array_operations(A, B):
    # Convert A and B to NumPy arrays
    A = np.array(A)
    B = np.array(B)

    # Arithmetic Operations
    sum_result = A + B
    diff_result = A - B
    prod_result = A * B

    # Statistical Operations
    mean_A = np.mean(A)
    median_A = np.median(A)
    std_dev_A = np.std(A)

    # Bitwise Operations
    and_result = A & B
    or_result = A | B
```

Terminal Test cases

< Prev Reset Submit Next >

 CodeTantra  Home

202401090126@mitaoe.ac.in ▾ Support Logout

3.2.5. Numpy: Copying and Viewing Arrays

01:05 AA ⚡ ? -

The given code takes a list of integers as input and converts it into a NumPy array. Your task is to complete the code by:

- Creating a view of the `original_array` and assigning it to `view_array`.
 - Creating a copy of the `original_array` and assigning it to `copy_array`.

After completing these steps, observe how modifying the view affects the original array, while modifying the copy does not.

Input Format:

- A single line of space-separated integers.

Output Format:

- After modifying the view:

```
Original array after modifying view: <original_array>
View array: <view_array>
```

Sample Test Cases

copyAnd...

```
1 import numpy as np
2
3 inputlist = list(map(int,input().split(" ")))
4
5 # Original array
6 original_array = np.array(inputlist)
7 # Create a view
8 view_array=original_array.view()
9
10
11 # Create a copy
12 copy_array =original_array.copy()
13
14
15 # Modify the view
16 view_array[0] = 99
17 print("Original array after modifying view:", original_array)
18 print("View array:", view_array)
19
20 # Modify the copy
21 copy_array[1] = 88
```

Terminal Test cases

< Prev Reset Submit Next >

3.2.6. Numpy: Searching, Sorting, Counting, Broadcasting

00:44 AA ☾ ↻ -

The given code in the editor takes a single array, `array1`, as space-separated integers as input from the user.

Additionally, it takes the following inputs:

- `search_value`: The value to search for in the array.
- `count_value`: The value to count its occurrences in the array.
- `broadcast_value`: The value to add for broadcasting across the array.

You need to complete the code to perform the following operations.

1. **Searching**: Find the indices where `search_value` appears in `array1` and print these indices.

2. **Counting**: Count how many times `count_value` appears in `array1` and print the count.

3. **Broadcasting**: Add `broadcast_value` to each element of `array1` using broadcasting, and print the resulting array.

4. **Sorting**: Sort `array1` in ascending order and print the sorted array.

Input Format

Sample Test Cases

arrayOpe...

```
import numpy as np

# Input array from the user
array1 = np.array(list(map(int, input().split())))

# Searching
search_value = int(input("Value to search: "))
count_value = int(input("Value to count: "))
broadcast_value = int(input("Value to add: "))

# Find indices where value matches in array1
a=np.where(array1==search_value)[0]
print(a)

# Count occurrences in array1
b=np.count_nonzero(array1==count_value)
print(b)

# Broadcasting addition
c=array1+broadcast_value
print(c)

# Sort the first array
d=np.sort(array1)
```

Terminal Test cases

< Prev Reset Submit Next >

3.2.7. Student Data Analysis and Operations

58:37 A C D -

Write a Python program that takes the file name of a CSV file containing student details, including roll numbers and their marks in three subjects as input, reads the data, and performs the following operations:

- **Print all student details:** Display the complete details of all students, including roll numbers and marks for all subjects.
- **Find total students:** Determine the total number of students in the dataset.
- **Print all student roll numbers:** Extract and print the roll numbers of all students.
- **Print Subject 1 marks:** Extract and print the marks of all students in Subject 1.
- **Find minimum marks in Subject 2:** Identify the lowest marks in Subject 2.
- **Find maximum marks in Subject 3:** Identify the highest marks in Subject 3.
- **Print all subject marks:** Display the marks of all students for each subject.
- **Find total marks of students:** Compute the total marks for each student across all subjects.
- **Find the average marks of each student:** Compute the average marks for each student.
- **Find average marks of each subject:** Compute the average marks for all students in each subject.

Sample Test Cases

Explorer **Operations**

```
1 import numpy as np
2
3 a = np.loadtxt("Sample.csv", delimiter=',', skiprows=1)
4
5 print("All student Details:\n",a)
6
7 # 2. print total students
8 r,c=a.shape
9 print("Total Students:",r)
10
11 # 3. Print all student Roll numbers
12 print("All Student Roll Nos",a[:,0])
13
14 # 4. Print subject 1 marks
15 print("Subject 1 Marks",a[:,1])
16
17 # 5. print minimum marks of Subject 2
18 print("Min marks in Subject 2",np.min(a[:,2]))
19
20 # 6. print maximum marks of Subject 3
21 print("Max marks in Subject 3",np.max(a[:,3]))
```

Terminal Test cases

< Prev Reset Submit Next >

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e455f1f9c5320ca6bd19/6773e4d5f1f9c5320ca6bcd2/667a7e042822046... 202401090126@mitaoe.ac.in Support Logout

CODETANTRA Home

4.1.1. Pandas - series creation and manipulation

07:45

Write a Python program that takes a list of numbers from the user, creates a Pandas series from it, and then calculates the mean of even and odd numbers separately using the `groupby` and `mean()` operations.

Input Format:

- The user should enter a list of numbers separated by space when prompted.

Output Format:

- The program should display the mean of even and odd numbers separately.
- Each mean value should be displayed with a label indicating whether it corresponds to even or odd numbers.

Sample Test Cases

seriesMa...

```
import pandas as pd

# Take inputs from the user to create a list of numbers
numbers = list(map(int, input().split()))

# Create a Pandas series from the list of numbers
series = pd.Series(numbers)

# Grouping by even and odd numbers and calculating the mean
grouped = series.groupby(series % 2 == 0).mean()

# Display the mean of even and odd numbers with labels
grouped.index = ['Even' if is_even else 'Odd' for is_even in
grouped.index]
print("Mean of even and odd numbers:")
print(grouped)
```

Terminal Test cases

< Prev Reset Submit Next >

Type here to search

32°C 7:35 PM 5/6/2025

Upload files · Raman1901884/E Course

mitaoe.codetantra.com/secure/course.jsp?euId=6773e3f2f1f9c5320ca6bc85#/contents/6773e455f1f9c5320ca6bd19/6773e4d5f1f9c5320ca6bdc2/667aa3072822046... ☆

CODETANTRA Home

202401090126@mitaoe.ac.in Support Logout

4.1.2. Dictionary to dataframe

14:55

A -

A dictionary of lists has been provided to you in the editor. Create a DataFrame from the dictionary of lists and perform the listed operations, then display the DataFrame before and after each manipulation.

Create the DataFrame:

- Convert the dictionary to a Pandas DataFrame.

Add a new row:

- Take inputs from the user for the new row data (name, age).
- Add the new row to the DataFrame.
- Display the DataFrame after adding the new row.

Modify a row:

- Modify a specific row by changing the age. Take the row index and new age value from the user.
- Display the DataFrame after modifying the row.

Sample Test Cases +

Explorer datafram...

```
1 import pandas as pd
2
3 # Provided dictionary of lists
4 data = {
5     'Name': ['Alice', 'Bob', 'Charlie'],
6     'Age': [25, 30, 35],
7 }
8
9 # Convert the dictionary to a DataFrame
10 df = pd.DataFrame(data)
11
12 # Display the original DataFrame
13 print("Original DataFrame:")
14 print(df)
15
16 # Adding a new row
17 new_name = input("New name: ")
18 new_age = int(input("New age: "))
19 new_row = {'Name':new_name, 'Age':new_age}
20 df = pd.concat([df,pd.DataFrame([new_row])],ignore_index = True)
```

Terminal Test cases

< Prev Reset Submit Next

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e455f1f9c5320ca6bd19/6773e4d5f1f9c5320ca6bdc2/667cf60f2365ba61... ★

CODETANTRA Home

202401090126@mitaoe.ac.in Support Logout

4.1.3. Student Information

44:21 4A ☺

Write a program to read a text file containing student information (name, age, and grade) using Pandas. Perform the following tasks:

- Display the first five rows of the data frame.
- Calculate the average age of the students(limit the average age up to 2 decimal places).
- Filter out the students who have a grade above a certain threshold(consider the threshold grade is 'B').

Note:
Refer to the displayed test cases for better understanding.

Sample Test Cases

Terminal Test cases

← → C ↻ 7:36 PM 5/6/2025

Explorer studentin... studentdat...

```
1 import pandas as pd
2
3 # Read the text file into a DataFrame
4 file = input()
5 data = pd.read_csv(file, sep="\s+", header=None, names=
6 ["Name", "Age", "Grade"])
7 print("First five rows:")
8 print(data.head(5))
9 # write your code here..
10 age=round(data['Age'].mean(),2)
11 print("Average age:",age)
12 print("Students with a grade up to B")
13 df=pd.DataFrame(data)
14 a=df[df['Grade']<='B']
15 print(a)
```

< Prev Reset Submit Next

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e455f1f9c5320ca6bd19/6773e4e4f1f9c5320ca6bdce/67860994a50fe56... Home 202401090126@mitaoe.ac.in Support Logout

4.2.1. Month with the Highest Total Sales

Write a Python program that takes the file name of a CSV file as input, reads the data, and performs the following operations.

- The CSV file contains the columns Date, Product, Quantity, Price, and City.
- Group the data by Month and calculate the total sales for each month.
- Find the month with the highest total sales and display it.
- Also, display the total sales for the best month.

Sample Data:

```
Date,Product,Quantity,Price,City
2025-01-01,Product A,5,20,New York
2025-01-01,Product B,3,15,Los Angeles
2025-01-02,Product A,7,20,New York
2025-01-02,Product C,4,30,Chicago
2025-01-03,Product B,2,15,Chicago
2025-01-03,Product A,8,20,Los Angeles
2025-01-04,Product C,6,30,New York
2025-01-05,Product A,5,20,New York
```

Sample Test Cases

```
import pandas as pd

# Prompt the user for the file name
file_name = input()

# Load the data
df = pd.read_csv(file_name)
df['Date'] = pd.to_datetime(df['Date'])

df['Month'] = df['Date'].dt.to_period('M')

df['Total_Sales'] = df['Quantity'] * df['Price']

monthly_sales = df.groupby('Month')['Total_Sales'].sum()
# Find the month with the highest total sales
best_month = monthly_sales.idxmax()
highest_sales = monthly_sales.max()

print(f"Best month: {best_month}")
print(f"Total sales: ${highest_sales:.2f}")
```

Terminal Test cases

← → ⌂ ⌂ mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e455f1f9c5320ca6bd19/6773e4e4f1f9c5320ca6bdce/67860994a50fe56... Home 202401090126@mitaoe.ac.in Support Logout

Type here to search

7:36 PM 5/6/2025

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e455f1f9c5320ca6bd19/6773e4e4f1f9c5320ca6bdce/67860994a50fe56... Star

4.2.1. Month with the Highest Total Sales

02:44 A ☾

Write a Python program that takes the file name of a CSV file as input, reads the data, and performs the following operations:

- The CSV file contains the columns: Date, Product, Quantity, Price, and City.
- Group the data by Month and calculate the total sales for each month.
- Find the month with the highest total sales and display it.
- Also, display the total sales for the best month.

Sample Data:

```
Date,Product,Quantity,Price,City
2025-01-01,Product A,5,20,New York
2025-01-01,Product B,3,15,Los Angeles
2025-01-02,Product A,7,20,New York
2025-01-02,Product C,4,30,Chicago
2025-01-03,Product B,2,15,Chicago
2025-01-03,Product A,8,20,Los Angeles
2025-01-04,Product C,6,30,New York
2025-01-04,Product B,5,15,Los Angeles
```

Sample Test Cases

```
import pandas as pd

# Prompt the user for the file name
file_name = input()

# Load the data
df = pd.read_csv(file_name)
df['Date'] = pd.to_datetime(df['Date'])

df['Month'] = df['Date'].dt.to_period('M')

df['Total_Sales'] = df['Quantity'] * df['Price']

monthly_sales = df.groupby('Month')['Total_Sales'].sum()
# Find the month with the highest total sales
best_month = monthly_sales.idxmax()
highest_sales = monthly_sales.max()

print(f"Best month: {best_month}")
print(f"Total sales: ${highest_sales:.2f}")
```

Terminal Test cases

< Prev Reset Submit Next >

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e455f1f9c5320ca6bd19/6773e4e4f1f9c5320ca6bdce/67861370a50fe56... Star

4.2.2. Best Selling Product

03:35 AA ☾ ↻ -

Write a Python program that takes the file name of a CSV file as input, reads the data, and performs the following operations:

- The CSV file contains the columns: Date, Product, Quantity, Price, and City.
- Find the product that sold the most in terms of quantity sold.
- Display the product that sold the most and the total quantity sold for that product.

Sample Data:

```
Date,Product,Quantity,Price,City
2025-01-01,Product A,5,20,New York
2025-01-01,Product B,3,15,Los Angeles
2025-01-02,Product A,7,20,New York
2025-01-02,Product C,4,30,Chicago
2025-01-03,Product B,2,15,Chicago
2025-01-03,Product A,8,20,Los Angeles
2025-01-04,Product C,6,30,New York
2025-01-04,Product B,5,15,Los Angeles
2025-01-05,Product A,3,20,Chicago
```

Explorer monthFor... sales_dat...

```
1 import pandas as pd
2
3 # Prompt the user for the file name
4 file_name = input()
5
6 # Load the data
7 df = pd.read_csv(file_name)
8
9
10 # Find the product with the highest total quantity sold
11 product_sales = df.groupby("Product")["Quantity"].sum()
12 best_product = product_sales.idxmax()
13 highest_quantity = product_sales.max()
14
15 # Display the result
16 print(f"Best selling product: {best_product}")
17 print(f"Total quantity sold: {highest_quantity}")
```

Sample Test Cases

Terminal Test cases

< Prev Reset Submit Next >

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e455f1f9c5320ca6bd19/6773e4e4f1f9c5320ca6bdce/67861553a50fe56... Home 202401090126@mitaoe.ac.in Support Logout

4.2.3. City that Sold the Most Products

00:27 A ⚡ -

Write a Python program that takes the file name of a CSV file as input, reads the data, and performs the following operations:

- The CSV file contains the columns: Date, Product, Quantity, Price, and city.
- Group the data by city and calculate the total quantity of products sold for each city.
- Find the city that sold the most products (based on the total quantity sold).

Sample Data:

```
Date,Product,Quantity,Price,City
2025-01-01,Product A,5,20,New York
2025-01-01,Product B,3,15,Los Angeles
2025-01-02,Product A,7,20,New York
2025-01-02,Product C,4,30,Chicago
2025-01-03,Product B,2,15,Chicago
2025-01-03,Product A,8,20,Los Angeles
2025-01-04,Product C,6,30,New York
2025-01-04,Product B,5,15,Los Angeles
```

Explorer monthFor... sales_dat...

```
import pandas as pd
# Prompt the user for the file name
file_name = input()
# Load the data
df = pd.read_csv(file_name)
# write the code..
city_sales = df.groupby("City")["Quantity"].sum()
#Find the city with the higest total quantity sold
best_city = city_sales.idxmax()
# Display the result
print(f"City sold the most products: {best_city}")
```

Submit Debugger

Sample Test Cases

Terminal Test cases

< Prev Reset Submit Next >

Type here to search

32°C 7:36 PM

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e455f1f9c5320ca6bd19/6773e4e4f1f9c5320ca6bdce/6788eea89ff79b6e... 202401090126@mitaoe.ac.in Support Logout

CODETANTRA Home

4.2.4. Most Frequently Sold Product Pairs

06:05 AA ☺ 🔍 ⏪ -

Write a Python program that takes the file name of a CSV file as input, reads the data, and performs the following operations:

- The CSV file contains the following columns: Date, Product, Quantity, Price, and City.
- For each date, find all pairs of products that were sold together (i.e., two products sold on the same date).
- Output the product pair/s that was sold most frequently.

Sample Data:

```
Date,Product,Quantity,Price,City
2025-01-01,Product A,5,20,New York
2025-01-01,Product B,3,15,Los Angeles
2025-01-02,Product A,7,20,New York
2025-01-02,Product C,4,30,Chicago
2025-01-03,Product B,2,15,Chicago
2025-01-03,Product A,8,20,Los Angeles
2025-01-04,Product C,6,30,New York
2025-01-04,Product B,5,15,Los Angeles
```

Sample Test Cases

Explorer frequenti... sales_dat...

```
import pandas as pd
from itertools import combinations
from collections import Counter

# Prompt user to input the file name
file_name = input()

# Read data from the specified CSV file
df = pd.read_csv(file_name)

# write the code
date_products = {}
for date, group in df.groupby('Date'):
    products = group['Product'].unique()
    if len(products) > 1:
        date_products[date] = products
pair_counter = Counter()
for products in date_products.values():
    pairs = combinations(sorted(products), 2)
    pair_counter.update(pairs)
if pair_counter:
```

Terminal Test cases

< Prev Reset Submit Next >

Type here to search

32°C 7:36 PM 5/6/2025

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e455f1f9c5320ca6bd19/6773e4e4f1f9c5320ca6bdce/67e2b9309025661... ☆



202401090126@mitaoe.ac.in Support Logout

4.2.5. Titanic Dataset Analysis and Data Cleaning

11:44 AA ☾ ✎ -

You are provided with the Titanic dataset containing information about passengers on the Titanic. Your task is to write Python code to answer the following questions based on the dataset. For each question, perform necessary data cleaning, transformations, and calculations as required.

1. Display the first 5 rows of the dataset
2. Display the last 5 rows of the dataset
3. Get the shape of the dataset (number of rows and columns)
4. Get a summary of the dataset (using .info()).
5. Get basic statistics (mean, standard deviation, etc.) of the dataset using .describe()
6. Check for missing values and display the count of missing values for each column
7. Fill missing values in the 'Age' column with the median age
8. Fill missing values in the 'Embarked' column with the most frequent value (mode)
9. Drop the 'Cabin' column due to many missing values.
10. Create a new column, 'FamilySize' by adding the 'SibSp' and 'Parch' columns.

The Titanic dataset contains columns as shown below,

Sample Test Cases

Explorer titanicDat...

```
1 import pandas as pd
2 import numpy as np
3
4 # Load the Titanic dataset
5 data = pd.read_csv('Titanic-Dataset.csv')
6
7 # 1. Display the first 5 rows of the dataset
8 print(data.head(5))
9
10 # 2. Display the last 5 rows of the dataset
11 print(data.tail(5))
12
13 # 3. Get the shape of the dataset
14 print(data.shape)
15
16 # 4. Get a summary of the dataset (info)
17 print(data.info())
18
19 # 5. Get basic statistics of the dataset
20 print(data.describe())
21
```

Terminal Test cases

< Prev Reset Submit Next >

4.2.6. Titanic Dataset Analysis and Data Cleaning - 2

38:04 AA ☾ ↻ ⏴ -

You are provided with the Titanic dataset containing information about passengers on the Titanic. Your task is to write Python code to answer the following questions based on the dataset.

1. Create a new column 'IsAlone' which is 1 if the passenger is alone (FamilySize = 0), otherwise 0.
2. Convert the 'Sex' column to numeric values (male: 0, female: 1)
3. One-hot encode the 'Embarked' column, dropping the first category.
4. Get the mean age of passengers.
5. Get the median fare of passengers.
6. Get the number of passengers by class.
7. Get the number of passengers by gender.
8. Get the number of passengers by survival status.
9. Calculate the survival rate of passengers.
10. Calculate the survival rate by gender.

The Titanic dataset contains columns as shown below,

Sample Test Cases

Explorer titanicDat...

```
1 import pandas as pd
2 import numpy as np
3
4 # Load the Titanic dataset
5 data = pd.read_csv('Titanic-Dataset.csv')
6 data['FamilySize'] = data['SibSp'] + data['Parch']
7 # 1. Create a new column 'IsAlone' (1 if alone, 0 otherwise)
8 data['IsAlone'] = np.where(data['FamilySize'] == 0, 1, 0)
9
10 # 2. Convert 'Sex' to numeric (male: 0, female: 1)
11 data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
12 data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)
13 # 3. One-hot encode the 'Embarked' column
14 mean_age = data['Age'].mean()
15 print(mean_age)
16 median_fare = data['Fare'].median()
17 print(median_fare)
18 passengers_by_class = data['Pclass'].value_counts()
19 print(passengers_by_class)
20 # 4. Get the mean age of passengers
```

Terminal Test cases

< Prev Reset Submit Next >

Upload files · Raman1901884/E Course

mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e455f1f9c5320ca6bd19/6773e4e4f1f9c5320ca6bdce/67e3805d7028471... ☆

CODETANTRA Home

202401090126@mitaoe.ac.in Support Logout

4.2.7. Titanic Dataset Analysis and Data Cleaning - 3 01:22

You are provided with the Titanic dataset containing information about passengers on the Titanic. Your task is to write Python code to answer the following questions based on the dataset.

1. Calculate the survival rate by class.
2. Calculate the survival rate by embarkation location (Embarked_S).
3. Calculate the survival rate by family size (FamilySize).
4. Calculate the survival rate by being alone (IsAlone).
5. Get the average fare by passenger class (Pclass).
6. Get the average age by passenger class (Pclass).
7. Get the average age by survival status (Survived).
8. Get the average fare by survival status (Survived).
9. Get the number of survivors by class (Pclass).
10. Get the number of non-survivors by class (Pclass).

The Titanic dataset contains columns as shown below,

Sample Test Cases

Explorer titanicDat...

```
1 import pandas as pd
2 import numpy as np
3
4 # Load the Titanic dataset
5 data = pd.read_csv('Titanic-Dataset.csv')
6 data['FamilySize'] = data['SibSp'] + data['Parch']
7 data['IsAlone'] = np.where(data['FamilySize'] > 0, 0, 1)
8 data = pd.get_dummies(data, columns=['Embarked'],
9 drop_first=True)
10 print(data.groupby('Pclass')['Survived'].mean())
11 print(data.groupby('Embarked_S')['Survived'].mean())
12 print(data.groupby('FamilySize')['Survived'].mean())
13 print(data.groupby('IsAlone')['Survived'].mean())
14 print(data.groupby('Pclass')['Fare'].mean())
15 print(data.groupby('Pclass')['Age'].mean())
16 print(data.groupby('Survived')['Age'].mean())
17 print(data.groupby('Survived')['Fare'].mean())
18 print(data[data['Survived']==1]['Pclass'].value_counts())
19 print(data[data['Survived']==0]['Pclass'].value_counts())
```

Terminal Test cases

< Prev Reset Submit Next >

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e455f1f9c5320ca6bd19/6773e4e4f1f9c5320ca6bdce/67e387fc7028471... ☆

4.2.8. Titanic Dataset Analysis and Data Cleaning - 4

00:34 WA ☾ ↻ -

You are provided with the Titanic dataset containing information about passengers on the Titanic. Your task is to write Python code to answer the following questions based on the dataset.

1. Get the number of survivors by gender (Sex).
2. Get the number of non-survivors by gender (Sex).
3. Get the number of survivors by embarkation location (Embarked_S).
4. Get the number of non-survivors by embarkation location (Embarked_S).
5. Calculate the percentage of children (Age < 18) who survived.
6. Calculate the percentage of adults (Age ≥ 18) who survived.
7. Get the median age of survivors.
8. Get the median age of non-survivors.
9. Get the median fare of survivors.
10. Get the median fare of non-survivors.

The Titanic dataset contains columns as shown below,

Sample Test Cases

Explorer

titanicDat...

```
1 import pandas as pd
2 import numpy as np
3
4 # Load the Titanic dataset
5 data = pd.read_csv('Titanic-Dataset.csv')
6 data = pd.get_dummies(data, columns=['Embarked'],
7 drop_first=True)
8 survival_by_gender = data[data['Survived']==1]
9     ['Sex'].value_counts()
10    print(survival_by_gender)
11    non_survivors_gender = data[data['Survived']==0]
12     ['Sex'].value_counts()
13    print(non_survivors_gender)
14    # 1. Get the number of survivors by gender
15    survivors_by_embarked = data[data['Survived']==1]
16     ['Embarked_S'].value_counts()
17    print(survivors_by_embarked)
18    non_survivors_embarked = data[data['Survived']==0]
19     ['Embarked_S'].value_counts()
20    print(non_survivors_embarked)
21    # 2. Get the number of non-survivors by gender
```

Terminal Test cases

< Prev Reset Submit Next >

 CodeTantra

5.1.1. Stacked Plot

16:29 AA

Create a stacked area plot to visualize the temperature variations for three different cities (City A, City B, and City C) across the months of the year. The temperature data is provided for each city in the editor.

Your task is to:

- Create a stacked area plot using the data.
 - Label the x-axis as "Month", the y-axis as "Temperature", and provide the title "Temperature Variation" for the plot.
 - Display the plot showing the temperature variation for each city throughout the months of the year.

Sample Test Cases

1 import matplotlib.pyplot as plt
2 import pandas as pd
3
4 # Data for Months and Temperature for three cities
5 data = {
6 'Month': ['January', 'February', 'March', 'April', 'May',
7 'June', 'July', 'August', 'September', 'October', 'November',
8 'December'],
9 'City_A_Temperature': [5, 7, 10, 13, 17, 20, 22, 21, 18,
10 12, 8, 6],
11 'City_B_Temperature': [2, 3, 5, 6, 10, 14, 16, 17, 12, 9,
12 5, 3],
13 'City_C_Temperature': [3, 4, 6, 8, 9, 12, 15, 14, 10, 7,
14 4, 2]
15 }
16
17 # Write your code...
18 df = pd.DataFrame(data)
19 plt.stackplot(df['Month'],df['City_A_Temperature'],df['City_B_Temperature'],df['City_C_Temperature'])
20 plt.title('Temperature Variation')

Terminal Test cases

[← Prev](#) [Reset](#) [Submit](#) [Next →](#)

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e45af1f9c5320ca6bd1d/6773e4f1f1f9c5320ca6bdd5/677cbdd52372a22... Star

2.1. Titanic Dataset

03:35 AA ☾ ⏺ ⏹ -

Write a Python program to analyze and visualize data from the Titanic dataset based on the following instructions:

Dataset Information:

The dataset is stored in a CSV file named `titanic.csv` and has been loaded using the `pandas` library. It contains the following columns:

- `Pclass`: Passenger class (1 = First, 2 = Second, 3 = Third).
- `Gender`: Gender of the passenger (male/female).
- `Age`: Age of the passenger.
- `Survived`: Survival status (0 = Did not survive, 1 = Survived).
- `Fare`: Ticket fare paid by the passenger.

Visualization:

To represent these trends, you will create 5 visualizations using Matplotlib. The visualizations should be arranged in a 3x2 grid (3 rows and 2 columns).

Sample Test Cases

Explorer titanicDat...

```
1 import pandas as pd
2 import matplotlib.pyplot as plt
3
4 # Load the Titanic dataset from the CSV file
5 df = pd.read_csv('titanic.csv')
6
7 # Set up the figure for 5 subplots
8 fig, axes = plt.subplots(3, 2, figsize=(12, 12))
9 # Load the Titanic dataset from the CSV file
10 df = pd.read_csv('titanic.csv')
11
12 # Set up the figure for 5 subplots
13 fig, axes = plt.subplots(3, 2, figsize=(12, 12))
14
15 # Plot 1: Count of passengers by class
16 axes[0, 0].bar(df['Pclass'].value_counts().index,
17 df['Pclass'].value_counts(), color='skyblue')
18 axes[0, 0].set_title("Passenger Class Distribution")
19 axes[0, 0].set_xlabel("Pclass")
20 axes[0, 0].set_ylabel("Count")
```

Terminal Test cases

< Prev Reset Submit Next >

5.2.2. Histogram of passenger information of Titanic

06:42 AA ☾ ☰ -

Write a Python code to plot a histogram for the distribution of the 'Age' column from the Titanic dataset. The histogram should display the frequency of different age ranges with the following specifications:

1. Use **30 bins** for the histogram.
2. Set the **edge color** of the bars to **black (k)**.
3. Label the x-axis as '**Age**' and the y-axis as '**Frequency**'.
4. Add the title "**Age Distribution**" to the histogram.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Test Cases

Histogram

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

# Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
data.drop('Cabin', axis=1, inplace=True)

# Convert categorical features to numeric
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)

# Write your code here for Histogram
plt.hist(data['Age'], bins=30, edgecolor="k")
plt.xlabel("Age")
plt.ylabel("Frequency")
```

Terminal Test cases

< Prev Reset Submit Next

Upload files · Raman1901884/E Course

mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e45af1f9c5320ca6bd1d/6773e4f1f1f9c5320ca6bdd5/67e28d6e7c0b912... ★

CODETANTRA Home

202401090126@mitaoe.ac.in Support Logout

5.2.3. Bar plot of survival rate of passengers

06:41 A ⚡ -

Write a Python code to plot a bar chart that shows the count of passengers who survived and did not survive in the Titanic dataset. The chart should display the following specifications:

1. Use the 'Survived' column to show the count of survivors (0 = Did not survive, 1 = Survived).
2. Set the chart type to 'bar'.
3. Add the title "Survival Count" to the chart.
4. Label the x-axis as 'Survived' and the y-axis as 'Count'.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Test Cases

BarPlot...

import pandas as pd
import matplotlib.pyplot as plt

Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)
data['Embarked'].fillna(data['Embarked'].mode()[0],
inplace=True)
data.drop('Cabin', axis=1, inplace=True)

Convert categorical features to numeric
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
data = pd.get_dummies(data, columns=['Embarked'],
drop_first=True)

Write your code here for Bar Plot for Survival Rate
survival_count = data['Survived'].value_counts()
survival_count.plot(kind='bar')
plt.title('Survival Count')

Terminal Test cases

< Prev Reset Submit Next

5.2.4. Bar Plot for Survival by Gender

02:18 A ⚡ -

Write a Python code to plot a stacked bar chart that shows the count of passengers who survived and did not survive, grouped by gender, in the Titanic dataset. The chart should display the following specifications:

1. Group the data by the 'Sex' column, then use the `value_counts()` function to count the occurrences of survivors (0 = Did not survive, 1 = Survived) for each gender.
2. Use a **stacked bar chart** to display the survival counts.
3. Add the title "**Survival by Gender**" to the chart
4. Label the x-axis as '**Gender**' and the y-axis as '**Count**'
5. The legend should indicate '**Not Survived**' and '**Survived**'.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked
1	0	3	Abdullah Ali	male	22	1	0	313330	7.25	CABIN_A45	S

Sample Test Cases

Explorer

BarPlotOf...

```

1 import pandas as pd
2 import matplotlib.pyplot as plt
3
4 # Load the Titanic dataset
5 data = pd.read_csv('Titanic-Dataset.csv')
6
7 # Data Cleaning
8 data['Age'].fillna(data['Age'].median(), inplace=True)
9 data['Embarked'].fillna(data['Embarked'].mode()[0],
10                         inplace=True)
11 data.drop('Cabin', axis=1, inplace=True)
12
13 # Convert categorical features to numeric
14 data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
15 data = pd.get_dummies(data, columns=['Embarked'],
16                       drop_first=True)
17
18 # Write your code here for Bar Plot for Survival by Gender
survival_by_gender = data.groupby('Sex')[['Survived']].value_counts().unstack().fillna(0)
survival_by_gender.columns = ['Not Survived', 'Survived']

```

Terminal Test cases

< Prev Reset Submit Next

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euId=6773e3f2f1f9c5320ca6bc85#/contents/6773e45af1f9c5320ca6bd1d/6773e4f1f1f9c5320ca6bdd5/67e291be7c0b912... 202401090126@mitaoe.ac.in Support Logout

CODETANTRA Home

5.2.5. Bar Plot for Survival by Pclass

Write a Python code to plot a stacked bar chart that shows the count of passengers who survived and did not survive, grouped by passenger class (Pclass), in the Titanic dataset. The chart should display the following specifications:

1. Group the data by the **Pclass** column and count the number of survivors (0 = Did not survive, 1 = Survived) for each class using **value_counts()**.
2. Use a **stacked bar chart** to display the survival counts.
3. Add the title "**Survival by Pclass**" to the chart.
4. Label the x-axis as '**Pclass**' and the y-axis as '**Count**'.
5. The legend should indicate '**Not Survived**' and '**Survived**'.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked
-------------	----------	--------	------	-----	-----	-------	-------	--------	------	-------	----------

Sample Test Cases

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

# Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
data.drop('Cabin', axis=1, inplace=True)

# Convert categorical features to numeric
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)

# Write your code here for Bar Plot for Survival by Pclass
survival_by_class = data.groupby('Pclass')[['Survived']].value_counts().unstack().fillna(0)
survival_by_class.columns = ['Not Survived', 'Survived']
```

Terminal Test cases

Upload files - Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e45af1f9c5320ca6bd1d/6773e4f1f1f9c5320ca6bdd5/67e297bf7c0b912... Support Logout



202401090126@mitaoe.ac.in Support Logout

5.2.6. Bar Plot for Survival by Embarked

00:52 A ☾ ↻ -

Write a Python code to plot a stacked bar chart showing the survival count for passengers based on their embarkation location in the Titanic dataset.

The chart should display the following specifications:

1. Use the **Embarked** column to determine the embarkation location. After converting this column into dummy variables (using `pd.get_dummies()`), plot the survival count based on the **Embarked_Q** column (representing passengers who embarked from Queenstown) in relation to survival.
2. Set the chart type to 'bar' and make it stacked.
3. Add the title "**Survival by Embarked**" to the chart.
4. Label the x-axis as '**Embarked**' and the y-axis as '**Count**'.
5. Include a legend to distinguish between survivors and non-survivors (label the legend as '**Survived**' and '**Not Survived**').

The Titanic dataset contains columns as shown below,

Pa	Su	Pcl	Nz	Se	An	Si	Da	Tic	Fa	Ca	E
ss	rvi										mh

Sample Test Cases

Explorer

BarPlotOf...

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

# Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
data.drop('Cabin', axis=1, inplace=True)

# Convert categorical features to numeric
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
data = pd.get_dummies(data, columns=['Embarked'],
drop_first=True)

# Write your code here for Bar Plot for Survival by Embarked

grouped = data.groupby('Embarked_Q')
['Survived'].value_counts().unstack().fillna(0)
```

Terminal Test cases

< Prev Reset Submit Next

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e45af1f9c5320ca6bd1d/6773e4f1f1f9c5320ca6bdd5/67e2992e7c0b912... 202401090126@mitaoe.ac.in Support Logout Debugger

CODETANTRA Home

5.2.7. Box plot for Age Distribution

00:19 A ⚡ -

Write a Python code to plot a boxplot that shows the distribution of the 'Age' column from the Titanic dataset across different passenger classes. The boxplot should display the following specifications:

1. Use the **Pclass** column to group the data for the boxplot
2. Set the title of the plot to "**Age by Pclass**".
3. Remove the default subtitle with **plt.suptitle("")**.
4. Label the x-axis as '**Pclass**' and the y-axis as '**Age**'.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Test Cases

BoxPlotF...

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

# Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
data.drop('Cabin', axis=1, inplace=True)

# Convert categorical features to numeric
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)

# Write your code here for Box Plot for Age by Pclass
plt.figure(figsize=(8,6))
data.boxplot(column='Age', by='Pclass')
```

Terminal Test cases < Prev Reset Submit Next

Type here to search 32°C 7:37 PM 5/6/2025 5

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euId=6773e3f2f1f9c5320ca6bc85#/contents/6773e45af1f9c5320ca6bd1d/6773e4f1f1f9c5320ca6bdd5/67e29db57c0b912... ★

CODETANTRA Home

202401090126@mitaoe.ac.in Support Logout

5.2.8. Box Plot for Age by Survived

00:22 A ☾ ↻ -

Write a Python code to plot a boxplot that shows the distribution of the 'Age' column from the Titanic dataset based on whether passengers survived or not. The boxplot should display the following specifications:

1. Use the **Survived** column to group the data for the boxplot (0 = Did not survive, 1 = Survived).
2. Set the title of the plot to "**Age by Survival**".
3. Remove the default subtitle with **plt.suptitle("")**.
4. Label the x-axis as '**Survived**' and the y-axis as '**Age**'.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Test Cases

BoxPlotF...

import pandas as pd
import matplotlib.pyplot as plt

Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)
data['Embarked'].fillna(data['Embarked'].mode()[0],
inplace=True)
data.drop('Cabin', axis=1, inplace=True)

Convert categorical features to numeric
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
data = pd.get_dummies(data, columns=['Embarked'],
drop_first=True)

Write your code here for Box Plot for Age by Survived

plt.figure(figsize=(8,6))
data.boxplot(column='Age', by='Survived')

Terminal Test cases

< Prev Reset Submit Next

Upload files · Raman1901884/E Course

mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e45af1f9c5320ca6bd1d/6773e4f1f1f9c5320ca6bdd5/67e29db57c0b912... ★ ↻

CODETANTRA Home 202401090126@mitaoe.ac.in Support Logout

5.2.8. Box Plot for Age by Survived

00:22 AA ☾ ⚡ -

Write a Python code to plot a boxplot that shows the distribution of the 'Age' column from the Titanic dataset based on whether passengers survived or not. The boxplot should display the following specifications:

1. Use the **Survived** column to group the data for the boxplot (0 = Did not survive, 1 = Survived).
2. Set the title of the plot to "**Age by Survival**".
3. Remove the default subtitle with **plt.suptitle("")**.
4. Label the x-axis as '**Survived**' and the y-axis as '**Age**'.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Test Cases

BoxPlotF...

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

# Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
data.drop('Cabin', axis=1, inplace=True)

# Convert categorical features to numeric
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)

# Write your code here for Box Plot for Age by Survived
plt.figure(figsize=(8,6))
data.boxplot(column='Age', by='Survived')
```

Terminal Test cases

< Prev Reset Submit Next

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euId=6773e3f2f1f9c5320ca6bc85#/contents/6773e45af1f9c5320ca6bd1d/6773e4f1f1f9c5320ca6bdd5/67e2a2977c0b912... Home

CODETANTRA Home

202401090126@mitaoe.ac.in Support Logout

5.2.10. Scatter Plot for Age vs. Fare

02:43 A C D -

Write a Python code to plot a scatter plot showing the relationship between the 'Age' and 'Fare' columns in the Titanic dataset. The scatter plot should display the following specifications:

1. Use the **Age** column for the x-axis and the **Fare** column for the y-axis.
2. Set the title of the plot to "**Age vs. Fare**".
3. Label the x-axis as '**Age**' and the y-axis as '**Fare**'.

The Titanic dataset contains columns as shown below,

PassegerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Test Cases

Explorer

AgeFareS...

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

# Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
data.drop('Cabin', axis=1, inplace=True)

# Convert categorical features to numeric
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
data = pd.get_dummies(data, columns=['Embarked'],
drop_first=True)

# Write your code here for Box Plot for Fare by Pclass
```

Terminal Test cases

< Prev Reset Submit Next >

Upload files · Raman1901884/E Course mitaoe.codetantra.com/secure/course.jsp?euclid=6773e3f2f1f9c5320ca6bc85#/contents/6773e45af1f9c5320ca6bd1d/6773e4f1f1f9c5320ca6bdd5/67e2a5387c0b912... 202401090126@mitaoe.ac.in Support Logout

CODETANTRA Home

2.11. Scatter Plot for Age vs. Fare by Survived

01:04 A ☽ ✎ -

Write a Python code to plot a scatter plot showing the relationship between the 'Age' and 'Fare' columns in the Titanic dataset, with points color-coded by survival status. The scatter plot should display the following specifications.

1. Use the **Age** column for the x-axis and the **Fare** column for the y-axis.
2. Color the points based on the **Survived** column: **Red** for passengers who did not survive (**Survived = 0**). **Blue** for passengers who survived (**Survived = 1**).
3. Set the title of the plot to "**Age vs. Fare by Survival**".
4. Label the x-axis as '**Age**' and the y-axis as '**Fare**'.

The Titanic dataset contains columns as shown below,

PassengerId	Survived	Pclass	Name	Sex	Age	SibSp	Parch	Ticket	Fare	Cabin	Embarked

Sample Test Cases

Explorer AgeFareS...

```
import pandas as pd
import matplotlib.pyplot as plt

# Load the Titanic dataset
data = pd.read_csv('Titanic-Dataset.csv')

# Data Cleaning
data['Age'].fillna(data['Age'].median(), inplace=True)
data['Embarked'].fillna(data['Embarked'].mode()[0], inplace=True)
data.drop('Cabin', axis=1, inplace=True)

# Convert categorical features to numeric
data['Sex'] = data['Sex'].map({'male': 0, 'female': 1})
data = pd.get_dummies(data, columns=['Embarked'], drop_first=True)

# Write your code here for Scatter Plot for Age vs. Fare by Survived
plt.figure()
colors = {0: 'red', 1: 'blue'}
```

Terminal Test cases

< Prev Reset Submit

Type here to search