

RAMBOQUANT

DESIGN GUIDE • v 4424

# RamboQuant

## Algo Trading Platform

---

Ramana R Ambore, **FRM**

WEBSITE

[ramboq.com](https://ramboq.com)

EDITION

July 4, 2026

## About this guide

The RamboQuant **Complete Design Guide** is a top-to-bottom developer + operator onboarding manual for a production algorithmic trading platform. Read cover-to-cover to build a full mental model of the codebase, or jump to any of the 42 sections for focused work. Every subsystem names the exact files; every architectural decision states its trade-off; **Part IX** is a cookbook of change recipes with exact-diff-level guidance.

**Generated**

July 4, 2026

**Revision**

v 4424 (a8d17907)

**Website**[ramboq.com](https://ramboq.com)**Tech Stack**

SvelteKit • Litestar • PostgreSQL • async SQLAlchemy 2.x • KiteTicker WebSocket • Kite / Dhan / Groww adapters • MCP • Gemini

## THE AUTHOR

### Ramana R Ambore, FRM

Principal FinTech Engineer & Quantitative Developer

Principal FinTech engineer and quantitative developer with **30+ years** across mainframe modernization and cloud-native financial platforms. **FRM** (GARP, 2022) and **CFA Level 2** candidate with a Master's in Computer Science. Currently **Principal System Analyst** at **Fidelity Investments**, leading billing-platform modernization on AWS + Snowflake, alongside proprietary legacy modernization tooling. Deep specialism in derivatives risk and options pricing — Black-Scholes, Greeks modeling, multi-leg strategy analytics — carried directly into RamboQuant's derivatives layer. **NTT Innovation Award** recipient (top-40 global innovator). Based in Merrimack, NH.

Profile: [ramanaambore.me](https://ramanaambore.me)

## EXPERIENCE &amp; RECOGNITION

**CURRENT ROLE****Principal System Analyst**

Fidelity Investments

Billing platform modernization on AWS + Snowflake; distributed fee-calculation engines.

**INDUSTRY DEPTH****30+ years FinTech**

Mainframe to cloud-native

Derivatives risk, options pricing (Black-Scholes, Greeks), multi-leg strategy analytics.

**RECOGNITION****NTT Innovation Award**

Top-40 global innovator

Selected globally for innovation contributions in financial-services engineering.

## CREDENTIALS

**FRM** (GARP, 2022) • **CFA Level 2** • **Master's, Computer Science** • Six Sigma Green Belt • IBM Certified DB2 DBA • Sun Certified Java Programmer

# Contents

|                                                              |           |
|--------------------------------------------------------------|-----------|
| <b>RamboQuant — Complete Design Guide</b>                    | <b>5</b>  |
| About the author                                             | 5         |
| Experience & recognition                                     | 5         |
| Credentials                                                  | 6         |
| Links                                                        | 6         |
| RamboQuant platform scope                                    | 6         |
| About this document                                          | 6         |
| Table of contents                                            | 6         |
| <b>Part I — Foundation</b>                                   | <b>8</b>  |
| 1. Architecture overview                                     | 8         |
| 2. Tech stack — at a glance                                  | 9         |
| 3. Core architectural principles                             | 9         |
| 3.1 Single source of truth at the broker boundary            | 9         |
| 3.2 Idempotency is the default                               | 9         |
| 3.3 Database is authoritative; in-memory is fast-path        | 10        |
| 3.4 Async by default, sync when forced                       | 10        |
| 3.5 Demo mode = signed-out + prod branch                     | 10        |
| 4. Concurrency model                                         | 10        |
| 4.1 Why one unicorn worker?                                  | 10        |
| 4.2 KiteTicker threading                                     | 11        |
| 4.3 Background task lifecycle                                | 11        |
| 4.5. Data layer — implementation detail                      | 11        |
| 4.5.1 Topology                                               | 11        |
| 4.5.2 File map                                               | 12        |
| 4.5.3 Engine + session factory                               | 12        |
| 4.5.4 Models — how to add / modify                           | 13        |
| 4.5.5 Session lifecycle in handlers                          | 14        |
| 4.5.6 Idempotent migrations pattern                          | 14        |
| 4.5.7 The seeders — bootstrapping defaults                   | 15        |
| 4.5.8 Settings cache layer                                   | 15        |
| 4.5.9 attached_gtts_json — the small-state JSON blob pattern | 16        |
| 4.5.10 Pool sizing + connection accounting                   | 16        |
| 4.5.11 Demo masking — at the data layer boundary             | 17        |
| 4.6 Database schema overview                                 | 17        |
| Table categories                                             | 17        |
| 4.7 Table relationships                                      | 21        |
| 4.8 Retention policies                                       | 22        |
| 4.9 Metrics + Performance tracking                           | 23        |
| Static metrics (per file)                                    | 24        |
| Runtime metrics (Web Vitals)                                 | 24        |
| Data flow                                                    | 24        |
| DB schema                                                    | 25        |
| Admin endpoints                                              | 25        |
| Frontend surface                                             | 25        |
| #major tag workflow                                          | 26        |
| Key files                                                    | 26        |
| <b>Part II — Order lifecycle</b>                             | <b>26</b> |
| 5. Order placement — single ticket (Ticket tab)              | 26        |
| 6. Order placement — basket (Chain tab)                      | 27        |
| 7. Chase loop lifecycle                                      | 28        |
| 8. The order/chase/template tripod                           | 28        |

|                                                                        |           |
|------------------------------------------------------------------------|-----------|
| 8.1 What each one owns . . . . .                                       | 28        |
| 8.2 Why three? Why not one big “manage this order” function? . . . . . | 29        |
| 8.3 The mode pivot . . . . .                                           | 29        |
| <b>Part III — Templates + exits</b>                                    | <b>29</b> |
| 9. Template attach pipeline . . . . .                                  | 29        |
| 10. 4-default template matrix . . . . .                                | 30        |
| 11. Template override merge . . . . .                                  | 31        |
| 12. Chase loop invariants . . . . .                                    | 31        |
| 13. Trail-stop subsystem . . . . .                                     | 32        |
| <b>Part IV — Brokers</b>                                               | <b>32</b> |
| 14. Broker abstraction . . . . .                                       | 33        |
| 14.5. Broker abstraction — implementation detail . . . . .             | 34        |
| 18. Frontend state architecture . . . . .                              | 38        |
| 18.1 Why no global store for order state? . . . . .                    | 38        |
| 18.2 The “shell” pattern . . . . .                                     | 38        |
| 19. The preview pipeline . . . . .                                     | 39        |
| <b>Part VI — Runtime</b>                                               | <b>39</b> |
| 20. Background task topology . . . . .                                 | 39        |
| 21. Data refresh — PositionStrip + Dashboard . . . . .                 | 40        |
| 22. Demo mode . . . . .                                                | 41        |
| 22.5. Investor portal — token-as-credential . . . . .                  | 41        |
| Why token-as-credential . . . . .                                      | 41        |
| Schema . . . . .                                                       | 41        |
| Active check . . . . .                                                 | 42        |
| Endpoints . . . . .                                                    | 42        |
| Visit tracking . . . . .                                               | 42        |
| Frontend separation . . . . .                                          | 42        |
| Revocation model . . . . .                                             | 42        |
| Source files . . . . .                                                 | 42        |
| 22.6. Investor portal — units-based NAV math . . . . .                 | 42        |
| Single source of math . . . . .                                        | 43        |
| Auto-bootstrap rule . . . . .                                          | 43        |
| Day-delta semantics under units . . . . .                              | 44        |
| Smoke-test invariants . . . . .                                        | 44        |
| Bootstrap edit / correction path . . . . .                             | 44        |
| Source files . . . . .                                                 | 44        |
| 22.7. Audit log — forensic trail . . . . .                             | 44        |
| Schema . . . . .                                                       | 45        |
| Two write paths . . . . .                                              | 45        |
| Failed mutations toggle . . . . .                                      | 45        |
| Category routing . . . . .                                             | 46        |
| UI — filter pills . . . . .                                            | 46        |
| Performance contract . . . . .                                         | 46        |
| Source files . . . . .                                                 | 46        |
| 22.8. Postback fan-out — book_changed bus . . . . .                    | 46        |
| Backend chain . . . . .                                                | 47        |
| Frontend bus . . . . .                                                 | 47        |
| Subscription map . . . . .                                             | 47        |
| Recipe — wire a new page to the bus . . . . .                          | 47        |
| Performance contract . . . . .                                         | 48        |
| Source files . . . . .                                                 | 48        |
| 22.9. History — multi-day orders / trades / funds . . . . .            | 48        |
| Endpoint surface . . . . .                                             | 48        |

|                                                                                     |           |
|-------------------------------------------------------------------------------------|-----------|
| Response shape highlights . . . . .                                                 | 49        |
| Funds capture (new — Jun 2026) . . . . .                                            | 49        |
| Drill, delta, backfill — closed limits . . . . .                                    | 49        |
| □ TECH — Voucher-level aggregation vs daily snapshot . . . . .                      | 50        |
| Idempotency on backfill . . . . .                                                   | 50        |
| Remaining limit . . . . .                                                           | 50        |
| Source files . . . . .                                                              | 51        |
| 22.10. Order placement latency — preflight + tick cache + paper-skip . . . . .      | 51        |
| Fix 1 — preflight parallelization . . . . .                                         | 51        |
| Fix 2 — tick-size index . . . . .                                                   | 52        |
| Fix 3 — PAPER skips route-level preflight . . . . .                                 | 52        |
| Combined ticket-path savings . . . . .                                              | 52        |
| Source files . . . . .                                                              | 52        |
| 22.11. Navbar audit — rename + resequence . . . . .                                 | 52        |
| 22.12. #audit workflow + Dhan / Groww postback scaffold . . . . .                   | 53        |
| Audit slices A, B, C (shipped Jun 2026) . . . . .                                   | 53        |
| _process_broker_postback shared helper . . . . .                                    | 54        |
| Source files . . . . .                                                              | 54        |
| 22.13. Audit slice D — UX consistency + palette consolidation + 2 defects . . . . . | 54        |
| UX consistency — adopting canonical components . . . . .                            | 55        |
| Palette alpha consolidation . . . . .                                               | 55        |
| Defects . . . . .                                                                   | 55        |
| Source files . . . . .                                                              | 55        |
| 22.14. Market-status — broker API beats bellwether-quote probe . . . . .            | 56        |
| Resolution order . . . . .                                                          | 56        |
| Adapter contract . . . . .                                                          | 56        |
| Side effects on quote budget . . . . .                                              | 57        |
| Adding the API to a new adapter . . . . .                                           | 57        |
| Source files . . . . .                                                              | 57        |
| 22.15. Chart indicator system — pure module + overlay persistence . . . . .         | 57        |
| Buy / sell signal markers . . . . .                                                 | 58        |
| Source files . . . . .                                                              | 59        |
| <b>Part VII — Operations</b> . . . . .                                              | <b>60</b> |
| 23. How to add a new template field . . . . .                                       | 60        |
| Backend . . . . .                                                                   | 60        |
| Frontend . . . . .                                                                  | 60        |
| Documents . . . . .                                                                 | 60        |
| 24. Testing philosophy . . . . .                                                    | 60        |
| 25. Logging discipline . . . . .                                                    | 61        |
| 26. Deployment notes . . . . .                                                      | 61        |
| 27. Sprint history + audit fixes . . . . .                                          | 61        |
| <b>Part VIII — Wrap-up</b> . . . . .                                                | <b>62</b> |
| 28. Reading order for a new developer . . . . .                                     | 62        |
| 29. When in doubt . . . . .                                                         | 62        |
| 30. Operator's mental model — the one-page summary . . . . .                        | 62        |
| <b>Part IX — Change recipes (cookbook)</b> . . . . .                                | <b>63</b> |
| 31. Recipe: add a new route . . . . .                                               | 63        |
| Steps . . . . .                                                                     | 63        |
| 32. Recipe: add a column to an existing table . . . . .                             | 64        |
| Steps . . . . .                                                                     | 64        |
| 33. Recipe: add a new background task . . . . .                                     | 65        |
| Steps . . . . .                                                                     | 65        |
| 34. Recipe: add a new agent action . . . . .                                        | 65        |

|                                                       |    |
|-------------------------------------------------------|----|
| Steps                                                 | 66 |
| 35. Recipe: add a new template field (worked example) | 66 |
| Steps                                                 | 66 |
| 36. Recipe: add a new broker capability flag          | 67 |
| Steps                                                 | 67 |
| 37. Recipe: add a new page                            | 68 |
| Steps                                                 | 68 |
| 38. Recipe: add a setting                             | 69 |
| Steps                                                 | 69 |
| 39. Recipe: change an existing default template       | 69 |
| Steps                                                 | 69 |
| 40. Recipe: wire a new notification channel           | 70 |
| Steps                                                 | 70 |
| 41. Recipe: ship a fix to dev + main                  | 70 |
| Steps                                                 | 71 |
| 42. Cross-cutting checklist before every commit       | 71 |
| Where to learn more                                   | 72 |
| Glossary                                              | 72 |
| Alphabetical section index                            | 73 |

## RamboQuant — Complete Design Guide

| Generated     | Revision    | Website                                     |
|---------------|-------------|---------------------------------------------|
| See PDF cover | See git log | <a href="https://ramboq.com">ramboq.com</a> |

**Tech Stack** — SvelteKit · Litestar · PostgreSQL · async SQLAlchemy 2.x · KiteTicker WebSocket · Kite / Dhan / Groww adapters · MCP · Gemini.

### About the author

**Ramana R Ambore, FRM** — Principal FinTech Engineer & Quantitative Developer, platform engineer for **RamboQuant LLP**.

Principal FinTech engineer and quantitative developer with **30+ years** across mainframe modernization and cloud-native financial platforms. **FRM** (GARP, 2022) and **CFA Level 2** candidate with a Master's in Computer Science. Currently **Principal System Analyst** at **Fidelity Investments**, leading billing-platform modernization on AWS + Snowflake, alongside proprietary legacy modernization tooling. Deep specialism in derivatives risk and options pricing — Black-Scholes, Greeks modeling, multi-leg strategy analytics — carried directly into RamboQuant's derivatives layer. **NTT Innovation Award** recipient (top-40 global innovator). Based in Merrimack, NH.

**Profile:** [ramanaambore.me](https://ramanaambore.me)

### Experience & recognition

|                       |                                                                                                                                           |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Current role</b>   | Principal System Analyst · Fidelity Investments — billing-platform modernization on AWS + Snowflake; distributed fee-calculation engines. |
| <b>Industry depth</b> | 30+ years FinTech, mainframe to cloud-native — derivatives risk, options pricing (Black-Scholes, Greeks), multi-leg strategy analytics.   |

---

|             |                                                                                              |
|-------------|----------------------------------------------------------------------------------------------|
| Recognition | NTT Innovation Award — top-40 global innovator, selected for financial-services engineering. |
|-------------|----------------------------------------------------------------------------------------------|

---

## Credentials

FRM (GARP, 2022) · CFA Level 2 · Master's, Computer Science · Six Sigma Green Belt · IBM Certified DB2 DBA · Sun Certified Java Programmer.

## Links

- **Website:** [ramboq.com](https://ramboq.com)
- **Profile:** [ramanaambore.me](https://ramanaambore.me)
- **Contact:** through the [ramboq.com](https://ramboq.com) contact page
- **Repo:** private; access via RamboQuant LLP

## RamboQuant platform scope

Builds and maintains the RamboQuant platform end-to-end: a production application covering multi-broker order routing, real-time market data pipelines, options analytics, portfolio tracking, and operator + investor-facing tooling.

**Tech Stack:** SvelteKit + Svelte 5 frontend · Litestar / Python async API · PostgreSQL with async SQLAlchemy 2.x · Kite / Dhan / Groww broker adapters · KiteTicker WebSocket + shared-memory tick pipeline · Gemini-driven market summaries · MCP-integrated research tooling · web-vitals-tracked deploys.

## About this document

The full developer onboarding document. Read top-to-bottom to understand the codebase end-to-end; reference specific sections for ongoing work. Flow diagrams use Mermaid. Tech-stack rationale (why / what / how / where) is interleaved with each subsystem rather than collected separately — easier to learn in context.

**Goal:** anybody who reads and understands this document should be able to modify and enhance features by making the actual code changes. Each subsystem section names the files; **Part IX** at the end is a cookbook of common change recipes with exact-diff-level guidance.

---

## Table of contents

### Part I — Foundation

- §1. Architecture overview
- §2. Tech stack — at a glance
- §3. Core architectural principles
- §4. Concurrency model
- §4.5. Data layer — implementation detail
- §4.6. Database schema overview
- §4.7. Table relationships
- §4.8. Retention policies
- §4.9. Metrics + performance tracking

### Part II — Order lifecycle

- §5. Order placement — single ticket (Ticket tab)

- §6. Order placement — basket (Chain tab)
- §7. Chase loop lifecycle
- §8. The order/chase/template tripod

### Part III — Templates + exits

- §9. Template attach pipeline
- §10. 4-default template matrix
- §11. Template override merge
- §12. Chase loop invariants
- §13. Trail-stop subsystem

### Part IV — Brokers

- §14. Broker abstraction
- §14.5. Broker abstraction — implementation detail
- §15. How to add a new broker
- §16. Broker gotchas

### Part V — Frontend

- §17. Frontend modal state
- §18. Frontend state architecture
- §19. The preview pipeline

### Part VI — Runtime

- §20. Background task topology
- §21. Data refresh — PositionStrip + Dashboard
- §22. Demo mode
- §22.5. Investor portal — token-as-credential
- §22.6. Investor portal — units-based NAV math
- §22.7. Audit log — forensic trail
- §22.8. Postback fan-out — book\_changed bus
- §22.9. History — multi-day orders / trades / funds
- §22.10. Order placement latency — preflight + tick cache + paper-skip
- §22.11. Navbar audit — rename + resequence
- §22.12. #audit workflow + Dhan / Groww postback scaffold
- §22.13. Audit slice D — UX consistency + palette consolidation + 2 defects
- §22.14. Market-status — broker API beats bellwether-quote probe
- §22.15. Chart indicator system — pure module + overlay persistence

### Part VII — Operations

- §23. How to add a new template field
- §24. Testing philosophy
- §25. Logging discipline
- §26. Deployment notes
- §27. Sprint history + audit fixes

### Part VIII — Wrap-up

- §28. Reading order for a new developer
- §29. When in doubt
- §30. Operator's mental model

### Part IX — Change recipes (cookbook)



- §31. Recipe: add a new route
- §32. Recipe: add a column to an existing table
- §33. Recipe: add a new background task
- §34. Recipe: add a new agent action
- §35. Recipe: add a new template field (worked example)
- §36. Recipe: add a new broker capability flag
- §37. Recipe: add a new page
- §38. Recipe: add a setting
- §39. Recipe: change an existing default template
- §40. Recipe: wire a new notification channel
- §41. Recipe: ship a fix to dev + main
- §42. Cross-cutting checklist before every commit

Tech-stack rationale boxes appear inline as **TECH: WHY · WHAT · HOW · WHERE** callouts throughout. Look for the gear glyph.

## Part I — Foundation

### 1. Architecture overview

flowchart LR

```
Operator((Operator)) -->|browser| FE[SvelteKit frontend<br/>port 5173 / static build]
FE -->|HTTPS REST| API[Litestar API<br/>port 8502 prod / 8503 dev]
API -->|asyncpg| DB[(PostgreSQL 17<br/>ramboq / ramboq_dev)]
API -->|broker SDK| KITE[Kite Connect<br/>+ KiteTicker WebSocket]
API -->|broker SDK| DHAN[Dhan v2]
API -->|broker SDK| GROWW[Groww]
API -->|google-genai| GEMINI[Gemini 2.5 Flash<br/>market + sentiment]
API -->|smtpplib| MAIL[SMTP - Hostinger]
API -->|requests| TG[Telegram Bot<br/>@RamboQuantBot]
KITE -->|postback HTTP| API
```

| Layer      | Tech                                                          | Key files                          |
|------------|---------------------------------------------------------------|------------------------------------|
| Frontend   | SvelteKit + Svelte 5 runes + ag-Grid + hand-rolled SVG charts | frontend/src/                      |
| API        | Litestar 2.x + msgspec.Struct schemas                         | backend/api/                       |
| DB         | PostgreSQL 17 + SQLAlchemy 2.x async + asyncpg                | backend/api/database.py, models.py |
| Brokers    | Vendor SDKs behind a unified Broker ABC                       | backend/brokers/                   |
| Background | asyncio tasks spawned at app startup                          | backend/api/background.py          |

## 2. Tech stack — at a glance

Each choice has a **why/what/how/where** callout inline where relevant (marked by `[]`). Key stacks:

| Layer         | Tech                                                    | Why                                                                       |
|---------------|---------------------------------------------------------|---------------------------------------------------------------------------|
| API           | Litestar 2.x + msgspec                                  | ~10× faster JSON encode/decode than pydantic on big payloads              |
| DB            | PostgreSQL 17 + SQLAlchemy 2.x async + asyncpg          | Fast, reliable, static typing, JSONB for attached_gtts_json blob          |
| Frontend      | SvelteKit + Svelte 5 runes + ag-Grid                    | Smaller bundle, native reactivity, row virtualization for 1000+ ticks/sec |
| Charts        | Hand-rolled SVG (no Chart.js)                           | 150KB saved, tighter control, palette integration                         |
| Concurrency   | asyncio + single uvicorn worker                         | Kite token affinity, in-process locks, background task state              |
| Notifications | Telegram (Bot API), SMTP (Hostinger)                    | Free, reliable, works everywhere                                          |
| WebSocket     | KiteTicker (Twisted reactor <code>[]</code> SSE bridge) | Sub-second LTP updates without burning rate limit                         |

Full rationale for each technology appears as `[] TECH` callouts throughout this doc (e.g. §3.1 broker abstraction, §4.2 KiteTicker threading, §4.3 background task lifecycle).

## 3. Core architectural principles

### 3.1 Single source of truth at the broker boundary

The Broker abstract base class (backend/brokers/base.py) is the **only** place vendor differences should leak. Every route, agent, and background task talks to a Broker instance via `get_broker(account)` from the registry.

`[] TECH` — WHY Vendor SDKs disagree on EVERYTHING (qty units, status strings, GTT shape). Letting that disagreement propagate past the adapter boundary creates bug surface area in every consumer. WHAT The ABC declares ~20 methods (place\_order, modify\_order, cancel\_order, orders, holdings, positions, funds, ltp, quote, historical\_data, place\_gtt, modify\_gtt, cancel\_gtt, get\_gtts, instruments, profile, holidays, order\_status, trades, basket\_order\_margins). HOW New broker? Implement every method, translate to Kite shape in `_normalise_*` helpers, register in `_ADAPTERS`. Capability gaps go in `BrokerCapabilities` — never inline if `broker_id == "groww"`. WHERE backend/brokers/base.py (ABC); backend/brokers/adapters/kite.py / dhan.py / groww.py (implementations); backend/brokers/capabilities.py (matrix).

### 3.2 Idempotency is the default

Every path that places a broker order or GTT can fire twice — postbacks arrive twice, chase terminals race postbacks, reconcile sweeps re-fire attaches. Four patterns make this safe:

| Pattern                                             | Where                                      | What it guards                                  |
|-----------------------------------------------------|--------------------------------------------|-------------------------------------------------|
| attached_gtts_json IS NULL check                    | <code>_fire_template_attach_on_fill</code> | Double-place TP/SL/Wing at broker               |
| <code>_TEMPLATE_ATTACH_LOCKS</code> [parer          | Same function                              | Concurrent races within the same row            |
| <code>_KILLED_ORDER_IDS</code> dict with 60-min TTL | chase.py                                   | Operator kills landing on stale broker_order_id |

| Pattern                         | Where                | What it guards                               |
|---------------------------------|----------------------|----------------------------------------------|
| MAX(prior, cumulative)<br>clamp | _record_partial_fill | Restart causing cumulative to be added again |

**When adding a new fill-time side-effect, ask:** can my handler fire twice for the same parent? If yes, what's the idempotency check?

### 3.3 Database is authoritative; in-memory is fast-path

The single uvicorn worker (`--workers 1` in prod — see §4.1) means in-process locks are sufficient, but the DB is still the source of truth. After a restart, every chase loop recovers via `recover_from_db` and re-derives state. Don't store anything operationally meaningful in in-process state without a DB write to back it up.

The `attached_gtts_json` column is a deliberate small-state JSON blob rather than a foreign-key normalized table:

- ☐ Atomic write per parent — no half-attached state visible to readers
- ☐ Easy to refactor the GTT spec shape (just version the JSON inside)
- ☐ Harder to JOIN against; we accept this because GTT inspection is rare

### 3.4 Async by default, sync when forced

Everything API-facing is `async def` over `asyncpg`. Broker SDK calls are `sync` — Kite/Dhan/Groww use requests under the hood — so we wrap them in `asyncio.to_thread(...)` to keep the event loop unblocked. The threadpool sizing is the default (32 workers); we've never seen it saturate because broker API calls are sub-second.

**Anti-pattern to avoid:** `broker.method()` directly in an `async def` route handler. Even if it returns “fast,” a single 2-second hang stalls every other request on that worker.

### 3.5 Demo mode = signed-out + prod branch

Demo isn't a separate code path — it's a runtime guard at the API boundary (`backend/api/auth_guard.py`) plus a frontend flag pulled from context. The same routes serve authenticated + demo traffic; the guard masks accounts and blocks writes. This means **a feature works in demo the moment it works for read-only sessions** — there's no separate “demo enablement” step to forget.

## 4. Concurrency model

### 4.1 Why one uvicorn worker?

`--workers 1` in prod is **intentional** for three reasons:

- **Kite session affinity:** multiple workers would invalidate each other's Kite tokens because Kite enforces one active session per IP.
- **In-process locking is enough:** all locks are `asyncio.Lock` instances; we never need multiprocess coordination.
- **Background tasks need shared state:** the trail-stop poller's in-memory state (`_TEMPLATE_ATTACH_LOCKS`, the ticker manager's `_tick_map`) is process-scoped. Multi-worker would require Redis or similar.

If we ever scale horizontally we'd need to externalize: tokens ☐ DB, locks ☐ DB advisory locks or Redis, ticker state ☐ a separate fanout service.

## 4.2 KiteTicker threading

KiteTicker runs Twisted internally — **all WebSocket callbacks fire on a Twisted reactor thread**, not the asyncio event loop. The TickerManager bridges this: - Twisted thread writes `_tick_map[token] = ltp` under a `threading.Lock` - Async handlers read via `get_ltp(token)` — same lock, briefly held

The lock is non-reentrant and the critical section is  $O(1)$  so no deadlock risk.

□ **TECH** — WHY Twisted reactors can't see asyncio's event loop, so we can't await from a tick callback. Lock-protected dict is the simplest viable bridge. WHAT `TickerManager._tick_map: dict[int, float] + _tick_lock: threading.Lock`. HOW Tick handler does with `self._tick_lock: self._tick_map[token] = ltp`. Async reader does the same under the lock, briefly. WHERE `backend/brokers/kite_ticker.py`.

If you add anything that runs on the Twisted side, never call `asyncio.run_coroutine_threadsafe` without testing both directions of the round-trip. The reactor doesn't know about asyncio's event loop.

## 4.3 Background task lifecycle

All background tasks are spawned in `app.on_startup` via `asyncio.create_task(...)`. They run forever; cancellation only happens at app shutdown. Each task is responsible for its own error handling — an uncaught exception kills the task silently. Every task body should be:

```
async def _task_X():
    while True:
        try:
            ...real work...
        except Exception as e:
            logger.exception(f"_task_X iteration failed: {e}")
        await asyncio.sleep(interval)
```

The try/except around the loop body is non-negotiable. We've burned hours debugging "why did the trail stop go silent" only to discover an unhandled `KeyError` ate the task three days earlier.

## 4.5. Data layer — implementation detail

This section is the "if you're modifying the data layer, here's the actual shape" reference. The data layer = SQLAlchemy 2.x async ORM + PostgreSQL + asyncpg driver. Read this end-to-end before changing any table.

### 4.5.1 Topology

```
flowchart TD
    subgraph appstart [App startup]
        START[backend/api/app.py on_startup]
        START --> INIT[init_db]
    end

    subgraph dblayer [Data layer]
        INIT --> META[Base.metadata.create_all]
        INIT --> ALT[ALTER TABLE ... IF NOT EXISTS<br/>idempotent migrations]
        INIT --> SEED[seed_grammar_tokens · seed_agent_templates<br/>seed_agents · seed_settings · seed_templates<br/>seed_global_pinned · seed_hedge_proxies]
    end
```

```

subgraph runtime [Runtime – every request]
    REQ[Route handler] -->|async with| AS[async_session]
    AS -->|asyncpg pool| PG[(PostgreSQL 17)]
    AS -->|expire_on_commit=False| RD[ORM rows readable post-commit]
end

INIT -.startup-only.-> META
META -.then.-> ALT
ALT -.then.-> SEED
SEED --> READY[App ready]
READY --> REQ

```

#### 4.5.2 File map

| File                            | Purpose                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------|
| backend/api/database.py         | Engine + session factory + init_db (the only place we touch DDL)                                   |
| backend/api/models.py           | Every SQLAlchemy declarative model. One file by convention so the data shape is one grep away.     |
| backend/api/schemas.py          | msgspec.Struct wire types. Mirror of models for HTTP responses.                                    |
| backend/shared/helpers/settings | SEEDS list + cached settings reader (get_int / get_float / get_bool / get_string)                  |
| backend/api/algo/templates_seec | SYSTEM_TEMPLATES + the seeder                                                                      |
| backend/api/algo/grammar.py     | _SYSTEM_TOKENS + grammar registry seeder                                                           |
| backend/api/cache.py            | In-memory TTL cache with per-key locking (NOT a substitute for the DB; cache invalidates on PATCH) |

#### 4.5.3 Engine + session factory

database.py is small and worth reading in full. Key shape:

```

# backend/api/database.py
engine = create_async_engine(
    DATABASE_URL,          # postgresql+asyncpg://...
    echo=False,
    pool_size=5,           # max connections kept warm in the pool
    max_overflow=10,       # extra one-off connections when pool exhausted
)

async_session = async_sessionmaker(
    engine,
    expire_on_commit=False, # load-bearing – see 4.5.5
    class_=AsyncSession,
)

async def init_db() -> None:
    """Idempotent: safe to run on every startup."""
    async with engine.begin() as conn:
        await conn.run_sync(Base.metadata.create_all)
        # ALTER TABLE ... IF NOT EXISTS for every column added after
        # the table's initial creation. We don't use Alembic.
        await conn.execute(text(

```

```

"ALTER TABLE algo_orders ADD COLUMN IF NOT EXISTS filled_quantity INTEGER"
))
# ... many more such ALTERs ...
# Seeders run after the DDL block – see §4.5.7

```

□ **TECH — Why `expire_on_commit=False`** — WHY After `commit()`, SQLAlchemy's default is to expire all ORM attributes on the committed rows, so the next attribute access triggers a fresh SELECT. That's catastrophic in our codebase because several handler paths commit then immediately read attributes (chase reconcile attach queue, `retry_template`, `postback fallback match`). With `expire-on-commit` we'd issue redundant SELECTs per commit. WHAT Setting this to `False` keeps the in-Python row state intact after commit. HOW Set globally on the `async_sessionmaker`. Never override per-session — consistency matters. WHERE `backend/api/database.py::async_session`.

#### 4.5.4 Models — how to add / modify

`backend/api/models.py` is the canonical schema. Every table is a `Mapped[]`-typed class:

```

# backend/api/models.py
class AlgoOrder(Base):
    __tablename__ = "algo_orders"

    id: Mapped[int] = mapped_column(Integer, primary_key=True, autoincrement=True)
    broker_order_id: Mapped[str | None] = mapped_column(String(64), nullable=True, index=True)
    account: Mapped[str] = mapped_column(String(32), index=True)
    symbol: Mapped[str] = mapped_column(String(64), index=True)
    quantity: Mapped[int] = mapped_column(Integer)
    filled_quantity: Mapped[int | None] = mapped_column(Integer, nullable=True)
    status: Mapped[str] = mapped_column(String(32), default="OPEN", index=True)
    mode: Mapped[str] = mapped_column(String(8), default="live", index=True)
    template_id: Mapped[int | None] = mapped_column(
        ForeignKey("order_templates.id", ondelete="SET NULL"), nullable=True
    )
    attached_gtts_json: Mapped[str | None] = mapped_column(Text, nullable=True)
    created_at: Mapped[datetime] = mapped_column(
        DateTime(timezone=True), server_default=func.now(), index=True
    )
    # ... ~30 more fields, see actual file ...

    __table_args__ = (
        Index("ix_algo_orders_mode_status", "mode", "status"), # composite, Sprint E
    )

```

**Rules when adding a column:** 1. Add the `Mapped[]` declaration to the model class. 2. Add an idempotent `ALTER TABLE algo_orders ADD COLUMN IF NOT EXISTS ...` to `init_db`. **Never write an Alembic migration** — our pattern is idempotent ALTERs at startup. 3. New column should be `nullable=True` with sensible default unless you're guaranteed to backfill all rows. 4. Composite indexes go in `__table_args__` and need an ALTER to ensure existence on rebuild. The convention: `Index("ix_<table>_<cols>", "col1", "col2")`.

**Rules when adding a table:** 1. Subclass `Base`, set `__tablename__`. 2. Declarative create happens automatically via `Base.metadata.create_all`. 3. Add seeded rows via a new seeder function called from `init_db`. 4. Add the corresponding `msgspec.Struct` in `schemas.py` if the table is operator-visible.

#### 4.5.5 Session lifecycle in handlers

The canonical handler pattern:

```
@get("/example", guards=[auth_or_demo_guard])
async def example(self, request: Request) -> ExampleResponse:
    async with async_session() as s:
        # Reads + writes happen here
        rows = (await s.execute(
            select(AlgoOrder).where(AlgoOrder.status == "OPEN")
        )).scalars().all()
        # Mutate
        for r in rows:
            r.last_seen = datetime.now(timezone.utc)
        # Single commit at the end of a logical group
        await s.commit()
    return ExampleResponse(rows=[_to_info(r) for r in rows])
```

Anti-patterns to avoid:

- ❑ Holding a session across await to a broker SDK call. The broker call could take 5 seconds; the session holds a connection from the pool the whole time. Wrap the broker call in `asyncio.to_thread` OR exit the `async with` block first and re-open after.
- ❑ Committing inside a loop without batching. Each commit is a round-trip — if you have 100 rows to update, batch into one commit at the end.
- ❑ `select(AlgoOrder)` without a WHERE clause and no LIMIT. Full-table scans land in production logs eventually; always paginate operator-visible queries.
- ❑ Mutating an ORM row from one session and reading from another within the same request. Use one session per logical unit of work.

#### 4.5.6 Idempotent migrations pattern

We don't use Alembic. Every schema change is an `ALTER TABLE ... IF NOT EXISTS` in `init_db`:

```
async def init_db():
    async with engine.begin() as conn:
        await conn.run_sync(Base.metadata.create_all)
        await conn.execute(text(
            "ALTER TABLE algo_orders ADD COLUMN IF NOT EXISTS filled_quantity INTEGER"
        ))
        await conn.execute(text(
            "ALTER TABLE algo_orders ADD COLUMN IF NOT EXISTS sl_trail_pct NUMERIC(8, 4)"
        ))
    # ... dozens more ...
```

This pattern was chosen because: - ❑ Zero ops overhead — no migrations folder, no version cursor, no rollback worry. - ❑ Deploy is just `git pull + restart`. The new column appears the moment the restart finishes. - ❑ Branch-switching works — if dev is ahead of main, switching back to main doesn't break (the column exists; the code that uses it is gone). - ❑ No DOWN migrations. We don't drop columns; if we want to remove a field, we stop reading from it but leave the column in place. - ❑ Cannot rename columns easily. The workaround: add a new column, dual-write for one deploy, switch reads, then stop writing the old.

The pattern is suitable for small-team prod with infrequent destructive changes. If we ever need ten-engineer concurrent migrations, this stops scaling and we'd move to Alembic.

#### 4.5.7 The seeders — bootstrapping defaults

Seven seeders run at startup. Six fire from inside `init_db()` (in `backend/api/database.py`); `seed_hedge_proxies` is registered as its own `on_startup` coroutine in `app.py` so it runs after the DDL block:

| Seeder                            | Where it lives                                                                                                     | What it seeds                                                                                  | Operator-overridable?                                                                                                              |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <code>seed_grammar_tokens</code>  | <code>backend/api/algo/grammar.py</code>                                                                           | Grammar tokens (metric/scope/op/channel/format/tem                                             | Toggleable <code>is_active</code> ; cannot delete system tokens                                                                    |
| <code>seed_agent_templates</code> | <code>backend/api/algo/template_regi</code>                                                                        | Reusable agent templates referenced by built-in agents                                         | Toggleable; refresh on boot                                                                                                        |
| <code>seed_agents</code>          | <code>backend/api/algo/agent_engine.i</code>                                                                       | 10 built-in agents (6 loss-, 3 expiry-, 1 manual)                                              | Editable; seeder force-resets schedule field + force-inactives built-in summary agents on every boot                               |
| <code>seed_settings</code>        | <code>backend/shared/helpers/settings</code>                                                                       | Settings rows (alerts.cooldown_minutes, chase.max_consecutive_errors, etc.)                    | Yes — operator edits via <code>/admin/settings</code> ; seeder preserves value and only refreshes metadata                         |
| <code>seed_templates</code>       | <code>backend/api/algo/templates_seer</code>                                                                       | 4-default order templates (default-bull, default-long-option, default-bear, default-short-vol) | Partial — system templates are overwritten on every restart, but operator's saved copies (different <code>user_id</code> ) survive |
| <code>seed_global_pinned</code>   | <code>backend/api/routes/watchlist.py</code>                                                                       | Pinned global watchlists (Markets, Default)                                                    | Editable per-user; global rows refresh                                                                                             |
| <code>seed_hedge_proxies</code>   | <code>backend/api/routes/hedge_proxi</code><br>(runs from <code>app.on_startup</code> , not <code>init_db</code> ) | Six default pairs (GOLDBEES □ GOLD/GOLDM, etc.)                                                | Editable via <code>/admin/settings</code> → Hedge proxies                                                                          |

The recurring tension in seeders: **how much to overwrite on every boot vs preserve operator changes?** The pattern: - **Description / schema / metadata** — always refreshed (code is the source of truth) - **value / conditions / actions / events** — preserved on existing rows (operator's overrides) - **status** — preserved EXCEPT for built-in summary agents which force-reset to inactive (see `seed_agents`) - **New rows added** with whatever default the SEEDS const ships

If you're adding a new seeder, follow this pattern. The audit-friendly path is `INSERT ... ON CONFLICT DO UPDATE SET <metadata only>` so existing values can't be clobbered.

#### 4.5.8 Settings cache layer

`backend/shared/helpers/settings.py` exposes `get_int`, `get_float`, `get_bool`, `get_string` readers backed by an in-process dict cache:

```
_SETTINGS_CACHE: dict[str, Any] = {}
_CACHE_GENERATION = 0

def get_int(key: str, default: int) -> int:
    val = _SETTINGS_CACHE.get(key)
    if val is None:
        return default
    return int(val)
```

The cache loads on first read + invalidates on every PATCH (the route handler bumps `_CACHE_GENERATION` and



clears `_SETTINGS_CACHE`). This means: - ☐ Hot-path reads are  $O(1)$  dict lookup — settings are checked thousands of times per minute on background tasks. - ☐ Operator edits take effect on the next read, no service restart. - ☐ Multi-worker would need per-worker invalidation (we're single-worker — see §4.1 — so this isn't an issue).

When adding code that reads a setting, **always go through `get_*` helpers**. Never `SELECT ... FROM settings WHERE key = ...` in a hot path.

#### 4.5.9 attached\_gtts\_json — the small-state JSON blob pattern

`AlgoOrder.attached_gtts_json` deserves its own subsection because it's the load-bearing column for template attach (§9):

```
# Persisted shape (string-encoded JSON)
[
  {
    "kind": "gtt",
    "label": "TP",
    "id": "abc123",                # broker GTT id
    "current_trigger": 250.0,
    "sl_trail_pct": null,
    "tp_trigger": 250.0,
    "highest_ltp": 200.0,         # set if sl_trail_pct is non-null
    "lowest_ltp": 200.0,
    "sibling_id": null           # set for Groww emulated OCO pairs
  },
  {
    "kind": "wing",
    "label": "Wing BUY",
    "id": "def456",               # broker order id (not GTT — wings are real positions)
    "qty": 50,
    "symbol": "NIFTY24APR21500PE"
  },
  ...
]
```

**Why a blob and not a child table?** Three reasons: - Atomic write per parent — readers never see “half-attached” state. - Easy to refactor the spec shape (just version the JSON inside, no migration). - GTT inspection is rare — we don't JOIN against it. When we read it, we read the whole bracket anyway.

**Idempotency rule:** the `_fire_template_attach_on_fill` function checks `attached_gtts_json` IS NULL before writing. Once populated, it's never re-attached (see §9 for the full guard chain). To force a re-attach, the operator hits `POST /orders/algo/<id>/retry-template`.

#### 4.5.10 Pool sizing + connection accounting

Defaults: - `pool_size=5` connections kept warm - `max_overflow=10` extra one-off connections under burst - `pool_pre_ping=True` checks the connection is alive before checkout

We've never seen pool exhaustion in prod because: - Single worker (§4.1) caps concurrent request handlers at the asyncio scheduler's natural limit. - Background tasks use SHORT sessions (async with inside the loop body, not around the loop).

Symptoms of pool exhaustion (if you ever see them): - Slow request handlers despite low DB CPU. - `TimeoutError: QueuePool limit of size 20 overflow 10 reached in logs`.

Fix path: investigate which handler is holding sessions across await to a slow external call. **Don't bump pool\_size first** — it's almost always a code-shape problem, not a sizing one.

#### 4.5.11 Demo masking — at the data layer boundary

Read paths for demo sessions mask account values via `mask_column` (§22). The masking happens **at the route layer**, not at the data layer:

```
# Wrong — masking inside the ORM
class AlgoOrder(Base):
    account: Mapped[str] = mapped_column(String(16))
    @property
    def account_display(self):
        return mask_column(self.account)

# Right — masking at the route handler
@get("/orders")
async def list_orders(self, request: Request) -> list[OrderInfo]:
    rows = await self._fetch()
    is_demo = request.state.is_demo
    return [
        OrderInfo(account=mask_column(r.account) if is_demo else r.account, ...)
        for r in rows
    ]
```

This keeps the data layer free of presentation concerns and avoids subtle bugs (e.g. ORM expressions seeing masked values during a JOIN).

## 4.6 Database schema overview

RamboQuant's data model spans 35+ SQLAlchemy tables, split into logical domains. Two PostgreSQL databases: `ramboq` (prod, main branch) and `ramboq_dev` (dev branches). All tables live in the branch-local DB except `broker_accounts`, which is shared.

### Table categories

**Auth + User Management** — User identity, email verification, roles, compliance:

| Table                             | Purpose                                                                                       | Key columns                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------------------|-----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>users</code>                | Operator profiles + LP investor records.<br>Unified table for internal staff + external LPs.  | <code>id</code> (PK), <code>account_id</code> (unique), <code>username</code> , <code>role</code> (designated/trader/risk/admin/partner), <code>email</code> , <code>pan</code> , <code>kyc_verified</code> , <code>contribution_date</code> , <code>share_pct</code> , <code>assigned_accounts</code> , <code>assigned_strategies</code> , <code>token_version</code> (for force-logout) |
| <code>auth_tokens</code>          | One-time email verification + password-reset tokens. Single table with purpose discriminator. | <code>id</code> (PK), <code>user_id</code> (FK), <code>purpose</code> (verify reset), <code>token</code> (unique), <code>expires_at</code> , <code>used_at</code>                                                                                                                                                                                                                         |
| <code>impersonation_events</code> | Audit of admin/designated impersonating a partner. Tracks session start + end.                | <code>id</code> (PK), <code>actor_username</code> , <code>target_username</code> , <code>started_at</code> , <code>ended_at</code> , <code>end_reason</code>                                                                                                                                                                                                                              |
| <code>investor_tokens</code>      | Long-lived URL tokens for LP-facing portal access. Token IS the credential.                   | <code>id</code> (PK), <code>user_id</code> (FK), <code>token</code> (unique), <code>expires_at</code> , <code>revoked_at</code> , <code>last_visit_at</code> , <code>visit_count</code>                                                                                                                                                                                                   |

| Table              | Purpose                                                                                                     | Key columns                                                                                                          |
|--------------------|-------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| investor_events    | LP capital ledger — subscriptions, redemptions, bootstrap events. Source of truth for units-based NAV math. | id (PK), user_id (FK), event_type (subscription redemption bootstrap), event_date, amount, nav_per_unit, units_delta |
| monthly_statements | Audit of auto-emailed LP statements. One row per (user, period_year, period_month).                         | id (PK), user_id (FK), period_year, period_month, generated_at, sent_at, recipients_json, pdf_size_bytes, error      |

### Broker Connection — Account credentials + market metadata:

| Table                   | Purpose                                                                              | Key columns                                                                                                                                                                                  |
|-------------------------|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| broker_accounts         | Shared table (ramboq DB only) storing encrypted broker credentials for all branches. | id (PK), account (unique, e.g. ZG0790), broker_id (kite dhan groww), user_id (FK), api_key_enc, access_token_enc, source_ip, priority, poll_priority, circuit_breaker_enabled, display_order |
| market_holidays         | Exchange holiday calendar (NSE/MCX/CDS). Seeded from broker API, cached.             | id (PK), exchange, holiday_date (unique per exchange)                                                                                                                                        |
| market_special_sessions | Special trading sessions (e.g. Muhurat trading). Operator-editable overrides.        | id (PK), exchange, date, start_time, end_time, reason                                                                                                                                        |

### Watchlists — User-defined symbol groups:

| Table           | Purpose                                                                                    | Key columns                                                                             |
|-----------------|--------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| watchlists      | Named list containers. Global rows (is_global=True, user_id=NULL) shared across all users. | id (PK), user_id (FK nullable), name, is_global, is_default, is_pinned, sort_order      |
| watchlist_items | Individual symbols in a watchlist. Includes operator-supplied alias.                       | id (PK), watchlist_id (FK), tradingsymbol, exchange, alias (optional label), sort_order |

### Orders + Execution — Core order lifecycle and attribution:

| Table             | Purpose                                                                                                                  | Key columns                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------|--------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| algo_orders       | Master order row. Spans manual + agent-fired + template-attached + chase iterations. Mode: sim/paper/live/replay/shadow. | id (PK), account, symbol, exchange, transaction_type (BUY/SELL), quantity, filled_quantity (cumulative across partials), initial_price, current_limit (re-quoted during chase), fill_price, status (OPEN/FILLED/REJECTED/CANCELLED), mode, engine (manual/sim/paper/live/replay/shadow/expiry), agent_id (FK nullable), broker_order_id, template_id (FK), attached_gtts_json (JSON list of {kind, label, id, ...}), basket_tag, parent_order_id (for TP/SL children), strategy_id (FK), request_id (for audit drill-through) |
| algo_order_events | Append-only timeline per order. One row per state transition (placed, chase_modify, fill, unfill, reject, cancel).       | id (PK), order_id (FK), ts, kind (placed chase_modify fill unfill reject cancel postback ...), message, payload_json                                                                                                                                                                                                                                                                                                                                                                                                          |

| Table         | Purpose                                                                                                                     | Key columns                                                                                                                                                                    |
|---------------|-----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| algo_events   | Legacy event log (pre-AgentEvent era). Deprecated; kept for compatibility.                                                  | id (PK), algo_order_id (FK nullable), event_type, detail, timestamp                                                                                                            |
| strategies    | Named bucket for order attribution. Owns lots + provides per-strategy P&L rollup.                                           | id (PK), slug (unique), name, description, owner_user_id (FK nullable), capacity_cap_inr, target_volatility, is_active                                                         |
| strategy_lots | Per-strategy FIFO lot ledger. Opens on fill, closes when counter-direction consumes it. Authoritative for per-strategy P&L. | id (PK), strategy_id (FK), open_order_id (FK nullable), account, symbol, exchange, side (B/S), qty, remaining_qty, open_price, close_price, realized_pnl, opened_at, closed_at |

## Agents + Conditions — Rule engine and alert infrastructure:

| Table          | Purpose                                                                                                               | Key columns                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------|-----------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| agents         | Declarative rules: condition tree → alert → actions. Includes loss alerts, expiry alerts, user-defined custom agents. | id (PK), slug (unique), name, long_name (3-part descriptor), description, conditions (JSONB tree), events (alert channels), actions (order/cancel/close side-effects), scope (per_account all_accounts), schedule (market_hours continuous ...), cooldown_minutes, fire_at_time (gate to HH:MM window), trade_mode (paper live per-agent override), status (active inactive cooldown completed), lifespan_type (persistent one_shot n_fires until_date), tier (critical high medium low for noise reduction), topic (agent grouping tag), digest_window_sec (buffer outgoing alerts), debounce_minutes, condition_first_true_at, tags (JSONB list), blackout_windows (quiet hours) |
| agent_events   | Alert events fired by agents. Persisted for operator inspection + MCP queries.                                        | id (PK), agent_id (FK), event_type (fired suppressed error ...), trigger_condition (the condition leaf that fired), detail, sim_mode (simulator flag), timestamp                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| grammar_tokens | Token catalog (metrics, scopes, operators, channels, actions). Extensible alphabet for condition/alert/action trees.  | id (PK), grammar_kind (condition notify action), token_kind, token (name), value_type, resolver (dotted path to function), params_schema, enum_values (JSONB), is_active, is_system                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

## NAV + Performance — Investor slicing and daily metrics:

| Table              | Purpose                                                                                                       | Key columns                                                                                                           |
|--------------------|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| nav_daily          | Daily firm-level NAV snapshot. Written after broker positions settle. Authoritative for all investor slicing. | id (PK), as_of_date (unique), nav, cash_total, positions_mtm, holdings_mtm, accounts_snapshot (JSONB list), note      |
| strategy_snapshots | Daily per-strategy P&L rollup. Charts the strategy performance curve.                                         | id (PK), strategy_id (FK), as_of_date, open_lots_count, open_notional, realised_pnl, unrealised_pnl, margin_allocated |

| Table          | Purpose                                                                                   | Key columns                                                                    |
|----------------|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| perf_snapshots | Nightly static + runtime metrics per page. Used for trend analysis + performance budgets. | id (PK), page_or_route, metrics_json (JSONB), static_metrics_json, captured_at |

### Data Snapshots — Intraday market state + persistent cache:

| Table                | Purpose                                                                                                                          | Key columns                                                                                                                                      |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| daily_book           | Intraday snapshot of positions, holdings, or funds per account per symbol. Captured at market close, useful when markets closed. | id (PK), kind (positions holdings funds), account, symbol, exchange, qty, avg_price, ltp, pnl, pnl_pct, date, captured_at, segment (NSE MCX ...) |
| ohlcv_daily          | 5-year OHLCV history. Persistence tier 2 fallback for chart data.                                                                | symbol, exchange (PK), date (PK), open, high, low, close, volume                                                                                 |
| instruments_snapshot | Per-exchange symbol↔token map. Refreshed daily.                                                                                  | id (PK), exchange, date, payload (JSONB full instruments dict), row_count                                                                        |
| holidays_snapshot    | Exchange holiday sets per year. Immutable once year closes.                                                                      | id (PK), exchange, year, dates_json (JSONB list)                                                                                                 |
| intraday_bars        | 5/15/30/60-minute bars. 90-day rolling retention.                                                                                | id (PK), symbol, exchange, date, interval (5min 15min 30min 60min), bar_ts, open, high, low, close, volume                                       |
| movers_snapshots     | Nightly snapshot of top movers (NIFTY, NIFTYNXT50, etc). Pre-computed so /pulse doesn't timeout.                                 | id (PK), index_symbol, snapshot_date, movers_json (JSONB list)                                                                                   |

### Audit + Compliance — Forensic trails:

| Table              | Purpose                                                                                      | Key columns                                                                                                                                                                                                                                          |
|--------------------|----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| audit_log          | HTTP request + mutation audit trail. Every write captured by middleware + explicit handlers. | id (PK), actor_user_id, username, role, action, category (order.place order.fill agent.action system.nav ...), method, path, target_type, target_id, status_code, summary, request_id (FK to all go_orders for drill-through), client_ip, created_at |
| mcp_audit          | Mutations initiated via MCP (Claude Code research mode). Tracks tool calls + results.        | id (PK), user_id (FK), tool_name, args_redacted, result_status, result_summary, request_id, created_at                                                                                                                                               |
| admin_email_events | Audit of admin-triggered alert sends (e.g. manual test notifications).                       | id (PK), admin_user_id, recipient_email, subject, body_preview, sent_at, error                                                                                                                                                                       |
| visitor_log        | Minimal analytics — timestamps of /auth/login + visitor count.                               | id (PK), visitor_ip, last_seen_at, visitor_count                                                                                                                                                                                                     |

### Market Lifecycle + Background Jobs — System state:

| Table                   | Purpose                                                                                   | Key columns                                                                                     |
|-------------------------|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| market_lifecycle_events | Audit log of market open/close transitions per exchange. Indexed for operator drill-down. | id (PK), exchange, event_type (nse:open nse:close nse:close_settled ...), fired_at, captured_at |

| Table                  | Purpose                                                                      | Key columns                                                                      |
|------------------------|------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| code_metrics_snapshots | Captured per release (commit SHA). Query count, test counts, response times. | id (PK), release_version, static_metrics_json, runtime_metrics_json, captured_at |

### Configuration + Extensibility:


| Table            | Purpose                                                                                                                    | Key columns                                                                                                                                                                                     |
|------------------|----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| settings         | DB-backed tunables: alert cooldown, retry counts, market hours, etc. Operator-editable via /admin/settings.                | id (PK), category, key (unique), value_type (int float bool string), value (operator-editable), default_value, description, schema (JSON validation), units                                     |
| order_templates  | Reusable bracket recipes. System templates (default-bull, default-bear, etc) seeded at boot; operator saves custom copies. | id (PK), user_id (FK nullable), name, slug, owner_user_id (FK nullable), tp_pct, sl_pct, wing_premium_pct, wing_strike_offset, wing_qty, tp_scales_json, tp_order_type, sl_trail_pct, is_system |
| hedge_proxies    | Cross-reference between holdings (GOLDBEES) and option roots they hedge (GOLD). Includes $\beta$ regression.               | id (PK), proxy_symbol, target_root, is_active, note, beta, correlation, regression_at                                                                                                           |
| research_threads | Persistent Chat threads in /admin/research (MCP Lab). One row per thread; messages stored as JSON.                         | id (PK), created_by_user_id (FK), title, slug, messages_json (JSONB), summary, created_at, updated_at                                                                                           |
| sim_recordings   | Deterministic event logs for replay. Captures every state mutation so operator can re-run identical scenarios.             | id (PK), label, scenario, seed_mode, started_at, ended_at, duration_sec, tick_count, event_count, payload (JSONB event stream), owner_user_id (FK)                                              |
| sim_iterations   | Multi-run coordinator. First iteration references itself; others reference iteration 1 via parent_run_id.                  | id (PK), slug (unique), parent_run_id (FK self-ref nullable), iteration_index, iterations_total, regime, seed, started_at, ended_at, end_reason, params_json, summary_json                      |

### News + Market Reports:

| Table          | Purpose                                                           | Key columns                                                            |
|----------------|-------------------------------------------------------------------|------------------------------------------------------------------------|
| market_report  | Single-row cache (id=1) for daily market summary from Gemini API. | id (PK, always 1), content, cycle_date, refreshed_at, generated_at     |
| news_headlines | RSS headlines cache. Pre-filtered on /market page.                | id (PK), link (unique), title, summary, published_at, source, category |

## 4.7 Table relationships

Simplified ERD (ASCII, readable in PDF):

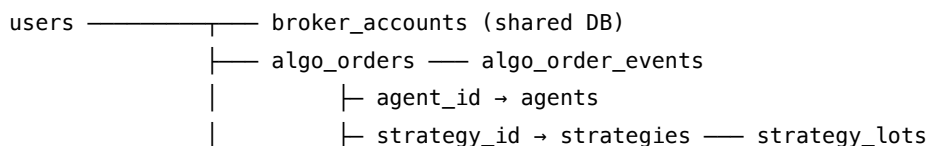

```

|           |— template_id → order_templates
|           |— parent_order_id → algo_orders (self-ref TP/SL)
|— agent_events ← agents
|— watchlists — watchlist_items
|— investor_events (capital ledger)
|— investor_tokens (URL credentials)
|— monthly_statements
|— sim_recordings
|— research_threads
|— auth_tokens

```

nav\_daily ——— (master NAV – no FK, firm aggregate)

strategy\_snapshots – strategies

daily\_book ——— (account/symbol/kind snapshot, no FK)

perf\_snapshots ——— (page metrics, no FK)

market\_lifecycle\_events, code\_metrics\_snapshots, settings,  
order\_templates, hedge\_proxies, grammar\_tokens — (configuration, mostly no FK)

#### Persistence:

ohlcv\_daily, instruments\_snapshot, holidays\_snapshot,  
intraday\_bars, movers\_snapshots — (market data cache, no FK)

#### Audit:

audit\_log – request\_id → algo\_orders (drill-through)  
mcp\_audit – user\_id → users  
admin\_email\_events – admin\_user\_id → users

**Key foreign-key patterns:** - algo\_orders.agent\_id □ agents.id: ON DELETE SET NULL (preserve order history if agent deleted) - agent\_events.agent\_id □ agents.id: ON DELETE CASCADE (retire agent history when agent deleted) - algo\_orders.parent\_order\_id □ algo\_orders.id: ON DELETE SET NULL (self-ref for TP/SL children) - algo\_order\_events.order\_id □ algo\_orders.id: ON DELETE CASCADE (timeline only meaningful with parent) - investor\_events.user\_id □ users.id: ON DELETE RESTRICT (capital ledger is audit trail; explicit operator action required to delete LP) - User.id: multiple targets use ON DELETE CASCADE (auth\_tokens, investor\_tokens, monthly\_statements) or SET NULL (impersonation, strategy owner)

## 4.8 Retention policies

Data retention is staggered — critical audit trails kept longer than ephemeral cache. Configured via settings table; operator can adjust retention via /admin/settings □ Retention.

| Table                | Retention | Config key  | Rationale                                                        |
|----------------------|-----------|-------------|------------------------------------------------------------------|
| ohlcv_daily          | 5 years   | (hardcoded) | SEBI Cat-III backtest horizon                                    |
| instruments_snapshot | 7 days    | (hardcoded) | Symbol token changes rarely; old snapshots are cheap to drop     |
| holidays_snapshot    | Forever   | (hardcoded) | Reference data — rarely used but occasionally queried for audits |

| Table              | Retention           | Config key                       | Rationale                                                                          |
|--------------------|---------------------|----------------------------------|------------------------------------------------------------------------------------|
| intraday_bars      | 90 days             | (hardcoded)                      | Intraday charts old after 3 months; 90-day window covers quarterly strategy review |
| algo_events        | 30 days             | retention.algo_events_days       | Operational log; older entries rarely queried                                      |
| algo_order_events  | 90 days             | retention.algo_order_events_days | Order timeline — longer window for compliance disputes                             |
| auth_tokens        | 7 days after expiry | retention.auth_tokens_days       | One-time verify/reset tokens; ephemeral by design                                  |
| mcp_audit          | 90 days             | mcp.audit_retention_days         | MCP tool calls (research mode) — compliance audit trail                            |
| audit_log          | 365 days            | retention.audit_log_days         | User action audit trail — 1-year window for disputes                               |
| nav_daily          | Forever             | (hardcoded)                      | Investor reporting — Cat-III requires 8-year retention                             |
| daily_book         | Forever             | (hardcoded)                      | Intraday snapshots become the P&L source after market close                        |
| investor_events    | Forever             | (hardcoded)                      | Capital ledger — units-based NAV depends on full history                           |
| monthly_statements | Forever             | (hardcoded)                      | Investor statements are permanent records                                          |
| strategy_snapshots | Forever             | (hardcoded)                      | Strategy performance is historical record                                          |
| All others         | Forever             | —                                | Configuration, metadata, non-critical operational logs kept for full history       |

**Cleanup mechanism:** nightly cron (03:10 IST and staggered) runs `DELETE FROM <table> WHERE created_at < now() - interval`. Per-table cleanup is idempotent — multiple runs don't corrupt state.

**Operator override:** Set retention to 0 in `/admin/settings` to disable deletion for that table (useful during active investigation).

## 4.9 Metrics + Performance tracking

RamboQuant tracks two orthogonal signals: **static code health** (per-file metrics) and **runtime Web Vitals** (per-page response times, JavaScript heap pressure). Both are persisted nightly to `perf_snapshots` and visualized in `/admin/perf`.

□ **TECH — Why centralized metrics** — WHY Operator feedback (Jun 2026): “dropdown lag”, “refresh button stuck”, “frontend heap keeps growing”. A single dashboard surfacing cyclomatic complexity + LCP + JS heap reveals systemic issues (subscription leaks, long tasks, state bloat) before they degrade UX. WHAT Nightly snapshot of static + runtime metrics, persisted with ISO8601 timestamp + `page_or_route` tag. HOW `scripts/perf_baseline.py` computes static via `radon cc + line-count`; `scripts/perf_capture_run.sh` runs Playwright against dev to harvest LCP/TBT/heap via `performance.timing` + Chrome DevTools Protocol. Cron orchestrator (`_task_perf_snapshot` at 04:00 IST) executes both; inserts row via `POST /api/admin/perf/snapshot` (internal, no auth required from cron). WHERE `backend/api/models.py::PerfSnapshot`, `backend/api/routes/admin.py`, `scripts/perf_*.py`.



## Static metrics (per file)

| Metric                                                                                                                                                                                                                  | Ideal                           | How                                                                 | Notes                                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------|
| LOC                                                                                                                                                                                                                     | Components < 1500, Pages < 3000 | wc -l (excludes blank + comment-only)                               | Baseline for cognitive load                                   |
| cc_max                                                                                                                                                                                                                  | < 20                            | Cyclomatic complexity of most complex function in file via radon cc | Red flag at > 50: hard to maintain, high defect risk          |
| cc_avg                                                                                                                                                                                                                  | < 8                             | Mean complexity across all functions                                | Safe zone; > 15 indicates refactor candidate                  |
| <code>effectcount** &lt;20perSveltefile Regex:  Too many effects = hard to trace reactivity     **\$state count**   &lt; 50 per Svelte file   Regex boundary matchstate(`declaratio: cachebugs   **derived count</code> | Monitor trend                   | Regex boundary match \$derived declarations                         | No hard limit; watch for explosion as sign of over-reactivity |

**Cyclomatic complexity thresholds** (colour coding): - Green: cc < 10 — safe, easy to read - Yellow: cc 10–20 — moderately complex, watch carefully - Red: cc > 20 — hard to maintain, high defect risk - Critical: cc > 50 — refactor mandatory before merge

## Runtime metrics (Web Vitals)

| Metric    | Ideal        | How measured                                                      | Notes                                                        |
|-----------|--------------|-------------------------------------------------------------------|--------------------------------------------------------------|
| LCP       | < 2500 ms    | Largest Contentful Paint — largest above-fold element render time | Chrome DevTools via Playwright                               |
| TBT       | < 200 ms     | Total Blocking Time — sum of long-task durations during page load | Chrome DevTools via Playwright                               |
| JS Heap   | < 50 MB      | V8 heap size after page settles (Chrome only)                     | Leak detector; baseline should not grow session-over-session |
| Route p50 | < 200 ms     | Median backend request latency (per endpoint)                     | Sampled from access logs                                     |
| Route p95 | < 500 ms     | 95th-percentile tail latency                                      | Catches outlier slow requests                                |
| QPS       | < 20 typical | Requests per second per route                                     | Expected load during market hours                            |

## Data flow

**Static compute** — `scripts/perf_baseline.py --with-cyclomatic --no-build:` - Walks backend/ + frontend/src recursively - For each .py file: LOC count + radon cc function list - For each .svelte file: LOC count + regex boundary match for `$effect()`, `$state()`, `$derived` declarations (regex patterns in the script handle `$derived.by(...)` and `$props({...})`) - Outputs JSON with per-file metrics

**Runtime capture** — `scripts/perf_capture_run.sh:` - Spins up Playwright against `dev.ramboq.com` - For each route in a curated list (positions, holdings, orders, dashboard, etc): - Navigate `[]` wait for settle (3s

idle) ☐ capture window.performance.timing.navigationStart, performance.memory.usedJSHeapSize (Chrome only) - Extract LCP via PerformanceObserver + 'largest-contentful-paint' entypoint - Sum performance.getEntriesByType('longtask') duration for TBT - Outputs JSON per route

**Nightly persist** — `_task_perf_snapshot` (04:00 IST): 1. Calls `perf_baseline.py --with-cyclomatic --no-build` 2. Calls `perf_capture_run.sh` 3. Merges static + runtime JSONs 4. `POST /api/admin/perf/snapshot` with `{page_or_route, static_metrics, runtime_metrics}` 5. Inserts `PerfSnapshot(captured_at=now(), page_or_route=..., metrics_json=..., static_metrics_json=...)` row

## DB schema

```
class PerfSnapshot(Base):
    __tablename__ = "perf_snapshots"

    id                : int (PK)
    page_or_route     : str (e.g. "GET /api/positions", "/orders", "/dashboard")
    metrics_json      : dict (JSONB - runtime metrics: lcp_ms, tbt_ms, heap_mb, qps, ...)
    static_metrics_json : dict (JSONB - static metrics: loc, cc_max, cc_avg, ...)
    captured_at       : datetime (UTC, unique per (page_or_route, day))

    __table_args__ = (
        Index("ix_perf_snapshots_route_ts", page_or_route, captured_at.desc()),
    )
```

**Retention:** 365 days (config: `retention.perf_snapshots_days`, default 365).

## Admin endpoints

- `GET /api/admin/perf/latest` — latest snapshot per page/route (no history).
- `GET /api/admin/perf/history?page=<route>&days=30` — time series for a single `page_or_route` over N days. Returns `{captured_at, metrics_json, static_metrics_json}`.
- `GET /api/admin/perf/regressions?days=7&threshold_pct=10` — detect pages where any metric exceeded 7-day median by > 10%. Returns list with regression alert.
- `POST /api/admin/perf/snapshot` — internal cron endpoint. No auth; HMAC signature (`X-PERF-SIGNATURE` header, signed with `api_secret`) required.

All endpoints are admin-guarded except `/snapshot`.

## Frontend surface

`/admin/perf` dashboard — card grid layout: - **Code Health Card** — time-series chart of `cc_max` + LOC trend (30-day window) - **Runtime Card** — time-series chart of LCP + TBT + heap (30-day window) - **Regression Alert** — sticky callout at top if regressions detected in last 7 days - **Metrics Glossary** — info tooltips (hover on metric label ☐ show WHAT/IDEAL/IMPACT/FIX)

**Metric metadata SSOT** — `frontend/src/lib/data/metricMetadata.js` exports `METRIC_META`:

```
export const METRIC_META = {
  cc_max: {
    WHAT: "Highest cyclomatic complexity of any function in the file",
    IDEAL: "< 20 for maintainability",
    IMPACT: "High cc means more defects, longer review cycles",
    FIX: "Extract complex functions into helpers, simplify boolean logic"
  },
}
```

```
lcp_ms: {
  WHAT: "Largest Contentful Paint – largest above-fold element render time",
  IDEAL: "< 2500 ms",
  IMPACT: "Poor LCP = operator sees blank page for seconds",
  FIX: "Lazy-load off-viewport components, defer non-critical JS"
},
// ... per metric
};
```

**InfoHint component** (reused everywhere) displays this tooltip on hover.

### #major tag workflow

When operator adds #major prefix to any ask, the concurrent refactor flow is triggered:

1. Audit agent fetches top-3 cyclomatic/LOC hotspots from last 30 days of perf\_snapshots
2. Identify regressions flagged in last 7 days
3. Parallel refactor tasks per hotspot
4. Recompute metrics after changes + assert no regression vs baseline

Example:

#major add a new route

- audit sees cc\_max creeping from 18→22 in chase.py over 2w
- refactor: extract \_chase\_place\_order, \_chase\_poll, \_chase\_status into focused functions (break one 60-line function into 3 functions × ~20 lines each)
- recompute: cc\_max now 14, tests pass
- merge

### Key files

- backend/api/models.py::PerfSnapshot — schema
- backend/api/routes/admin.py::perf\_snapshot — cron endpoint
- scripts/perf\_baseline.py — static metrics compute
- scripts/perf\_capture\_run.sh — runtime capture via Playwright
- backend/api/background.py::\_task\_perf\_snapshot — orchestrator (04:00 IST)
- frontend/src/lib/data/metricMetadata.js — METRIC\_META glossary
- frontend/src/routes/(algo)/admin/perf/+page.svelte — dashboard

## Part II — Order lifecycle

### 5. Order placement — single ticket (Ticket tab)

```
sequenceDiagram
    actor OP as Operator
    participant OT as OrderTicket.svelte
    participant API as /api/orders/ticket
```

```

participant DB as algo_orders
participant CH as chase_order (background)
participant BR as Broker
participant PB as postback (Kite only)

OP-->>OT: Fill form + Submit
OT-->>API: POST /ticket (mode, side, sym, qty, price, template_id)
API-->>DB: INSERT AlgoOrder (status=OPEN, broker_order_id=NULL)
API-->>CH: place_order → chase_order (async)
CH-->>BR: place_order
BR-->>CH: order_id
API-->>DB: UPDATE broker_order_id
API-->>OT: success
BR-->>PB: postback (Kite only)
PB-->>DB: UPDATE status + fill_price
PB-->>PB: _fire_template_attach_on_fill

```

**Files:** frontend/src/lib/order/OrderTicket.svelte (submit) □ backend/api/routes/orders.py::ticket\_order □ backend/api/algo/chase.py::chase\_order □ postback (Kite) or polling.

**Race-window guard:** AlgoOrder commits with broker\_order\_id=NULL first. Fast IOC fill in this window is caught by postback-fallback matching (account, symbol, side, qty, status=OPEN) within 60s.

## 6. Order placement — basket (Chain tab)

Multi-leg submission grouped per-account, dispatched in parallel via `asyncio.gather`:

```

sequenceDiagram
    participant SP as SymbolPanel.svelte
    participant API as /api/orders/basket
    participant BR1 as Account A broker
    participant BR2 as Account B broker
    participant DB as algo_orders

    SP-->>SP: Group basketLegs by account
    SP-->>API: POST /basket (groups with legs)
    par dispatch A
        API-->>BR1: place_order per leg
        BR1-->>DB: INSERT AlgoOrder per leg
    and dispatch B
        API-->>BR2: place_order per leg
        BR2-->>DB: INSERT AlgoOrder per leg
    end
    end
    API-->>SP: results (ok/fail counts)

```

**Files:** frontend/src/lib/SymbolPanel.svelte::submitBasket (grouping) □ backend/api/routes/orders.py::place\_basket (parallel dispatch).

**Template isolation:** legs with explicit `template_id` ignore shell overrides. Legs with no `template_id` inherit shell defaults.

## 7. Chase loop lifecycle

```
stateDiagram-v2
    [*] --> Placing
    Placing --> Polling: place_order returns order_id
    Polling --> Placing: status=OPEN AND price moved → cancel + replace
    Polling --> Filled: status=COMPLETE
    Polling --> Partial: cumulative_filled > already_filled
    Partial --> Polling: still has residual
    Partial --> Filled: cumulative = total
    Polling --> Rejected: status=REJECTED
    Polling --> KilledMidReplace: is_killed(NEW_id) post-replace
    Polling --> Killed: operator kill detected at status check
    Polling --> Unfilled: attempts >= max_attempts
    Polling --> ErrorAbort: >= _MAX_CHASE_ERRORS consecutive
    Filled --> [*]: _emit_chase_terminal(chase_fill)
    Rejected --> [*]: _emit_chase_terminal(chase_failed)
    Killed --> [*]: _emit_chase_terminal(chase_cancelled)
    KilledMidReplace --> [*]: _emit_chase_terminal(chase_cancelled, post-replace)
    Unfilled --> [*]: _emit_chase_terminal(chase_unfilled)
    ErrorAbort --> [*]
```

**Key files:** - backend/api/algo/chase.py::chase\_order — main loop - backend/api/algo/chase.py — partial-fill branch (search \_record\_partial\_fill) - backend/api/algo/chase.py — kill-race post-replace check (search is\_killed(current\_order\_id) after \_sync\_algo\_order\_id) - backend/api/algo/chase.py::\_emit\_chase\_terminal — snapshot + downstream attach - backend/api/algo/chase.py::\_sync\_algo\_order\_id — writes broker\_order\_id + current\_limit

□ **TECH — sync polling vs WebSocket order updates** — WHY Postback delivery is unreliable for non-Kite brokers (Dhan + Groww are poll-only). Sync polling is the lowest-common-denominator that works everywhere. WHAT chase\_order calls \_order\_status every 20s (configurable per chase). HOW Each iteration: depth quote □ adjusted limit □ cancel old + place new □ sync ID □ wait □ poll status. WHERE backend/api/algo/chase.py.

### Partial-fill math (post C-1 fix):

```
already_filled = quantity - remaining_qty
```

```
new_delta = cumulative_filled - already_filled
```

```
fire partial branch when: cumulative_filled > 0 AND new_delta > 0 AND cumulative_filled < quantity
```

## 8. The order/chase/template tripod

This is the most complex part of the codebase. Three subsystems with overlapping responsibilities:

### 8.1 What each one owns

|                                  | Owns                                                  | Reads               |
|----------------------------------|-------------------------------------------------------|---------------------|
| <b>Order routing</b> (orders.py) | The broker-facing entry path. Single ticket + basket. | Settings, templates |

|                                                | Owns                                                                                            | Reads                                               |
|------------------------------------------------|-------------------------------------------------------------------------------------------------|-----------------------------------------------------|
| <b>Chase loop</b> (chase.py)                   | The per-order placement lifecycle. Cancel + replace + status polling + partial fill accounting. | Broker, AlgoOrder, kill signal                      |
| <b>Template attach</b><br>(template_attach.py) | Post-fill exit-rule wiring.<br>TP/SL/Wing/Scale/Trail GTTs at the broker.                       | OrderTemplate, AlgoOrder (read-only at attach time) |

## 8.2 Why three? Why not one big “manage this order” function?

History: the chase loop existed first (single ticket  $\square$  place + chase to fill). Templates were bolted on later (Phase 0–3 + Sprints A–E). The current shape is intentional — each subsystem can be tested in isolation:

- Chase tests use a mock `_order_status` that returns a scripted sequence.
- Template tests build a `TemplatePlan` directly and assert the GTT spec shape.
- Routes are integration-tested with real broker mocks (backend/tests/).

## 8.3 The mode pivot

`mode`  $\in$  {sim, paper, live, shadow} decides which adapter the order actually hits. The pivot happens at submit time (`_resolve_mode` in backend/api/algo/actions.py) and is **persisted on the AlgoOrder row** — every downstream branch (chase terminal, postback, reconcile, template attach) reads `row.mode` to decide whether to call a real broker or the paper engine.

**Gotcha:** the chase loop runs the same code regardless of mode. Paper mode is achieved by injecting the paper engine’s `place_order` adapter at the broker registry boundary. Don’t add `if mode == 'live'` branches inside chase — the abstraction is the broker registry, not the chase.

# Part III — Templates + exits

## 9. Template attach pipeline

```

flowchart TD
    subgraph triggers [Fill triggers]
        PB[Postback handler<br/>orders.py order_postback]
        CT[Chase terminal<br/>chase.py _emit_chase_terminal]
        RC[Reconcile sweep<br/>orders.py reconcile_*]
        RT[Operator retry<br/>orders.py retry_template]
    end

    PB --> FF[_fire_template_attach_on_fill]
    CT --> FF
    RC --> FF
    RT --> APT[apply_template_to_order]

    FF -->|attached_gtt_json IS NULL guard| APT
    APT --> RP[resolve_template_plan]
    RP --> PLAN[TemplatePlan: gttts + wing]
    APT --> WS[_pick_wing_by_premium<br/>chain scan]
  
```

```

PLAN --> GTT1[broker.place_gtt - TP]
PLAN --> GTT2[broker.place_gtt - SL]
PLAN --> GTT3[broker.place_gtt - scale-out N]
WS --> W0[broker.place_order - wing leg]
GTT1 --> AGG[Aggregate result.gtt_ids]
GTT2 --> AGG
GTT3 --> AGG
W0 --> AGG
AGG -->|attached_gtts_json| DB[(algo_orders.attached_gtts_json)]
AGG --> RES[AttachResult<br/>{ok, errors[], notes[]}]

```

**Key files:** - backend/api/algo/template\_attach.py::resolve\_template\_plan — override merge + scope resolution - backend/api/algo/template\_attach.py::\_pick\_wing\_by\_premium — OI + spread filters - backend/api/algo/template\_attach.py::AttachResult — return type (NOT TemplateAttachResult — the docs previously had this wrong) - backend/api/routes/orders.py::\_fire\_template\_attach\_on\_fill — idempotency guard + persistence - backend/api/routes/orders.py::retry\_template — manual re-fire path. Persists attached\_gtts\_json per H-7 + trail-stop scaffolding per Sc.5

**Idempotency:** \_get\_template\_attach\_lock(parent\_row\_id) + attached\_gtts\_json IS NULL check. Strong dict with 1h TTL after M-5 fix replaces the prior WeakValueDictionary.

□ **TECH — JSON blob vs normalized table for attached\_gtts\_json** — WHY Each parent has 1-5 GTTs + maybe a wing. A child table would mean a JOIN on every order grid render. The blob lets us read the whole bracket in one column-fetch. WHAT Stored as a JSON array of entries ({kind: "gtt", label: "TP", id: "...", current\_trigger: ..., sl\_trail\_pct: ...}). HOW Always write atomically (single column update); read+parse on every access (cheap because rows are small). WHERE backend/api/models.py::AlgoOrder.attached\_gtts\_json + \_fire\_template\_attach\_on\_fill.

## 10. 4-default template matrix

flowchart LR

```

Op([Operator picks symbol + side]) --> SC{appliesToFor}
SC -->|BUY + ends CE/PE| B0[buy_option<br/>default-long-option<br/>TP+80% MARKET]
SC -->|BUY + EQ/FUT| BA[buy_any<br/>default-bull<br/>TP+30% SL-20%]
SC -->|SELL + ends CE/PE| S0[sell_option<br/>default-short-vol<br/>TP+50% + Wing 10%]
SC -->|SELL + EQ/FUT| SA[sell_any<br/>default-bear<br/>TP+30% SL-20%]
B0 --> CHIP[Default pill name chip<br/>+ override inputs]
BA --> CHIP
S0 --> CHIP
SA --> CHIP
CHIP --> PREV[0n-fill preview chip<br/>□ triggers]

```

**Key files:** - backend/api/algo/templates\_seed.py::SYSTEM\_TEMPLATES — seeded defaults + rebalance logic - frontend/src/lib/order/OrderTicket.svelte::\_appliesToFor - frontend/src/lib/SymbolPanel.svelte::\_appliesToFor — same helper at shell level - frontend/src/lib/SymbolPanel.svelte::\_sideAwareDefault — with fallback to focused-leg symbol - frontend/src/routes/(algo)/automation/templates/+page.svelte — coverage view (note: /automation/templates is the actual route; older docs reference /admin/templates which is stale)

## 11. Template override merge

Operator overrides flow through multiple layers; understanding the merge order saves hours of debugging.

Request:

```
template_id=T1, tp_pct_override=20, sl_pct_override=None
```

Backend persist (orders.py::\_build\_overrides\_json ~line 541):

```
AlgoOrder.template_id          = T1
AlgoOrder.template_overrides_json = '{"tp_pct": 20}' # only NON-None overrides
```

At fill (template\_attach.py::\_pick):

```
tp_pct = _ov.get("tp_pct") or template.get("tp_pct")
    → 20 (override wins)
sl_pct = _ov.get("sl_pct") or template.get("sl_pct")
    → template's saved sl_pct (no override)
```

**Per-leg vs shell:** when a basket leg has `template_id` set explicitly (not inherited from `_sharedTemplateId`), the SHELL overrides DO NOT flow through. This is the audit-Sc.12 fix — pre-fix the shell's `tp_pct_override` silently contaminated a leg that the operator had retargeted to a different template.

submitBasket logic:

```
effective_template = leg.template_id ?? shell_template
if leg has its own template_id:
    tp_override = leg.tp_pct_override (do NOT fall through to shell)
else:
    tp_override = leg.tp_pct_override ?? shell.tp_pct_override
```

---

## 12. Chase loop invariants

Six things the chase loop MUST guarantee:

1. **AlgoOrder.broker\_order\_id** always matches the **LATEST broker order**. Cancel-and-replace updates this via `_sync_algo_order_id`. Without it the postback handler can't resolve a row by `broker_order_id`.
2. **AlgoOrder.current\_limit** reflects the **latest re-quoted limit**. Added in M-6. ChaseCard renders this when present so the operator sees the live limit, not entry.
3. **AlgoOrder.filled\_quantity** is **monotonic and never exceeds AlgoOrder.quantity**. The `MAX(prior, cumulative)` clamp in `_record_partial_fill` enforces this post C-1 fix. Template attach reads `filled_quantity` to size exit GTTs.
4. **Operator kills take effect on the very next loop iteration**. `mark_killed(broker_order_id)` is synchronous + the loop checks `is_killed(current_order_id)` (a) at status-check time AND (b) immediately after replace (C-2 fix). The dict has a 60-min TTL so a stale kill flag can't survive across days.
5. **Partial fills get persisted on every NEW delta, not just the first**. The branch fires when `cumulative > already_filled` post-C-1 fix.
6. **A chase that hits  $\geq$  `_MAX_CHASE_ERRORS` consecutive exceptions aborts**. Prevents infinite re-trying against a broker that's down.

Break any of these and template attach sizes wrong, kills get ignored, or zombie chases burn rate limit.



### 13. Trail-stop subsystem

```
sequenceDiagram
    participant T as _task_trail_stop<br/>(every 30s)
    participant DB as algo_orders.attached_gtts_json
    participant PB as PriceBroker.ltp
    participant BR as broker.modify_gtt

    loop every templates.trail_poll_interval_seconds
        T->>DB: SELECT rows with sl_trail_pct
        T->>T: Build (sym, account, exchange) batches
        T->>PB: PriceBroker.ltp(keys) - falls over per broker
        PB-->>T: {key: {last_price}}
        T->>T: For each entry: compute new trigger<br/>long: peak × (1 - trail%)<br/>short: trough × (1 + trail%)
        alt new_trigger more favorable than current
            T->>BR: broker.modify_gtt(gtt_id, trigger=new)
            alt modify succeeds
                BR-->>T: ok
                T->>DB: UPDATE attached_gtts_json with new trigger
            else Dhan partial (ENTRY_LEG ok, TARGET_LEG fail)
                BR-->>T: raise(dhan_partial_modify=True)
                T->>DB: persist partial_modify_error
                T->>T: WARNING log + Telegram alert
                T->>T: pop sl_trail_pct (stop ratcheting)
            else NotImplementedError
                T->>T: pop sl_trail_pct (stop ratcheting)
            end
        end
    end
end
```

**Key files:** - backend/api/background.py::\_task\_trail\_stop - backend/api/background.py — Dhan partial-modify detect + alert (M-2 fix, search dhan\_partial\_modify) - backend/brokers/adapters/dhan.py::modify\_gtt — two-leg dispatch (Sprint C) - backend/brokers/adapters/groww.py — emulated OCO trail (currently NotImplementedError-skip) - backend/brokers/adapters/dhan.py::ltp — wired via instruments cache (B-2 fix)

**Asymmetric SELL guard note:** the poller's SELL ratchet check is `current_trigger > 0 AND proposed < current_trigger`. If `current_trigger=0` (entry never persisted), the guard short-circuits `trail` silently dead. This is why **every persistence path that writes a trail entry MUST seed `current_trigger`** (see Sc.5a fix in `retry_template`).

## Part IV — Brokers

## 14. Broker abstraction

```

flowchart TD
    subgraph routes [Route layer]
        OR[orders.py routes]
        AC[actions.py agent actions]
        BG[background.py tasks]
    end

    subgraph reg [Registry]
        GB[get_broker account]
        GPB[get_price_broker]
        GHB[get_historical_brokers<br/>Kite-only filter]
        GSB[get_sparkline_broker<br/>Kite-only filter]
    end

    OR --> GB
    AC --> GB
    BG --> GB
    OR --> GPB
    AC --> GPB
    BG --> GPB

    subgraph abc [Broker ABC]
        OABC[order_status]
        PABC[place_order]
        MABC[modify_order / cancel_order]
        GABC[place_gtt / modify_gtt / cancel_gtt]
        LABC[ltp / quote / historical_data]
    end

    GB --> KITE[KiteBroker]
    GB --> DHAN[DhanBroker]
    GB --> GROWW[GrowwBroker]

    KITE -.implements.-> abc
    DHAN -.implements.-> abc
    GROWW -.implements.-> abc

    KITE --> KSDK[kiteconnect SDK]
    DHAN --> DSDK[dhanhq SDK]
    GROWW --> GSDK[growwapi SDK]

```

**Capability matrix surface:**

- backend/brokers/capabilities.py::BrokerCapabilities — dataclass with every capability flag
- backend/brokers/registry.py::get\_historical\_brokers — Kite-only filter
- frontend/src/lib/data/brokerCapWarnings.js — single source of truth for warning strings (H-5)
- frontend/src/lib/order/OrderTicket.svelte::capWarningFor — single-account
- frontend/src/lib/SymbolPanel.svelte::aggregateCapWarnings — cross-account (H-5)

□ **TECH — PriceBroker fallback chain** — WHY Some brokers can answer quote/ltp/historical (Kite), some can't (Dhan returns {} by design for quote). Walking the chain lets the operator's chart still render even when their primary account is throttled. WHAT PriceBroker.\_try(method\_name, \*args) iterates eligible brokers, calls method,

checks predicates (`_quote_has_data` / `_ltp_has_data` / `_historical_has_data`), returns first successful response. HOW Add a new method by name in the predicate map. Rate-limit cool-off (`_RATE_LIMIT_COOLOFF`) excludes throttled accounts for 30s. WHERE backend/brokers/registry.py::PriceBroker.

## 14.5. Broker abstraction — implementation detail

**Full broker layer architecture** — file map, singleton lifecycle, token caching, source-IP binding, and capability matrix — lives in [CLAUDE.md §14.5](#) for brevity. This section is a quick read list only.

**Files** — backend/brokers/{base.py, kite.py, dhan.py, groww.py, capabilities.py, registry.py} + backend/shared/helpers/{connections.py, broker\_creds.py, kite\_ticker.py}.

**Key rules:** 1. **Kite-shape contract** — every return value must match Kite Connect shape. Dhan/Groww adapters have `_normalise_*` helpers. The `_DHAN_STATUS_TO_KITE` status map is critical (audit B-1). 2. **Singleton per process** — adapters live via `Connections()` singleton. Each Kite login takes 10-15s; re-doing per-request is unworkable. 3. **IPv6 source-binding** — Kite + Dhan enforce one-session-per-IP rules. Each account binds to a unique IPv6 via `_IPv6SourceAdapter` (Kite/Dhan) or `ContextVar` proxy (Groww). 4. **Token cache** — each broker persists tokens to `.log/<broker>_tokens.json`. On startup, skips login if fresh token cached; fires full login only on miss/expiry/manual delete. 5. **Registry factories** — use `get_broker(account)` for operator actions, `get_price_broker()` for shared market data, `get_historical_brokers()` for OHLCV + regression, `get_sparkline_broker()` for KiteTicker. 6. **Capabilities immutable** — frozen dataclass with every field explicit per broker (no defaults). Used to render warning chips on OrderTicket when template asks for unsupported GTT shape.

**PriceBroker fallback chain** — when a broker returns empty data (Dhan returns {} for MCX quotes by design), walk to the next broker. Rate-limit cool-off excludes throttled accounts for 30s. `postback_gtt="reliable", rate_limit_orders_sec=10, ) DHAN_CAPS = BrokerCapabilities( broker_id="dhan", display_name="Dhan", gtt_single=True, gtt_oco=True, gtt_modify=True, gtt_cap_per_account=50, gtt_validity_days=365, gtt_supports_mcx=False, bracket_order=True, cover_order=True, atomic_basket=True, order_tag=True, margin_preview=True, # Audit fix — no Dhan WebSocket / GTT-fire postback handler is wired # in the codebase today; detection is the poll-based _task_oco_pair_watcher postback_gtt="poll_only", rate_limit_orders_sec=20, ) GROWW_CAPS = BrokerCapabilities( broker_id="groww", display_name="Groww", gtt_single=True, gtt_oco=False, gtt_modify=True, gtt_cap_per_account=25, gtt_validity_days=90, gtt_supports_mcx=False, bracket_order=False, cover_order=False, atomic_basket=False, order_tag=False, # No native tag; broker_order_link sidecar covers it margin_preview=False, postback_gtt="poll_only", rate_limit_orders_sec=5, )`

OCO emulation for Groww (no ``gtt_oco``) is implemented in ``groww.py::place_gtt`` via two single-trigger GTTs + the ``_task_oco_pair_watcher`` background task that cancels the surviving sibling when one fires. There's

``CAPS_BY_BROKER_ID`` maps both the canonical ``"zerodha_kite"`` and the legacy ``"kite"`` alias to ``KITE_CAPS``, so older Y-seeded rows keep resolving without a column rewrite.

Frontend reads via ``GET /api/admin/brokers/{account}/capabilities`` (in-memory, no broker call). UI helper ``brokerCapWarnings.js`` consults the matrix to warn the operator at submit time when

### 14.5.9 Per-broker quirks worth knowing

These are documented inline in code, but listed here for orientation:

```
| Broker | Quirk | Where it's handled |
|---|---|---|
| Kite | `tag` is 20-char max | `_truncate_tag` in `backend/brokers/adapters/kite.py` |
| Kite | Postback HMAC validation | `order_postback` route checksum check |
| Kite | Rate-limited historical_data quota (low per-second budget) | `_RATE_LIMIT_COOLOFF` 30s window in register
`_RATE_LIMIT_COOLOFF_SECONDS = 30` |
| Kite | One-IP-per-app rule | `_IPv6SourceAdapter` mount |
| Dhan | Token dashboard validity defaults to 5min | Operator must extend to 24h in Dhan dashboard |
| Dhan | `ltp()` returns `{}` for MCX commodity by design | PriceBroker fallback + B-
2 fix logs the empty response |
| Dhan | `modify_gtt` needs TWO calls (ENTRY_LEG + TARGET_LEG) | Sprint C dispatch in `dhan.py::modify_gtt` |
| Dhan | One-active-token-per-app-per-IP rule | `_IPv6SourceAdapter` + multi-
account stabilizer in `Connections` |
| Groww | Module-level `requests` calls with no session hook | ContextVar monkey-
patch (see §14.5.5) |
| Groww | No native OCO | Emulated via two single GTTs + `_task_oco_pair_watcher` cancellation of survivor |
| Groww | `cancel_gtt` needs exchange (numeric id collision risk) | M-
4 fix raises if exchange missing |
| Groww | No `historical_data` support | `historical_data=False` cap; sparkline + chart endpoints fall over to Ki
```

### ### 14.5.10 Modifying the broker layer – guard rails

If you're touching anything in `backend/brokers/`:

- **Never branch in callers by `broker\_id`.** The whole point of the abstraction is that callers don't know which vendor
  - **Always re-shape vendor responses to Kite shape.** Frontend + chase + template all expect Kite shape. Skipping the
  - **Status maps are non-negotiable.** Every vendor status must map to a Kite-  
canonical status (`COMPLETE`, `OPEN`, `CANCELLED`, `REJECTED`, `EXPIRED`, `TRIGGER PENDING`). A missing entry breaks
  - **Wrap sync SDK calls in `asyncio.to\_thread`.** Adapters are sync internally; callers MUST go through `asyncio.to\_t
  - **Log silent failures.** B-4 audit fix: when a broker SDK returns empty data instead of raising, log `WARNING` with m
  - **Update `capabilities.py` first.** If you discover a vendor supports something we'd marked `False`, update the mat
- visible warnings flow from the matrix.

---

## ## 15. How to add a new broker

If you're integrating a new vendor (e.g. "Upstox"):

### ### Backend

1. **Implement the adapter** in `backend/brokers/upstox.py`. Subclass `Broker` (ABC at `base.py`). Implement EVERY method. There's no "partial" mode. If a method genuinely doesn't apply, raise `NotImplementedError` with a clear message rather

2. **Translate to Kite shape.** Every method that returns operator-

facing data (orders, positions, ltp, GTTs) must shape its return to match Kite's structure. Frontend renders are Kite-shape; downstream chase + template code expects Kite-shape. Build a `\_normalise\_\*` helper per category. Mirror the pattern

3. **\*\*Status-string normalization.\*\*** Add `\_UPSTOX\_STATUS\_TO\_KITE = {...}`. Every Kite-canonical status (`COMPLETE`, `OPEN`, `CANCELLED`, `REJECTED`, `EXPIRED`) must map from one Upstox string. The B-1 audit lesson: a single missing entry silently breaks chase fill detection for an entire broker.

4. **\*\*Capabilities.\*\*** Add `UPSTOX\_CAPS` in `capabilities.py` with EVERY field set explicitly. Don't rely on dataclass being explicit makes capability gaps visible at code review.

5. **\*\*Register in `registry.py`.** Add to `\_ADAPTERS` map + `CAPS\_BY\_BROKER\_ID`.

6. **\*\*Token caching.\*\*** Each broker has its own `.log/<broker>\_tokens.json`. Follow the connection wrapper pattern in `

7. **\*\*Tests.\*\*** Add `backend/tests/test\_upstox\_broker.py`. Mock the vendor SDK at the boundary; assert your `\_normalise`

### ### Frontend

8. **\*\*No frontend code change needed.\*\*** The `BrokerCapabilities` dataclass is the contract; the cap warning helper at `visible capabilities` surface automatically.

---

## ## 16. Broker gotchas

Documented so you don't relearn them the hard way:

```
| Gotcha | Bit us in |
|---|---|
| **Postback arrives before broker_order_id is committed** | Race window between AlgoOrder pre-
persist + seed-broker_id second commit. Fix: fallback recent=NULL-id match (C-3) |
| **Cumulative vs delta in status polls** | Every broker reports `filled_quantity` cumulatively. Pre-
fix we added the cumulative value each call → inflation across restarts (C-1) |
| **Kill recorded against old broker_order_id** | Cancel-and-
replace creates a new id; kill was only checked against old. Operator's kill silently ignored (C-2) |
| **WeakValueDictionary GC during await** | `_TEMPLATE_ATTACH_LOCKS` could be GC'd between mint and acquire. Fix: str
5). 1h chosen because longest realistic live-chase window is ~30 min; 1h is 2x headroom |
| **Reconcile attach BEFORE commit** | Attach pipeline opened its own session and read pre-
commit state. Fix: defer to after commit (C-4 single + bulk) |
| **Empty `_normalise_orders` status map** | Groww's "EXECUTED" passed through verbatim; chase loop never saw "COMPLE
1) |
| **Dhan `ltp()` returned `{}`** by design until B-2. Trail stop silently dead -
no log, no Telegram, just zero ratchet | |
| **Groww `cancel_gtt` blind segment fallback** | Could cancel wrong GTT on numeric id collision. Now raises if exchan
4) |
| **Naive `datetime.now()` in DB writes** | Mix with tz-
aware columns → "AT TIME ZONE" errors. Always `datetime.now(timezone.utc)` |
```

```
| **Kite's `tag` is 20-char max** | We truncate via `_truncate_tag` in `chase.py` |
| **Trail-stop persistence missing `current_trigger`** | Asymmetric SELL guard short-
circuits with `0`. Every trail-write path must seed (Sc.5a) |
| **OCO double-fire 15s window** | `oco_pair_poll_seconds` default. Matches the `poll_only` GTT detection lag operator
8) |
| **60-second postback fallback window** | Long enough to cover the slowest IOC fill + DB commit race; short enough to
pollination with new orders (C-3) |
```

```
---
```

## # Part V – Frontend

### ## 17. Frontend modal state

```
```mermaid
flowchart TD
    SP[SymbolPanel.svelte]
    SP -->|tab=ticket| OT[OrderTicket.svelte]
    SP -->|tab=chain| OCT[OptionChainTab.svelte]
    SP --> TPL[Template row: Default/None pill]
    SP --> BB[Basket bar pills]
    SP --> CC[ChaseCard.svelte]

    OT --> OD[OrderDepth.svelte]
    OT -->|onMarginUpdate| SP
    OT -->|onPreviewPlanUpdate| SP

    subgraph shellState [Shell-level state]
        SA[_sharedAccount]
        ST[_sharedTemplateId]
        SO[_sharedTpOverride / Sl / Wingx2]
        BL[basketLegs[]]
        FK[_focusedLegKey]
    end

    end

    SP -.binds.-> SA
    SP -.binds.-> ST
    SP -.binds.-> SO
    SP -.owns.-> BL
    SP -.owns.-> FK

    OT -.binds.-> SA
    OT -.binds.-> ST
    OT -.binds.-> SO

    OCT -.binds.-> SA
    OCT -.binds.-> ST
```

OCT `-.onAddLeg.-> BL`

TPL `-.reads.-> ST`

BB `-.iterates.-> BL`

BB `-.click pill.-> FK`

**Key files:** - `frontend/src/lib/SymbolPanel.svelte` — shell + Template row + basket bar + chase card mount - `frontend/src/lib/order/OrderTicket.svelte` — Ticket form + depth ladder + margin preview - `frontend/src/lib/order/OptionChainTab.svelte` — strike grid + futures + chain quotes - `frontend/src/lib/order/OrderDepth.svelte` — bid/ask depth (visibility-gated polling)

**Preview chip swap rule (Chain tab):** - `basketLegs.length === 0` □ Ticket-form preview - `basketLegs.length > 0` + no focus □ last-leg preview - `_focusedLegKey !== null` □ that specific leg's preview, badge shows LEG N/M ● - Click any basket pill □ set `_focusedLegKey` - Click chip itself □ cycle to next leg - Operator × on focused leg □ key clears, falls back to last-leg

□ **TECH** — **Svelte 5 `$bindable()` props** — WHY Two-way sync without prop-drilling or a global store. WHAT Child component declares `let { templateId = $bindable(null) } = $props();` parent writes `bind:templateId={_sharedTemplateId}`. HOW Mutations on either side propagate. Avoid `bind:` for derived values (use a `$derived` instead). WHERE `SymbolPanel.svelte` □ `OrderTicket.svelte` □ `OptionChainTab.svelte` template + account props.

## 18. Frontend state architecture

### 18.1 Why no global store for order state?

Svelte stores would be the obvious pattern but we don't use them for order modal state. Reasons:

- **Modals are short-lived.** The operator opens, fills, submits, closes. State outlives a single modal mount maybe 5% of the time (basket persists across tab flips).
- **Component-local state with bindable props is enough.** `bind:value` on Svelte 5 runes provides bidirectional sync without the boilerplate.
- **One modal at a time.** We don't need a global "current order context" — the modal owns its context.

The exceptions: `executionMode` (navbar drives every page), `authStore` (every page), `dataCache` (PositionStrip + dashboards share), `orderTemplatesStore` (template CRUD broadcast). These are all narrow — they don't carry order-specific state.

### 18.2 The "shell" pattern

`SymbolPanel.svelte` is a shell. It owns: - Header (account + symbol pickers) - Tabs (Ticket / Chain) - Template row (Default/None pill + override inputs + preview chip) - Basket bar (when basket has legs) - Common action footer (margin chip + Submit)

The actual tab content (`OrderTicket.svelte`, `OptionChainTab.svelte`) is mounted as a child. State pipes through: - **Down via props:** shell □ tab (e.g. `_sharedAccount` □ account prop) - **Up via callbacks:** tab □ shell (e.g. `onMarginUpdate`, `onPreviewPlanUpdate`) - **Two-way via bind::** for shared mutable state (e.g. `bind:templateId={_sharedTemplateId}`)

When you add a new piece of shell-visible state, decide once: - Is it tab-specific? □ Stay in the tab component. - Should it survive tab flips? □ Lift to shell. - Does any tab need to READ it? □ Pipe down via prop. - Does any tab need to WRITE it? □ `bind:` it.

## 19. The preview pipeline

The on-fill preview chip (on fill → TP □ 250 / SL □ 180 / + Wing BUY ...) is the single most useful piece of context at submit time. It's computed via two independent pipelines:

- **OrderTicket's \_previewPlan** □ computed against the Ticket form's symbol/side/qty/price/template.
- **SymbolPanel's \_lastLegPlan** □ computed against the last basket leg (or operator-focused leg).

The chip render switches between them based on `_activeTab === 'chain' && basketLegs.length > 0`. **Why two pipelines?** Because the inputs are different: - Ticket: form state, not yet a “leg” - Last-leg: a fully-formed leg with its own account + symbol + overrides

Both call the same backend endpoint (`previewTicketTemplate`) with the same payload shape. The frontend just feeds them differently.

□ **TECH — Backend preview endpoint vs frontend simulation** — WHY Operators trust □ values that come from the same code path that will ACTUALLY fire on fill. Computing them in the frontend would risk drift; computing them in the backend guarantees the chip reflects reality. WHAT `POST /api/orders/preview-ticket-template` returns `{plan: {gtts: [...], wing: {...}, notes: [...]}}`. HOW Frontend debounces 200ms after any override change; backend runs `resolve_template_plan` with `apply_path="preview"` so no broker calls fire. WHERE `backend/api/routes/orders.py::preview_ticket_template`.

## Part VI — Runtime

### 20. Background task topology

```

gantt
  title Background tasks (app.on_startup)
  dateFormat HH:mm
  axisFormat %H:%M
  section Market data
    Performance refresh (5min) :perf, 09:00, 6h
    Sparkline warm (daily 00:30) :spark, 00:30, 1m
    Hedge proxy regression (daily 02:30) :hp, 02:30, 5m
  section Order lifecycle
    OCO pair watcher (15s) :oco, 09:00, 6h
    Trail-stop poller (30s) :trail, 09:00, 6h
    Ticker watchdog (30s) :tw, 09:00, 6h
  section Daily ops
    Open summaries :open, 09:15, 5m
    Close summaries :close, 15:30, 5m
    MCP audit cleanup (03:15) :mcp, 03:15, 1m

```

**Key files:** - `backend/api/background.py` — all task definitions - `backend/api/app.py::on_startup` — spawn list

**Tasks that touch operator orders:** - `_task_performance` (5min) — fetches positions/holdings/funds; runs `agent_engine.run_cycle` - `_task_oco_pair_watcher` (15s) — Groww emulated OCO sibling cancel - `_task_trail_stop` (30s) — Dhan + Kite trail SL ratchet - `_task_ticker_watchdog` (30s) — KiteTicker reconnect



on disconnect

□ **TECH — Why poll-based + not event-based** — WHY Vendor postbacks are unreliable (Dhan + Groww have no inbound webhook; Kite drops 0.5-2% in our experience). Polling is the conservative floor. WHAT Each task runs on its own asyncio cadence; no scheduler library. HOW Pick interval based on operator latency tolerance: trail-stop = 30s (slow ratchet OK), OCO watcher = 15s (faster because both legs settling within window means double-fire). WHERE backend/api/background.py.

## 21. Data refresh — PositionStrip + Dashboard

```
sequenceDiagram
    actor OP as Operator
    participant PS as PositionStrip.svelte
    participant API as /api/positions, /api/holdings, /api/funds
    participant BR as Broker (Kite)
    participant CACHE as dataCache (in-memory)

    OP->>PS: Mount on any algo page
    PS->>CACHE: Read last-good snapshot for fast paint
    PS->>API: fetchPositions + fetchHoldings + fetchFunds (parallel)
    API->>BR: kite.positions + kite.holdings + kite.margins
    BR-->>API: rows
    API-->>PS: rows
    PS->>CACHE: Update dataCache
    loop every 30s (marketAwareInterval)
        PS->>API: re-fetch
    end
    note over PS: positionsPnl = sum(p.pnl)<br/>positionsToday = sum(p.day_change_val)<br/>holdingsToday = sum(h.day_change_val)<br/>holdingsTotal = sum(h.pnl)
```

**Key files:** - frontend/src/lib/PositionStrip.svelte — navbar strip aggregations - backend/api/routes/positions.py, holdings.py, funds.py — REST endpoints - backend/brokers/broker\_apis.py::fetch\_positions / fetch\_holdings / fetch\_margins - backend/api/cache.py — server-side cache (per-key locking + TTL)

/admin/derivatives Snapshot TOTAL reconciles to PositionStrip by adding back the rows the page filters out (equity intraday positions + derivative-looking holdings) via \_excludedByAccount. See frontend/src/routes/(algo)/admin/derivatives/+page.svelte (search\_byUnderlyingTotal).

□ **TECH — marketAwareInterval polling vs WebSocket** — WHY Position state changes when fills happen; we already get fills via KiteTicker, but positions are aggregated server-side. Polling is cheaper than rebuilding aggregations client-side. WHAT marketAwareInterval(fn, 30000) polls every 30s during market hours, pauses on document.hidden. HOW Use the helper from \$lib/stores; never raw setInterval. WHERE frontend/src/lib/stores.js::marketAwareInterval.

## 22. Demo mode

```

flowchart LR
    Anon([Anonymous prod visitor]) --> AUTH{authStore.user}
    AUTH -->|null + branch=main| DEMO[Demo session<br/>state.is_demo = True]
    AUTH -->|signed in| AUTHED[Authenticated session]

    DEMO --> RB[Read paths: real data, accounts masked<br/>ZG0790 → ZG####]
    DEMO --> WB[Write paths: blocked at API]
    WB -->|POST /orders/place| 403
    WB -->|POST /orders/ticket mode=live| DOWNGRADE[Silently downgraded to paper]
    WB -->|/api/admin/*| 401

    DEMO --> UI[UI shows:<br/>· Sign In button replaces user pill<br/>· Settings/Brokers/Users hidden<br/>· Template picker shows muted note]
  
```

**Key files:** - backend/api/auth\_guard.py::is\_demo\_request + auth\_or\_demo\_guard - frontend/src/routes/(algo)/+layout.svelte — demo nav-link gating - frontend/src/lib/SymbolPanel.svelte — template row demo gate (L-3) - backend/brokers/broker\_apis.py::mask\_column — for demo + public

### 22.5. Investor portal — token-as-credential

Public read-only NAV surface for LPs. The URL /investor/<token> IS the credential — no login, no password. Operator mints from /admin per-user Portal button, copies the URL, forwards through their own channel (WhatsApp / email).

#### Why token-as-credential

The boutique fund has 1–5 LPs. Asking each LP to manage a password for a quarterly NAV check is friction nobody wants. Carta, SS&C/GP-Link, and Yieldstreet all converge on the same pattern for LP-facing statements: a long-lived per-LP URL that’s revocable on suspicion of leakage. Same threat model as a long-lived API key — if you trust the recipient with the URL, the URL is fine.

□ **TECH — Long-lived URL token vs JWT magic-link** — WHY JWT magic-links are short-lived (5-15 min); they’re great for a one-time “log in to this session” handshake but useless for “bookmark this URL and re-check the value every Friday.” The investor portal is a recurring read-only surface, not a session. WHAT 32-byte secrets.token\_hex □ 64-char string, 90-day default expiry, revocable. HOW Stored raw in investor\_tokens.token (same convention as AuthToken — the token IS the URL slug; hashing adds no security since possession of the URL == access). WHERE backend/api/models.py::InvestorToken, backend/api/routes/investor.py.

#### Schema

```

class InvestorToken(Base):
    __tablename__ = "investor_tokens"
    id, user_id (FK users.id), token (64-char unique),
    expires_at, revoked_at (nullable),
    last_visit_at, visit_count (operator visibility),
    note (admin label), created_by (FK users.id), created_at
  
```

Base.metadata.create\_all picks it up on next deploy — no migration.

### Active check

`_is_active(row, now) := row.revoked_at is None AND row.expires_at > now`. Three terminal states surfaced in the admin UI: ACTIVE (green) / REVOKED (red) / EXPIRED (slate).

### Endpoints

**Admin** (manage\_investor\_tokens cap, admin-only): - GET `/api/admin/users/{id}/investor-tokens` — list (pre-view only, never full token) - POST `/api/admin/users/{id}/investor-tokens` — mint (returns full token + portal URL ONCE) - DELETE `/api/admin/users/{id}/investor-tokens/{tid}` — revoke

**Public** (no auth — token in URL is the credential): - GET `/api/investor/{token}/slice` `InvestorSliceResponse` (same math as `/api/nav/me`) - GET `/api/investor/{token}/history?days=180` `curve`

### Visit tracking

`_resolve_token()` bumps `last_visit_at` + `visit_count` on every successful resolve via a best-effort UPDATE (try/except, rollback on failure). The operator's admin modal surfaces the timestamp + count so they know “this LP last looked 3 weeks ago” without leaving the page. The counter increments per endpoint hit, so a single page load bumps it by 2 (slice + history).

### Frontend separation

The portal page lives at `frontend/src/routes/investor/[token]/+page.svelte` — sibling of (public) and (algo) route groups. It inherits only the root `+layout.svelte` (which is empty — just `{@render children()}`), so it gets none of the algo navbar or the public marketing nav. Cream + champagne palette matching the marketing site so LPs land on a “professional statement” page, not a Bloomberg-style trading desk.

Robots `noindex,nofollow` in `<svelte:head>` so leaked URLs don't end up in search engines.

### Revocation model

Revoke is destructive but trivially reversible — admin clicks Revoke (confirms via `ConfirmModal`), `revoked_at` flips to `now()`, next visit 401s. Re-mint creates a new row; the old row stays for the audit trail.

Idempotent: revoking an already-revoked row is a no-op (the original `revoked_at` timestamp is preserved so “when did we revoke this?” remains accurate).

### Source files

- `backend/api/models.py::InvestorToken`
- `backend/api/routes/investor.py` — both controllers
- `backend/api/rbac.py::CAPS["manage_investor_tokens"]`
- `frontend/src/routes/investor/[token]/+page.svelte` — LP-facing page
- `frontend/src/routes/(algo)/admin/+page.svelte` — `openPortal()` modal + mint flow
- `frontend/src/lib/api.js::``{fetchInvestorTokens, mintInvestorToken, revokeInvestorToken}`

## 22.6. Investor portal — units-based NAV math

The v1 model (`slice = share_pct × firm_nav`) is **retired**. Every LP slice / cost-basis / P&L computation now flows through the standard fund-accounting units model:

`units_held(user, t) = ∑ units_delta for user's events <= t`

```

total_units(t)      =  $\Sigma$  units_held across every LP
nav_per_unit(t)     = firm_nav(t) / total_units(t)
slice(user, t)      = units_held  $\times$  nav_per_unit
cost_basis(user, t) =  $\Sigma$  amount (sub+bootstrap) -  $\Sigma$  amount (redemption)
pnl(user, t)        = slice - cost_basis

```

□ **TECH — Units vs static share\_pct** — WHY static share\_pct breaks when an LP joins mid-period (their cost basis is the day they bought in, not “since fund inception”) or partially redeems (the remaining slice’s basis must shrink in proportion). WHAT Each LP holds a count of partnership units; the fund publishes a per-unit value daily; slices are products. HOW Subscription buys units at the day’s nav\_per\_unit, redemption sells at the day’s nav\_per\_unit, gains accrue automatically through firm\_nav growth. WHERE backend/api/algos/investor\_units.py is the single math source; four callsites consume it.

### Single source of math

backend/api/algos/investor\_units.py exposes:

- ensure\_user\_bootstrap(s, user) — idempotent synthetic-event seed for v1 □ units migration
- ensure\_all\_bootstrapped(s) — covers every eligible LP; called at the start of every units compute
- units\_held(events, as\_of) / cost\_basis(events, as\_of) — pure-function primitives
- slice\_value(user\_events, all\_events, firm\_nav, as\_of) — returns (slice, nav\_per\_unit)
- compute\_slice(s, user, firm\_nav, as\_of) — DB-aware wrapper
- compute\_slice\_history(user\_events, all\_events, firm\_curve) — pre-fetched, walks dates in pure Python

Switched callsites (all four):

| Surface                                                | Old                               | New                                   |
|--------------------------------------------------------|-----------------------------------|---------------------------------------|
| /api/nav/me (authenticated LP)                         | share_pct $\times$ firm_nav / 100 | compute_slice()                       |
| /api/nav/me/history                                    | scaled curve                      | compute_slice_history()               |
| /api/investor/{token}/slice + /history (public portal) | scaled curve                      | compute_slice / compute_slice_history |
| compute_statement() (monthly PDF)                      | period-anchored scale             | event-walked slice                    |

### Auto-bootstrap rule

On every units compute, ensure\_all\_bootstrapped(s) scans every eligible LP (is\_active=True AND share\_pct > 0) and inserts a synthetic event for any without one. The bootstrap row encodes the v1 state:

```

InvestorEvent(
    event_type = "bootstrap",
    units_delta = user.share_pct,
    amount     = user.contribution,
    nav_per_unit = contribution / share_pct # 1.0 fallback when contribution=0
    event_date  = contribution_date or created_at.date() or today,
)

```

This guarantees that **the first request after this code lands reproduces v1 numbers identically** when share\_pcts sum to 100 across all eligible LPs. When the sum  $\neq$  100 (operator-residual case with implicit ownership), the units model redistributes proportionally and slices sum to firm\_nav by construction — slightly different numbers, but internally consistent + correct going forward.

### Day-delta semantics under units

`day_delta_share` on `/api/nav/me` is computed as `slice(today) - slice(prior)`, both via the SAME event set. This means:

- A pure market gain shows up as positive day-delta  $\square$
- A subscription between the two snapshots inflates `slice(today)` but ALSO appears in `cost_basis`, so it doesn't read as P&L on the LP's portal
- A redemption deflates `slice(today)` symmetrically

The portal UI labels this as “Day  $\Delta$ ” but the operator should read it as “change in your slice's market value since yesterday's snapshot.”

### Smoke-test invariants

Math is verified end-to-end against a fixture (see commit 322f0c22):

| Scenario                                          | Invariant                                                     | Verified  |
|---------------------------------------------------|---------------------------------------------------------------|-----------|
| All LPs at bootstrap, share_pcts sum to 100       | slices match v1 exactly                                       | $\square$ |
| Fund grows N%                                     | each LP's slice grows N% on their basis                       | $\square$ |
| LP_A subscribes mid-period at higher nav_per_unit | extra subscription doesn't double-count as P&L                | $\square$ |
| Any state                                         | $\Sigma \text{ slices} == \text{firm\_nav}$ (modulo rounding) | $\square$ |

### Bootstrap edit / correction path

Operator wants to fix a bootstrap row (wrong contribution, wrong share\_pct in users row, missing LP):

1. Edit `User.contribution / share_pct` in `/admin` (existing flow)
2. Delete the bootstrap event in `/admin`  $\square$  Portal  $\square$  Events tab
3. Next compute auto-bootstraps with the corrected User columns

The delete-then-recompute cycle preserves history (bootstrap event has the old timestamp) without manual reconciliation.

### Source files

- `backend/api/algo/investor_units.py` — math + bootstrap
- `backend/api/algo/investor_statement.py::compute_statement` — PDF math via units
- `backend/api/routes/nav.py::my_slice + my_history` — authenticated LP endpoints
- `backend/api/routes/investor.py::slice + history` — public portal endpoints
- `backend/api/models.py::InvestorEvent` — events journal table

## 22.7. Audit log — forensic trail

Single `audit_log` table catches every mutating event the platform produces — HTTP mutations (via middleware), broker fills (via postback handler), agent-initiated actions (via the action dispatcher), and background-task events (NAV compute, monthly statement send). Read surface at `/admin/audit` is cap-gated to `view_audit` (designated / admin / risk).

$\square$  **TECH** — ASGI middleware + fire-and-forget writes — WHY SEBI Cat-III's “every mutating event” requirement

can't be satisfied with per-route decorators (easy to forget; impossible to enforce). A middleware catches everything by default. WHAT AuditMiddleware wraps every HTTP response; on a mutating 2xx/3xx it schedules a `_write_audit` coroutine via `asyncio.create_task`. Response leaves the server immediately; the DB write lands shortly after. HOW Failed audit writes log a warning and drop — the user's request never blocks on the audit pipeline. WHERE `backend/api/audit.py`.

## Schema

```
class AuditLog(Base):
    id, actor_user_id (FK users.id), actor_username, actor_role,
    action, category, method, path,
    target_type, target_id,
    status_code, summary,
    request_id (UUID, mirrored in X-Request-ID),
    client_ip, user_agent, created_at
```

- `actor_*` fields are SNAPSHOTTED — a later role demotion doesn't rewrite history.
- `category` is a coarse tag (`order.fill`, `agent.action`, `system.nav`, ...) populated by `_derive_category_from_path` for HTTP rows and explicitly by `write_audit_event` callers.
- `request_id` correlates each audit row with the API log line for the same request.

## Two write paths

**1. HTTP middleware (default)** — `AuditMiddleware.handle` watches every response. Skips non-mutating methods + `_SUPPRESS_PREFIXES`. Captures actor from JWT, status code from the wrapped send, body summary from the first 1 KB of response. Path-derived category via `_derive_category_from_path`.

**2. Non-HTTP helper (added Jun 2026)** — `write_audit_event(category, action, ...)` is the public API for any code path that mutates state without going through HTTP:

| Caller                                                            | Category                                                                        | Actor        |
|-------------------------------------------------------------------|---------------------------------------------------------------------------------|--------------|
| Broker postback handler<br>( <a href="#">orders.py</a> )          | <code>order.fill</code> / <code>order.cancel</code> / <code>order.reject</code> | broker       |
| Agent action dispatcher<br>( <a href="#">actions.py:execute</a> ) | <code>agent.action</code>                                                       | agent:<slug> |
| Monthly statement send<br>( <a href="#">background.py</a> )       | <code>system.statement</code>                                                   | system       |
| NAV compute<br>( <a href="#">background.py</a> )                  | <code>system.nav</code>                                                         | system       |

The helper is fire-and-forget (`asyncio.get_running_loop().create_task(...)`); failed writes log a warning and drop. Sim-mode actions are intentionally NOT audited — they're already isolated in the sim event log and don't touch real state.

## Failed mutations toggle

`audit.log_failed_mutations` setting (default `False`). When ON, the middleware also writes audit rows for 4xx/5xx mutating responses. Use for defect tracking ("operator hit SUBMIT and saw 422 — what blocked?"); toggle off otherwise to avoid volume spikes from validation errors.

## Category routing

`_PATH_CATEGORY_RULES` in `audit.py` is the prefix-match table. Adding a new business surface is one tuple. Example:

```
_PATH_CATEGORY_RULES: tuple[tuple[str, str], ...] = (
    ("/api/orders/ticket", "order.place"),
    ("/api/orders/postback", "order.fill"),
    ...
)
```

For PUT/PATCH `/api/orders/{id}` and DELETE `/api/orders/{id}`, the middleware narrows the generic order category to `order.modify` / `order.cancel` based on HTTP method.

## UI — filter pills

`/admin/audit` carries a row of category pills (All / Orders / Agents / Users / Config / System) above the existing column filters. Each pill passes a comma-separated category list to the backend; `SQL IN (...)` does the rest. The Category column in the table carries per-bucket tints (green orders / cyan agents / amber users / violet config / slate system).

## Performance contract

- Every audit write is `asyncio.create_task(_write_audit(...))` — no `await`. The middleware's `handle()` returns immediately after the wrapped response.
- The DB insert pays no transaction beyond its own session; failures swallow into a logger warning.
- Helper invocations from background tasks pay the same fire-and-forget cost.
- Read path is one paginated query with `LIMIT/OFFSET`; the `(category, created_at)` and `(actor_user_id, created_at)` indexes cover the common UI queries.

## Source files

- `backend/api/audit.py` — middleware + `write_audit_event` helper
- `backend/api/models.py::AuditLog` — table
- `backend/api/routes/audit.py` — read surface + filters
- `frontend/src/routes/(algo)/admin/audit/+page.svelte` — viewer + pills

## 22.8. Postback fan-out — `book_changed` bus

Single coordinated refresh trigger for every position-derived surface after a broker postback. Replaces the prior pattern where each surface polled its own cadence and downstream aggregates (Snapshot grid totals, strategy analytics, payoff curve) lagged the per-cell qty patch by 5–15 s.

□ **TECH — Coordinated invalidation vs per-page polling** — WHY the postback handler historically invalidated only the orders cache. `positions` and `holdings` had their own 30 s TTL, and the strategy endpoint memoised its own analytics — so the Snapshot grid showed patched per-cell qty (via `position_filled` optimistic patch) but stale aggregates until the next per-page poll cycle. Operator's report: "snapshot grid updated two iterations." WHAT Terminal postbacks now invalidate every dependent cache atomically + broadcast a single `book_changed` event. A frontend singleton subscriber re-emits via a Svelte store; every position-derived page subscribes once and refetches its primary loader. HOW 200 ms upstream debounce coalesces basket-order bursts. Monotonic counter store lets `$effect` re-run on every increment without payload comparison. WHERE `backend/api/routes/orders.py::order_postback` + `frontend/src/lib/data/bookChanged.js`.

## Backend chain

**POST /api/orders/postback** on any terminal status (COMPLETE / CANCELLED / REJECTED / EXPIRED):

```
invalidate("orders")
if _terminal:
    invalidate("positions")
    invalidate("holdings")
    broadcast({
        "event": "book_changed",
        "account": masked, "exchange": ..., "tradingsymbol": ...,
        "reason": status, "ts": int(time() * 1000),
    })
if status == "COMPLETE":
    broadcast({"event": "position_filled", "qty": signed_delta, ...})
```

`position_filled` is preserved alongside the new event — it carries the qty delta the per-cell optimistic-patch path on Pulse + Performance reads. `book_changed` is the broader coordination signal that also covers CANCELLED / REJECTED paths where there's no qty to patch.

## Frontend bus

`$lib/data/bookChanged.js`:

- Singleton subscriber via `createPerformanceSocket`. Started from `(algo)/+layout.svelte::onMount` so every algo page sees it. Idempotent — multiple `startBookChangedBus()` calls share one WS.
- Listens for `book_changed`, debounces 200 ms, increments `bookChanged` (a monotonic counter writable store) + sets `lastBookEvent` (latest payload).
- Pages subscribe with a `$effect` that watches the counter and calls their primary loader once per increment. Counter pattern (vs payload comparison) lets the effect re-run trivially on every change.

## Subscription map

| Page                            | Loaders called on increment                   |
|---------------------------------|-----------------------------------------------|
| <code>/admin/derivatives</code> | <code>loadPositions() + loadStrategy()</code> |
| <code>/dashboard</code>         | <code>loadHero()</code>                       |
| <code>/pulse</code>             | <code>loadPulse()</code>                      |
| <code>/orders</code>            | <code>_debouncedLoadOrders()</code>           |
| <code>/performance</code>       | <code>loadAll({ fresh: true })</code>         |

## Recipe — wire a new page to the bus

```
<script>
import { bookChanged } from '$lib/data/bookChanged';

async function loadXxx() { /* page's primary loader */ }

let _bookCounter = 0;
$effect(() => {
    const n = $bookChanged;
    if (n <= _bookCounter) return;

```



```

    _bookCounter = n;
    loadXxx();
  });
</script>

```

That's it. The counter guard prevents re-entry; the upstream debounce handles burst coalescing.

### Performance contract

- Backend fan-out runs inside the postback handler's existing `_asyncio.create_task` block — zero added latency on the broker ack path.
- One extra JSON broadcast per terminal status (~150 bytes wire). At 10 fills/sec that's 1.5 KB/sec across all WS clients combined.
- Frontend debounce keeps loader calls to one per 200 ms window per page.
- Pages without the wiring fall back to their existing pollers — additive, never breaks the prior path.

### Source files

- `backend/api/routes/orders.py::order_postback` — invalidation chain + broadcasts
- `frontend/src/lib/data/bookChanged.js` — singleton subscriber + stores
- `frontend/src/routes/(algo)/+layout.svelte` — `startBookChangedBus()` callsite
- Wired pages: [admin/derivatives](#), [dashboard](#), [MarketPulse](#), [orders](#), [PerformancePage](#)

## 22.9. History — multi-day orders / trades / funds

`/admin/history` is the row-level forensic surface — three tabs over the platform's append-only datasets: Orders (`algo_orders`), Trades (`daily_book.kind='trades'`), Funds (`daily_book.kind='funds'`). Companion to `/admin/audit` (event-level log); same `view_audit` cap, different storage shape.

□ **TECH — Append-only daily\_book vs broker SDK** — WHY Kite Connect (and most Indian broker SDKs) expose ONLY today's orders + trades; historical data must be scraped from the Console UI. RamboQuant snapshots every loaded account at 15:35 IST into `daily_book` so the platform owns the multi-day record-of-truth without depending on the broker's UI export. WHAT One row per (date, account, kind, symbol) with a unique constraint that lets re-runs upsert idempotently. HOW `_task_daily_snapshot` background task fires at 15:35 IST + on startup. WHERE `backend/api/algo/daily_snapshot.py` + `backend/api/models.py::DailyBook`.

### Endpoint surface

`backend/api/routes/history.py::HistoryController` — `view_audit` cap, three reads:

| Endpoint                                      | Source                                 | Default range | Pagination       |
|-----------------------------------------------|----------------------------------------|---------------|------------------|
| GET<br><code>/api/admin/history/orders</code> | <code>algo_orders</code>               | 30 days       | 50/page, cap 500 |
| GET<br><code>/api/admin/history/trades</code> | <code>daily_book[kind='trades']</code> | 30 days       | 50/page, cap 500 |
| GET<br><code>/api/admin/history/funds</code>  | <code>daily_book[kind='funds']</code>  | 90 days       | unpaged          |

Shared params: `from_date` / `to_date` / `accounts` / `symbols` (comma-separated lists for accounts + symbols).

Orders adds status / mode. Funds drops symbols.

### Response shape highlights

- **Orders:** counts field is a SQL-side GROUP BY status histogram. UI renders as summary pills without paginating.
- **Trades:** summary.total\_notional is  $\sum \text{qty} \times \text{avg\_cost}$  across the FILTERED set, computed via `_func.sum()` so pagination doesn't degrade accuracy.
- **Funds:** earliest\_date is `MIN(daily_book.date) WHERE kind='funds'` — the UI's “tracking started X” chip uses it to set expectations while historical backfill catches up.

### Funds capture (new — Jun 2026)

`_funds_rows` — runs alongside the existing holdings / positions / trades capture inside `_task_daily_snapshot`. Per account, per segment (equity / commodity), one row per day. Idempotent via the existing `daily_book` ON CONFLICT clause.

Column mapping (re-using the generic `daily_book` schema to avoid a new table):

| daily_book column | Funds semantic                                           |
|-------------------|----------------------------------------------------------|
| qty               | utilised.debits (□ debited today)                        |
| avg_cost          | available.cash                                           |
| ltp               | available.opening_balance                                |
| day_pnl           | utilised.realised_m2m                                    |
| total_pnl         | net (segment net worth)                                  |
| symbol            | '__seg__' sentinel (unique constraint requires non-null) |
| exchange          | segment label uppercased                                 |

The mapping is intentionally pragmatic — `daily_book` is denormalised by design, and adding a separate `funds_book` table would duplicate the schema without adding value. The semantics are clear from `kind='funds'`.

### Drill, delta, backfill — closed limits

**Per-row audit drill** — closed. `algo_orders.request_id` (nullable VARCHAR(36), indexed) captured on `POST /api/orders/ticket` from `request.scope.state.request_id` stamped by `AuditMiddleware`. `GET /api/admin/audit` accepts a `request_id` filter param; the audit page reads `?request_id=...` URL param on mount + widens `since_hours` to 90 days. History Orders tab grows an Audit ↗ column per row that opens `/admin/audit?request_id=<uuid>` pre-filtered.

**Cashbook Δ on Funds tab** — closed. `FundsRow.cash_delta` computed server-side: `HistoryController.list_funds` walks rows in  $O(N)$ , groups by (account, segment), sorts ASC by date, sets `prior_cash` to the previous row's `cash_available` each step. Response keeps DESC order (newest first) for the UI; per-row delta carries the move within the (account, segment) series. UI tints positive green / negative red / em-dash for the first row in a series.

**Funds backfill** — endpoint + Dhan adapter both wired.

Adapter contract:

```
def funds_ledger(self, from_date: str, to_date: str) -> list[dict]:
    """Return a list of normalised per-(date, segment) rows:
    [{date, segment, cash_available, opening_balance,
```

```
debits, realised_m2m, net, payload}, ...]
"""
```

Endpoint flow:

```
@post("/funds/backfill", guards=[admin_guard])
async def backfill_funds(...) -> FundsBackfillResponse:
    broker = get_broker(account)
    if not hasattr(broker, "funds_ledger"):
        raise HTTPException(status_code=501, detail=...)
    entries = await loop.run_in_executor(
        None, lambda: broker.funds_ledger(from_iso, to_iso))
    # INSERT ... ON CONFLICT DO UPDATE per entry - same column
    # mapping as _funds_rows in the live snapshot path.
```

Broker support matrix:

- **Kite (zerodha\_kite)** — no programmatic ledger. Always 501.
- **Dhan** — wired ([DhanBroker.funds\\_ledger](#)). SDK method discovery probes `get_ledger_report (v2) / get_funds_ledger / ledger_report` (fork variants) with `kwargs` positional fallback. Aggregates voucher-level entries per (voucherdate, segment); `_DHAN_SEGMENT_MAP` collapses Dhan exchange codes to our 2-segment vocabulary.
- **Groww** — pending. Same single-file pattern: add `funds_ledger(from, to)` to `GrowwBroker` returning the normalised shape.

## □ TECH — Voucher-level aggregation vs daily snapshot

Dhan's `/v2/statement/ledger` returns voucher-level entries (one per transaction: a trade settlement, a brokerage debit, an MTM credit), not daily summaries. The adapter aggregates because `daily_book[kind='funds']` is intentionally per-day per-segment — re-using the existing snapshot schema instead of adding a `funds_ledger_voucher` table.

Aggregation logic: - Group entries by (voucherdate, segment). - Sum debit + credit separately per group. - Track first + last runbal as SOD / EOD proxies (Dhan returns entries in chronological order within a day). - Output `cash_available = close_runbal`, `opening_balance = close_runbal - (credits - debits)`, `realised_m2m = credits - debits` (semantically “net daily cash move”, not pure MTM — voucher entries include brokerage / STT / exchange charges that operator should not interpret as P&L).

## Idempotency on backfill

The backfill loop uses `INSERT ... ON CONFLICT (date, account, kind, symbol) DO UPDATE SET ...` — same clause as `_upsert_rows` in the daily snapshot path. Re-running a backfill with a wider date range overwrites existing rows with the canonical Dhan numbers (intentional — if both the live snapshot AND a backfill cover the same day, the backfill's voucher-aggregated numbers are more accurate than a single `broker.margins()` snapshot taken at 15:35 IST).

Per-row try/except + single bulk commit at the end: a single bad voucher entry doesn't lose a multi-month pull. Failed rows log to debug + increment the skipped counter; the response surfaces both counts.

## Remaining limit

- **Cashbook view as a separate tab** — running-balance walk that reconciles trade-leg deltas against funds snapshots row by row. The  $\Delta$  column gives the daily move; a dedicated tab could enumerate the trade

contributions that produced it. Not in scope for this slice; a follow-up SQL view + 4th tab.

### Source files

- backend/api/routes/history.py — controller + 3 endpoints
- backend/api/algo/daily\_snapshot.py — `_funds_rows` + pipeline wiring
- backend/api/models.py::DailyBook — table (unchanged; just a new kind value)
- frontend/src/routes/(algo)/admin/history/+page.svelte — viewer
- frontend/src/lib/api.js — `fetchHistoryOrders/Trades/Funds` wrappers

## 22.10. Order placement latency — preflight + tick cache + paper-skip

Closes the order-placement deterioration the operator flagged (“placement feels slow now”). Three orthogonal fixes ship together because they target the same hot path:

□ **TECH — Sequential awaits vs `asyncio.gather`** — WHY `await` on a `run_in_executor` blocks the route until the broker SDK returns; four sequential awaits = ~800-1200ms on Kite’s typical 200-300ms round-trip. Even though each call is itself `async`-scheduled, the `await` chain serializes them. WHAT Wrap each independent broker call in its own helper coroutine with self-contained exception handling, then fire all four with `asyncio.gather`. Total wall-time becomes `max(individual call)` instead of `sum(individual calls)`. HOW Each helper returns a plain Python value on success or a sentinel (`None` / tuple-with-error) on failure, so the consumer can branch on result type rather than handle exceptions across the `gather` boundary. WHERE backend/api/algo/actions.py::`run_preflight` — fan-out helpers `_fetch_profile` / `_fetch_instruments` / `_fetch_basket_margin` / `_fetch_account_margins`.

### Fix 1 — preflight parallelization

`run_preflight` previously ran four broker calls in strict sequence:

```
profile = await loop.run_in_executor(None, broker.profile)           # ~300ms
instruments = await loop.run_in_executor(None, broker.instruments, exchange) # ~250ms
bm_result = await loop.run_in_executor(None, broker.basket_order_margins, ...) # ~300ms
m = await loop.run_in_executor(None, broker.margins)                # ~300ms
# Total: ~1150ms sequential
```

The new structure:

```
# Stage 1 (synchronous) – build basket_orders (uses cached get_lot_size).
# Stage 2 (parallel) – gather the 4 independent broker calls:
profile_res, instruments_res, bm_res, margins_res = await asyncio.gather(
    _fetch_profile(),           # None for non-Kite brokers
    _fetch_instruments(),       # None when exchange not in F&O / qty<=0
    _fetch_basket_margin(),     # Exception on failure (handled below)
    _fetch_account_margins(),   # (seg_dict, error_str) tuple
)
# Total: ~max(300ms) parallel
```

Each helper handles its own exceptions so a single broker failure surfaces as a logged warning + `None` result rather than tearing down the `gather`. `_fetch_basket_margin` returns the exception object (not raising) so the consumer can re-raise into the existing `MARGIN_SHORTFALL` block’s `try/except` — minimal change to the downstream handler.

### Fix 2 — tick-size index

`_align_price_to_tick` looked up the contract's `tick_size` via a linear scan:

```
for inst in items:                # items = 10-50k rows
    if inst.s == sym_u and inst.e == ex_u:
        tick = float(inst.ts or 0)
        break
```

Ticket route called this twice per order (price + trigger), so a single ticket paid ~100k linear iterations.

Now a module-level `_TICK_INDEX: dict[tuple[str, str], float]` is built lazily from the instruments cache. `_TICK_INDEX_STAMP` holds the cached `InstrumentsResponse` object; identity comparison (`resp is not _TICK_INDEX_STAMP`) detects cache refresh and triggers a rebuild. Subsequent ticket calls are  $O(1)$  dict lookups.

Trade-off: the rebuild itself is still  $O(N)$  — one scan per cache refresh (typical TTL ~10 minutes). Hot-path savings dominate; ~50ms per ticket recovered.

### Fix 3 — PAPER skips route-level preflight

`PaperTradeEngine.register_open_order` already runs `basket_order_margins` internally — it's the gate that decides REJECTED vs OPEN on an open order, and writes the broker's exact error string into `AlgoOrder.detail` when the basket margin check fails. The route-level preflight before that was running the SAME basket\_margin call (plus three others) for the SAME order, costing ~800ms with zero additional correctness.

The PAPER branch of `ticket_order` no longer calls `run_preflight()`. LIVE preflight stays — it's the only chance to block before `kite.place_order` actually fires.

### Combined ticket-path savings

| Path         | Before                                                           | After                                                        |
|--------------|------------------------------------------------------------------|--------------------------------------------------------------|
| LIVE ticket  | ~1200ms preflight + ~150ms route + ~300ms place_order ≈ 1.65s    | ~300ms preflight + ~150ms route + ~300ms place_order ≈ 0.75s |
| PAPER ticket | ~1200ms preflight + ~150ms route + ~50ms engine register ≈ 1.40s | ~150ms route + ~50ms engine register ≈ 0.20s                 |

PAPER is the bigger win because the entire preflight goes away; LIVE saves roughly half the latency.

### Source files

- `backend/api/algo/actions.py::run_preflight` — parallel gather
- `backend/api/routes/orders.py::_align_price_to_tick` + `_TICK_INDEX` —  $O(1)$  tick lookup
- `backend/api/routes/orders.py::ticket_order` — PAPER preflight skip block

## 22.11. Navbar audit — rename + resequence

Operator-requested audit of the algo navbar.

### Renames:

- modes group → explore. The old name was vestigial from the `sim/paper/live/shadow/replay` terminology before the mode toggles moved to the navbar dropdown (Wave C). Group now contains just Sandbox; can grow when Replay gets its own dedicated entry.

- Lab label ☐ Sandbox. Industry-standard term across QuantConnect / Streak / Sensibull; reads faster to first-time visitors than the prior internal jargon. URL /admin/execution unchanged — bookmarks + deep links preserved.

**Monitor resequence** (rationale = daily-trader workflow frequency):

old: Tour Pulse Dashboard Derivatives Strategies NAV Orders Charts Automation

new: Tour Pulse Dashboard Orders Derivatives Charts Automation Strategies NAV

Orders moved ahead of analysis surfaces (Derivatives / Charts) since active trading is the trader's primary entry point. Strategies + NAV move to the end — attribution + LP-facing views are weekly, not minute-by-minute.

**Implementation:**

```
// frontend/src/routes/(algo)/+layout.svelte
const GROUP_LABELS = {
  monitor: 'Monitor',
  analyze: 'Analyze',
  explore: 'Explore',
  build: 'Build',
  config: 'Config',
};
const INLINE_GROUPS = new Set(['monitor', 'analyze', 'explore']);
```

INLINE\_GROUPS controls which groups render inline in the desktop nav; the rest collapse to dropdown triggers. Mobile drawer shows every group with a GROUP\_LABELS caption for scan-by-intent navigation.

## 22.12. #audit workflow + Dhan / Groww postback scaffold

The operator runs periodic comprehensive audits by writing the literal hashtag #audit in chat. The coding agent dispatches 8 parallel audit subagents (one per dimension: performance / defects / stale code / UX consistency / palette / broker-API parity / data layer / docs) and synthesizes findings into a severity-tagged punch list. Audit findings ship as audit slice <letter> commits.

☐ **TECH — Parallel audit subagents vs single deep review** — WHY A single agent asked to cover 8 dimensions produces shallow work on each. Eight focused subagents each get a tight scope brief, run concurrently, and report independently. WHAT 8 Agent tool-calls in one message with subagent\_type=audit (read-only), each prompt cites the canonical patterns to check against. HOW Each subagent returns a focused punch list with severity tags (HIGH / MED / LOW); the coordinator synthesizes into a remediation plan rather than firing fixes unilaterally. WHERE Memory file ~/.claude/projects/-Users-ramanambore-projects-ramboq/memory/feedback\_audit\_tag.md documents the workflow.

### Audit slices A, B, C (shipped Jun 2026)

**Slice A — quick wins:** doc drift in CLAUDE.md + README.md (navbar renames modes ☐ explore, Lab ☐ Sandbox, monitor sequence); stale code purges (OrderDetail.svelte, margin\_optimizer.py, shadow.py + ShadowController, 4 api.js shadow stubs, fetchPnlRange — all confirmed unreferenced); palette fixes (LogPanel border #10b981 ☐ #4ade80; RefreshButton badges 600-level ☐ 400-level).

**Slice B — perf + data layer:** - \_task\_performance ticker subscribe loop, \_task\_trail\_stop, \_task\_oco\_pair\_watcher: sequential per-account awaits ☐ asyncio.gather. Each saves ~200-300ms × N accounts. - get\_lot\_size O(N) ☐ O(1) via \_LOT\_INDEX dict (same identity-stamp invalidation pattern as routes/orders.py::\_TICK\_INDEX). - 3 DB indexes added in init\_db migration block (idempotent CREATE INDEX

IF NOT EXISTS): - ix\_algo\_orders\_trail\_stop — partial on (mode, status) WHERE attached\_gtts\_json IS NOT NULL - ix\_news\_headlines\_published\_at — DESC - ix\_strategy\_lots\_open — composite missing from create\_all on pre-existing tables - Operator-visible interrupt fixes batched in: - /admin/history + /admin/audit: \$effect-gated load (was onMount checking \_canView once at false; load never fired) - Algo layout: removed blanket “non-admin □ /signin” redirect (vestigial from old admin/partner tier; broke tour for trader/risk/admin roles — pre-rename names were ops/observer) - “Prev Close” □ “Close” rename across PerformancePage, MarketPulse, /admin/derivatives

**Slice C — defects + Dhan/Groww postback scaffold:** - list\_active\_chases template-attach gap: live-reconcile path flipped FILLED but never called \_maybe\_fire\_template\_attach\_for\_reconcile. Now captures \_reconciled\_filled rows + fires after commit. - chase.py:806 partial-fill slippage formula: quantity □ filled\_qty or quantity (the old formula overstated slippage when partials happened). - New routes POST /api/orders/{dhan,groww}\_postback with shared \_process\_broker\_postback helper that mirrors the Kite path’s fan-out (AlgoOrder sync + audit log + cache invalidate + WS broadcasts). Best-effort; logs raw payload on first hit so parser can be tuned.

### **\_process\_broker\_postback shared helper**

`backend/api/routes/orders.py::_process_broker_postback` — extracted from the Kite postback inline logic so Dhan + Groww routes call the same fan-out:

```
async def _process_broker_postback(
    *, broker_id, order_id, status, account, symbol, txn, qty, price,
    exchange="", status_message="",
):
    # 1. AlgoOrder row sync by broker_order_id (status, fill_price, filled_at)
    # 2. order_events row (broker_postback kind)
    # 3. audit_log entry tagged order.fill|cancel|reject
    # 4. invalidate orders / positions / holdings on terminal
    # 5. broadcast order_update + position_filled + book_changed
```

Status normalization uses `_DHAN_STATUS_TO_KITE` and `_GROWW_STATUS_TO_KITE` tables already in the broker adapters. Best-effort throughout; never 5xx so the broker doesn’t retry.

### **Source files**

- `backend/api/algo/actions.py::run_preflight` — parallel gather (slice 22.10)
- `backend/api/background.py::_task_{performance, trail_stop, oco_pair_watcher}` — slice B parallel gathers
- `backend/brokers/adapters/kite.py::get_lot_size + _LOT_INDEX` — slice B O(1) lookup
- `backend/api/database.py::init_db` — slice B index migrations
- `backend/api/routes/orders.py::list_active_chases` — slice C template-attach fix
- `backend/api/algo/chase.py:806` — slice C slippage formula
- `backend/api/routes/orders.py::order_postback_{dhan, groww} + _process_broker_postback` — slice C postback scaffolds

## **22.13. Audit slice D — UX consistency + palette consolidation + 2 defects**

Closes the remaining MED-severity items from the #audit run. Pattern: converge on canonical components + canonical CSS-custom-prop alphas rather than introducing new code.



## UX consistency — adopting canonical components

Three pages were running their own bespoke implementations of patterns the codebase already had canonical components for. Each replacement deletes the bespoke chrome + the CSS that supported it:

| Page                                     | Bespoke pattern                                          | Canonical replacement                                                           |
|------------------------------------------|----------------------------------------------------------|---------------------------------------------------------------------------------|
| /admin/history                           | .hist-tabs + .hist-tab (+ active border + count badge)   | <AlgoTabs tabs={{id, label, badge}, ...}} bind:value={tab} onChange={setTab} /> |
| /admin/statements                        | native <select class="ms-select"> + .ms-select CSS block | <Select bind:value={selectedPeriod} options={_months} />                        |
| PageHeaderActions<br>amber+cyan hover bg | rgba(_, 0.12) (drift)                                    | rgba(_, 0.14) matching --algo-amber-bg / --algo-cyan-bg canonical               |

□ **TECH — Canonical-component adoption vs maintaining bespoke chrome** — WHY Every bespoke tab strip / select / pill the operator can't visually distinguish from the canonical ones is friction on muscle memory. Slice D's audit found 4 parallel pill-strip implementations across audit / statements / templates / agent-templates pages — same job, four different CSS classes. WHAT Replace bespoke implementations with the existing canonical component when the contract matches; the canonical component does the styling once and every page inherits. HOW AlgoTabs already exposes tabs: [{id, label, badge, color}] so the History tab badge logic (showing total only on the active tab) maps trivially. Select accepts options: [{value, label}] so the period dropdown's already-correct data shape is a one-line swap. WHERE frontend/src/lib/AlgoTabs.svelte, frontend/src/lib/Select.svelte.

## Palette alpha consolidation

The cyan-bg alpha 0.10 was drifting across 5 files (8 callsites) while the canonical --algo-cyan-bg is 0.14. CommandBar / HireMeModal / OrderCard / OrderTicket / SymbolPanel all converged. Same fix on PageHeaderActions amber 0.12 □ 0.14.

Net effect: a chip background on one page now visually matches the same conceptual element on another page. Pre-fix the operator's brain had to disambiguate "is this cyan-12 or cyan-14?" — now both reach var(--algo-cyan-bg).

## Defects

**paper.py::reset() race** — pre-fix the three dict-replace operations (\_open\_orders, \_price\_history, \_underlying\_history) ran unlocked. If a concurrent step() snapshot or \_capture\_price\_history write happened during the replace, the price-history chart data for the first tick of a new sim could silently land in the OLD dict reference while the new sim queried the empty replacement. Fix: acquire self.\_lock around the replacements.

**history.py::backfill\_funds docstring** — was claiming "idempotent — existing rows are not overwritten (ON CONFLICT DO NOTHING)" but the SQL is DO UPDATE SET ... (full overwrite). Operator-surprise risk: a hand-edit to a funds row gets clobbered on the next backfill with the same date range. Docstring now accurately documents the overwrite + warns the operator to treat funds rows as read-only.

## Source files

- frontend/src/routes/(algo)/admin/history/+page.svelte — <AlgoTabs> adoption
- frontend/src/routes/(algo)/admin/statements/+page.svelte — <Select> adoption
- frontend/src/lib/PageHeaderActions.svelte — amber/cyan 0.12□0.14
- frontend/src/lib/{CommandBar,HireMeModal,SymbolPanel}.svelte + or-  
der/{OrderCard,OrderTicket}.svelte — cyan 0.10□0.14
- backend/api/algo/paper.py::reset — self.\_lock acquisition



- backend/api/routes/history.py::backfill\_funds — docstring correction

## 22.14. Market-status — broker API beats bellwether-quote probe

The agent engine's market\_hours schedule gate and the daily snapshot pipeline both consult probe\_market\_active(exchange) to decide whether the market is currently trading. Pre-slice-E the probe used a workaround: call kite.quote() on bellwether symbols (NIFTY 50 + NIFTY BANK for NSE/NFO, SENSEX for BSE/BFO, or the dynamically-resolved nearest MCX commodity futures contract — not hardcoded CRUDEOIL), check last\_trade\_time freshness within a 15-minute window. Worked, but spent Kite's quote budget on a question Kite's API can't answer directly.

□ **TECH — Authoritative broker API vs inferred bellwether probe** — WHY Kite Connect has no market-status endpoint; the only signal Kite exposes is a quote with last\_trade\_time. Dhan and Groww both ship a direct market-status API (get\_market\_status and variants). When an authoritative answer is one round-trip away, prefer it over an inferred one — bellwether probes have edge cases (illiquid contracts, weekend Muhurat sessions, MCX evening sessions) where the inference disagrees with the broker. WHAT Extend the Broker ABC with an optional market\_status(exchange) -> bool | None method. Adapters that have the API override and return True/False. The probe layer iterates brokers, takes the first definitive answer, falls back to the bellwether path when no broker answers. HOW SDK-method discovery probes (getattr(sdk, 'get\_market\_status', None) etc.) handle adapter version drift. Per-exchange 60s cache absorbs the per-tick gate evaluation. WHERE backend/brokers/base.py::market\_status, backend/brokers/adapters/dhan.py::market\_status, backend/brokers/adapters/groww.py::market\_status, backend/shared/helpers/market\_probe.py::probe\_market\_active.

### Resolution order

```
probe_market_active(exchange):
    if cache hit and fresh (60s TTL): return cached
    for broker in all_brokers():
        verdict = broker.market_status(exchange)  # ← step 1
        if isinstance(verdict, bool):
            cache[exchange] = verdict
            return verdict
    # step 2: fall back to bellwether-quote probe (unchanged path)
    kite = resolve_kite_handle()
    if kite is None: return None
    bellwethers = _candidates(exchange, broker)
    q = kite.quote(bellwethers)
    active = any(row.last_trade_time >= now - 15min for row in q)
    cache[exchange] = active
    return active
```

### Adapter contract

```
class Broker(ABC):
    def market_status(self, exchange: str) -> bool | None:
        """True / False if broker exposes a market-status endpoint
        for `exchange`; None when adapter doesn't implement one or
```

```
the call fails. Optional method, not abstract."""
return None
```

Both Dhan and Groww implementations probe known SDK method names (`get_market_status` / `market_status` / `get_exchange_status`) across SDK version drift; iterate the response rows (whatever shape the SDK returns); map our exchange vocabulary (NSE / BSE / NFO / BFO / CDS / MCX) to the broker's segment codes (Dhan: NSE\_EQ / BSE\_EQ / NSE\_FNO / BSE\_FNO / NSE\_CURRENCY / MCX\_COMM; Groww: similar with variants); return `True` if ANY mapped segment reports active.

### Side effects on quote budget

A typical Kite-only deployment hits the bellwether path on every cache miss  $\square 4 \text{ symbols} \times 1 \text{ quote call} \approx 4$  instruments off the 10-req/sec quote budget per probe. A Dhan-loaded deployment skips that entirely for any exchange Dhan covers; only the rare cache-miss-with-Dhan-down case falls through.

### Adding the API to a new adapter

```
def market_status(self, exchange: str) -> bool | None:
    sdk = self.client
    status_fn = (getattr(sdk, "get_market_status", None)
                 or getattr(sdk, "market_status", None))
    if status_fn is None:
        return None
    try:
        resp = self._safe_call(lambda c: status_fn())
    except Exception as e:
        logger.debug(f"{self.broker_id}.market_status failed: {e}")
        return None
    # map your broker's segment codes → our vocabulary
    # return True if any mapped segment reports active
    # return False if all closed
    # return None if no mapping matched (fall through to next broker)
```

### Source files

- `backend/brokers/base.py::market_status` — ABC default
- `backend/brokers/adapters/dhan.py::market_status` — Dhan implementation
- `backend/brokers/adapters/groww.py::market_status` — Groww implementation
- `backend/shared/helpers/market_probe.py::probe_market_active` — resolution chain + cache

## 22.15. Chart indicator system — pure module + overlay persistence

Technical indicators (SMA, EMA, VWAP, Bollinger Bands, RSI, MACD) live in a single pure module rather than being inlined in `ChartWorkspace`.

$\square$  **TECH — Indicators as a pure stateless module** — WHY Inline math inside a 2000-line Svelte component is untestable with `node --test` (no DOM, no Svelte runtime needed). Extracting the math to a pure module means a 32-test suite can verify hand-calculated reference values, edge cases (empty arrays,  $N=0$ , constant series), and Wilder-smoothing correctness without a browser. WHAT `frontend/src/lib/chart/indicators.js` exports `sma`, `ema`,

vwap, bollinger, rsi, macd. Each function takes an OHLCV bars array, returns a typed series array. First (n-1) entries are {ts, value: null} — warmup convention. `HOW_assertN(n)` throws `RangeError` for non-positive or non-integer periods. `MACD` throws when `fast >= slow`. All functions are pure (no side-effects, no imports). WHERE `frontend/src/lib/chart/indicators.js`; tests at `frontend/scripts/indicators.test.js`.

**Overlay palette** (canonical colours, do not vary):

| Overlay        | CSS class       | Colour                                            | Notes                       |
|----------------|-----------------|---------------------------------------------------|-----------------------------|
| SMA 20         | overlay-sma     | #7dd3fc sky-blue                                  | dashed 4-3                  |
| SMA 50         | overlay-sma     | #c084fc violet                                    | dashed 6-3                  |
| EMA 20         | overlay-ema     | #4ade80 green                                     | solid                       |
| EMA 50         | overlay-ema     | #fb923c orange                                    | dashed 6-3                  |
| VWAP           | overlay-vwap    | #7dd3fc cyan                                      | solid 1.4px                 |
| BB mid         | overlay-bb      | #7dd3fc cyan                                      | solid 1px                   |
| BB upper/lower | overlay-bb      | #7dd3fc cyan                                      | dashed 3-2                  |
| BB fill        | overlay-bb      | rgba(125,211,252,0.06)                            | no stroke                   |
| RSI line       | overlay-rsi     | #fbbf24 amber                                     | solid 1.5px                 |
| MACD line      | overlay-macd    | #fbbf24 amber                                     | solid 1.4px                 |
| MACD signal    | overlay-macd    | #f87171 red                                       | dashed 3-2                  |
| MACD histogram | (line elements) | rgba(74,222,128,0.55) /<br>rgba(248,113,113,0.55) | green above zero, red below |

**Sub-panel geometry** (SVG user-unit constants in `ChartWorkspace.svelte`): - `RSI_H` = 48 — RSI panel height - `MACD_H` = 56 — MACD panel height - `_bandH` = (`_showRsi` ? `RSI_H` : 0) + (`_showMacd` ? `MACD_H` : 0) — reserved bottom space - `_innerH` = `chartH` - `CPAD_T` - `CPAD_B` - `_bandH` — usable height for the price panel

**Overlay persistence:** - `LocalStorage` key: `rbq.cache.chart-overlays.v1` (JSON array of string keys) - `Init`: `$state([])` — empty server-side. Never `$state(_loadPrefs())` because `$state()` init runs during SSR where `localStorage` is undefined. - `Hydration`: `onMount` reads and validates the stored array against `_OVERLAY_OPTS`. Sets `_overlaysHydrated` = `true` after reading. - `Save`: `$effect` watches `_overlays` but guards with `if (!_overlaysHydrated)` return to prevent overwriting stored prefs during the first render frame.

**VWAP note** — indices (NIFTY 50, NIFTY BANK etc.) carry `volume=0` on every bar. `calcVwap()` returns `null` for all points when `cumVol=0`. The `{#if _vwapPath}` block in the SVG template silently suppresses the element. This is correct: VWAP is a price/volume metric that has no meaning for non-tradeable indices.

### Buy / sell signal markers

□ **TECH — Signal detection as pure helpers, render layer pure SVG** — WHY Operator brief: surface buy/sell points TradingView-style for each active indicator. Detection logic must be testable (node `--test`) and the marker layer must respect the canonical algo palette so the visual vocabulary matches the rest of the app. WHAT Five exports in `indicators.js` — `emaSignals(fast, slow)`, `vwapSignals(closes, vwapArr)`, `bollingerSignals(closes, bb)`, `rsiSignals(arr, oversold=30, overbought=70)`, `macdSignals(macdLine, signalLine)`. Each returns `[{i, type:'buy'|'sell'}]`. Inputs are duck-typed — they accept raw number arrays, `{value}` arrays (real ema output), or `{close}` bars (raw OHLCV). HOW In `ChartWorkspace`, `_signalMarkers` is a `$derived.by` that re-runs only when `_bars` or `_overlays` change; `_signalLayout` translates events to `{x, y, type, tag, tooltip, stack}` records with same-bar stacking. SVG renders one `<g class="signal-marker signal-{type}">` per event with a triangle + 9px monospace tag. WHERE `frontend/src/lib/chart/indicators.js::emaSignals|vwapSignals|bollingerSignals|rsiSignals|macdSignals`;

frontend/src/lib/ChartWorkspace.svelte::\_signalMarkers|\_signalLayout.

### Marker palette + geometry (canonical, do not vary):

| Element                   | Spec                                                                                                            |
|---------------------------|-----------------------------------------------------------------------------------------------------------------|
| Buy triangle              | filled #4ade80 emerald-400, 10×8 px, anchored at bar's low + 8 px pad, tip-up                                   |
| Sell triangle             | filled #f87171 red-400, 10×8 px, anchored at bar's high – 8 px pad, tip-down                                    |
| Stroke                    | #0a0a0a 0.5 px (subtle outline so triangles read against the chart background tint)                             |
| Tag font                  | 9 px monospace, weight 700, paint-order stroke-then-fill with 2.5 px dark stroke for legibility against bars    |
| Tag colour                | matches triangle (#4ade80 buy, #f87171 sell)                                                                    |
| Stack offset              | 16 px vertical between markers on the same bar (split: buys below, sells above)                                 |
| Indicator tag text        | EMA↑ / EMA↓ / VWAP↑ / VWAP↓ / BB↓ (buy = lower band) / BB↑ (sell = upper band) / RSI↑ / RSI↓ / MACD↑ / MACD↓    |
| Tooltip (<title> element) | Buy signal – RSI 14 @ 2026-04-15 (verb + indicator + bar timestamp)                                             |
| Density throttle          | per-indicator cap of 12 events on dense ranges ( <code>_bars.length &gt;= 180</code> ); most-recent events kept |
| Bollinger throttle        | first bar of a contiguous lower / upper band run only — prevents 5-marker spam on multi-bar breaks              |

### Signal detection rules (peer-platform standard — TradingView / Sensibull / Streak / Upstox):

| Indicator    | Buy                                                  | Sell                                                |
|--------------|------------------------------------------------------|-----------------------------------------------------|
| EMA cross    | fast > slow AND prev fast ≤ prev slow (golden cross) | fast < slow AND prev fast ≥ prev slow (death cross) |
| VWAP         | close > vwap AND prev close ≤ prev vwap              | close < vwap AND prev close ≥ prev vwap             |
| Bollinger    | close ≤ lower band (first bar)                       | close ≥ upper band (first bar)                      |
| RSI 14       | rsi > 30 AND prev rsi ≤ 30                           | rsi < 70 AND prev rsi ≥ 70                          |
| MACD 12/26/9 | macd > signal AND prev macd ≤ prev signal            | macd < signal AND prev macd ≥ prev signal           |

**Toggle UX** — Signals chip in chart toolbar renders only when `_overlays.length > 0` (no markers to show without an indicator). Default ON, persisted to `localStorage` key `rbq.cache.chart-signals.v1`. Same height + active-state palette (cyan-400) as the Intraday chip — toolbar height SSOT (`--chart-toolbar-h`) preserved.

### Source files

- `frontend/src/lib/chart/indicators.js` — pure indicator + signal functions
- `frontend/src/lib/ChartWorkspace.svelte` — imports `calcEma`, `calcVwap`, `calcMacd`, `calcBollinger`, `calcRsi`, + 5 signal helpers; all overlay paths and `_signalMarkers` / `_signalLayout` are \$derived
- `frontend/scripts/indicators.test.js` — 52-test unit suite (`node --test`) covering indicator math + 5 signal helpers
- `frontend/e2e/chart_overlays.spec.js` — indicator paths Playwright spec
- `frontend/e2e/chart_signals.spec.js` — buy/sell markers Playwright spec (chromium-desktop + mobile-  
portrait)

## Part VII — Operations

## 23. How to add a new template field

Templates have grown organically. The current schema is wide (5 mandatory + 7 optional fields). To add a new one:

### Backend

1. **Add the column** to OrderTemplate in backend/api/models.py.
2. **Idempotent ALTER TABLE** in backend/api/database.py::init\_db.
3. **Schema fields** in backend/api/schemas.py — OrderTemplate (response), OrderTemplateCreate, OrderTemplatePatch. Also TicketOrderRequest + BasketLeg if you want a per-submit override.
4. **\_build\_overrides\_json** in orders.py (search for the function name) — add the override `{} JSON` key.
5. **resolve\_template\_plan** in template\_attach.py — add the `_pick()` call and the GTT spec emission.
6. **Seeded defaults** — update SYSTEM\_TEMPLATES in templates\_seed.py if your field should ship with a value.

### Frontend

7. **Template management UI** at /automation/templates — add the input.
8. **Override input** at the shell-level Template container in SymbolPanel.svelte — add the override field + reset on template change.
9. **Preview** — previewTicketTemplate should already wire it because the backend handles it; double-check the chip render handles the new shape.

### Documents

10. **Add a row** to §10 if it's a default field.
11. **Update §11** if your field has unusual merge semantics.

## 24. Testing philosophy

The codebase has fewer tests than ideal — that's a known debt. Where tests exist:

- **backend/tests/** — pytest + pytest-asyncio. Run via `pytest backend/tests/`.
- **frontend/e2e/** — Playwright. Run via `cd frontend && npx playwright test`.
- **No unit tests for frontend** — relies on svelte-check + manual flows + e2e.

The Playwright tests run against dev.ramboq.com (deployed dev branch). They're slow but high-confidence. Use them for any UX flow that changes; backend pytest for any algo/broker change.

**Rule of thumb:** if you're touching chase.py, template\_attach.py, or any broker adapter, add a pytest test. If you're touching SymbolPanel / OrderTicket flow, add a Playwright spec.

□ **TECH — Why Playwright over Cypress** — WHY Multi-tab support, native browser context isolation, better async waits. Cypress's same-origin restrictions don't fit our auth flow (OAuth-like JWT). WHAT Specs in frontend/e2e/\*.spec.js. Run with `--workers=1` so dev DB writes don't race. HOW Use `expect(...).toContainText(...)` for chip assertions; `toHaveAttribute('placeholder', ...)` for input placeholders. WHERE frontend/e2e/.

## 25. Logging discipline

Three log files matter:

- `api_log_file` — full API log (5MB rotating × 5). Read this first when debugging.
- `api_error_file` — stdout+stderr tee from systemd. Catches uncaught exceptions.
- `hook.log` — webhook listener output.

Log levels by intent: - **DEBUG** — for trace-style detail. Verbose; filtered out in prod. - **INFO** — operator-visible events. Order placed, agent fired, chase replaced. - **WARNING** — recoverable failures. Broker auth retry, asymmetric GTT, partial OCO failure. - **ERROR** — uncaught exceptions, lost state. Should also trigger Telegram.

**Don't log inside hot loops** without a rate limit. `_task_performance` ran a `logger.info` per row early on; quickly buried `api_log_file` under non-actionable noise.

## 26. Deployment notes

Both dev and main deploy via webhook. Push triggers:

```
GitHub push → webhook.ramboq.com → /etc/webhook/dispatch.sh
→ main: /opt/ramboq/webhook/deploy.sh prod main
→ other: /opt/ramboq_dev/webhook/deploy.sh dev <branch>
```

`deploy.sh` (per env): 1. `git pull` 2. `pip install` (production deps) 3. `npm run build` (vite) 4. `systemctl restart ramboq_api.service / ramboq_dev_api.service` 5. `notify_deploy.py` (Telegram-only since May 2026)

**Per-environment serialisation:** a host-wide `/tmp/ramboq_deploy.lock` prevents concurrent prod + dev builds from race-condition npm conflicts. `nice -n 19 ionice -c 3` on npm so background builds never starve API responsiveness.

**Manual server work after SSH:** always `chown -R www-data:www-data /opt/ramboq /opt/ramboq_dev`. Webhook deploys fail silently if file owner is wrong.

□ **TECH — Webhook-based deploy vs CI/CD platform** — WHY We're a single-server setup; GitHub Actions would add 30-60s to every deploy plus a \$/runner cost. The webhook is bash + git, zero dependencies. WHAT webhook (Adnan Hajdarbegovic's daemon) listens on port 9000, validates the HMAC, runs `dispatch.sh`. HOW Push to a watched branch triggers it automatically. Logs in `hook.log`. WHERE `/etc/webhook/hooks.json` (on server); `webhook/dispatch.sh` + `webhook/deploy.sh` (in repo).

## 27. Sprint history + audit fixes

Previous fixes are documented in-code via comments. Key milestones:

| Phase/Sprint      | Key fixes                                                   | Lookup                                     |
|-------------------|-------------------------------------------------------------|--------------------------------------------|
| Phase 0-3         | Template attach pipeline (resolve □ plan □ GTT place)       | <code>grep Phase \d</code>                 |
| Sprint A-E        | Reconcile paths, partial fills, Dhan/Groww OCO, rate limits | <code>grep Sprint [A-E]</code>             |
| Gap closure (B-L) | 28 audit fixes across categories                            | <code>git log --grep="audit fix" -i</code> |

See commit bodies for specific gap IDs (e.g. B-1 = Dhan status map, C-3 = postback fallback window, H-5 = cap

warnings). These are documented in code as defensive comments.

## Part VIII — Wrap-up

### 28. Reading order for a new developer

If you’ve got a week to onboard:

**Day 1 — understand the shape:** - This doc end-to-end - CLAUDE.md skim (it’s the operator-facing manual; some route URLs may reference /agents/\* which has been redirected to /automation/\* — see §29) - backend/api/app.py startup wiring - backend/api/models.py schema

**Day 2 — order flow:** - frontend/src/lib/SymbolPanel.svelte + OrderTicket.svelte (the modal) - backend/api/routes/orders.py::ticket\_order (single submit path) - backend/api/algo/chase.py::chase\_order (the loop)

**Day 3 — templates:** - backend/api/algo/template\_attach.py (resolve + apply) - backend/api/algo/templates\_seed.py (the matrix) - Trace one BUY CE order from click ☐ fill ☐ attach end-to-end

**Day 4 — brokers:** - backend/brokers/base.py (the ABC) - backend/brokers/adapters/kite.py (reference impl) - backend/brokers/adapters/dhan.py + groww.py (vendor quirks)

**Day 5 — background + extras:** - backend/api/background.py (every task) - backend/api/algo/actions.py (agent action handlers) - frontend/src/lib/order/ChaseCard.svelte + OrderCard.svelte (display)

If you’ve got a day: read §7 (chase loop) above, then read chase.py::chase\_order source. Everything else extends from that one function.

### 29. When in doubt

Open an Agent with subagent\_type=audit and ask it to trace your specific scenario. The audit agents in this codebase are well-calibrated for finding subtle issues. Don’t merge a change to chase.py or template\_attach.py without one.

**Known doc-drift in CLAUDE.md** (as of the most recent doc audit): the older operator manual still references /agents, /agents/activity, /agents/fragments URLs. These have been redirected to /automation, /automation/activity, etc. The redirect routes still work; the URLs in CLAUDE.md are just stale. The current canonical URLs are under /automation/\*.

### 30. Operator’s mental model — the one-page summary

| Action                                          | Read this section           |
|-------------------------------------------------|-----------------------------|
| “What happens when I click Submit on Ticket?”   | §5 — single ticket sequence |
| “What does the chase loop do between attempts?” | §7 — chase lifecycle        |

| Action                                               | Read this section                                                |
|------------------------------------------------------|------------------------------------------------------------------|
| “How does TP/SL get attached?”                       | §9 — template attach pipeline                                    |
| “Why is my SL not ratcheting on Dhan?”               | §13 — trail-stop subsystem                                       |
| “How does the Default pill pick the right template?” | §10 — 4-default matrix                                           |
| “When does the preview chip swap on Chain?”          | §17 — frontend modal state                                       |
| “What runs in the background?”                       | §20 — task topology                                              |
| “Why does the navbar strip not match the dashboard?” | §21 — data refresh paths                                         |
| “What can a demo visitor do?”                        | §22 — demo mode flow                                             |
| “How do I add a new broker?”                         | §15                                                              |
| “How do I add a new template field?”                 | §23                                                              |
| “What’s the tech stack?”                             | §2 — overview; also inline <code>TECH</code> callouts throughout |

## Part IX — Change recipes (cookbook)

This section turns the design knowledge above into runnable change recipes. Each recipe lists the **exact files to edit**, the **exact pattern to copy**, and the **verification step** before commit. Use these as templates — copy-paste, rename, tweak.

The cookbook is intentionally prescriptive. You do not need to read the full doc above to follow a recipe; you only need §3 (architectural principles) for the philosophy, then jump straight here.

### 31. Recipe: add a new route

**Scenario:** you want a new endpoint, e.g. `GET /api/positions/heatmap` that returns aggregated per-symbol stats.

#### Steps

1. **Pick the right route file.** `backend/api/routes/` is grouped by domain (`orders.py`, `positions.py`, `holdings.py`, `agents.py`, etc.). Add the new route to the matching file. New domain? Create `heatmap.py`.
2. **Write the msgspec response type** in `backend/api/schemas.py`:

```
class HeatmapRow(msgspec.Struct):
    symbol: str
    pnl: float
    weight: float
class HeatmapResponse(msgspec.Struct):
    rows: list[HeatmapRow]
    refreshed_at: str
```

3. **Add the route** to the controller (mirror an existing simple route as a template — e.g. `PositionsCon-`



troller.list\_positions in backend/api/routes/positions.py):

```
@get("/heatmap", guards=[auth_or_demo_guard])
async def heatmap(self, request: Request) -> HeatmapResponse:
    is_demo = request.state.is_demo
    rows = await self._build_heatmap()
    if is_demo:
        rows = [_mask_row(r) for r in rows]
    return HeatmapResponse(rows=rows, refreshed_at=timestamp_display())
```

4. **Register the controller** in backend/api/app.py if the file is new. Existing controllers don't need re-registration.
5. **Frontend wrapper** in frontend/src/lib/api.js:

```
export const fetchHeatmap = () => _get('/api/positions/heatmap');
```

The wrapper handles auth, retries, demo masking display, and error trimming automatically. **Never call fetch() directly from a component** — always go through api.js.

6. **Demo masking.** Read paths must mask account values for demo sessions (§22). Use mask\_column(col) helper, never roll your own.
7. **Verify.** pytest backend/tests/test\_routes\_smoke.py (add a smoke test if the route is non-trivial) + manual curl.

## 32. Recipe: add a column to an existing table

**Scenario:** you want algo\_orders.last\_chase\_quote to store the last broker depth snapshot.

### Steps

1. **Edit backend/api/models.py.** Add the field to the SQLAlchemy model:

```
last_chase_quote: Mapped[str | None] = mapped_column(Text, nullable=True)
```

2. **Add an idempotent ALTER** to backend/api/database.py::init\_db:

```
await conn.execute(text(
    "ALTER TABLE algo_orders ADD COLUMN IF NOT EXISTS last_chase_quote TEXT"
))
```

The IF NOT EXISTS is non-negotiable — init\_db runs on every startup, idempotency required.

3. **Update msgspec schema** in backend/api/schemas.py if the column should be returned over the wire:

```
class AlgoOrderInfo(msgspec.Struct, kw_only=True):
    ...
    last_chase_quote: str | None = None
```

kw\_only=True is non-negotiable — the struct interleaves required + optional fields, and Python 3.13's stricter msgspec refuses that without it. Don't strip the modifier when copy-pasting.

4. **Populate it.** Decide which code path writes to it. For our example, chase.py::chase\_order writes after each depth quote fetch.

5. **Frontend render** (optional). Add a column to `OrderCard.svelte` or `OrderTab.svelte` ag-Grid config; render via `cellRenderer`.
6. **Verify**. `psql -d ramboq_dev -c "\d algo_orders"` shows the new column; `pytest`; e2e if frontend-visible.

□ **Never write a migration script.** The `init_db ALTER TABLE ... IF NOT EXISTS` pattern is the migration mechanism. We don't use Alembic.

### 33. Recipe: add a new background task

**Scenario:** you want `_task_unrealized_pnl_alert` that fires every 60s during market hours.

#### Steps

1. **Define the coroutine** in `backend/api/background.py`. Copy the shape of `_task_oco_pair_watcher` — it's the simplest template:

```
async def _task_unrealized_pnl_alert():
    interval = 60
    while True:
        try:
            await _run_unrealized_pnl_check()
        except Exception as e:
            logger.exception(f"_task_unrealized_pnl_alert failed: {e}")
        await asyncio.sleep(interval)
```

The `try/except` around the loop body is **non-negotiable** — without it, an uncaught exception silently kills the task forever.

2. **Spawn it at startup.** In `backend/api/app.py::on_startup`:

```
asyncio.create_task(_task_unrealized_pnl_alert())
```

3. **Gate by market hours** if appropriate. Use `is_any_segment_open()` from `backend/shared/helpers/date_time_utils.py`:

```
if not is_any_segment_open():
    await asyncio.sleep(interval)
    continue
```

4. **Gate by capability flag.** If the task hits an external service, wrap in `is_enabled('telegram' | 'mail' | ...)` so dev branches don't spam.
5. **Verify.** Start dev (`uvicorn backend.api.app:app`), watch `.log/api_log_file` for the task's INFO/DEBUG logs, kill, restart, confirm it picks up cleanly.

□ **Do not use `time.sleep`.** Always await `asyncio.sleep(...)`. Sync sleep blocks the entire event loop.

### 34. Recipe: add a new agent action

**Scenario:** you want `square_off_underlying` so an agent can close every position on a given underlying.

## Steps

1. **Add the handler** in backend/api/algo/actions.py. Mirror the shape of \_action\_close\_position:

```
async def _action_square_off_underlying(
    action: AgentAction,
    context: dict[str, Any],
) -> ActionResult:
    params = action.params or {}
    underlying = params.get("underlying")
    if not underlying:
        return ActionResult(ok=False, reason="missing underlying")
    ...
```

2. **Register it** in the \_ACTION\_HANDLERS map at the bottom of actions.py:

```
_ACTION_HANDLERS["square_off_underlying"] = _action_square_off_underlying
```

3. **Add the grammar token** in backend/api/algo/grammar.py::\_SYSTEM\_TOKENS:

```
{
    "grammar_kind": "action",
    "token_kind": "action_type",
    "token": "square_off_underlying",
    "value_type": "enum",
    "resolver": "backend.api.algo.actions._action_square_off_underlying",
    "params_schema": {
        "required": ["underlying"],
        "properties": {"underlying": {"type": "string"}},
    },
    "is_system": True,
    "is_active": True,
}
```

4. **Mode resolution.** Honor \_resolve\_mode() — never call broker directly. Use get\_broker(account) and respect the row's mode.
5. **Verify.** Create a test agent in dev via /admin/tokens + /automation, fire-in-simulator, confirm event row + broker call.

## 35. Recipe: add a new template field (worked example)

**Scenario:** add tp\_breakeven\_lock: bool — when true, after TP1 fires, modify SL to entry price (free trade).

## Steps

1. **Backend column** in backend/api/models.py::OrderTemplate:

```
tp_breakeven_lock: Mapped[bool | None] = mapped_column(Boolean, nullable=True)
```

2. **Idempotent ALTER** in backend/api/database.py::init\_db:

```
await conn.execute(text(
    "ALTER TABLE order_templates ADD COLUMN IF NOT EXISTS tp_breakeven_lock BOOLEAN"
```

```
))
```

3. **Schemas** in backend/api/schemas.py:

- OrderTemplate (response): tp\_breakeven\_lock: bool | None = None
- OrderTemplateCreate, OrderTemplatePatch: same field
- TicketOrderRequest: optional tp\_breakeven\_lock\_override: bool | None = None if you want per-submit override
- BasketLeg: same per-leg

4. **Override JSON build** in backend/api/routes/orders.py::\_build\_overrides\_json (search for the function):

```
if data.tp_breakeven_lock_override is not None:
    result["tp_breakeven_lock"] = data.tp_breakeven_lock_override
```

5. **Plan resolution** in backend/api/algo/template\_attach.py::resolve\_template\_plan:

```
breakeven_lock = _pick("tp_breakeven_lock", template, overrides)
```

Then emit the appropriate behavior — for breakeven lock, you'd persist it into attached\_gtts\_json and watch for TP1 fill events.

6. **Seeded defaults** in backend/api/algo/templates\_seed.py::SYSTEM\_TEMPLATES — add to whichever defaults should ship with it ON.

7. **Frontend management UI** at frontend/src/routes/(algo)/automation/templates/+page.svelte:

- Add a toggle to the create/edit form
- Surface it in the listing

8. **Frontend override input** in frontend/src/lib/SymbolPanel.svelte:

- Add a \_sharedTpBreakevenLockOverride = \$state(null) shell-level
- Render in the Template row alongside the existing override inputs
- Reset on template change (search the \$effect block that watches \_sharedTemplateId)
- Pass through to OrderTicket and per-leg basket logic

9. **Preview chip.** Backend handles the math; frontend just renders. The preview will automatically pick up the new override because previewTicketTemplate passes through the full overrides dict.

10. **Update this doc.** Add a row to §10 (4-default matrix) if any default ships with it, and to §11 (merge order) if your field has unusual merge semantics.

11. **Verify.** svelte-check, pytest, e2e on dev.ramboq.com: create a template with the field, place a paper order, watch the chain of events in .log/api\_log\_file.

## 36. Recipe: add a new broker capability flag

**Scenario:** you want to track whether each broker supports iceberg orders (currently not in the matrix).

### Steps

1. **Add the field** to backend/brokers/capabilities.py::BrokerCapabilities:

```
@dataclass(frozen=True)
class BrokerCapabilities:
    ...                # existing fields
    iceberg_order: bool    # No default – force explicit setting per broker
```

Note the discipline: real fields don't get defaults (audit B-5 lesson). Every broker constant must set every field.

2. **Set per-broker explicitly in all four** constants — KITE/DHAN/GROWW plus the UNKNOWN\_CAPS fallback at the bottom of capabilities.py. Missing UNKNOWN\_CAPS will crash the unknown-broker code path at runtime:

```
KITE_CAPS      = BrokerCapabilities(..., iceberg_order=True)
DHAN_CAPS      = BrokerCapabilities(..., iceberg_order=False)
GROWW_CAPS     = BrokerCapabilities(..., iceberg_order=False)
UNKNOWN_CAPS   = BrokerCapabilities(..., iceberg_order=False) # conservative default
```

3. **Capability registry** in capabilities.py::CAPS\_BY\_BROKER\_ID already routes by broker\_id — no change needed.
4. **Frontend warning helper** in frontend/src/lib/data/brokerCapWarnings.js:
  - Update the warning-aggregation logic to surface a warning when a template asks for an iceberg leg against a broker where !caps.iceberg\_order.
5. **Consumer code** queries via get\_broker(account).capabilities.iceberg\_order or the HTTP endpoint /api/admin/brokers/{account}/capabilities.
6. **Verify.** Inspect /admin/brokers page; the new cap should surface in the row.

## 37. Recipe: add a new page

**Scenario:** new admin page at /admin/funds-history.

### Steps

1. **Create the route file** frontend/src/routes/(algo)/admin/funds-history/+page.svelte. Copy structure from /admin/brokers/+page.svelte — it's the simplest admin page template.
2. **Page header.** Use the canonical pattern (see “Page-header rule” in CLAUDE.md or §17 of this doc):

```
<div class="page-header">
  <span class="algo-title-group">
    <h1 class="page-title-chip">Funds History</h1>
  </span>
  <span class="algo-ts">{$nowStamp}</span>
  <span class="ml-auto"></span>
  <span class="page-header-actions">
    <RefreshButton onClick={load} loading={_loading} label="Refresh" />
    <PageHeaderActions />
  </span>
</div>
```

3. **Navbar entry** in frontend/src/routes/(algo)/+layout.svelte navItems. Pick a group (monitor | analyze

| modes | build | config). Set adminOnly: true if it should hide in demo mode.

#### 4. Data loading. Always:

- Use \$effect for mount + cleanup (not legacy onMount)
- Use marketAwareInterval from \$lib/stores for polling (not raw setInterval)
- Read via \$lib/api.js wrappers

#### 5. Verify. Visit the route, check navbar entry, confirm Refresh works, watch console for errors. Playwright spec if non-trivial.

## 38. Recipe: add a setting

**Scenario:** add chase.max\_consecutive\_errors so operator can tune the abort threshold (currently hardcoded \_MAX\_CHASE\_ERRORS=5).

### Steps

#### 1. Add to SEEDS in backend/shared/helpers/settings.py:

```
("chase", "chase.max_consecutive_errors", "int", 5,
  "Abort a chase after this many consecutive API failures", None, "errors"),
```

#### 2. Read it wherever the constant was used. Replace \_MAX\_CHASE\_ERRORS with get\_int('chase.max\_consecutive\_errors', 5). The cache invalidates on every PATCH; reads are O(1).

#### 3. Verify. Visit /admin/settings ☐ confirm new row in the Chase bucket. Edit it, watch the change take effect on next chase iteration without restart.

☐ **TECH** — the seeder preserves operator overrides on deploy; only the description / schema / default\_value refresh. So bumping the default in code only affects fresh installs.

## 39. Recipe: change an existing default template

**Scenario:** operator wants default-long-option to have SL −40% instead of no SL.

### Steps

#### 1. Edit SYSTEM\_TEMPLATES in backend/api/algo/templates\_seed.py:

```
{
  "name": "default-long-option",
  ...
  "sl_pct": 40, # was None
  "sl_type": "LIMIT",
}
```

#### 2. Re-seeder behavior. On startup, seed\_templates (in templates\_seed.py) rebuilds system templates by name — operator's edits to custom templates are preserved, but system templates are overwritten. **The operator's pulls of default-long-option will get the new SL on next deploy.**

#### 3. If operator has saved-instance edits (i.e. clicked Edit on a system template and saved), those land in a

separate row keyed by `user_id`. They survive system re-seed. To force-refresh, the operator deletes their saved copy.

4. **Verify.** Restart dev, hit `/automation/templates`, confirm SL value is updated. Place a test order — fill should trigger SL GTT placement.

## 40. Recipe: wire a new notification channel

**Scenario:** add Slack as a notify channel alongside Telegram + email.

### Steps

1. Add config keys in `backend/config/secrets.yaml` (manually on server, gitignored):

```
slack_webhook_url: "https://hooks.slack.com/services/..."
```

2. Add capability flag in `backend/config/backend_config.yaml::cap_in_dev`:

```
slack: True
```

`is_enabled('slack')` returns True on main always, else respects this flag.

3. Add the helper in `backend/shared/helpers/alert_utils.py`:

```
def _send_slack(message: str) -> None:
    if not is_enabled('slack'):
        return
    webhook = secrets.get('slack_webhook_url')
    if not webhook:
        return
    requests.post(webhook, json={"text": message}, timeout=5)
```

4. Add the grammar token for the notify channel:

```
# backend/api/algo/grammar.py::_SYSTEM_TOKENS
{
    "grammar_kind": "notify",
    "token_kind": "channel",
    "token": "slack",
    ...
}
```

5. Wire it in `_dispatch` in `alert_utils.py` — for each notify event, check `channel == 'slack'` and call `_send_slack`.
6. UI checkbox in agent editor (`frontend/src/routes/(algo)/automation/+page.svelte`) — add Slack to the events grid.
7. **Verify.** Create a test agent with Slack notify, fire in simulator, confirm message lands.

## 41. Recipe: ship a fix to dev + main

**Scenario:** you've finished a small fix on dev branch and want to deploy to prod.

## Steps

### 1. Run pre-flight checks locally.

- `cd backend && pytest` (or scoped to affected files)
- `cd frontend && npm run check` (svelte-check)
- `cd frontend && npx playwright test --workers=1` if frontend-touching

### 2. Commit on dev. Use the conventional format:

<Sprint/scope>: <one-line summary>

<optional body explaining why>

Co-Authored-By: Claude Opus 4.7 (1M context) <noreply@anthropic.com>

### 3. Push dev. git push origin dev. Webhook triggers dev deploy automatically. Watch logs:

```
ssh ramboq "tail -f /opt/ramboq_dev/.log/api_log_file"
```

### 4. Verify on dev.ramboq.com. Manual smoke test of the changed feature.

### 5. Merge to main.

```
git checkout main
git merge --ff-only dev
git push origin main
git checkout dev # back to dev for next change
```

### 6. Webhook deploys prod automatically. Watch /opt/ramboq/.log/api\_log\_file.

### 7. Telegram deploy ping lands in RamboQuant Alerts group — confirm.

□ Don't squash-merge. We keep linear history via `--ff-only`. □ Don't tag releases; we deploy on every push.

## 42. Cross-cutting checklist before every commit

Run mentally before every commit. Skipping any of these has burned us before:

- **Demo mode honored?** Read paths mask accounts; write paths return 403 or downgrade to paper (§22).
- **Idempotency on side-effects?** Anything that places orders/GTTs needs a guard (§3.2).
- **Mode resolution?** Order code reads `row.mode` instead of branching by `if live` (§3.4).
- **Logger discipline?** No `print()`; no logger calls in hot loops (§25).
- **Hot-loop sleep?** `asyncio.sleep`, never `time.sleep` (§4.3).
- **TODO/FIXME?** None in code paths; finish or extract.
- **Old tests still pass?** `pytest` on the closest test file.
- **svelte-check clean?** No new errors introduced.
- **CLAUDE.md updated?** If a fact in CLAUDE.md changes, fix it here.
- **DESIGN\_GUIDE.md updated?** This file. Especially recipe sections + line-anchored grep targets if functions moved.
- **Sprint/audit fix labeled?** Commit body mentions the gap ID or sprint letter so `git log --grep` finds it.
- **Co-author trailer?** Co-Authored-By line at the end of the commit body.

If you can't tick every box, hold the commit. The cost of pausing is low; the cost of regression is high.



## Where to learn more

| If you want to learn...                       | Read                           |
|-----------------------------------------------|--------------------------------|
| How the operator uses the platform end-to-end | USER_GUIDE.md                  |
| Day-to-day operations + troubleshooting       | ADMIN_GUIDE.md                 |
| Agent authoring + testing                     | AGENTS_GUIDE.md                |
| Simulator scenarios + Run-in-Simulator        | SIMULATOR_GUIDE.md             |
| Lab + MCP-driven research workflow            | LAB_MCP_GUIDE.md               |
| Operator's-eye-view of every page             | CLAUDE.md (large, but indexed) |
| Architecture + change recipes                 | This document                  |

## Glossary

Curated index of the terms that appear repeatedly in this guide. Alphabetized so you can jump-lookup without scrolling the TOC.

| Term                      | Meaning                                                                                                                                                                             |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Action</b>             | Side-effect an agent performs when its condition fires — place order, close position, alert. See §34.                                                                               |
| <b>AgentEngine</b>        | Declarative rule runner. Reads agents table + built-in BUILTIN_AGENTS, evaluates conditions each cycle, dispatches actions. §22.5, §34.                                             |
| <b>Alert</b>              | Runtime event produced when an agent condition fires. Persisted to agent_events; may or may not have a Notify or Action. Distinct from <b>Notify</b> .                              |
| <b>Basket order</b>       | Multi-account / multi-leg order dispatched atomically. POST /api/orders/basket groups by account and fans out via asyncio.gather. §6, §22.10.                                       |
| <b>Broker abstraction</b> | Uniform Python interface (Kite / Dhan / Groww adapters) so route handlers stay broker-agnostic. backend/brokers/adapters/. §14.                                                     |
| <b>Chase loop</b>         | Adaptive limit-order engine that re-quotes toward the touch until filled or capped. Spread-aware. §7, §12.                                                                          |
| <b>cap_in_dev</b>         | Nested dict of capability flags in backend_config.yaml. All True on main, per-branch on dev. Gated via is_enabled('<cap>').                                                         |
| <b>close_settled</b>      | Second phase of the snapshot lifecycle — fires 15 min after <exch>:close. UPSERTs broker's weighted-avg-last-30-min close price.                                                    |
| <b>conn_service</b>       | Standalone Litestar app on /tmp/ramboq_conn.sock that owns broker sessions (Kite WebSocket, Dhan/Groww tokens). Restart independent of the main API.                                |
| <b>Demo mode</b>          | Signed-out + prod branch — read-only + PII-masked. Write paths return 403 or degrade to paper. §22.                                                                                 |
| <b>Firm NAV</b>           | $\text{cash\_sod} + \text{option\_premium} + \sum \text{position.unrealised} + \sum \text{holdings.cur\_val}$ . Canonical formula (v4) in backend/api/algo/nav.py:compute_firm_nav. |
| <b>GTT</b>                | Good-Till-Triggered order — broker-side conditional order. Kite native; Dhan OCO leg; Groww emulated. §9.                                                                           |
| <b>@for_all_accounts</b>  | Decorator that fans out a broker call across every account and concatenates the results. pd.concat(..., ignore_index=True) at call site.                                            |

| Term                      | Meaning                                                                                                                                                                       |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Idempotency guard</b>  | Column like <code>attached_gttts_json</code> IS NULL that ensures a side-effect fires at most once even under postback retries. §3.2.                                         |
| <b>KiteTicker</b>         | Persistent Kite WebSocket. One per <code>conn_service</code> process. Ticks land in <code>/dev/shm/ramboq_ticks</code> mmap; main API reads via <code>MmapTickReader</code> . |
| <b>LP unit</b>            | Limited-Partner accounting unit. $\text{units\_held} \times \text{nav\_per\_unit} = \text{slice}$ . §22.6.                                                                    |
| <b>MarketPulse</b>        | Two-side ag-Grid page ( <code>/pulse</code> ) — pinned watchlists + movers left, positions + holdings right. Canonical operator surface.                                      |
| <b>MCP</b>                | Model Context Protocol — Claude-Code integration exposing 25 platform tools (17 read-only + 2 persist + 6 write-gated).                                                       |
| <b>Notify</b>             | Delivery channel wrapping an Alert — telegram / email / websocket / log. Vocabulary chain: Agent → Alert → Notify → Action.                                                   |
| <b>OHLCV</b>              | Open-High-Low-Close-Volume daily bars. Cached in <code>ohlcv_store</code> (3-tier: LRU → PostgreSQL → broker). 5-year retention.                                              |
| <b>Paper mode</b>         | Live-quote execution against <code>PaperTradeEngine</code> — no broker orders. Mode 2 of the confidence ladder (sim → paper → shadow → live).                                 |
| <b>PBKDF2</b>             | Password hash algorithm (SHA-256, 210k iters). JWT signing separate — HS256.                                                                                                  |
| <b>Preflight</b>          | Fat-finger + lot-multiple guards before order placement (G1, G2). Parallelized via <code>asyncio.gather</code> . §22.10.                                                      |
| <b>Proxy hedge</b>        | Cross-reference between holdings and option roots. $\beta$ -regressed. <code>hedge_proxies</code> table.                                                                      |
| <b>Refresh cycle mode</b> | Persistence override — off / soft / hard. Bypasses cache tiers when defect-recovering. Runtime-only, resets on restart.                                                       |
| <b>Shadow mode</b>        | Log-only mode — validates payload against real broker but does not execute. Mode 5, prod-only.                                                                                |
| <b>snapshot_extras</b>    | Payload block in <code>daily_book.payload_json</code> carrying open/high/low/close_settled/day_change_val/... for closed-hours reads.                                         |
| <b>Snapshot lifecycle</b> | Per-exchange event sequence — open → close (first-cut snapshot) → close_settled (broker's settled close).                                                                     |
| <b>SSOT</b>               | Single Source Of Truth. See <code>baseDayPnlForPosition</code> (Day P&L), <code>compute_firm_nav</code> (NAV), <code>resolve_current_price</code> (LTP resolver).             |
| <b>Template attach</b>    | Post-fill automation — attaches GTT exits and take-profit legs to a filled parent. Idempotent via <code>parent_order_id</code> . §9.                                          |
| <b>Ticker mmap</b>        | <code>/dev/shm/ramboq_ticks</code> — fixed 4096-slot shared-memory buffer, version-word atomic, lock-free reads. Main API tails it via <code>MmapTickReader</code> .          |
| <b>Trail stop</b>         | Stop-loss that ratchets toward the touch on favorable moves. Broker-side (Kite <code>trail_gtt</code> ) or emulated. §13.                                                     |
| <b>Virtual root</b>       | MCX/CDS synthetic symbol (e.g. <code>CRUDE0IL</code> = front-month, <code>CRUDE0IL_NEXT</code> = back-month). Resolver: <code>symbol_resolver.py</code> .                     |

## Alphabetical section index

Quick-jump index by first significant word — useful when you remember a name but not the section number.

| Section                    | §     |
|----------------------------|-------|
| Architecture overview      | §1    |
| Audit log — forensic trail | §22.7 |
| Background task topology   | §20   |

| Section                                     | §      |
|---------------------------------------------|--------|
| Broker abstraction                          | §14    |
| Broker abstraction — implementation detail  | §14.5  |
| Broker gotchas                              | §16    |
| Chart indicator system                      | §22.15 |
| Chase loop invariants                       | §12    |
| Chase loop lifecycle                        | §7     |
| Concurrency model                           | §4     |
| Core architectural principles               | §3     |
| Cross-cutting checklist before every commit | §42    |
| Data layer — implementation detail          | §4.5   |
| Data refresh — PositionStrip + Dashboard    | §21    |
| Database schema overview                    | §4.6   |
| Demo mode                                   | §22    |
| Deployment notes                            | §26    |
| History — orders / trades / funds           | §22.9  |
| Investor portal — token-as-credential       | §22.5  |
| Investor portal — units-based NAV math      | §22.6  |
| Logging discipline                          | §25    |
| Market-status probe                         | §22.14 |
| Metrics + performance tracking              | §4.9   |
| Navbar audit — rename + resequence          | §22.11 |
| Operator's mental model                     | §30    |
| Order placement — basket (Chain tab)        | §6     |
| Order placement — single ticket             | §5     |
| Order placement latency                     | §22.10 |
| Postback fan-out — book_changed bus         | §22.8  |
| Reading order for a new developer           | §28    |
| Recipe — add a background task              | §33    |
| Recipe — add a broker capability flag       | §36    |
| Recipe — add a column to a table            | §32    |
| Recipe — add a new agent action             | §34    |
| Recipe — add a new page                     | §37    |
| Recipe — add a new route                    | §31    |

| Section                              | §      |
|--------------------------------------|--------|
| Recipe — add a new template field    | §35    |
| Recipe — add a setting               | §38    |
| Recipe — change a default template   | §39    |
| Recipe — ship a fix to dev + main    | §41    |
| Recipe — wire a notification channel | §40    |
| Retention policies                   | §4.8   |
| Sprint history + audit fixes         | §27    |
| Table relationships                  | §4.7   |
| Tech stack — at a glance             | §2     |
| Template attach pipeline             | §9     |
| Template matrix (4 defaults)         | §10    |
| Template override merge              | §11    |
| Testing philosophy                   | §24    |
| The order/chase/template tripod      | §8     |
| The preview pipeline                 | §19    |
| Trail-stop subsystem                 | §13    |
| UX audit slice D                     | §22.13 |
| When in doubt                        | §29    |
| #audit workflow + postback scaffold  | §22.12 |